

**EXECUTIVE SUMMARY OF ENVIRONMENTAL IMPACT ASSESSMENT
AND
ENVIRONMENT MANAGEMENT PLAN
FOR OBTAINING**

Environmental Clearance under EIA Notification – 2006

Schedule Sl. No. 1 (a) (i): Mining Project

“B1” CATEGORY – MINOR MINERAL – CLUSTER – NON-FOREST LAND

CLUSTER EXTENT = 7.25.00hectares

At

**Devariyambakkam Village, Walajabad Taluk,
Kancheepuram District, Tamil Nadu State**

TOR File No. 11378 and ToR Identification No. TO24B0108TN5756614N, dated.11.01.2025

NAME AND ADDRESS OF THE PROPOSED PROJECT PROPONENT

Name and Address	Extent & S.F.No.	Production in m ³
Mr. M. Dhayalan, S/o. Munusamy No.139, Salai Street, Devariyambakkam Village, Ullavur Post, Walajabad Taluk, Kancheepuram District-631606	2.59.25ha & 293/1B, 293/2A, 293/2B, 293/2C, 295, 300/1A(Part), 301/1A1B, 301/1A2(Part) & 301/1A3B	Rough stone (m ³) – 355708 Gravel (m ³) - 38942

ENVIRONMENTAL CONSULTANT

GEO TECHNICAL MINING SOLUTIONS

No: 1/213-B, Ground Floor, Natesan Complex

Oddapatti, Collectorate Post office,

Dharmapuri-636705. Tamil Nadu.

E-mail: info.gtmsdpi@gmail.com,

Website: www.gtmsind.com



NABET ACC. NO: NABET/EIA/23-26/RA 0319

Valid till: 31.12.2026

ENVIRONMENTAL LAB

EKDANT ENVIRO SERVICES (P) LIMITED

NABL Accredited and Recognised Laboratory

No. R7/1,avk Tower, North Main Road, Anna Nagar, West Exten.

Chennai – 600 101

NABL Certificate Number: TC- 11742,

Valid Until: 31/05/2025

Baseline Study Period – December 2024 - February 2025

EXECUTIVE SUMMARY

1.0 INTRODUCTION

As the proposed rough stone and gravel mining project (B1) falls within the quarry cluster of 500 m radius with the total extent of 7.25.00ha, it requires submission of EIA report for grant of Environmental Clearance (EC) after conducting public hearing. The proposed project falling in S.F.No.293/1B, 293/2A, 293/2B, 293/2C, 295, 300/1A(Part), 301/1A1B 301/1A2(Part) & 301/1A3B over the extent of 2.59.25ha is situated in the cluster falling in Devariyambakkam Village, Walajabad Taluk, Kancheepuram District, Tamil Nadu. The quarries involved in the calculation of cluster extent are of one proposed quarry and two existing quarries.

2 PROJECT DESCRIPTION

The proposed project area is located between Latitudes from 12°48'54.71"N to 12°49'1.67"N Longitudes from 79°52'40.61"E to 79°52'47.37"E in Devariyambakkam Village, Walajabad Taluk, Kancheepuram District, Tamil Nadu. According to the approved mining plan, about 355708m³ of rough stone and 38942m³ of gravel will be mined up to the depth of 50m BGL in the five years. The quarrying operation is proposed to be carried out by open cast semi-mechanized mining method involving drilling and formation of benches of the prescribed dimensions.

3. DESCRIPTION OF THE ENVIRONMENT

Baseline data were collected to evaluate the existing environmental condition in the core and buffer areas during **December 2024 through February 2025** as per CPCB guidelines. The data were collected by both the FAEs and NABL accredited and MoEF notified **Ekdant Enviro Services (P) Limited** for the environmental attributes including soil, water, noise, air and by FAEs for ecology and biodiversity, traffic, and socio-economy.

3.1 Land Environment

Land use pattern of the area of 5 km radius was studied using Sentinel II imagery. LULC types and their extent are given in Table 1.1

Table 1.1 LULC Statistics of the Study Area

S. No.	Classification	Area (ha)	Area (%)
1	Bare Ground	3.43	0.04
2	Built Area	1524.75	17.60
3	Crops	5523.89	63.77
4	Mining/Industrial area	106.57	1.23
5	Flooded Vegetation	65.82	0.76
6	Rangeland	855.19	9.87
7	Trees	44.04	0.51
8	Water	538.09	6.21
Total		8661.78	100.0

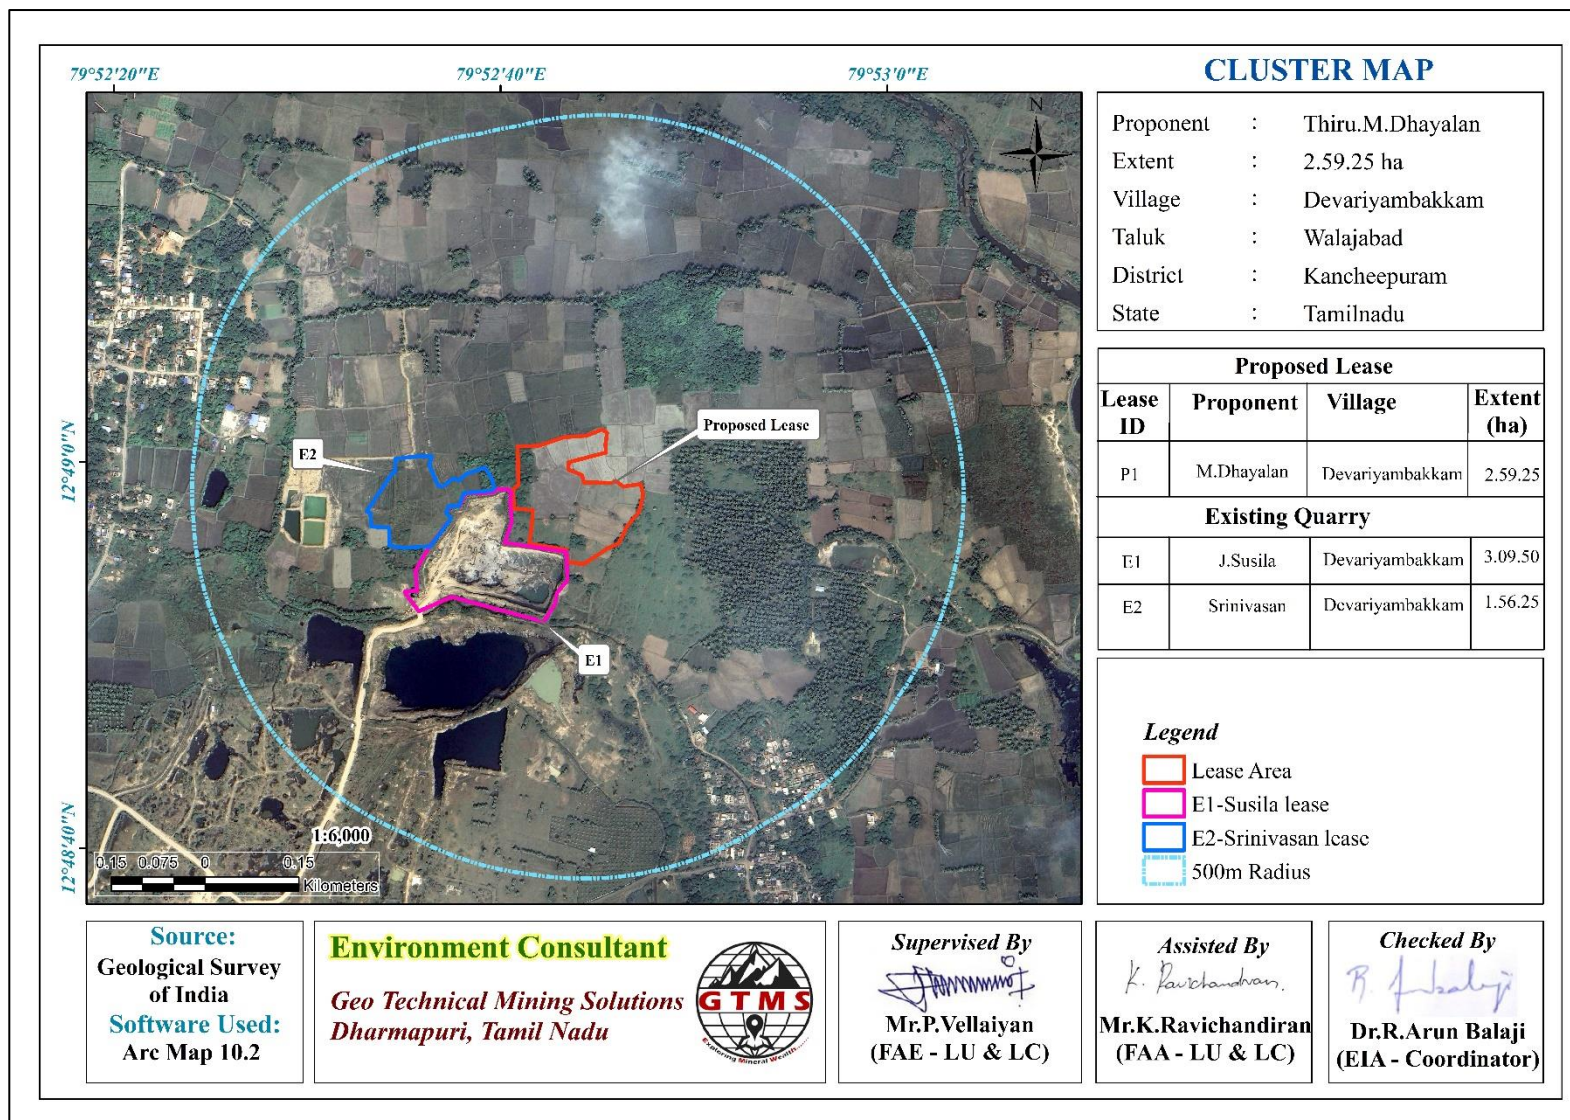


Figure 1. Google Earth Image Showing in cluster map

3.2 Soil Characteristics

Physical Characteristics

The soil samples in the study area show loamy textures varying between sandy loam, to sandy clay loam. pH of the soil varies from 7.35 to 8.52 indicating slightly acidic to slightly alkaline nature. Electrical conductivity of the soil varies from 42.5 to 82.30 ($\mu\text{mhos/cm}$). Bulk density ranges between 1.03 to 1.45 g/cc.

Chemical Characteristics

Calcium ranges between 27.0 to 47.0 mg/kg. Magnesium ranges between 14.0 to 22.0 mg/kg. Sodium ranges between 165 and 219 mg/kg. Potassium ranges between 3.0 to 15.20 mg/kg.

3.3 Water Environment

Surface Water

Thenneri Lake (Palar Canal), Periamadurapakkam Lake and Ullavur Lake are the prominent surface water resources present in the study area. This river was ephemeral in nature, which convey water only after rainfall events. The proposed project area is located in 0.69 km E of Thenneri Lake (Palar Canal), and 0.81 km SE of Periamadurapakkam Lake and 1.27 km S of Ullavur Lake as shown in Table 3.5 and Figure 3.6. Three surface water sample, known as SW-1, SW-2 and SW-3 were collected and to assess the baseline water quality. Table 3.6 summarizes surface and ground water quality data of the collected sample. Result for surface water sample in the Table 3.6 indicate that the physical, chemical and biological parameters, and heavy metals are within permissible limits in comparison with standards of IS10500:2012.

Ground Water

Groundwater in the study area occurs in the crystalline rocks of Archaean age and recent alluvium. The movement of the groundwater is controlled by the intensity of weathering and fracturing of crystalline rocks. Dug wells are the most common ground water abstraction structures in the area. However, in dry season, people in the study area heavily rely on bore wells for their domestic and agriculture purpose.

Three groundwater samples, known as OW-1, OW-2 and OW-3 were collected from open wells and analysed for physico-chemical conditions and bacteriological contents in order to assess baseline quality of ground water.

Data regarding depth to groundwater levels are essential to infer the direction of groundwater movement within the study area. Knowledge of groundwater flow direction is must in choosing location for background groundwater quality monitoring well and in locating recharge and discharge areas. Therefore, data regarding groundwater elevations were collected

from 9 open wells and 9 bore wells at various locations within 2 km radius around the proposed project sites for the period from March through May 2022 (Pre-Monsoon Season) and from December 2022 through February, 2023 (Post Monsoon Season).

According to the data, average depths to the static water table in open wells range from 11.3 to 15.9 m BGL in pre monsoon and 6.5 to 10.5 m BGL in post monsoon. The bore well data thus collected onsite are provided in Tables 3.9 and 3.10. The average depths to static potentiometric surface in bore wells for the period of December 2022 through February, 2023 (Post Monsoon Season) vary from 55.10 to 60.0 m and from 60.2 to 70.0 m for the period of March through May, 2022 (Pre-Monsoon Season). Data on the depths to static water table and potentiometric surface were used to draw contour lines connecting groundwater elevation (also known as equipotential hydraulic head) to determine the groundwater flow direction perpendicular to the contour lines.

3.4 AIR ENVIRONMENT

As per the monitoring data, PM_{2.5} ranges from 15.0 µg/m³ to 19.0 µg/m³; PM₁₀ from 36.9 µg/m³ to 50.9µg/m³; SO₂ from 3.8µg/m³ to 5.5µg/m³; NO_x from 12.1 µg/m³ to 15.5 g/m³. The concentration levels of the pollutants fall within the acceptable limits of NAAQS prescribed by CPCB.

3.5 NOISE ENVIRONMENT

Noise level in core zone was 47.4 dB (A) Leq during day time and 36.1 dB(A) Leq during night time. Noise levels recorded in buffer zone during day time varied from 40.6 to 44.8 dB (A) Leq and during night time from 36.3 to 40.5dB (A) Leq. Thus, the noise level for industrial and residential area meets the requirements of CPCB.

3.6 BIOLOGICAL ENVIRONMENT

The study found that there is no endemic, endangered migratory fauna found in the area. This area is not also a migratory path of any faunal species. Hence, this small mining operation over short period of time will not have any significant impact on the surrounding flora and fauna.

Flora in core zone

The mine lease area contains total of 23 species belonging to 15 families have been recorded from the mine lease area. 4 shrubs, 19 herbs were identified. There are no trees in mine lease area. The floral analysis indicates that there are no threatened (Vulnerable,

Endangered & Critically Endangered) species recorded from the core project site. A list of the IUCN Red List analysed plant species recorded inside the proposed project site.

Flora in 300 m radius zone

The 300m radius It contains a total of 34 species belonging to 21 families have been recorded from the buffer zone. 6 Trees (17%), 5 Shrubs (17%) and 22 Herbs and Climbers, Creeper, Grass & Cactus 20 (64%) were identified.

Fauna in Core Zone

The 21 varieties of species observed in the core zone. Among them numbers of Insects 8 (41%), Reptiles 3 (14%), Mammals 1 (4%) and Avian 9 (41%). A total of 21 species belonging to 15 families have been recorded from the core mining lease area. Number of species decreases towards the mining area this might be due the lack of vegetation. None of these species are threatened or endemic. There is no Schedule I species and eight species are under schedule IV according to Indian wild life Act 1972. A total eight species of birds were sighted in the mining lease area.

Fauna in Buffer Zone

A total of 47 species belonging to 34 families were recorded in the buffer zone. Based on habitat classification the majority of species were Birds 18 (40%), followed by Insects 15 (31%), Reptiles 7 (15%), 4 Mammals (8%) and amphibians 3 (6%). There are 4 schedule II species and 24 schedule IV species according to Indian wild life Act 1972.

3.7 SOCIO-ECONOMIC ENVIRONMENT

An attempt has been made to assess the impact of the proposed mining project on Socio-economic aspect of the study area. The various attributes that have been taken into account are population composition, employment generation, occupational shift, household income and consumption pattern. Implementation of the Proposed Mine Project will generate both direct and indirect employment. Besides, mining operation will be legally valid and it will bring income to the state exchequer. At present seasonal agriculture is the main occupation of the people as more than half of the population depends on it. With the implementation of the proposed mining project the occupational pattern of the people in the area will change making more people engaged in mining- based activities rather in seasonal agriculture.

4.0 ANTICIPATED ENVIRONMENTAL IMPACTS AND MITIGATION MEASURES

4.1 Land Environment

Anticipated Impact

-  Change in land use and land cover and topography of the mine lease area
-  Problems to human habitations due to dust and noise caused by movement of heavy vehicles
-  Soil erosion and sediment deposition in the nearby water bodies during the rainy season
-  Siltation of water course due to wash off from the exposed working area
-  Deterioration of soil quality in the surrounding area due to runoff from the project area
-  Decrease in the agricultural productivity of the surrounding land due to soil quality degradation

Mitigation Measures

-  Construction of garland drains, settling pits, and check dams to prevent runoff and siltation
-  Runoff water will be discharged into the settling tanks to reduce suspended sediment loads before runoff is discharged from the quarry site
-  The vegetation will be retained at the site wherever possible
-  Weekly monitoring and daily maintenance of erosion control systems so that they perform as specified specially during rainy season

4.2 Soil Environment

Anticipated Impact

-  Removal of protective vegetation cover
-  Exposure of subsurface materials which are unsuitable for vegetation establishment

Mitigation Measures

-  Run-off diversion – Garland drains will be constructed around the project boundary to prevent surface flows from entering the quarry works areas and will be discharged into vegetated natural drainage lines, or as distributed flow across an area stabilised against erosion.
-  Sedimentation ponds - Run-off from working areas will be routed towards sedimentation ponds. These trap sediment and reduce suspended sediment loads before runoff is discharged from the quarry site. Sedimentation ponds should be designed based on runoff, retention times, and soil characteristics. There may be a need to provide a series of sedimentation ponds to achieve the desired outcome.

- ✚ Retain vegetation – Retain existing or re-plant the vegetation at the site wherever possible.
- ✚ Monitoring and maintenance – Weekly monitoring and daily maintenance of erosion control systems so that they perform as specified specially during rainy season.

4.3 Water Environment

Anticipated Impact

- ✚ Surface and ground water resources may be contaminated due to pit water discharge, domestic sewage, discharge of oil and grease bearing waste water from washing of vehicles and machineries, and washouts from surface exposure or working areas
- ✚ As the proposed project acquires 5.0 KLD of water from water vendors, it will not extract water by developing abstraction structures in the lease area. Therefore, the project will not have impact on depletion of aquifer beneath the lease area.

Mitigation Measures

- ✚ Rain water from mine pit will be treated in settling tanks before being used for dust suppression and tree plantation purposes
- ✚ Domestic sewage from site office will be discharged in septic tank and then directed to soak pits
- ✚ Water from the tipper wash-down facility and machinery maintenance yard will be passed through interceptor traps/oil separators prior to its reuse
- ✚ The garland drainage will be connected to settling tank and sediments will be trapped in the settling tanks and only clear water will be discharged to the natural drainage
- ✚ Periodic (every 6 month once) analysis of ground water quality of quarry pit water and ground water of nearby villages will be conducted
- ✚ Artificial recharge structures will be established in suitable locations as part of the rainwater harvesting management program

4.4 AIR ENVIRONMENT

Anticipated Impact

Anticipated increase of the air pollutants due to quarrying activities have been predicted using AERMOD software. The values of cumulative concentration i.e., background + incremental concentration of pollutant in all the receptor locations are still within the prescribed NAAQ limits without effective mitigation measures. By adopting suitable mitigation measures, the pollutant levels in the atmosphere can be controlled further

Haul Road and Transportation

- ✚ Water will be sprinkled on haul roads twice a day to avoid dust generation

during transportation

- ✚ Transportation of material will be carried out during day time and material will be covered with tarpaulin
- ✚ The speed of tippers plying on the haul road will be limited to < 20 km/hr to avoid generation of dust
- ✚ Water sprinkling on haul roads and loading points will be carried out twice a day
- ✚ Main source of gaseous pollution will be from vehicle used for transportation of mineral. Therefore, weekly maintenance of machines improves combustion process and reduces pollution.
- ✚ The un-metalled haul roads will be compacted weekly before being put into use.
- ✚ Overloading of tippers will be avoided to prevent spillage.
- ✚ It will be ensured that all transportation vehicles carry a valid PUC certificate.
- ✚ Haul roads and service roads will be graded to clear accumulation of loose materials.

Green Belt

- ✚ Planting of trees all along mine haul roads outside the lease and regular grading of haul roads will be practiced to prevent the generation of dust due to movement of tractors/tippers.
- ✚ Green belt of adequate width will be developed around the project site.

Occupational Health

- ✚ Dust mask will be provided to the workers and their use will be strictly monitored.
- ✚ Annual medical checkups, trainings and campaigns will be arranged to ensure awareness about importance of wearing dust masks among all mine workers and tipper drivers.
- ✚ Ambient air quality monitoring will be conducted every six months to assess effectiveness of mitigation measures proposed.

4.5 Noise Environment

Anticipated Impact

Total noise level in all the sampling areas is well below the CPCB standards for industrial and residential areas. The peak particle velocity produced by the charge of 16.58kg is well below that of 0.3 mm/s as per Directorate General of Mines Safety for safe level criteria through Circular No. 7 dated 29/8/1997.

Mitigation Measures

- ✚ Proper maintenance, oiling and greasing of machines will be done every week to reduce generation of noise

- ✚ Provision of sound insulated chambers for the workers working on machines (HEMM) producing higher levels of noise.
- ✚ Silencers / mufflers will be installed in all machineries
- ✚ Green Belt/Plantation will be developed around the project area and along the haul roads. The plantation minimizes propagation of noise
- ✚ Personal Protective Equipment (PPE) like ear muffs/ear plugs will be provided to the operators of HEMM and persons working near HEMM and their use will be ensured through training and awareness
- ✚ Regular medical check-up and proper training to personnel to create awareness about adverse noise level effects.

4.6 Biological Environment

Anticipated Impact

- ✚ During loading the truck, dust generation will be likely. This shall be a temporary effect and not anticipated to affect the surrounding vegetation significantly
- ✚ The Number of plants in the mining lease area is given in Chapter 3 which vegetation in the lease area may be removed during mining.
- ✚ Carbon released from quarrying machineries and tippers during quarrying would be 3257 kg per day, 879349 kg per year and 4396746 kg for **five** years.

Mitigation Measures

- ✚ During conceptual stage, the top bench will be re-vegetated by planting local /native species and lower benches will be converted into rainwater harvesting structure following completion of mining activities, which will replace habitat resources for fauna species in this locality over a longer time.
- ✚ Existing roads will be used; new roads will not be constructed to reduce impact on flora.
- ✚ To mitigate carbon emission due to mining activities, we recommend planting trees around the quarry to offset the carbon emission during quarrying. A tree can sequester 23197 kg of carbon per year. Therefore, we recommend planting large number of trees around the quarry and near school campuses, government wasteland, roadsides etc.
- ✚ As per the greenbelt development plan as recommended by SEAC (Table 4.11), about 1296 trees will be planted within three months from the beginning of mining. These trees, when grown up would sequester carbon of 35345 about kg of the total carbon.

4.7 Socio Economic Environment

Anticipated Impact

- ✚ Dust generation from mining activity can have negative impact on the health of the workers and people in the nearby area
- ✚ Approach roads can be damaged by the movement of tippers
- ✚ Increase in Employment opportunities both direct and indirect thereby increasing economic status of people of the region

Mitigation Measures

- ✚ Good maintenance practices will be adopted for all machinery and equipment, which will help to avert potential noise problems
- ✚ Green belt will be developed in and around the project site as per Central Pollution Control Board (CPCB) guidelines
- ✚ Air pollution control measure will be taken to minimize the environmental impact within the core zone
- ✚ For the safety of workers, personal protective appliances like hand gloves, helmets, safety shoes, goggles, aprons, nose masks and ear protecting devices will be provided as per mines act and rules
- ✚ Benefit to the State and the Central governments through financial revenues by way of royalty, tax, duties, etc., from this project directly and indirectly

4.8 Occupational Health

- ✚ All the persons will undergo pre-employment and periodic medical examination
- ✚ Employees will be monitored for occupational diseases by conducting medical tests: General physical tests, Audiometric tests, Full chest, X-ray, Lung function tests, Spirometric tests, Periodic medical examination – yearly, Lung function test – yearly, those who are exposed to dust and Eye test
- ✚ Essential medicines will be provided at the site. The medicines and other test facilities will be provided at free of cost.
- ✚ The first aid box will be made available at the mine for immediate treatment. First aid training will be imparted to the selected employees regularly. The lists of first aid trained members shall be displayed at strategic places.

5.0 Environment Monitoring Program

Table 11.2 Environment Monitoring Program

S. No.	Environment Attributes	Location	Monitoring		Parameters
			Duration	Frequency	
1	Air Quality	2 Locations (1 Core & 1 Buffer)	24 hours	Once in 6 months	Fugitive Dust, PM _{2.5} , PM ₁₀ , SO ₂ and NO _x .
2	Meteorology	At mine site before start of Air Quality Monitoring & IMD Secondary Data	Hourly / Daily	Continuous online monitoring	Wind speed, Wind direction, Temperature, Relative humidity and Rainfall
3	Water Quality Monitoring	2 Locations (1SW & 1 GW)	-	Once in 6 months	Parameters specified under IS:10500, 1993 & CPCB Norms
4	Hydrology	Water level in open wells in buffer zone around 1 km at specific wells	-	Once in 6 months	Depth in m BGL
5	Noise	2 Locations (1 Core & 1 Buffer)	Hourly – 1 Day	Once in 6 months	Leq, Lmax, Lmin, Leq Day & Leq Night
6	Vibration	At the nearest habitation (in case of reporting)	–	During blasting operation	Peak particle velocity
7	Soil	2 Locations (1 Core & 1 Buffer)	–	Once in six months	Physical and chemical characteristics
8	Greenbelt	Within the project area	Daily	Monthly	Maintenance

Source: Guidance of manual for mining of minerals, February 2010

6.0 ADDITIONAL STUDIES

6.1 Risk Assessment

The DGMS risk assessment process is intended to identify existing and probable hazards in the work environment and all operations and assess the risk levels of those hazards in order to prioritize those that need immediate attention. The whole quarry operation will be carried out under the direction of a Qualified Competent Mine Manager holding certificate of competency to manage a metalliferous mine granted by the DGMS, Dhanbad for proposed project.

6.2 Disaster Management Plan

The objective of the disaster management plan is to make use of the combined resources of the mine and the outside services to:

-  Rescue and treat casualties;
-  Safeguard other people;
-  Minimize damage to property and the environment;

- ✚ Initially contain and ultimately bring the incident under control;
- ✚ Secure the safe rehabilitation of affected area; and
- ✚ Preserve relevant records and equipment for the subsequent inquiry into the cause and circumstances of the emergency.

6.3 Cumulative Impact Study

The results on the cumulative impact of the three proposed projects on air environment of the cluster do not exceed the permissible limits set by CPCB for air pollutants.

- ✚ The cumulative results of noise for the habitation in consideration do not exceed the limit set by CPCB for residential areas for day time
- ✚ PPV resulting from proposed project is well below the permissible limit of Peak Particle Velocity of 3mm/s.
- ✚ The proposed project will allocate Rs. 5,00,000/- towards CER as recommended by SEAC.
- ✚ The proposed projects will directly provide jobs to 22 local people, in addition to indirect jobs.
- ✚ The proposed projects will plant 1296 about trees in and around the lease area
- ✚ The proposed three projects will add 156 PCU per day to the nearby roads.

7.0 Project Benefits

Various benefits are envisaged due to the three proposed mine and benefits anticipated from the proposed project to the locality, neighbourhood, region and nation as a whole are:

- ✚ Direct employment to 22 local people
- ✚ Creation of community assets (infrastructure) like school buildings, village roads/ linked roads, dispensary & health Centre, community Centre, market place etc.,
- ✚ Strengthening of existing community facilities through the Community Development Program
- ✚ Skill development & capacity building like vocational training.
- ✚ Rs. 5,00,000 will be allocated for CER

8.0 ENVIRONMENT MANAGEMENT PLAN

In order to implement the environmental protection measures, an amount of **Rs.57,37,592** as capital cost and recurring cost as **Rs.22,03,827** as recurring cost/annum is proposed considering present market price considering present market scenario for the proposed project. After the adjustment of 5% inflation per year, the overall EMP cost for 5 years will be **Rs.1,79,15,130**.