

Date: 29.10.2025

From,

Thiru K. Ramaraj

2/395-1, Venkateshwara Nagar,
Premier Nagar West, Othakalmandapam,
Coimbatore District, Tamilnadu- 641 032.

To

District Environmental Engineer (Coimbatore District- South)

TamilNadu Pollution Control Board,
No. E-55A, Sidco Industrial Estate,
Kurichi, Coimbatore - 641 021.

Sub: Submission of Draft EIA/EMP report and Summary Roughstone & Gravel Quarry of Thiru. K. Ramaraj in S.F.No. 70/1(P) over an area of 1.06.50Ha in Myleripalayam Village, Madukkarai Taluk, Coimbatore District, Tamil Nadu– Public Hearing_Reg

Ref: ToR granted by SEIAA, Tamil Nadu vide letter No - TO25B0108TN5570602N dated 16.07.2025

Sir,

With reference to the abovementioned subject, I am herewith submitting the Draft EIA/EMP report and Summary of EIA/EMP report in English and Tamil for Roughstone & Gravel Quarry of Thiru. K. Ramaraj in S.F.No. 70/1(P) over an area of 1.06.50Ha in Myleripalayam Village, Madukkarai Taluk, Coimbatore District, Tamil Nadu. As per the terms of reference issued by SEIAA, Tamil Nadu referred to as (1) above, point no. 39 stipulates conduction of public hearing. Hence, I request you to consider conducting a public hearing for my project at the earliest.

Here with enclosed D.D No –

dated for public hearing.

Thank you.

Yours Faithfully,

Thiru. K. Ramaraj

Encl: as above

DRAFT EIA / EMP REPORT

FOR

ROUGH STONE AND GRAVEL QUARRY

Extent	1.06.50Ha
SF.Nos.	70/1(P)
Location	Myleripalayam village, madukkarai Taluk, coimbatore District
Land Type	Patta Land
Production	Roughstone – 73,750m³, Gravel – 10,614m³ for 5 years upto a depth of 48m.
Annual Production	Roughstone – 14,970m³, Gravel – 10,614m³

- Terms Identification No – TO25B0108TN5570602N dated 16.07.2025
- Baseline Monitoring– Summer Season (March – May 2025)

PROJECT PROPONENT

THIRU K.RAMARAJ

2/395-1, Venkateshwara Nagar, Premier Nagar West,
Othakalmandapam, Coimbatore District,
Tamilnadu- 641 032.

CONSULTANT

CREATIVE ENGINEERS & CONSULTANTS

NABET ACCREDITED CONSULTANCY, NABL ACCREDITED TESTING LAB

9B/4, Bharathwajar Street, East Tambaram, Chennai-600059.

Mobile: 09444133619 Email : cecgiri@yahoo.com,



S.No	1(a)
Category	B1

Project Code	CEC/EMP/MI-254
Date of Submission	29.10.2025

REVISIONS OF EIA/EMP REPORT

Revision number	Report Status	Date of submission
00/OCT/25	Draft EIA /EMP Report	29.10.2025

Environmental Impact Assessment & Environmental Management Plan Report for Roughstone & Gravel Quarry of Thiru. K. Ramaraj in S.F.No. 70/1(P) over an area of 1.06.50Ha in Myleripalayam Village, Madukkarai Taluk, Coimbatore District, Tamil Nadu was prepared by Creative Engineers & Consultants and authorized for submission by Mr.B.Swamynathan, EIA-Coordinator, of Creative Engineers & Consultants on 29.10.2025 after due review by the personnel and consultation with Thiru. K. Ramaraj. Current Revision number of the EIA/EMP report is 00/OCT/25, signifying as per the revision mentioned in the above table that this is a draft EIA/EMP report.

Signature:



Date: 29.10.2025

PROJECT PROPONENT DECLARATION


I, Thiru. K. Ramaraj received Terms of Reference under EIA Notification 2006 from SEIAA, Tamil Nadu vide their letter No - TO25B0108TN5570602N dated 16.07.2025 for a Roughstone and Gravel Quarry over an area of 1.06.50Ha in Survey No. 70/1(P) over an area of 1.06.50Ha in Myleripalayam Village, Madukkarai Taluk, Coimbatore District, Tamil Nadu.

We have entrusted the EIA study to M/s. Creative Engineers & Consultants (CEC), Chennai who have been accredited by the National Accreditation Board for Education & Training (NABET), Quality Council of India with their accreditation valid upto 23.12.2026

The Environmental Impact Assessment (EIA) and Environmental Management Plan (EMP) have been prepared as per the generic structure proposed in the EIA notification 2006, ToR issued by SEIAA, Tamil Nadu. The prescribed ToR along with compliance is also incorporated in the EIA/EMP Report.

This report is prepared based on the information and data obtained from the Mining Plan and other records and the field study carried out by various consultant that have been engaged. The data given in the EIA/EMP report are factually correct to the best of my knowledge.

Signature:

For K.Ramaraj


Date: 29.10.2025



CREATIVE ENGINEERS & CONSULTANTS

(NABET ACCREDITED, NABL ACCREDITED TESTING LABORATORY,
DEPARTMENT OF INDUSTRIES AND COMMERCE REGISTERED COMPANY)

EIA Consultant Undertaking

[In compliance with MoEF Office Memorandum No. J-11013/41/2006-IA.II (I) dated 04.08.2009]

Creative Engineers & Consultants (CEC) is an NABL accredited testing Laboratory, and also NABET accredited Category-A environment consultancy organization for preparing EIA/EMP reports for the sectors Mining of minerals, Thermal power plants, Mineral Beneficiation & Cement plants.

CEC has been accredited by the National Accreditation Board for Education & Training (NABET), Quality Council of India for empanelment of EIA Consultants with accreditation valid upto 23.12.2026.

Thiru K.Ramaraj received Terms of Reference under EIA Notification 2006 from SEIAA, Tamil Nadu vide their letter No - TO25B0108TN5570602N dated 16.07.2025 for a Roughstone and Gravel Quarry over an area of 1.06.50Ha in Myleripalayam Village, Madukkarai Taluk, Coimbatore District, Tamil Nadu.

The prescribed TOR is complied with and incorporated in the EIA Report and submitted. This report is based on the information and data obtained from Approved Mining Plan, other records and data from the field study by CEC. The data generated and given in the EIA/EMP Report are factually correct. The sample analyses are carried out through by Enviro Solutions & Labs, Coimbatore.

(P.Giri)

Chief Executive & EIA Coordinator

Creative Engineers & Consultants

Date: **29.10.2025**

Annexure – VII

Declaration by Experts contributing to the EIA Report for

Roughstone & Gravel Quarry of Thiru K.Ramaraj over an area of 1.06.50Ha in Survey No.70/1(P) in Myleripalayam Village, Madukkarai Taluk, Coimbatore District, Tamil Nadu.

I, hereby, certify that I was a part of the EIA team in the following capacity that developed the above EIA.

EIA coordinator:

Name: **B.Swamynathan**



Signature and Date:


Period of involvement: **Febraury 2025 onwards**


Contact information: **09444133619**

Functional area experts:

S. No.	Function al areas	Name of the expert/s	Involvement (period and task**)	Signature and date
1	AP*	P.Giri	• Identification of baseline monitoring stations and study of the monitored data with respect to the applicable standards. • Identification of sources of air pollution comprising dust, gaseous emission due to mining & other activities • Identification of Impacts & suggestion of mitigation measures Period: March 2025 onwards	
		B.Swamynathan	• Data interpretation of Micro meteorological data for wind rose. • Identification of polluting source and suggestion of suitable mitigation measures. Period: Febraury 2025 onwards	

2	WP*	G.Sandhya	• Study of the monitored data with respect to the applicable standards. • Identification of Water requirement & Source • Preparation of water balance diagram • Identification of Water polluting sources • Impact of the project on the water quality, both surface and groundwater • Suggestion of Mitigation measures to control water pollution Period: March 2025 onwards	
3	SHW*	P.Giri	• Quantification of mineral & waste from mining operation • Waste disposal method evaluation • Providing dump management plan • Providing Surface Runoff Management Structure Requirements. • Identification of Hazardous waste and its details of disposal Period: March 2025 onwards	
4	SE*	R.Baburaj	• Identification of villages in the study area and finalization of demographic profile of the villages within the study area. • Preparation of sections relevant to SE functional area in the EIA/EMP report Period: March 2025 onwards	
5	EB*	B.Swamynathan	• Perusal of existing data relevant to this project. • Studying the details of flora and fauna, separately for core, buffer zone and forest area based on primary field survey. • Identification of species, Indicating the Schedule of the fauna present in the study area • Assessment of impact on Biological environment and suggestion of mitigative measures • Collecting & providing details of existing and proposed Green belt development /plantation in the core zone Period: February 2025 onwards	
6	HG*	K.Shankar	• Study of existing surface drainage arrangements in the core and buffer zone, impact due to mining on these drainage courses and suggestion of mitigative measures	

			• Perusal of site specific ground water table details for the core zone and the study area. • Studied the hydrological aspects of surface and groundwater in study area • Study about impact on the hydrology due to mining operation • Suggesting mitigative measures like RWH for enhancement of ground water level Period: March 2025 onwards	
7	GEO*	K.Shankar	• Study of geology of the ML area and the surrounding areas. • Provide details about Mineral composition Period: March 2025 onwards	
8	SC*	B.Swamynathan	• Study of soil profile • Assessment of Impact on soil and suggesting plantation scheme. Period: February 2025 onwards	
9	AQ*	G.Sandhya	• Quantification of emission particulars • Air quality modelling for post project impact on the air quality prediction of the study area. Analysis of the Isopleth generated • Arriving at the post project concentration at the AAQ monitoring locations • Preparation of meteorological data in suitable form for input into the model • Simulation of model for generation of Isopleth and data interpretation. • Studying the impact on AAQ monitoring locations due to the generated emissions. • Preparation of sections relevant to AQ functional area in the EIA/EMP report. Period: March 2025 onwards	
10	NV*	P.Giri	• Identification of baseline monitoring stations and study of the monitored data with respect to the applicable standards. • Predict the noise level and vibration level due to proposed mining operation based on scientific evaluation. • Suggesting the Mitigation measures to control noise pollution, Suggesting the Mitigation measures to	

			control ground vibration Period:March 2025 onwards	
11	LU	B.Swamynathan	• Collection of Remote sensing satellite data to study the land use pattern. • Primary field survey and limited field verification • Preparation of Land use map using Satellite data of the project area separately for the core zone and the buffer zone and providing the land use pattern. Period:Febraury 2025 onwards	
12	RH*	K.Shankar	• Identified Major risks involved in the project Mitigation measures suggested to avoid risk. • Preparation of onsite and offsite emergency management plan Period:March 2025 onwards	

*One TM against each FAE may be shown


**Please attach additional sheet if required

Declaration by the Head of the accredited consultant organization/ authorized person

I,P.Giri hereby, confirm that the above mentioned experts prepared the EIA report for **Roughstone & Gravel Quarry of Thiru. K. Ramaraj in S.F.No. 70/1(P) over an area of 1.06.50Ha in Myleripalayam Village, Madukkarai Taluk, Coimbatore District, Tamil Nadu.**

I also confirm that EIA Coordinator (EC) has gone through the report, and the consultant organization shall be fully accountable for any misleading information.It is certified that no unethical practices, plagiarism involved in carrying out the work and external data / text has not been used without proper acknowledgement while preparing this EIA report.

Signature:



Name: **P.Giri**

Designation:**Chief Executive**

Name of the EIA consultant organization:**Creative Engineers & Consultants, Chennai – 59**

NABET Certificate No. & Issue Date:**No- NABET/EIA/23-26/RA 0331 & date 23.12.2026**

National Accreditation Board for Education and Training

Certificate of Accreditation

Creative Engineers and Consultants, Chennai

9B/4, Bharathwajar street, East Tambaram, Chennai, Tamil Nadu

The organization is accredited as **Category-A** under the QCI-NABET Scheme for Accreditation of EIA Consultant Organization, Version 3: for preparing EIA/EMP reports in the following Sectors-

S. No	Sector Description	Sector (as per)		Cat.
		NABET	MoEFCC	
1.	Mining of minerals- opencast mining only	1	1 (a) (i)	A
2.	Thermal power plants	4	1 (d)	A
3.	Mineral beneficiation	7	2 (b)	A
4.	Cement plants	9	3 (b)	A

Note: Names of approved EIA Coordinators and Functional Area Experts are mentioned in RAAC minutes dated May 03, 2024, posted on QCI-NABET website.

The Accreditation shall remain in force subject to continued compliance to the terms and conditions mentioned in QCI-NABET's letter of accreditation bearing no QCI/NABET/ENV/ACO/24/3250 dated May 24, 2024. The accreditation needs to be renewed before the expiry date by Creative Engineers and Consultants, Chennai following due process of assessment.

Issue Date
May 24, 2024

Valid up to
December 23, 2026




Mr. Ajay Kumar Jha
(Sr. Director, NABET)

Certificate No.
NABET/EIA/23-26/RA 0331



Prof (Dr) Varinder S Kanwar
(CEO-NABET)

For the updated List of Accredited EIA Consultant Organizations with approved Sectors please refer to QCI-NABET website.

CONTENTS

DRAFT EIA/EMP REPORT FOR ROUGHSTONE & GRAVEL QUARRY OF THIRU.K.RAMARAJ IN S.F.NOS. 70/1(P) OVER AN AREA OF 1.06.50HA IN MYLERIPALAYAM VILLAGE, MADUKKARAI TALUK, COIMBATORE DISTRICT, TAMIL NADU.

CONTENTS

S.No	PARTICULARS	PG NO.
TERMS OF REFERENCE & ITS COMPLIANCE		
A.	COPY OF TOR	--
B.	COMPLIANCE TO TOR POINTS	T-1
EIA/ EMP REPORT- CHAPTERS		
I	INTRODUCTION	1-1
II	PROJECT DESCRIPTION	2-1
III	DESCRIPTION OF ENVIRONMENT	3-1
IV	ANTICIPATED ENVIRONMENTAL IMPACTS AND MITIGATION MEASURES	4-1
V	ANALYSIS OF ALTERNATIVES	5-1
VI	ENVIRONMENTAL MONITORING PROGRAMME	6-1
VII	ADDITIONAL STUDIES	7-1
VIII	PROJECT BENEFITS	8-1
IX	ENVIRONMENTAL COST BENEFIT ANALYSIS	9-1
X	ENVIRONMENTAL MANAGEMENT PLAN	10-1
XI	SUMMARY & CONCLUSION	11-1
XII	DISCLOSURE OF CONSULTANTS ENGAGED	12-1
ADDITIONAL ENCLOSURES WITH EIA/EMP REPORT CHAPTERS		
	ANNEXURES	A-1



CHAPTER-WISE CONTENTS

CHAPTER 1 INTRODUCTION	1-1
1.1 PURPOSE OF THE REPORT:	1-1
1.2 IDENTIFICATION OF PROJECT &PROJECT PROPONENT:	1-1
1.3 BRIEF DESCRIPTION OF NATURE, SIZE, LOCATION &PROJECT IMPORTANCE	1-3
1.4 SCOPE OF THE STUDY:	1-4
CHAPTER 2 PROJECT DESCRIPTION	2-1
2.1 TYPE OF PROJECT:	2-1
2.2 NEED & JUSTIFICATION FOR THE PROJECT:	2-1
2.3 LOCATION:	2-1
2.4 LAND CLASSIFICATION:	2-11
2.5 GEOLOGY:	2-11
2.6 SIZE AND MAGNITUDE OF THE OPERATION:	2-13
2.6.2 MINING METHOD:	2-14
2.7 PROPOSED SCHEDULE FOR APPROVAL AND IMPLEMENTATION:	2-14
2.8 TECHNOLOGY AND PROCESS DESCRIPTION:	2-15
2.9 PROJECT DESCRIPTION:	2-15
2.10 DESCRIPTION OF MITIGATION MEASURES:	2-21
2.11 ASSESSMENT OF NEW & UNTESTED TECHNOLOGY:	2-22
CHAPTER 3 DESCRIPTION OF ENVIRONMENT	3-1
3.1 GENERAL:	3-1
3.2 SOCIO-ECONOMIC CONFIGURATIONS OF THE AREA:	3-4
3.3 EXISTING ENVIRONMENTAL QUALITY	3-11
3.4 LAND ENVIRONMENT - LANDUSE & LAND COVER	3-29
3.5 BIOLOGICAL ENVIRONMENT:	3-34
3.6 HYDROGEOLOGICAL STUDY:	3-42

CHAPTER 4 ANTICIPATED ENVIRONMENTAL IMPACTS AND MITIGATION

MEASURES	4-1
4.1 GENERAL	4-1
4.2 AIR ENVIRONMENT:	4-1
4.3 WATER ENVIRONMENT:	4-9
4.4 NOISE AND VIBRATION:	4-13
4.5 LAND ENVIRONMENT:	4-17
4.6 BIOLOGICAL ENVIRONMENT:	4-18
4.7 SOCIO ECONOMIC ENVIRONMENT:	4-23
4.8 OCCUPATIONAL HEALTH AND SAFETY:	4-24
4.9 LOGISTICAL SYSTEM:	4-26
4.10 WASTE MANAGEMENT:	4-27

CHAPTER 5 5-1

ANALYSIS OF ALTERNATIVES 5-1

5.1 ALTERNATE TECHNOLOGY:	5-1
5.2 ALTERNATE SITE:	5-1

CHAPTER 6 6-1

ENVIRONMENTAL MONITORING PROGRAMME 6-1

6.1 GENERAL	6-1
6.2 MONITORING SCHEDULES FOR VARIOUS PARAMETERS	6-1
6.3 LEGISLATIVE AND REGULATORY FRAME WORK:	6-2
6.4 ENVIRONMENTAL MONITORING COST:	6-8

CHAPTER 7 7-1

ADDITIONAL STUDIES 7-1

7.1 GENERAL:	7-1
7.2 PUBLIC CONSULTATION:	7-1



DRAFT EIA/EMP REPORT FOR ROUGHSTONE & GRAVEL QUARRY OF THIRU.K.RAMARAJ IN S.F.NOS. 70/1(P) OVER AN AREA OF 1.06.50HA IN MYLERIPALAYAM VILLAGE, MADUKKARAI TALUK, COIMBATORE DISTRICT, TAMIL NADU.

7.3	RISK ASSESSMENT:	7-1
7.4	REHABILITATION AND RESETTLEMENT (R & R) PLAN:	7-4
7.5	MINE CLOSURE PLAN:	7-5
7.6	CUMULATIVE IMPACT STUDY:	7-5
7.7	PIT SLOPE STABILITY PLAN	7-11
CHAPTER 8		8-1
PROJECT BENEFITS		8-1
CHAPTER 9		9-1
ENVIRONMENTAL COST BENEFIT ANALYSIS		9-1
CHAPTER 10		10-1
ENVIRONMENTAL MANAGEMENT PLAN		10-1
10.1	INTRODUCTION:	10-1
10.2	COMPONENTS OF THE ENVIRONMENTAL MANAGEMENT PLAN:	10-1
10.3	ENVIRONMENTAL POLLUTION CONTROL COST:	10-9
10.4	CONCLUSION:	10-11
CHAPTER 11		11-1
SUMMARY & CONCLUSION		11-1
11.1	INTRODUCTION:	11-1
11.2	SALIENT FEATURES OF THE PROJECT:	11-2
11.3	EXISTING ENVIRONMENTAL SCENARIO:	11-5
11.4	ANTICIPATED ENVIRONMENTAL IMPACTS AND MITIGATION MEASURES:	11-9
11.5	ENVIRONMENTAL MONITORING PROGRAMME:	11-16
11.6	ADDITIONAL STUDIES:	11-17
11.7	CONCLUSION:	11-17
CHAPTER 12 DISCLOSURE OF CONSULTANTS ENGAGED		12-1



LIST OF FIGURES

Figure 2.1: Location Map	2-2
Figure 2.2: Approachability Map	2-3
Figure 2.3: Lease Plan	2-4
Figure 2.4: Satellite Imagery Showing Corner Co-ordinates of the Project Area	2-6
Figure 2.5: Village Map	2-8
Figure 2.6: Details of features within 500m radius	2-9
Figure 2.7: Surface & Geological Plan	2-12
Figure 2.8: Geological Cross Section	2-13
Figure 2.9: Process Flow Diagram	2-15
Figure 2.10: Year wise Plan	2-17
Figure 2.11: Year wise Cross Section	2-18
Figure 2.12: Conceptual Plan	2-19
Figure 2.13: Conceptual Cross Section	2-20
Figure 3.1: Study Area Map	3-2
Figure 3.2: Demographic Structure in Buffer Zone	3-6
Figure 3.3: Cyclone Prone Areas	3-12
Figure 3.4: Seismic Zone Map of India	3-13
Figure 3.5: Average Wind Rose	3-16
Figure 3.6: Ambient Air Quality Study Stations	3-18
Figure 3.7: Ambient Air Quality Data	3-19
Figure 3.8: Location of Water Sampling Stations	3-21
Figure 3.9: Location of Noise Sampling Stations	3-24
Figure 3.10: Noise Level Data	3-25
Figure 3.11: Location of Soil Sampling Stations	3-27
Figure 3.12 : Landsat 8 Satellite Data of the Study Area	3-30
Figure 3.13: Map Showing Land Use Categories around 10km Buffer	3-31
Figure 3.14: Landuse within the Buffer Zone Area	3-33



DRAFT EIA/EMP REPORT FOR ROUGHSTONE & GRAVEL QUARRY OF THIRU.K.RAMARAJ IN S.F.NOS. 70/1(P) OVER AN AREA OF 1.06.50HA IN MYLERIPALAYAM VILLAGE, MADUKKARAI TALUK, COIMBATORE DISTRICT, TAMIL NADU.

Figure 3.15: Drainage Map	3-42
Figure 3.16: Geology Map.....	3-43
Figure 3.17: Geomorphology Map.....	3-44
Figure 3.18: Lithology Map.....	3-45
Figure 3.19: Soil Map	3-46
Figure 4.1: Isopleth of GLC Prediction for PM ₁₀	4-6
Figure 4.2: Isopleth of GLC Prediction for PM _{2.5}	4-7
Figure 4.3: Water Balance Diagram	4-9
Figure 4.4: Surface Runoff Management Structures	4-11
Figure 7.1: Vicinity Map.....	7-7
Figure 10.1: Organization Chart	10-3
Figure 12.1: Disclosure of consultants engaged.....	12-1

LIST OF TABLES

Table 1.1 Identification of project	1-1
Table 1.2: Identification of Project Proponent.....	1-1
Table 1.3: Statutory Approvals	1-2
Table 1.4: Brief Description of Nature of project.....	1-3
Table 1.5: Location of the project	1-3
Table 2.1: Mine site description.....	2-1
Table 2.2: Features within 300m radius	2-10
Table 2.3: Survey Number wise Area Breakup.....	2-11
Table 2.4: Details of reserves.....	2-14
Table 2.5: Details of Equipments	2-14
Table 2.6: Proposed Schedule of Implementation	2-14
Table 2.7: Previous lease details.....	2-15
Table 2.8: Existing Pit Dimensions	2-16
Table 2.9: Production during earlier lease period (22.01.2019 – 21.01.2024).....	2-16
Table 2.10: Production Schedule During Plan Period.....	2-16



DRAFT EIA/EMP REPORT FOR ROUGHSTONE & GRAVEL QUARRY OF THIRU.K.RAMARAJ IN S.F.NOS. 70/1(P) OVER AN AREA OF 1.06.50HA IN MYLERIPALAYAM VILLAGE, MADUKKARAI TALUK, COIMBATORE DISTRICT, TAMIL NADU.

Table 2.11: Ultimate Pit Dimensions	2-18
Table 2.12: Land Use.....	2-20
Table 2.13: Project Requirements.....	2-21
Table 3.1: Type of Baseline Data	3-1
Table 3.2: Environmental Setting of the Study Area	3-3
Table 3.3: Social, Economic and Demographic Profile of the Study Area.....	3-4
Table 3.4: Primary Schools in the Buffer Zone Rural Villages	3-8
Table 3.5: Education Facility Availability.....	3-9
Table 3.6: Healthcare Amenities Availability.....	3-9
Table 3.7: Infrastructure Facilities	3-9
Table 3.8: Average Annual Rainfall Data.....	3-14
Table 3.9: Meteorological Data	3-15
Table 3.10: Air Quality Monitoring	3-17
Table 3.11: Air Quality Monitoring Locations	3-17
Table 3.12: Ambient Air Quality Data	3-19
Table 3.13: Water Quality Monitoring	3-20
Table 3.14: Summary of Water Quality Data	3-22
Table 3.15: Noise Level Monitoring	3-23
Table 3.16: Ambient Noise Level in dB (A).....	3-25
Table 3.17: Soil Quality Monitoring.....	3-26
Table 3.18: Soil Quality Data.....	3-28
Table 3.19: RS satellite image used for the present study.....	3-29
Table 3.20: Major Landuse Units of the Study Area	3-30
Table 3.21: Area Estimation of Landuse Categories in Buffer Zone	3-31
Table 3.22: Land Use Pattern of the Study Area Falling Within 10 Km Area in (Ha).....	3-33
Table 3.23: List of Floristic Species in the Core Zone.....	3-36
Table 3.24: List of Floristic Species in the Buffer Zone.....	3-38
Table 3.25: List of Fauna in the Buffer Zone	3-41



DRAFT EIA/EMP REPORT FOR ROUGHSTONE & GRAVEL QUARRY OF THIRU.K.RAMARAJ IN S.F.NOS. 70/1(P) OVER AN AREA OF 1.06.50HA IN MYLERIPALAYAM VILLAGE, MADUKKARAI TALUK, COIMBATORE DISTRICT, TAMIL NADU.

Table 4.1: Impact and Mitigation Measures – Air Environment.....	4-2
Table 4.2: Emission Sources.....	4-3
Table 4.3: Emission Factors.....	4-4
Table 4.4: Emission Rate	4-4
Table 4.5: Peak Incremental Concentration	4-4
Table 4.6: Concentrations Of PM ₁₀ after Project Implementation.....	4-8
Table 4.7: Concentrations Of PM _{2.5} after Project Implementation	4-8
Table 4.8: Main Sources of Noise	4-13
Table 4.9: Impact of Noise Levels	4-14
Table 4.10: Post Project Noise Levels.....	4-15
Table 4.11: Permissible Peak Particle Velocity (PPV) In Mining Areas	4-17
Table 4.12: Land Use Table	4-18
Table 4.13: Land Use During Post Operational Period	4-18
Table 4.14: Impact on Biological Environment	4-19
Table 4.15: Proposed Plantation	4-23
Table 4.16: CER Cost	4-24
Table 4.17: Details of Transportation	4-26
Table 6.1: Environmental Monitoring Schedule	6-2
Table 6.2: Environmental Standards	6-3
Table 6.3: National Ambient Air Quality Standards.....	6-3
Table 6.4: IS – 10500 :2012 Standards.....	6-5
Table 6.5: Noise Level Standards	6-7
Table 6.6: Permissible Noise For Industrial Workers As Laid Down By CPCB	6-7
Table 6.7: Permissible Peak Particle Velocity (PPV) In Mining Areas	6-8
Table 7.1: Details of quarries within 500m radius	7-5
Table 7.2: Salient details of the proposed quarries.....	7-8
Table 7.4: Concentrations of PM ₁₀ after Project Implementation	7-9
Table 7.5: Concentrations of PM _{2.5} after Project Implementation	7-9



DRAFT EIA/EMP REPORT FOR ROUGHSTONE & GRAVEL QUARRY OF THIRU.K.RAMARAJ IN S.F.NOS. 70/1(P) OVER AN AREA OF 1.06.50HA IN MYLERIPALAYAM VILLAGE, MADUKKARAI TALUK, COIMBATORE DISTRICT, TAMIL NADU.

Table 7.7: Cumulative number of trips.....	7-11
Table 10.1: Environmental Control Cost.....	10-9
Table 11.1: Site Details	11-2
Table 11.2: Environment Setting of The Study Area.....	11-3
Table 11.3: Technical Description	11-3
Table 11.4: Social, Economic and Demographic Profile of the Study Area.....	11-5
Table 11.5: Baseline Data	11-6
Table 11.6: Land Use in 10Km Buffer Zone	11-8
Table 11.7: Mitigation Measures – Air Environment	11-10
Table 11.8: Mitigation Measures – Water Pollution	11-11

LIST OF ANNEXURES

Annexure 1: Precise Area Communication	A-1
Annexure 2: Mining Plan Approval	A-3
Annexure 3: Details of quarry within 500m radius	A-5
Annexure 4: VAO Letter	A-7
Annexure 5: Existing Pit letter	A-9
Annexure 6: Consent Registered Documents	A-11
Annexure 7: Previous EC Copy	A-31
Annexure 8: Certified compliance report	A-41
Annexure 9: Population Breakup and Literacy Levels in the Buffer Zone	A-138
Annexure 10: Occupational Structure in the Buffer Zone	A-140
Annexure 11: Educational Facilities in the Buffer Zone	A-142
Annexure 12: Medical Facilities in the Buffer Zone	A-144
Annexure 13: Infrastructural Facilities in the Buffer Zone	A-146
Annexure 14: Ambient Air Quality Data	A-148
Annexure 15: Noise Quality Data	A-154
Annexure 16: Water Quality Data	A-155
Annexure 17: Soil Quality Data	A-161



**DRAFT EIA/EMP REPORT FOR ROUGHSTONE & GRAVEL QUARRY OF THIRU.K.RAMARAJ IN
S.F.NOS. 70/1(P) OVER AN AREA OF 1.06.50HA IN MYLERIPALAYAM VILLAGE, MADUKKARAI
TALUK, COIMBATORE DISTRICT, TAMIL NADU.**

Annexure 18:	Village-wise Land Use Pattern in the Buffer Zone	A-167
Annexure 19:	Mine plan report with Annexres & plantes	A-169



TERMS OF REFERENCE & ITS COMPLIANCE



File No: 12187
Government of India
Ministry of Environment, Forest and Climate Change
(Issued by the State Environment Impact Assessment Authority(SEIAA),
TAMIL NADU)



Dated 16/07/2025



To,

Thiru. K. Ramaraj
2/395-1, Venkateswara Nagar, Premier Nagar West, othakalmandapam (PO), Coimbatore district,
TAMIL NADU-641032
ramarajrst2023@gmail.com

Subject: Grant of Terms of Reference along with Public Hearing under the provision of the EIA Notification 2006, as amended -regarding.

Sir/Madam,

Sub: SEIAA, Tamil Nadu – Proposed Rough Stone and Gravel Quarry lease over an extent 1.60.5 Ha at S.F.No. 70/1(P), Myleripalayam Village, Madukkarai Taluk, Coimbatore District, Tamil Nadu by Thiru. K. Ramaraj - under project category – “B1” and Schedule S.No. 1(a) – ToR issued along with Public Hearing- preparation of EIA report – Regarding.

Ref: 1. Online proposal No. SIA/TN/MIN/528033/2025, Dated: 14.05.2025.

2. Minutes of the 578th meeting of SEAC held on 13.06.2025.

3. Minutes of the 849th SEIAA meeting held on 10.07.2025.

2. The particulars of the proposal are as below :

(i) TOR Identification No.	TO25B0108TN5570602N
(ii) File No.	12187
(iii) Clearance Type	TOR
(iv) Category	B1
(v) Project/Activity Included Schedule No.	1(a) Mining of minerals
(vii) Name of Project	ROUGHSTONE & GRAVEL QUARRY OF THIRU.K.RAMARAJ
(viii) Name of Company/Organization	KANDASAMY RAMARAJ
(ix) Location of Project (District, State)	COIMBATORE, TAMIL NADU
(x) Issuing Authority	SEIAA
(xi) Applicability of General Conditions	no
(xii) Applicability of Specific Conditions	no

1. In view of the particulars given in the Para 1 above, the project proposal inter alia including Form-1 (Part A and B) were submitted to the SEIAA for an appraisal by the SEAC under the provision of EIA notification 2006 and its subsequent amendments.
2. The above-mentioned proposal has been considered by SEIAA in the meeting held on 10.07.2025. The minutes of the meeting and all the Application and documents submitted [(viz. Form-1 Part A, Part B,)] are available on PARIVESH portal which can be accessed by scanning the QR Code above.
3. The State Expert Appraisal Committee (SEAC), based on the information & clarifications provided by the project proponent and after detailed deliberations on all technical aspects recommended the proposal for grant of Terms of Reference with public hearing under the provision of EIA Notification, 2006 and as amended thereof subject to the stipulation of specific and general conditions as detailed in Annexure (2).
4. The SEIAA has examined the proposal in accordance with the Environment Impact Assessment (EIA) Notification, 2006 & further amendments thereto and after accepting the recommendations of the SEAC hereby decided to issue the following Terms of Reference with public hearing for instant proposal of Thiru. K. Ramaraj under the provisions of EIA Notification, 2006 and as amended thereof.
5. The Ministry/SEIAA-TN reserves the right to stipulate additional conditions, if found necessary.
6. The Terms of Reference with public hearing to the aforementioned project is under provisions of EIA Notification, 2006. It does not tantamount to approvals/consent/permissions etc. required to be obtained under any other Act/Rule/regulation. The Project Proponent is under obligation to obtain approvals /clearances under any other Acts/Regulations or Statutes, as applicable, to the project.
7. This issues with the approval of the Competent Authority.
8. The TORs with public hearing prescribed shall be valid for a period of three years from the date of issue, for submission of the EIA/EMP report as per OM No. J-11013/41/2006-IA-II(I)(part) dated 29th August, 2017.

Copy To

1. The Secretary, Ministry of Mines, Government of India, Shastri Bhawan, New Delhi.
2. The Additional chief Secretary to Government, Environment and Forests Department, Tamil Nadu.
3. The Additional Chief Secretary to Government, Natural Resources Department, Tamil Nadu.
4. The Chairman, Central Pollution Control Board, Parivesh Bhawan, CBD-Cum-Office Complex, East Arjun Nagar, New Delhi-110 032.
5. The Chair Person, TNPC Board, 76, Mount Salai, Guindy, Chennai-32
6. The District Collector, Coimbatore District
7. The Commissioner of Geology and Mines, Guindy, Chennai-32
8. The Assistant Director, Department of Geology & Mining, Coimbatore District
9. EI Division, Ministry of Environment & Forests, Paryavaran Bhawan, New Delhi.
10. Integrated Regional office of MoEF&CC, Sastri Bhawan, Nungambakkam, Chennai
11. File Copy.

Annexure 1

Specific Terms of Reference for (Mining Of Minerals)

1. Seac Conditions - Site Specific

S. No	Terms of Reference
1.1	1. The PP shall obtain Certified Compliance Report (CCR) from Integrated Regional Office, MoEF&CC, Chennai for the earlier Environmental Clearance obtained from DEIAA. 2. The PP shall complete greenbelt and fencing for both existing & proposed mining sites and furnish photographs for the same. 3. A Cluster Management Committee (CMC) shall be constituted including all the mines in the cluster as Committee Members for the effective management of the mining operation in the cluster through systematic & scientific approach with appointment of statutory personnel,

S. No	Terms of Reference
	appropriate environmental monitoring, good maintenance of haul roads and village/panchayat roads, authorized blasting operation etc. The PP shall submit the following details in the form of an Affidavit during the EIA appraisal: (i) Copy of the agreement forming CMC. (ii) The Organisation chart of the Committee with defining the role of the members (iii) The 'Standard Operating Procedures' (SoP) executing the planned activities. 4. The Boundary pillars to be erected as per the mine rules and the evidence should be submitted along with the EIA report. 5. Since waterbodies are situated nearby, the PP shall carry out the hydrogeological and hydrological study including the details of waterflow pattern to determine the impacts of the mining operation in the waterbodies. 6. The project proponent shall submit a Certified Compliance Report (CCR) obtained from the RO, MoEF&CC, Chennai for the previous EC dated. 11.08.2017 and appropriate mitigating measures for the non-compliance items, if any. 7. The details of enumeration of structures including schools, colleges, primary health centres should be submitted along with the EIA report. 8. The structures within the radius of (i) 50 m, (ii) 100 m, (iii) 200 m and (iv) 300 m & upto 1km shall be enumerated with details such as dwelling houses with number of occupants, whether it belongs to the owner (or) not, places of worship, industries, factories, sheds, etc. and spell out the mitigation measures to be proposed for the protection of the above structures, if any during the quarrying operations. 9. The proponent shall furnish photographs of adequate fencing; garland drainage built with siltation tank & green belt along the periphery including replantation of existing trees; maintaining the safety distance between the adjacent quarries & water bodies nearby provided as per the approved mining plan. 10. The Proponent shall carry out Bio diversity study as a part of EIA study and the same shall be included in the Report. 11. The PP shall prepare the EMP for the entire life of mine and also furnish the sworn affidavit stating to abide the EMP for the entire life of mine. 12. The PP shall carry out the comprehensive studies on the cumulative environmental impacts of the existing & proposed quarries which included drilling & blasting, loading & hauling on the surrounding village and structures. 13. For the safety of the persons employed in the quarry, the PP shall carry out the scientific studies to assess the slope stability of the existing quarry wall (exists without benches) for spelling out the slope stability action plan with mitigation measures and working methodology, by involving any one of the reputed Research and Academic Institutions such as CSIR-Central Institute of Mining & Fuel Research / Dhanbad, NIRM/Bangalore, Division of Geotechnical Engineering-IIT-Madras, NIT-Dept of Mining Engg, Surathkal, and Dept of Mining Engg., Anna University Chennai, etc. A copy of such scientific study report shall be submitted with an action plan accommodating the inclusion of haul road accessibility with maintaining the proper gradient by ensuring the slope stability of the working benches to be constructed and existing quarry wall. 14. The PP shall install the CCTV camera for the continuous surveillance of mining activity & furnish the photographic/videographic evidence along with the EIA report.

2. Seac Standard Conditions

S. No	Terms of Reference
2.1	1. In the case of existing/operating mines, a letter obtained from the concerned AD (Mines) shall be submitted and it shall include the following: (i) Original pit dimension

S. No	Terms of Reference
	(ii) Quantity achieved Vs EC Approved Quantity (iii) Balance Quantity as per Mineable Reserve calculated. (iv) Mined out Depth as on date Vs EC Permitted depth (v) Details of illegal/illicit mining (vi) Violation in the quarry during the past working. (vii) Quantity of material mined out outside the mine lease area (viii) Condition of Safety zone/benches (ix) Revised/Modified Mining Plan showing the benches of not exceeding 6 m height and ultimate depth of not exceeding 50m. 2. Details of habitations around the proposed mining area and latest VAO certificate regarding the location of habitations within 300m radius from the periphery of the site. 3. The proponent is requested to carry out a survey and enumerate on the structures located within the radius of (i) 50 m, (ii) 100 m, (iii) 200 m and (iv) 300 m (v) 500m shall be enumerated with details such as dwelling houses with number of occupants, whether it belongs to the owner (or) not, places of worship, industries, factories, sheds, etc with indicating the owner of the building, nature of construction, age of the building, number of residents, their profession and income, etc. 4. The PP shall submit a detailed hydrological report indicating the impact of proposed quarrying operations on the waterbodies like lake, water tanks, etc are located within 1 km of the proposed quarry. 5. The Proponent shall carry out Bio diversity study through reputed Institution and the same shall be included in EIA Report. 6. The DFO letter stating that the proximity distance of Reserve Forests, Protected Areas, Sanctuaries, Tiger reserve etc., up to a radius of 25 km from the proposed site. 7. In the case of proposed lease in an existing (or old) quarry where the benches are not formed (or) partially formed as per the approved Mining Plan, the Project Proponent (PP) shall the PP shall carry out the scientific studies to assess the slope stability of the working benches to be constructed and existing quarry wall, by involving any one of the reputed Research and Academic Institutions - CSIR-Central Institute of Mining & Fuel Research / Dhanbad, NIRM/Bangalore, Division of Geotechnical Engineering-IIT-Madras, NIT-Dept of Mining Engg, Surathkal, and Anna University Chennai-CEG Campus. The PP shall submit a copy of the aforesaid report indicating the stability status of the quarry wall and possible mitigation measures during the time of appraisal for obtaining the EC. 8. However, in case of the fresh/virgin quarries, the Proponent shall submit a conceptual 'Slope Stability Plan' for the proposed quarry during the appraisal while obtaining the EC, when the depth of the working is extended beyond 30 m below ground level. 9. The PP shall furnish the affidavit stating that the blasting operation in the proposed quarry is carried out by the statutory competent person as per the MMR 1961 such as blaster, mining mate, mine foreman, II/I Class mines manager appointed by the proponent. 10. The PP shall present a conceptual design for carrying out only controlled blasting operation involving line drilling and muffle blasting in the proposed quarry such that the blast-induced ground vibrations are controlled as well as no fly rock travel beyond 30 m from the blast site. 11. The EIA Coordinators shall obtain and furnish the details of quarry/quarries operated by the proponent in the past, either in the same location or elsewhere in the State with video and photographic evidences. 12. If the proponent has already carried out the mining activity in the proposed mining lease area after 15.01.2016, then the proponent shall furnish the following details from AD/DD, mines, 13. What was the period of the operation and stoppage of the earlier mines with last work permit issued by the AD/DD mines? 14. Quantity of minerals mined out. · Highest production achieved in any one year · Detail of approved depth of mining. · Actual depth of the mining achieved earlier.

S. No	Terms of Reference
	· Name of the person already mined in that leases area. · If EC and CTO already obtained, the copy of the same shall be submitted. · Whether the mining was carried out as per the approved mine plan (or EC if issued) with stipulated benches. 15. All corner coordinates of the mine lease area, superimposed on a High-Resolution Imagery/Topo sheet, topographic sheet, geomorphology, lithology and geology of the mining lease area should be provided. Such an Imagery of the proposed area should clearly show the land use and other ecological features of the study area (core and buffer zone). 16. The PP shall carry out Drone video survey covering the cluster, green belt, fencing, etc., 17. The proponent shall furnish photographs of adequate fencing, green belt along the periphery including replantation of existing trees & safety distance between the adjacent quarries & water bodies nearby provided as per the approved mining plan. 18. The Project Proponent shall provide the details of mineral reserves and mineable reserves, planned production capacity, proposed working methodology with justifications, the anticipated impacts of the mining operations on the surrounding environment, and the remedial measures for the same. 19. The Project Proponent shall provide the Organization chart indicating the appointment of various statutory officials and other competent persons to be appointed as per the provisions of the Mines Act'1952 and the MMR, 1961 for carrying out the quarrying operations scientifically and systematically in order to ensure safety and to protect the environment. 20. The Project Proponent shall conduct the hydro-geological study considering the contour map of the water table detailing the number of groundwater pumping & open wells, and surface water bodies such as rivers, tanks, canals, ponds, etc. within 1 km (radius) along with the collected water level data for both monsoon and non-monsoon seasons from the PWD / TWAD so as to assess the impacts on the wells due to mining activity. Based on actual monitored data, it may clearly be shown whether working will intersect groundwater. Necessary data and documentation in this regard may be provided. 21. The proponent shall furnish the baseline data for the environmental and ecological parameters with regard to surface water/ground water quality, air quality, soil quality & flora/fauna including traffic/vehicular movement study. 22. The Proponent shall carry out the Cumulative impact study due to mining operations carried out in the quarry specifically with reference to the specific environment in terms of soil health, biodiversity, air pollution, water pollution, climate change and flood control & health impacts. Accordingly, the Environment Management plan should be prepared keeping the concerned quarry and the surrounding habitations in the mind. 23. Rain water harvesting management with recharging details along with water balance (both monsoon & non-monsoon) be submitted. 24. Land use of the study area delineating forest area, agricultural land, grazing land, wildlife sanctuary, national park, migratory routes of fauna, water bodies, human settlements and other ecological features should be indicated. Land use plan of the mine lease area should be prepared to encompass preoperational, operational and post operational phases and submitted. Impact, if any, of change of land use should be given. 25. Details of the land for storage of Overburden/Waste Dumps (or) Rejects outside the mine lease, such as extent of land area, distance from mine lease, its land use, R&R issues, if any, should be provided. 26. Proximity to Areas declared as 'Critically Polluted' (or) the Project areas which attracts the court restrictions for mining operations, should also be indicated and where so required, clearance certifications from the prescribed Authorities, such as the TNPCB (or) Dept. of Geology and Mining should be secured and furnished to the effect that the proposed mining activities could be considered. 27. Description of water conservation measures proposed to be adopted in the Project should be given. Details of rainwater harvesting proposed in the Project, if any, should be provided.

S. No	Terms of Reference
	28. Impact on local transport infrastructure due to the Project should be indicated. 29. A tree survey study shall be carried out (nos., name of the species, age, diameter etc.,) both within the mining lease applied area & 300m buffer zone and its management during mining activity. 30. A detailed mine closure plan for the proposed project shall be included in EIA/EMP report which should be site-specific. 31. As a part of the study of flora and fauna around the vicinity of the proposed site, the EIA coordinator shall strive to educate the local students on the importance of preserving local flora and fauna by involving them in the study, wherever possible. 32. The purpose of Green belt around the project is to capture the fugitive emissions, carbon sequestration and to attenuate the noise generated, in addition to improving the aesthetics. A wide range of indigenous plant species should be planted as given in the appendix-I in consultation with the DFO, State Agriculture University. The plant species with dense/moderate canopy of native origin should be chosen. Species of small/medium/tall trees alternating with shrubs should be planted in a mixed manner. 33. Taller/one year old Saplings raised in appropriate size of bags, preferably ecofriendly bags should be planted as per the advice of local forest authorities/botanist/Horticulturist with regard to site specific choices. The proponent shall earmark the greenbelt area with GPS coordinates all along the boundary of the project site with at least 3 meters wide and in between blocks in an organized manner 34. A Disaster management Plan shall be prepared and included in the EIA/EMP Report for the complete life of the proposed quarry (or) till the end of the lease period. 35. A Risk Assessment and management Plan shall be prepared and included in the EIA/EMP Report for the complete life of the proposed quarry (or) till the end of the lease period. 36. Occupational Health impacts of the Project should be anticipated and the proposed preventive measures spelt out in detail. Details of pre-placement medical examination and periodical medical examination schedules should be incorporated in the EMP. The project specific occupational health mitigation measures with required facilities proposed in the mining area may be detailed. 37. Public health implications of the Project and related activities for the population in the impact zone should be systematically evaluated and the proposed remedial measures should be detailed along with budgetary allocations. 38. The Socio-economic studies should be carried out within a 5 km buffer zone from the mining activity. Measures of socio-economic significance and influence to the local community proposed to be provided by the Project Proponent should be indicated. As far as possible, quantitative dimensions may be given with time frames for implementation. 39. Details of litigation pending against the project, if any, with direction /order passed by any Court of Law against the Project should be given. 40. Benefits of the Project if the Project is implemented should be spelt out. The benefits of the Project shall clearly indicate environmental, social, economic, employment potential, etc. 41. If any quarrying operations were carried out in the proposed quarrying site for which now the EC is sought, the Project Proponent shall furnish the detailed compliance to EC conditions given in the previous EC with the site photographs which shall duly be certified by MoEF&CC, Regional Office, Chennai (or) the concerned DEE/TNPCB. 42. The PP shall prepare the EMP for the entire life of mine and also furnish the sworn affidavit stating to abide the EMP for the entire life of mine. 43. Concealing any factual information or submission of false/fabricated data and failure to comply with any of the conditions mentioned above may result in withdrawal of this Terms of Conditions besides attracting penal provisions in the Environment (Protection) Act, 1986.

3. Seiaa Specific Conditions :

S. No	Terms of Reference
3.1	After detailed discussions, the Authority accepts the recommendation of SEAC-II and decided to grant Terms of Reference (ToR) along with Public Hearing for the quantity of 73,750 m³ of Rough Stone & 10,614 m³ of Gravel upto the depth of 48m BGL (including the existing depth of 38m BGL) as per the approved mining plan, under cluster for undertaking the combined Environment Impact Assessment Study and preparation of separate Environment Management Plan subject to the conditions as recommended by SEAC-II & normal conditions & the conditions mentioned in Annexure of this minutes.

4. Seiaa Standard Conditions :

S. No	Terms of Reference
4.1	<u>Cluster Management Committee</u> - Cluster Management Committee shall be framed which must include all the proponents in the cluster as members including the existing as well as proposed quarry. - The members must coordinate among themselves for the effective implementation of EMP as committed including Green Belt Development, Water sprinkling, tree plantation, blasting etc., - The List of members of the committee formed shall be submitted to AD/Mines before the execution of mining lease and the same shall be updated every year to the AD/Mines. - Detailed Operational Plan must be submitted which must include the blasting frequency with respect to the nearby quarry situated in the cluster, the usage of haul roads by the individual quarry in the form of route map and network. - The committee shall deliberate on risk & emergency management plan, fire safety & evacuation plan and sustainable development goals pertaining to the cluster in a holistic manner especially during natural calamities like intense rain and the mitigation measures considering the inundation of the cluster and evacuation plan. - The Cluster Management Committee shall form Environmental Policy to practice sustainable mining in a scientific and systematic manner in accordance with the law. The role played by the committee in implementing the Environmental policy devised shall be given in detail in the EIA Report. - The committee shall furnish action plan regarding the restoration strategy with respect to the individual quarry falling under the cluster in a holistic manner. - The committee shall deliberate on the health of the workers/staff involved in the mining as well as the health of the public in the vicinity. <u>Agriculture & Agro-Biodiversity</u> - Impact on surrounding agricultural fields around the proposed mining Area. - Impact on soil flora & vegetation around the project site. - Details of type of vegetation including no. of trees & shrubs within the proposed mining area and. If so, transplantation of such vegetation all along the boundary of the proposed mining area shall committed mentioned in EMP. - The Environmental Impact Assessment should study the agro-biodiversity, agro- forestry, horticultural plantations, the natural ecosystem, the soil micro flora, fauna and soil seed banks and suggest measures to maintain the natural Ecosystem. - Action should specifically suggest for sustainable management of the area and restoration of ecosystem for flow of goods and services. - The project proponent shall study and furnish the impact of project on plantations in adjoining patta lands, Horticulture, Agriculture and livestock. <u>Forests</u> - The project proponent shall detailed study on impact of mining on Reserve forests and free ranging wildlife.

S. No	Terms of Reference
	16. The Environmental Impact Assessment should study impact on forest, vegetation, endemic, vulnerable and endangered indigenous flora and fauna. 17. The Environmental Impact Assessment should study impact on standing trees and the existing trees should be numbered and action suggested for protection. 18. The Environmental Impact Assessment should study impact on protected areas, Reserve Forests, National Parks, Corridors and Wildlife pathways, near project site. <u>Water Environment</u> 19. Hydro-geological study considering the contour map of the water table detailing the number of ground water pumping & open wells, and surface water bodies such as rivers, tanks, canals, ponds etc. within 1 km (radius) so as to assess the impacts on the nearby waterbodies due to mining activity. Based on actual monitored data, it may clearly be shown whether working will intersect groundwater. Necessary data and documentation in this regard may be provided, covering the entire mine lease period. 20. Erosion Control measures. 21. Detailed study shall be carried out in regard to impact of mining around the proposed mine lease area on the nearby Villages, Water-bodies/ Rivers, & any ecological fragile areas. 22. The project proponent shall study impact on fish habitats and the food WEB/ food chain in the water body and Reservoir. 23. The project proponent shall study and furnish the details on potential fragmentation impact on natural Environment, by the activities. 24. The project proponent shall study and furnish the impact on aquatic plants and animals in water bodies and possible scars on the landscape, damages to nearby caves, heritage site, and archaeological sites possible land form changes visual and aesthetic impacts. 25. The Terms of Reference should specifically study impact on soil health, soil erosion, the soil physical, chemical components and microbial components. 26. The Environmental Impact Assessment should study on wetlands, water bodies, rivers streams, lakes and farmer sites. 27. The EIA shall include the impact of mining activity on the following: a) Hydrothermal/Geothermal effect due to destruction in the Environment. b) Bio-geochemical processes and its foot prints including Environmental stress. c) Sediment geochemistry in the surface streams. <u>Energy</u> 28. The measures taken to control Noise, Air, Water, Dust Control and steps adopted to efficiently utilise the Energy shall be furnished.

S. No	Terms of Reference
	<u>Climate Change</u> 29. The Environmental Impact Assessment shall study in detail the carbon emission and also suggest the measures to mitigate carbon emission including development of carbon sinks and temperature reduction including control of other emission and climate mitigation activities. 30. The Environmental Impact Assessment should study impact on climate change, temperature rise, pollution and above soil & below soil carbon stock, soil health and physical, chemical & biological soil features. 31. Impact of mining on pollution leading to GHGs emissions and the impact of the same on the local livelihood. <u>Mine Closure Plan</u> 32. Detailed Mine Closure Plan covering the entire mine lease period as per precise area communication order issued. <u>EMP</u> 33. Detailed Environment Management Plan along with adaptation, mitigation & remedial strategies covering the entire mine lease period as per precise area communication order issued and the scope for achieving SDGs. 34. The Environmental Impact Assessment should hold detailed study on EMP with budget for Green belt development and mine closure plan including disaster management plan. <u>Risk Assessment</u> 35. To furnish risk assessment and management plan including anticipated vulnerabilities during operational and post operational phases of Mining. <u>Disaster Management Plan</u> 36. To furnish disaster management plan and disaster mitigation measures in regard to all aspects to avoid/reduce vulnerability to hazards & to cope with disaster/untoward accidents in & around the proposed mine lease area due to the proposed method of mining activity & its related activities covering the entire mine lease period as per precise area communication order issued. <u>Others</u> 37. The project proponent shall furnish VAO certificate with reference to 300m radius regard to approved habitations, schools, Archaeological sites, Structures, railway lines, roads, water bodies such as streams, odai, vaari, canal, channel, river, lake pond, tank etc. 38. As per the MoEF& CC office memorandum F.No.22-65/2017-IA.III dated: 30.09.2020 and 20.10.2020 the proponent shall address the concerns raised during the public consultation and all the activities proposed shall be part of the Environment Management Plan. 39. The project proponent shall study and furnish the possible pollution due to plastic and microplastic on the Environment. The ecological risks and impacts of plastic & microplastics on

S. No	Terms of Reference
	aquatic Environment and fresh water systems due to activities, contemplated during mining may be investigated and reported.

Standard Terms of Reference for (Mining of minerals)

1.

S. No	Terms of Reference
1.1	Year-wise production details since 1994 should be given, clearly stating the highest production achieved in any one year prior to 1994. It may also be categorically informed whether there had been any increase in production after the EIA Notification 1994 came into force, w.r.t. the highest production achieved prior to 1994
1.2	A copy of the document in support of the fact that the Proponent is the rightful lessee of the mine should be given
1.3	All documents including approved mine plan, EIA and Public Hearing should be compatible with one another in terms of the mine lease area, production levels, waste generation and its management, mining technology etc. and should be in the name of the lessee
1.4	All corner coordinates of the mine lease area, superimposed on a High Resolution Imagery/toposheet, topographic sheet, geomorphology and geology of the area should be provided. Such an Imagery of the proposed area should clearly show the land use and other ecological features of the study area (core and buffer zone)
1.5	Information should be provided in Survey of India Toposheet in 1:50,000 scale indicating geological map of the area, geomorphology of land forms of the area, existing minerals and mining history of the area, important water bodies, streams and rivers and soil characteristics
1.6	Details about the land proposed for mining activities should be given with information as to whether mining conforms to the land use policy of the State; land diversion for mining should have approval from State land use board or the concerned authority
1.7	It should be clearly stated whether the proponent Company has a well laid down Environment Policy approved by its Board of Directors? If so, it may be spelt out in the EIA Report with description of the prescribed operating process/procedures to bring into focus any infringement/deviation/ violation of the environmental or forest norms/ conditions? The hierarchical system or administrative order of the Company to deal with the environmental issues and for ensuring compliance with the EC conditions may also be given. The system of reporting of non-compliances / violations of environmental norms to the Board of Directors of the Company and/or shareholders or stakeholders at large, may also be detailed in the EIA Report
1.8	Issues relating to Mine Safety, including subsidence study in case of underground mining and slope study in case of open cast mining, blasting study etc. should be detailed. The proposed safeguard measures in each case should also be provided
1.9	The study area will comprise of 10 km zone around the mine lease from lease periphery and the data contained in the EIA such as waste generation etc. should be for the life of the mine / lease period

S. No	Terms of Reference
1.10	Land use of the study area delineating forest area, agricultural land, grazing land, wildlife sanctuary, national park, migratory routes of fauna, water bodies, human settlements and other ecological features should be indicated. Land use plan of the mine lease area should be prepared to encompass preoperational, operational and post operational phases and submitted. Impact, if any, of change of land use should be given
1.11	Details of the land for any Over Burden Dumps outside the mine lease, such as extent of land area, distance from mine lease, its land use, R&R issues, if any, should be given
1.12	A Certificate from the Competent Authority in the State Forest Department should be provided, confirming the involvement of forest land, if any, in the project area. In the event of any contrary claim by the Project Proponent regarding the status of forests, the site may be inspected by the State Forest Department along with the Regional Office of the Ministry to ascertain the status of forests, based on which, the Certificate in this regard as mentioned above be issued. In all such cases, it would be desirable for representative of the State Forest Department to assist the Expert Appraisal Committees
1.13	Status of forestry clearance for the broken up area and virgin forestland involved in the Project including deposition of net present value (NPV) and compensatory afforestation (CA) should be indicated. A copy of the forestry clearance should also be furnished
1.14	Implementation status of recognition of forest rights under the Scheduled Tribes and other Traditional Forest Dwellers (Recognition of Forest Rights) Act, 2006 should be indicated
1.15	The vegetation in the RF / PF areas in the study area, with necessary details, should be given
1.16	A study shall be got done to ascertain the impact of the Mining Project on wildlife of the study area and details furnished. Impact of the project on the wildlife in the surrounding and any other protected area and accordingly, detailed mitigative measures required, should be worked out with cost implications and submitted
1.17	Location of National Parks, Sanctuaries, Biosphere Reserves, Wildlife Corridors, Ramsar site Tiger/ Elephant Reserves/(existing as well as proposed), if any, within 10 km of the mine lease should be clearly indicated, supported by a location map duly authenticated by Chief Wildlife Warden. Necessary clearance, as may be applicable to such projects due to proximity of the ecologically sensitive areas as mentioned above, should be obtained from the Standing Committee of National Board of Wildlife and copy furnished
1.18	A detailed biological study of the study area [core zone and buffer zone (10 km radius of the periphery of the mine lease)] shall be carried out. Details of flora and fauna, endangered, endemic and RET Species duly authenticated, separately for core and buffer zone should be furnished based on such primary field survey, clearly indicating the Schedule of the fauna present. In case of any scheduled- I fauna found in the study area, the necessary plan alongwith budgetary provisions for their conservation should be prepared in consultation with State Forest and Wildlife Department and details furnished. Necessary allocation of funds for implementing the same should be made as part of the project cost
1.19	Proximity to Areas declared as Critically Polluted or the Project areas likely to come under the Aravali Range, (attracting court restrictions for mining operations), should also be indicated and where so required, clearance certifications from the prescribed Authorities, such as the SPCB or

S. No	Terms of Reference
	State Mining Dept. Should be secured and furnished to the effect that the proposed mining activities could be considered
1.20	Similarly, for coastal Projects, A CRZ map duly authenticated by one of the authorized agencies demarcating LTL, HTL, CRZ area, location of the mine lease w.r.t CRZ, coastal features such as mangroves, if any, should be furnished. (Note: The Mining Projects falling under CRZ would also need to obtain approval of the concerned Coastal Zone Management Authority)
1.21	R&R Plan/compensation details for the Project Affected People (PAP) should be furnished. While preparing the R&R Plan, the relevant State/National Rehabilitation & Resettlement Policy should be kept in view. In respect of SCs /STs and other weaker sections of the society in the study area, a need based sample survey, family-wise, should be undertaken to assess their requirements, and action programmes prepared and submitted accordingly, integrating the sectoral programmes of line departments of the State Government. It may be clearly brought out whether the village(s) located in the mine lease area will be shifted or not. The issues relating to shifting of village(s) including their R&R and socio-economic aspects should be discussed in the Report
1.22	One season (non-monsoon) [i.e. March-May (Summer Season); October-December (post monsoon season) ; December-February (winter season)]primary baseline data on ambient air quality as per CPCB Notification of 2009, water quality, noise level, soil and flora and fauna shall be collected and the AAQ and other data so compiled presented date-wise in the EIA and EMP Report. Site-specific meteorological data should also be collected. The location of the monitoring stations should be such as to represent whole of the study area and justified keeping in view the pre-dominant downwind direction and location of sensitive receptors. There should be at least one monitoring station within 500 m of the mine lease in the pre-dominant downwind direction. The mineralogical composition of PM10, particularly for free silica, should be given
1.23	Air quality modeling should be carried out for prediction of impact of the project on the air quality of the area. It should also take into account the impact of movement of vehicles for transportation of mineral. The details of the model used and input parameters used for modeling should be provided. The air quality contours may be shown on a location map clearly indicating the location of the site, location of sensitive receptors, if any, and the habitation. The wind roses showing pre-dominant wind direction may also be indicated on the map
1.24	The water requirement for the Project, its availability and source should be furnished. A detailed water balance should also be provided. Fresh water requirement for the Project should be indicated
1.25	Necessary clearance from the Competent Authority for drawl of requisite quantity of water for the Project should be provided
1.26	Description of water conservation measures proposed to be adopted in the Project should be given. Details of rainwater harvesting proposed in the Project, if any, should be provided
1.27	Impact of the Project on the water quality, both surface and groundwater, should be assessed and necessary safeguard measures, if any required, should be provided
1.28	Based on actual monitored data, it may clearly be shown whether working will intersect groundwater. Necessary data and documentation in this regard may be provided. In case the working will intersect groundwater table, a detailed Hydro Geological Study should be undertaken and Report furnished. The Report inter-alia, shall include details of the aquifers present and impact

S. No	Terms of Reference
	of mining activities on these aquifers. Necessary permission from State Ground Water Authority for working below ground water and for pumping of ground water should also be obtained and copy furnished
1.29	Details of any stream, seasonal or otherwise, passing through the lease area and modification / diversion proposed, if any, and the impact of the same on the hydrology should be brought out
1.30	Information on site elevation, working depth, groundwater table etc. Should be provided both in AMSL and bgl. A schematic diagram may also be provided for the same
1.31	A time bound Progressive Greenbelt Development Plan shall be prepared in a tabular form (indicating the linear and quantitative coverage, plant species and time frame) and submitted, keeping in mind, the same will have to be executed up front on commencement of the Project. Phase-wise plan of plantation and compensatory afforestation should be charted clearly indicating the area to be covered under plantation and the species to be planted. The details of plantation already done should be given. The plant species selected for green belt should have greater ecological value and should be of good utility value to the local population with emphasis on local and native species and the species which are tolerant to pollution
1.32	Impact on local transport infrastructure due to the Project should be indicated. Projected increase in truck traffic as a result of the Project in the present road network (including those outside the Project area) should be worked out, indicating whether it is capable of handling the incremental load. Arrangement for improving the infrastructure, if contemplated (including action to be taken by other agencies such as State Government) should be covered. Project Proponent shall conduct Impact of Transportation study as per Indian Road Congress Guidelines
1.33	Details of the onsite shelter and facilities to be provided to the mine workers should be included in the EIA Report
1.34	Conceptual post mining land use and Reclamation and Restoration of mined out areas (with plans and with adequate number of sections) should be given in the EIA report
1.35	Occupational Health impacts of the Project should be anticipated and the proposed preventive measures spelt out in detail. Details of pre-placement medical examination and periodical medical examination schedules should be incorporated in the EMP. The project specific occupational health mitigation measures with required facilities proposed in the mining area may be detailed
1.36	Public health implications of the Project and related activities for the population in the impact zone should be systematically evaluated and the proposed remedial measures should be detailed along with budgetary allocations
1.37	Measures of socio economic significance and influence to the local community proposed to be provided by the Project Proponent should be indicated. As far as possible, quantitative dimensions may be given with time frames for implementation
1.38	Detailed environmental management plan (EMP) to mitigate the environmental impacts which, should inter-alia include the impacts of change of land use, loss of agricultural and grazing land, if any, occupational health impacts besides other impacts specific to the proposed Project
1.39	Public Hearing points raised and commitment of the Project Proponent on the same along with time

S. No	Terms of Reference
	bound Action Plan with budgetary provisions to implement the same should be provided and also incorporated in the final EIA/EMP Report of the Project
1.40	Details of litigation pending against the project, if any, with direction /order passed by any Court of Law against the Project should be given
1.41	The cost of the Project (capital cost and recurring cost) as well as the cost towards implementation of EMP should be clearly spelt out
1.42	A Disaster management Plan shall be prepared and included in the EIA/EMP Report
1.43	Benefits of the Project if the Project is implemented should be spelt out. The benefits of the Project shall clearly indicate environmental, social, economic, employment potential, etc
1.44	Besides the above, the below mentioned general points are also to be followed:- a) All documents to be properly referenced with index and continuous page numbering. b) Where data are presented in the Report especially in Tables, the period in which the data were collected and the sources should be indicated. c) Project Proponent shall enclose all the analysis/testing reports of water, air, soil, noise etc. using the MoEF&CC/NABL accredited laboratories. All the original analysis/testing reports should be available during appraisal of the Project. d) Where the documents provided are in a language other than English, an English translation should be provided. e) The Questionnaire for environmental appraisal of mining projects as devised earlier by the Ministry shall also be filled and submitted. f) While preparing the EIA report, the instructions for the Proponents and instructions for the Consultants issued by MoEF vide O.M. No. J-11013/41/2006-IA.II(I) dated 4th August, 2009, which are available on the website of this Ministry, should be followed. g) Changes, if any made in the basic scope and project parameters (as submitted in Form-I and the PFR for securing the TOR) should be brought to the attention of MoEF&CC with reasons for such changes and permission should be sought, as the TOR may also have to be altered. Post Public Hearing changes in structure and content of the draft EIA/EMP (other than modifications arising out of the P.H. process) will entail conducting the PH again with the revised documentation. h) As per the circular no. J-11011/618/2010-IA.II(I) dated 30.5.2012, certified report of the status of compliance of the conditions stipulated in the environment clearance for the existing operations of the project, should be obtained from the Regional Office of Ministry of Environment, Forest and Climate Change, as may be applicable. i) The EIA report should also include (i) surface plan of the area indicating contours of main topographic features, drainage and mining area, (ii) geological maps and sections and (iii) sections of the mine pit and external dumps, if any, clearly showing the land features of the adjoining area

A. STANDARD TERMS OF REFERENCE

- 1) Year-wise production details since 1994 should be given, clearly stating the highest production achieved in any one year prior to 1994. It may also be categorically informed whether there had been any increase in production after the EIA Notification 1994 came into force, w.r.t. the highest production achieved prior to 1994.
- 2) A copy of the document in support of the fact that the Proponent is the rightful lessee of the mine should be given.
- 3) All documents including approved mine plan, EIA and Public Hearing should be compatible with one another in terms of the mine lease area, production levels, waste generation and its management, mining technology etc. and should be in the name of the lessee.
- 4) All corner coordinates of the mine lease area, superimposed on a High Resolution Imagery/ topo sheet, topographic sheet, geomorphology and geology of the area should be provided. Such an Imagery of the proposed area should clearly show the land use and other ecological features of the study area (core and buffer zone).
- 5) Information should be provided in Survey of India Topo sheet in 1:50,000 scale indicating geological map of the area, geomorphology of land forms of the area, existing minerals and mining history of the area, important water bodies, streams and rivers and soil characteristics.
- 6) Details about the land proposed for mining activities should be given with information as to whether mining conforms to the land use policy of the State; land diversion for mining should have approval from State land use board or the concerned authority.
- 7) It should be clearly stated whether the proponent Company has a well laid down Environment Policy approved by its Board of Directors? If so, it may be spelt out in the EIA Report with description of the prescribed operating process/procedures to bring into focus any infringement/deviation/ violation of the environmental or forest norms/ conditions? The hierarchical system or administrative order of the Company to deal with the environmental issues and for ensuring compliance with the EC conditions may also be given. The system of reporting of non-compliances / violations of environmental norms to the Board of Directors of the Company and/or shareholders or stakeholders at large, may also be detailed in the EIA Report.
- 8) Issues relating to Mine Safety, including subsidence study in case of underground mining and slope study in case of open cast mining, blasting study etc. should be detailed. The proposed safeguard measures in each case should also be provided.

- 9) The study area will comprise of 10 km zone around the mine lease from lease periphery and the data contained in the EIA such as waste generation etc. should be for the life of the mine / lease period.
- 10) Land use of the study area delineating forest area, agricultural land, grazing land, wildlife sanctuary, national park, migratory routes of fauna, water bodies, human settlements and other ecological features should be indicated. Land use plan of the mine lease area should be prepared to encompass preoperational, operational and post operational phases and submitted. Impact, if any, of change of land use should be given.
- 11) Details of the land for any Over Burden Dumps outside the mine lease, such as extent of land area, distance from mine lease, its land use, R&R issues, if any, should be given.
- 12) Certificate from the Competent Authority in the State Forest Department should be provided, confirming the involvement of forest land, if any, in the project area. In the event of any contrary claim by the Project Proponent regarding the status of forests, the site may be inspected by the State Forest Department along with the Regional Office of the Ministry to ascertain the status of forests, based on which, the Certificate in this regard as mentioned above be issued. In all such cases, it would be desirable for representative of the State Forest Department to assist the Expert Appraisal Committees.
- 13) Status of forestry clearance for the broken up area and virgin forestland involved in the Project including deposition of Net Present Value (NPV) and Compensatory Afforestation (CA) should be indicated. A copy of the forestry clearance should also be furnished.
- 14) Implementation status of recognition of forest rights under the Scheduled Tribes and other Traditional Forest Dwellers (Recognition of Forest Rights) Act, 2006 should be indicated.
- 15) The vegetation in the RF / PF areas in the study area, with necessary details, should be given.
- 16) A study shall be got done to ascertain the impact of the Mining Project on wildlife of the study area and details furnished. Impact of the project on the wildlife in the surrounding and any other protected area and accordingly, detailed mitigative measures required, should be worked out with cost implications and submitted.
- 17) Location of National Parks, Sanctuaries, Biosphere Reserves, Wildlife Corridors, Ramsar site Tiger/ Elephant Reserves/(existing as well as proposed), if any, within 10 km of the mine lease should be clearly indicated, supported by a location map duly

authenticated by Chief Wildlife Warden. Necessary clearance, as may be applicable to such projects due to proximity of the ecologically sensitive areas as mentioned above, should be obtained from the Standing Committee of National Board of Wildlife and copy furnished.

- 18) A detailed biological study of the study area [core zone and buffer zone (10 km radius of the periphery of the mine lease)] shall be carried out. Details of flora and fauna, endangered, endemic and RET Species duly authenticated, separately for core and buffer zone should be furnished based on such primary field survey, clearly indicating the Schedule of the fauna present. In case of any scheduled-I fauna found in the study area, the necessary plan along with budgetary provisions for their conservation should be prepared in consultation with State Forest and Wildlife Department and details furnished. Necessary allocation of funds for implementing the same should be made as part of the project cost.
- 19) Proximity to Areas declared as 'Critically Polluted' or the Project areas likely to come under the 'Aravali Range', (attracting court restrictions for mining operations), should also be indicated and where so required, clearance certifications from the prescribed Authorities, such as the SPCB or State Mining Department should be secured and furnished to the effect that the proposed mining activities could be considered.
- 20) Similarly, for Coastal Projects, a CRZ map duly authenticated by one of the authorized agencies demarcating LTL, HTL, CRZ area, location of the mine lease with respect to CRZ, coastal features such as mangroves, if any, should be furnished. (Note: The Mining Projects falling under CRZ would also need to obtain approval of the concerned Coastal Zone Management Authority).
- 21) R&R Plan/compensation details for the Project Affected People (PAP) should be furnished. While preparing the R&R Plan, the relevant State/National Rehabilitation & Resettlement Policy should be kept in view. In respect of SCs /STs and other weaker sections of the society in the study area, a need based sample survey, family-wise, should be undertaken to assess their requirements, and action programmes prepared and submitted accordingly, integrating the sectoral programmes of line departments of the State Government. It may be clearly brought out whether the village(s) located in the mine lease area will be shifted or not. The issues relating to shifting of village(s) including their R&R and socio-economic aspects should be discussed in the Report.
- 22) One season (non-monsoon) [i.e. March-May (Summer Season); October-December (post monsoon season) ; December-February (winter season)]primary baseline data on

ambient air quality as per CPCB Notification of 2009, water quality, noise level, soil and flora and fauna shall be collected and the AAQ and other data so compiled presented date-wise in the EIA and EMP Report. Site-specific meteorological data should also be collected. The location of the monitoring stations should be such as to represent whole of the study area and justified keeping in view the pre-dominant downwind direction and location of sensitive receptors. There should be at least one monitoring station within 500 m of the mine lease in the pre-dominant downwind direction. The mineralogical composition of PM10, particularly for free silica, should be given.

- 23) Air quality modeling should be carried out for prediction of impact of the project on the air quality of the area. It should also take into account the impact of movement of Vehicles for transportation of mineral. The details of the model used and input parameters used for modeling should be provided. The air quality contours may be shown on a location map clearly indicating the location of the site, location of sensitive receptors, if any, and the habitation. The wind roses showing pre-dominant wind direction may also be indicated on the map.
- 24) The water requirement for the Project, its availability and source should be furnished. A detailed water balance should also be provided. Fresh water requirement for the Project should be indicated.
- 25) Necessary clearance from the Competent Authority for drawl of requisite quantity of water for the Project should be provided.
- 26) Description of water conservation measures proposed to be adopted in the Project should be given. Details of rainwater harvesting proposed in the Project, if any, should be provided.
- 27) Impact of the Project on the water quality, both surface and groundwater, should be assessed and necessary safeguard measures, if any required, should be provided.
- 28) Based on actual monitored data, it may clearly be shown whether working will intersect groundwater. Necessary data and documentation in this regard may be provided. In case the working will intersect groundwater table, a detailed Hydro Geological Study should be undertaken and Report furnished. The Report inter-alia, shall include details of the aquifers present and impact of mining activities on these aquifers. Necessary permission from Central Ground Water Authority for working below ground water and for pumping of ground water should also be obtained and copy furnished.
- 29) Details of any stream, seasonal or otherwise, passing through the lease area and

modification / diversion proposed, if any, and the impact of the same on the hydrology should be brought out.

- 30) Information on site elevation, working depth, groundwater table etc. Should be provided both in AMSL and bgl. A schematic diagram may also be provided for the same.
- 31) A time bound Progressive Greenbelt Development Plan shall be prepared in a tabular form (indicating the linear and quantitative coverage, plant species and time frame) and submitted, keeping in mind, the same will have to be executed up front on commencement of the Project. Phase-wise plan of plantation and compensatory afforestation should be charted clearly indicating the area to be covered under plantation and the species to be planted. The details of plantation already done should be given. The plant species selected for green belt should have greater ecological value and should be of good utility value to the local population with emphasis on local and native species and the species which are tolerant to pollution.
- 32) Impact on local transport infrastructure due to the Project should be indicated. Projected increase in truck traffic as a result of the Project in the present road network (including those outside the Project area) should be worked out, indicating whether it is capable of handling the incremental load. Arrangement for improving the infrastructure, if contemplated (including action to be taken by other agencies such as State Government) should be covered. Project Proponent shall conduct Impact of Transportation study as per Indian Road Congress Guidelines.
- 33) Details of the onsite shelter and facilities to be provided to the mine workers should be included in the EIA Report.
- 34) Conceptual post mining land use and Reclamation and Restoration of mined out areas (with plans and with adequate number of sections) should be given in the EIA report.
- 35) Occupational Health impacts of the Project should be anticipated and the proposed preventive measures spelt out in detail. Details of pre-placement medical examination and periodical medical examination schedules should be incorporated in the EMP. The project specific occupational health mitigation measures with required facilities proposed in the mining area may be detailed.
- 36) Public health implications of the Project and related activities for the population in the impact zone should be systematically evaluated and the proposed remedial measures should be detailed along with budgetary allocations.
- 37) Measures of socio economic significance and influence to the local community

proposed to be provided by the Project Proponent should be indicated. As far as possible, quantitative dimensions may be given with time frames for implementation.

- 38) Detailed Environmental Management Plan (EMP) to mitigate the environmental impacts which, should inter-alia include the impacts of change of land use, loss of agricultural and grazing land, if any, occupational health impacts besides other impacts specific to the proposed Project.
- 39) Public Hearing points raised and commitment of the Project Proponent on the same along with time bound Action Plan with budgetary provisions to implement the same should be provided and also incorporated in the final EIA/EMP Report of the Project.
- 40) Details of litigation pending against the project, if any, with direction /order passed by any Court of Law against the Project should be given.
- 41) The cost of the Project (capital cost and recurring cost) as well as the cost towards implementation of EMP should be clearly spelt out.
- 42) A Disaster management Plan shall be prepared and included in the EIA/EMP Report.
- 43) Benefits of the Project if the Project is implemented should be spelt out. The benefits of the Project shall clearly indicate environmental, social, economic, employment potential, etc.
- 44) Besides the above, the below mentioned general points are also to be followed:-
 - a) Executive Summary of the EIA/EMP Report
 - b) All documents to be properly referenced with index and continuous page numbering.
 - c) Where data are presented in the Report especially in Tables, the period in which the data were collected and the sources should be indicated.
 - d) Project Proponent shall enclose all the analysis/testing reports of water, air, soil, noise etc. using the MoEF&CC/NABL accredited laboratories. All the original analysis/testing reports should be available during appraisal of the Project.
 - e) Where the documents provided are in a language other than English, an English translation should be provided.
 - f) The Questionnaire for environmental appraisal of mining projects as devised earlier by the Ministry shall also be filled and submitted.
 - g) While preparing the EIA report, the instructions for the Proponents and instructions for the Consultants issued by MoEF&CC vide O.M. No. J-11013/41/2006-IA.II(I) dated 4th August, 2009, which are available on the website of this Ministry, should be followed.

- h) Changes, if any made in the basic scope and project parameters (as submitted in Form-I and the PFR for securing the TOR) should be brought to the attention of MoEF&CC with reasons for such changes and permission should be sought, as the ToR may also have to be altered. Post Public Hearing changes in structure and content of the draft EIA/EMP (other than modifications arising out of the P.H. process) will entail conducting the PH again with the revised documentation.
- i) As per the circular no. J-11011/618/2010-IA.II(I) dated 30.5.2012, certified report of the status of compliance of the conditions stipulated in the Environment Clearance for the existing operations of the project, should be obtained from the Regional Office of Ministry of Environment, Forest and Climate Change, as may be applicable.
- j) The EIA report should also include (i) surface plan of the area indicating contours of main topographic features, drainage and mining area, (ii) geological maps and sections and (iii) sections of the mine pit and external dumps, if any, clearly showing the land features of the adjoining area.

In addition to the above, the following shall be furnished:-

The Executive summary of the EIA/EMP report in about 8-10 pages should be prepared incorporating the information on following points:

1. Project name and location (Village, District, State, Industrial Estate (if applicable).
2. Process description in brief, specifically indicating the gaseous emission, liquid effluent and solid and hazardous wastes.
3. Measures for mitigating the impact on the environment and mode of discharge or disposal.
4. Capital cost of the project, estimated time of completion.
5. The proponent shall furnish the contour map of the water table detailing the number of wells located around the site and impacts on the wells due to mining activity.
6. A detailed study of the lithology of the mining lease area shall be furnished.
7. Details of village map, "A" register and FMB sketch shall be furnished.
8. Detailed mining closure plan for the proposed project approved by the Geology of Mining department shall be submitted along with EIA report.
9. Obtain a letter /certificate from the Assistant Director of Geology and Mining standing that there is no other Minerals/resources like sand in the quarrying area within the approved depth of mining and below depth of mining and the same shall be furnished in the EIA report.

10. EIA report should strictly follow the Environmental Impact Assessment Guidance Manual for Mining of Minerals published February 2010.
11. Detail plan on rehabilitation and reclamation carried out for the stabilization and restoration of the mined areas.
12. The EIA study report shall include the surrounding mining activity, if any.
13. Modeling study for Air, Water and noise shall be carried out in this field and incremental increase in the above study shall be substantiated with mitigation measures.
14. A study on the geological resources available shall be carried out and reported.
15. A specific study on agriculture & livelihood shall be carried out and reported.
16. Impact of soil erosion, soil physical chemical and biological property changes may be assumed.
17. Site selected for the project - Nature of land - Agricultural (single/double crop), barren, Govt./ private land, status of its acquisition, nearby (in 2-3 km.) water body, population, within 10km other industries, forest, eco-sensitive zones, accessibility, (note - in case of industrial estate this information may not be necessary)
18. Baseline environmental data - air quality, surface and ground water quality, soil characteristic, flora and fauna, socio-economic condition of the nearby population
19. Identification of hazards in handling, processing and storage of hazardous material and safety system provided to mitigate the risk.
20. Likely impact of the project on air, water, land, flora-fauna and nearby population
21. Emergency preparedness plan in case of natural or in plant emergencies
22. Issues raised during public hearing (if applicable) and response given
23. CER plan with proposed expenditure.
24. Occupational Health Measures
25. Post project monitoring plan
26. The project proponent shall carry out detailed hydro geological study through intuitions/NABET Accredited agencies.
27. A detailed report on the green belt development already undertaken is to be furnished and also submit the proposal for green belt activities.
28. The proponent shall propose the suitable control measure to control the fugitive emissions during the operations of the mines.
29. A specific study should include impact on flora & fauna, disturbance to migratory pattern of animals.
30. Reserve funds should be earmarked for proper closure plan.

31. A detailed plan on plastic waste management shall be furnished. Further, the proponent should strictly comply with, Tamil Nadu Government Order (Ms) No.84 Environment and forests (EC.2) Department dated 25.06.2018 regarding ban on one time use and throw away plastics irrespective of thickness with effect from 01.01.2019 under Environment (Protection) Act, 1986. In this connection, the project proponent has to furnish the action plan.

Besides the above, the below mentioned general points should also be followed:-

- a. A note confirming compliance of the TOR, with cross referencing of the relevant sections / pages of the EIA report should be provided.
- b. All documents may be properly referenced with index, page numbers and continuous page numbering.
- c. Where data are presented in the report especially in tables, the period in which the data were collected and the sources should be indicated.
- d. While preparing the EIA report, the instructions for the proponents and instructions for the consultants issued by MoEF& CC vide O.M. No. J-11013/41/2006-IA.II (I) dated 4th August, 2009, which are available on the website of this Ministry should also be followed.
- e. The consultants involved in the preparation of EIA/EMP report after accreditation with Quality Council of India (QCI)/National Accreditation Board of Education and Training (NABET) would need to include a certificate in this regard in the EIA/EMP reports prepared by them and data provided by other organization/Laboratories including their status of approvals etc. In this regard circular no F. No.J -11013/77/2004-IA-II(I) dated 2nd December, 2009, 18th March 2010, 28th May 2010, 28th June 2010, 31st December 2010 & 30th September 2011 posted on the Ministry's website <http://www.moef.nic.in/> may be referred.
 - After preparing the EIA (as per the generic structure prescribed in Appendix-III of the EIA Notification, 2006) covering the above mentioned points, the proponent will take further necessary action for obtaining environmental clearance in accordance with the procedure prescribed under the EIA Notification, 2006.
 - The final EIA report shall be submitted to the SEIAA, Tamil Nadu for obtaining Environmental Clearance.

- The TORs with public hearing prescribed shall be **valid for a period of three years** from the date of issue, for submission of the EIA/EMP report as per OMNo.J-11013/41/2006-IA-II(I)(part) dated 29th August, 2017.



**DRAFT EIA/EMP REPORT FOR ROUGHSTONE & GRAVEL QUARRY OF THIRU.K.RAMARAJ IN
S.F.NOS. 70/1(P) OVER AN AREA OF 1.06.50HA IN MYLERIPALAYAM VILLAGE, MADUKKARAI
TALUK, COIMBATORE DISTRICT, TAMIL NADU.**

TOR COMPLIANCE

S.No	ToR Points	Reply	Pg.No
1. SEAC CONDITIONS - SITE SPECIFIC			
1	The PP shall obtain Certified Compliance Report (CCR) from Integrated Regional Office, MoEF&CC, Chennai for the earlier Environmental Clearance obtained from DEIAA.	CCR Report obtained from the RO, MoEF&CC, Chennai, Enclosed as Annexure - 8	A-41
2	The PP shall complete greenbelt and fencing for both existing & proposed mining sites and furnish photographs for the same.	• Agreed	--
3	A Cluster Management Committee (CMC) shall be constituted including all the mines in the cluster as Committee Members for the effective management of the mining operation in the cluster through systematic & scientific approach with appointment of statutory personnel, appropriate environmental monitoring, good maintenance of haul roads and village/panchayat roads, authorized blasting operation etc. The PP shall submit the following details in the form of an Affidavit during the EIA appraisal: a) Copy of the agreement forming CMC. b) The Organisation chart of the Committee with defining the role of the members c) The 'Standard Operating Procedures' (SoP) executing the planned activities.	• Environmental Management Cell of projects in the cluster will act as a Cluster Management Committee. The various activities to be undertaken by this committee are detailed in para 10.2.2, Chapter – X. • Affidavit in this regard will be submitted during EIA appraisal.	10.3
4	The Boundary pillars to be erected as per the mine rules and the evidence should be submitted along with the EIA report.	• Agreed	--
5	Since waterbodies are situated nearby, the PP shall carry out the hydrogeological and hydrological study including the details of waterflow pattern to determine the impacts of the mining operation in the waterbodies.	• Hydrogeological Study is detailed under Section 3.6, Chapter-III.	3-42
6	The project proponent shall submit a Certified Compliance Report (CCR) obtained from the RO, MoEF&CC, Chennai for the previous EC dated 11.08.2014 and appropriate mitigating measures for the non-compliance items, if any.	CCR Report obtained from the RO, MoEF&CC, Chennai, Enclosed as Annexure - 8	A-41
7	The details of enumeration of structures including schools, colleges, primary health centres should be submitted along with the EIA report.	Details of the features produced within 500m radius are provided in Figure 2.6, Chapter-II	2-9
8	The structures within the radius of (i) 50 m, (ii) 100 m, (iii) 200 m and (iv) 300 m & upto 1km shall be	Details of the features produced within 500m radius are provided in Figure 2.6, Chapter-II	2-9



**DRAFT EIA/EMP REPORT FOR ROUGHSTONE & GRAVEL QUARRY OF THIRU.K.RAMARAJ IN
S.F.NOS. 70/1(P) OVER AN AREA OF 1.06.50HA IN MYLERIPALAYAM VILLAGE, MADUKKARAI
TALUK, COIMBATORE DISTRICT, TAMIL NADU.**

S.No	ToR Points	Reply	Pg.No
	enumerated with details such as dwelling houses with number of occupants, whether it belongs to the owner (or) not, places of worship, industries, factories, sheds, etc. and spell out the mitigation measures to be proposed for the protection of the above structures, if any during the quarrying operations.		
9	The proponent shall furnish photographs of adequate fencing, garland drainage built with siltation tank & green belt along the periphery including replantation of existing trees; maintaining the safety distance between the adjacent quarries & water bodies nearby provided as per the approved mining plan.	Site photographs have been provided in Chapter-II. Fencing and plantation are already carried out.	2-7
10	The Proponent shall carry out Bio diversity study as a part of EIA study and the same shall be included in the Report.	A detailed study of flora and fauna composition in the core and buffer zone of the project has been made through primary field surveys. The details are furnished in para 3.5, Chapter III.	3-37
11	The PP shall prepare the EMP for the entire life of mine and also furnish the sworn affidavit stating to abide the EMP for the entire life of mine.	EMP is prepared for the entire life of the mine. Affidavit will be provided along with the final EIA/EMP report.	-
12	The PP shall carry out the comprehensive studies on the cumulative environmental impacts of the existing & proposed quarries which included drilling & blasting, loading & hauling on the surrounding village and structures.	The details of the quarries located within the 500m radius of the project is given vide Annexure-3. A cumulative impact study has been carried out and furnished in Para 7.6, Chapter-VII. Environmental Management Plan is provided under Chapter-X.	A-5 7-5 10-2
13	For the safety of the persons employed in the quarry, the PP shall carry out the scientific studies to assess the slope stability of the existing quarry wall (exists without benches) for spelling out the slope stability action plan with mitigation measures and working methodology, by involving any one of the reputed Research and Academic Institutions such as CSIR-Central Institute of Mining & Fuel Research / Dhanbad, NIRM/Bangalore, Division of Geotechnical Engineering-IIT-Madras, NIT-Dept of Mining Engg, Surathkal, and Dept of Mining Engg., Anna University Chennai, etc. A copy of such scientific study report shall be submitted with an action plan accommodating the inclusion of haul road accessibility with maintaining the proper gradient by ensuring the slope stability of the working benches to be constructed and existing quarry wall.	Pit slope stability plan has been provided under Section 7.7, Chapter-VII	7-9



DRAFT EIA/EMP REPORT FOR ROUGHSTONE & GRAVEL QUARRY OF THIRU.K.RAMARAJ IN S.F.NOS. 70/1(P) OVER AN AREA OF 1.06.50HA IN MYLERIPALAYAM VILLAGE, MADUKKARAI TALUK, COIMBATORE DISTRICT, TAMIL NADU.

S.No	ToR Points	Reply	Pg.No																									
14	The PP shall install the CCTV camera for the continuous surveillance of mining activity & furnish the photographic/videographic evidence along with the EIA report.	Agreed	-																									
2. SEAC STANDARD CONDITIONS																												
1	In the case of existing/operating mines, a letter obtained from the concerned AD (Mines) shall be submitted and it shall include the following: a) Original pit dimension b) Quantity achieved Vs EC Approved Quantity c) Balance Quantity as per Mineable Reserve calculated. d) Mined out Depth as on date Vs EC Permitted depth e) Details of illegal/illicit mining f) Violation in the quarry during the past working. g) Quantity of material mined out outside the mine lease area h) Condition of Safety zone/benches i) Revised/Modified Mining Plan showing the benches of not exceeding 6 m height and ultimate depth of not exceeding 50m.	• K. Ramaraj, carried out mining in this area in 4 spells from 12.04.1995 – 11.04.2000, 19.06.2003 – 18.06.2008 07.10.2008 – 06.10.2013 & 22.01.2019 – 21.01.2024. <table><tr><th>S.No</th><th>S.F.No</th><th>Extent (Ha)</th><th>District Collectors Proceedings</th><th>Lease Period</th></tr><tr><td>1</td><td>71/1</td><td>0.53.5 Ha</td><td>153/94/X1 dated 12.04.1995</td><td>12.04.1995 – 11.04.2000</td></tr><tr><td>2</td><td>71/1</td><td>0.53.5 Ha</td><td>-</td><td>19.06.2003 – 18.06.2008</td></tr><tr><td>3</td><td>70/1,71/1</td><td>1.85.0 Ha</td><td>773/2008/mm1 dated 07.10.2008</td><td>07.10.2008 – 06.10.2013</td></tr><tr><td>4</td><td>70/1(P), 71/1</td><td>1.00.0 Ha</td><td>358/mines/2018 dated 22.01.2019</td><td>22.01.2019 – 21.01.2024</td></tr></table> A letter is obtained from the Assistant Director, Geology & Mining vide Rc.No.778/Mines/2024 dated 09.01.2025 wherein the existing pit dimensions and the production quantities mined out has been furnished. (Annexure-5)	S.No	S.F.No	Extent (Ha)	District Collectors Proceedings	Lease Period	1	71/1	0.53.5 Ha	153/94/X1 dated 12.04.1995	12.04.1995 – 11.04.2000	2	71/1	0.53.5 Ha	-	19.06.2003 – 18.06.2008	3	70/1,71/1	1.85.0 Ha	773/2008/mm1 dated 07.10.2008	07.10.2008 – 06.10.2013	4	70/1(P), 71/1	1.00.0 Ha	358/mines/2018 dated 22.01.2019	22.01.2019 – 21.01.2024	A-9
S.No	S.F.No	Extent (Ha)	District Collectors Proceedings	Lease Period																								
1	71/1	0.53.5 Ha	153/94/X1 dated 12.04.1995	12.04.1995 – 11.04.2000																								
2	71/1	0.53.5 Ha	-	19.06.2003 – 18.06.2008																								
3	70/1,71/1	1.85.0 Ha	773/2008/mm1 dated 07.10.2008	07.10.2008 – 06.10.2013																								
4	70/1(P), 71/1	1.00.0 Ha	358/mines/2018 dated 22.01.2019	22.01.2019 – 21.01.2024																								
2	Details of habitations around the proposed mining area and latest VAO certificate regarding the location of habitations within 300m radius from the periphery of the site.	• Letter from VAO is obtained and given as Annexure – 4 .	A-7																									
3	The proponent is requested to carry out a survey and enumerate on the structures located within the radius of (i) 50 m, (ii) 100 m, (iii) 200 m and (iv) 300 m (v) 500m shall be enumerated with details such as dwelling houses with number of occupants, whether it belongs to the owner (or) not, places of worship, industries, factories, sheds, etc with indicating the owner of the building, nature of construction, age of the building, number of residents, their profession and income, etc.	• Details of the features within 500m radius are provided in Figure 2.3, Chapter-II.	2-7																									
4	The PP shall submit a detailed hydrological report indicating the impact of proposed quarrying operations on the waterbodies like lake, water tanks, etc are located within 1 km of the proposed quarry.	• Hydrogeological Study is detailed under Section 3.6, Chapter-III.	3-39																									
5	The Proponent shall carry out Bio diversity study through reputed Institution and the same shall be included in EIA Report.	• A detailed study of flora and fauna composition in the core and buffer zone of the project has been made through primary field surveys. The details are furnished in para 3.5, Chapter III.	3-33																									



DRAFT EIA/EMP REPORT FOR ROUGHSTONE & GRAVEL QUARRY OF THIRU.K.RAMARAJ IN S.F.NOS. 70/1(P) OVER AN AREA OF 1.06.50HA IN MYLERIPALAYAM VILLAGE, MADUKKARAI TALUK, COIMBATORE DISTRICT, TAMIL NADU.

S.No	ToR Points	Reply	Pg.No
6	The DFO letter stating that the proximity distance of Reserve Forests, Protected Areas, Sanctuaries, Tiger reserve etc., up to a radius of 25 km from the proposed site.	•There area no Protected Areas, Sanctuaries, Tiger reserve etc., within 10km Radius.The details are furnished in Table no 3.2, Chapter III.	3.2
7	In the case of proposed lease in an existing (or old) quarry where the benches are not formed (or) partially formed as per the approved Mining Plan, the Project Proponent (PP) shall the PP shall carry out the scientific studies to assess the slope stability of the working benches to be constructed and existing quarry wall, by involving any one of the reputed Research and Academic Institutions - CSIR-Central Institute of Mining & Fuel Research / Dhanbad, NIRM/Bangalore, Division of Geotechnical Engineering-IIT-Madras, NIT-Dept of Mining Engg, Surathkal, and Anna University Chennai-CEG Campus. The PP shall submit a copy of the aforesaid report indicating the stability status of the quarry wall and possible mitigation measures during the time of appraisal for obtaining the EC.	•The lease applied area is mostly minedout area and the remaining is plain barren area covered by Gravel formation.	2-15
8	However, in case of the fresh/virgin quarries, the Proponent shall submit a conceptual 'Slope Stability Plan' for the proposed quarry during the appraisal while obtaining the EC, when the depth of the working is extended beyond 30 m below ground level.	•Pit slope stability plan has been provided under Section 7.7, Chapter-VII	7-9
9	The PP shall furnish the affidavit stating that the blasting operation in the proposed quarry is carried out by the statutory competent person as per the MMR 1961 such as blaster, mining mate, mine foreman, II/I Class mines manager appointed by the proponent.	•Will be submitted along with the final report	--
10	The PP shall present a conceptual design for carrying out only controlled blasting operation involving line drilling and muffle blasting in the proposed quarry such that the blast-induced ground vibrations are controlled as well as no fly rock travel beyond 30 m from the blast site.	•Controlled blasting will be adopted in this project and details of the same has been provided in Section 4.4.2, Chapter-IV	4-14
11	The EIA Coordinators shall obtain and furnish the details of quarry/quarries operated by the proponent in the past, either in the same location or elsewhere in the State with video and photographic evidences.	•Agreed	--
12	If the proponent has already carried out the mining activity in the proposed mining lease area after 15.01.2016, then the proponent shall furnish the following details from AD/DD, mines,	•K. Ramaraj, carried out mining in this area in 4 spells from 12.04.1995 – 11.04.2000, 19.06.2003 – 18.06.2008 07.10.2008 – 06.10.2013 & 22.01.2019 – 21.01.2024. Pit letter from AD mines stating these details are given as Annexure –5.	A-9
13	What was the period of the operation and stoppage	•Replied above in point no.12	--



DRAFT EIA/EMP REPORT FOR ROUGHSTONE & GRAVEL QUARRY OF THIRU.K.RAMARAJ IN S.F.NOS. 70/1(P) OVER AN AREA OF 1.06.50HA IN MYLERIPALAYAM VILLAGE, MADUKKARAI TALUK, COIMBATORE DISTRICT, TAMIL NADU.

S.No	ToR Points	Reply	Pg.No
	of the earlier mines with last work permit issued by the AD/DD mines?		
14	Quantity of minerals mined out. - Highest production achieved in any one year - Detail of approved depth of mining. - Actual depth of the mining achieved earlier. - Name of the person already mined in that leases area. - If EC and CTO already obtained, the copy of the same shall be submitted. - Whether the mining was carried out as per the approved mine plan (or EC if issued) with stipulated benches.	Replied above in point no.12	--
15	All corner coordinates of the mine lease area, superimposed on a High Resolution Imagery/Topo sheet, topographic sheet, geomorphology, lithology and geology of the mining lease area should be provided. Such an Imagery of the proposed area should clearly show the land use and other ecological features of the study area (core and buffer zone).	- Project coordinates superimposed in satellite imagery and given as Figure No - 2.4 in Chapter – II. - The 10km Radius Index plan showing buffer zone is given in Figure No.3.1 in Chapter – III. - Geology Map, Geomorphology, Lithology map are enclosed as Figure No.3.16, 3.17 and 3.18, Chapter-III.	2-6 3-1 3-41& 3-43
16	The PP shall carry out Drone video survey covering the cluster, Green belt, fencing etc.,	Agreed	--
17	The proponent shall furnish photographs of adequate fencing, green belt along the periphery including replantation of existing trees & safety distance between the adjacent quarries & water bodies nearby provided as per the approved mining plan.	Site photographs have been provided in Chapter-II.	2-7
18	The Project Proponent shall provide the details of geological reserves and mineable reserves, planned production capacity, proposed working methodology with justifications, the anticipated impacts of the mining operations on the surrounding environment and the proposed mitigation measures for the same.	- The details of geological and mineable reserves are provided in Table 2.4, Chapter-II. - The production schedule is provided in Table 2.7, Chapter-II. - The working methodology is detailed under Section 2.8, Chapter-II. - Anticipated impacts of mining operations on surrounding environment is provided under Chapter-IV.	2-14 2-16 2-15 4-1
19	The Project Proponent shall provide the Organization chart indicating the appointment of various statutory officials and other competent persons to be appointed as per the provisions of Mines Act'1952 and the MMR, 1961 for carrying out the quarrying operations scientifically and systematically in order to ensure safety and to protect the environment.	The organization chart has been provided in Figure No.10.1, Chapter-X.	10-3
20	The Project Proponent shall conduct the hydro-geological study considering the contour map of the	Details of hydrogeological scenario of this project is provided under section 3.6, Chapter-III.	3-39



DRAFT EIA/EMP REPORT FOR ROUGHSTONE & GRAVEL QUARRY OF THIRU.K.RAMARAJ IN S.F.NOS. 70/1(P) OVER AN AREA OF 1.06.50HA IN MYLERIPALAYAM VILLAGE, MADUKKARAI TALUK, COIMBATORE DISTRICT, TAMIL NADU.

S.No	ToR Points	Reply	Pg.No
	water table detailing the number of ground water pumping & open wells, and surface water bodies such as rivers, tanks, canals, ponds etc. within 1 km (radius) along with the collected water level data for both monsoon and non-monsoon seasons from the PWD / TWAD so as to assess the impacts on the wells due to mining activity. Based on actual monitored data, it may clearly be shown whether working will intersect groundwater. Necessary data and documentation in this regard may be provided.		
21	The proponent shall furnish the baseline data for the environmental and ecological parameters with regard to surface water/ground water quality, air quality, soil quality & flora/fauna including traffic/vehicular movement study.	•The baseline data on micro- meteorology, ambient air quality, Water quality, noise level, soil and flora & fauna are collected during Winter Season (December 2024 to February 2025) and detailed in Section 3.3 to 3.5 of Chapter-III. The details of Traffic Study is provided under Section 4.9, Chapter-IV.	3-13 & 3-33 4-23
22	The Proponent shall carry out the Cumulative impact study due to mining operations carried out in the quarry specifically with reference to the specific environment in terms of soil health, biodiversity, air pollution, water pollution, climate change and flood control & health impacts. Accordingly, the Environment Management plan should be prepared keeping the concerned quarry and the surrounding habitations in the mind.	•The details of the quarries located within the 500m radius of the project is given vide Annexure-3. •A cumulative impact study has been carried out and furnished in Para 7.6, Chapter-VII. •Environmental Management Plan is provided under Chapter-X.	A-5 7-5 10-1
23	Rain water harvesting management with recharging details along with water balance (both monsoon & non-monsoon) be submitted.	• The rain water falling in the quarries will be harvested in the sump at the lowest level of the respective quarry. This sump will act as a settling pond to prevent solids escaping along with discharge, before outlet. etc. • Towards surface runoff management, garland drain will be constructed which will be connected to settling ponds with silt traps. • Water requirement for this project is 8 KLD. The required water will be procured initially from outside agencies. Later Rain water harvested in the mine sump can also be used. • Details of rainwater harvesting are provided under Section 4.3.4.2, Chapter-IV.	4-11
24	Land use of the study area delineating forest area, agricultural land, grazing land, wildlife sanctuary, national park, migratory routes of fauna, water bodies, human settlements and other ecological features should be indicated. Land use plan of the mine lease area should be prepared to encompass preoperational, operational and post operational phases and submitted. Impact, if any, of change of land use should be given.	• The land use of the study area was studied to demarcate various LULC categories and its details are provided under section 3.4, Chapter-III. • The land use pattern at present and at the end of the quarrying period has been provided under section 4.5.1, Chapter-IV. • The post mining land use has been provided in Table No. 4.13. .The post mining land use plan showing afforestation and water body is shown in Figure No- 4.5.	3-27 4-16



**DRAFT EIA/EMP REPORT FOR ROUGHSTONE & GRAVEL QUARRY OF THIRU.K.RAMARAJ IN
S.F.NOS. 70/1(P) OVER AN AREA OF 1.06.50HA IN MYLERIPALAYAM VILLAGE, MADUKKARAI
TALUK, COIMBATORE DISTRICT, TAMIL NADU.**

S.No	ToR Points	Reply	Pg.No
25	Details of the land for storage of Overburden/Waste Dumps (or) Rejects outside the mine lease, such as extent of land area, distance from mine lease, its land use, R&R issues, if any, should be provided.	• There is no waste generation anticipated in this quarry. As such there are no OB dumps involved.	--
26	Proximity to Areas declared as 'Critically Polluted' (or) the Project areas which attracts the court restrictions for mining operations, should also be indicated and where so required, clearance certifications from the prescribed Authorities, such as the TNPCB (or) Dept. of Geology and Mining should be secured and furnished to the effect that the proposed mining activities could be considered.	• Not Applicable	--
27	Description of water conservation measures proposed to be adopted in the Project should be given. Details of rainwater harvesting proposed in the Project, if any, should be provided.	• The rain water falling in the quarry will be harvested in the sump at the lowest level of the quarry. This sump will act as a settling pond to prevent solids escaping along with discharge, before outlet. etc. • Towards surface runoff management, garland drain will be constructed around the quarry and will be connected to a settling pond with silt traps. The supernatant clear water from the settling pond will be flow to the downstream users. The surface runoff management structures diagram is given in Figure No 4.4, Chapter-IV. • The methods for reducing water consumption and rainwater harvesting is provided in section 4.3.4, Chapter-IV.	4-11 4-9
28	Impact on local transport infrastructure due to the Project should be indicated.	• From this proposed quarry the entire output will be transported to the crusher units and other buyers etc. Since the production from this lease is very less, there will be just 1 trip per hour of additional truck traffic. The existing road can absorb this traffic due to this project Details are provided under section 4.9, Chapter-IV.	4.23
29	A tree survey study shall be carried out (nos., name of the species, age, diameter etc.,) both within the mining lease applied area & 300m buffer zone and its management during mining activity.	• An ecological survey of the study area was conducted with reference to listing of species and assessment of the existing baseline ecological conditions. Details are provided under section 3.5.1, Chapter-III.	3-33
30	A detailed mine closure plan for the proposed project shall be included in EIA/EMP report which should be site-specific.	• Details of Mine Closure Plan is provided under section 7.5, Chapter-VII.	7-4
31	As a part of the study of flora and fauna around the vicinity of the proposed site, the EIA coordinator shall strive to educate the local students on the importance of preserving local flora and fauna by involving them in the study, wherever possible.	• An ecological survey of the study area was conducted with reference to listing of species and assessment of the existing baseline ecological conditions. Details are provided under section 3.5.1, Chapter-III.	3-33
32	The purpose of Green belt around the project is to capture the fugitive emissions, carbon sequestration and to attenuate the noise generated, in addition to	• Agreed	--



DRAFT EIA/EMP REPORT FOR ROUGHSTONE & GRAVEL QUARRY OF THIRU.K.RAMARAJ IN S.F.NOS. 70/1(P) OVER AN AREA OF 1.06.50HA IN MYLERIPALAYAM VILLAGE, MADUKKARAI TALUK, COIMBATORE DISTRICT, TAMIL NADU.

S.No	ToR Points	Reply	Pg.No
	improving the aesthetics. A wide range of indigenous plant species should be planted as given in the appendix-I in consultation with the DFO, State Agriculture University. The plant species with dense/moderate canopy of native origin should be chosen. Species of small/medium/tall trees alternating with shrubs should be planted in a mixed manner.		
33	Taller/one year old Saplings raised in appropriate size of bags, preferably ecofriendly bags should be planted as per the advice of local forest authorities/botanist/Horticulturist with regard to site specific choices. The proponent shall earmark the greenbelt area with GPS coordinates all along the boundary of the project site with at least 3 meters wide and in between blocks in an organized manner.	• Agreed	--
34	A Disaster management Plan shall be prepared and included in the EIA/EMP Report for the complete life of the proposed quarry (or) till the end of the lease period.	• The disaster management plan has been provided under section 7.3.1, Chapter-VII.	7-3
35	A Risk Assessment and management Plan shall be prepared and included in the EIA/EMP Report for the complete life of the proposed quarry (or) till the end of the lease period.	• Various risks likely to arise due to mining activities are detailed under section 7.3, Chapter-VII.	7-1
36	Occupational Health impacts of the Project should be anticipated and the proposed preventive measures spelt out in detail. Details of pre-placement medical examination and periodical medical examination schedules should be incorporated in the EMP. The project specific occupational health mitigation measures with required facilities proposed in the mining area may be detailed.	• Details of occupational health and safety aspects are given under the subsections of Para 4.8, Chapter-IV.	4-21
37	Public health implications of the Project and related activities for the population in the impact zone should be systematically evaluated and the proposed remedial measures should be detailed along with budgetary allocations.	• Details of the socio-economic survey conducted in the buffer zone has been provided in Para 3.2.4, Chapter-III. • Public health facilities will be further aimed to be developed through CER activities wherein periodic health checkups, medical camps for the locals will be conducted.	3-8
38	The Socio-economic studies should be carried out within a 5 km buffer zone from the mining activity. Measures of socio-economic significance and influence to the local community proposed to be provided by the Project Proponent should be indicated. As far as possible, quantitative	• Nearby villages were visited for conducting study to know about socio-economic conditions, including aspirations and requirements of the people for a better living and collected relevant data. The details are provided under section 3.2.4, Chapter-III.	3-8



DRAFT EIA/EMP REPORT FOR ROUGHSTONE & GRAVEL QUARRY OF THIRU.K.RAMARAJ IN S.F.NOS. 70/1(P) OVER AN AREA OF 1.06.50HA IN MYLERIPALAYAM VILLAGE, MADUKKARAI TALUK, COIMBATORE DISTRICT, TAMIL NADU.

S.No	ToR Points	Reply	Pg.No
	dimensions may be given with time frames for implementation.		
39	Details of litigation pending against the project, if any, with direction /order passed by any Court of Law against the Project should be given.	• PP informed that there is no litigation pending against the project.	--
40	Benefits of the Project if the Project is implemented should be spelt out. The benefits of the Project shall clearly indicate environmental, social, economic, employment potential, etc.	• The Roughstone and Gravel Quarry will benefit this region in the fields of employment opportunities, improved per capita income for local people, improved social welfare facilities in respect of education, health, infrastructural etc. • Direct employment to about 20 people and indirect employment to scores of people. • By means of carrying out the socio-economic development activities, local community development is expected. Towards the same, the proponent has planned to allocate Rs.5 Lakhs for various activities under CER for all the three projects together. From the CER activities allocated for various social welfare activities, the villages near the lease area will be benefited.	8-1
41	If any quarrying operations were carried out in the proposed quarrying site for which now the EC is sought, the Project Proponent shall furnish the detailed compliance to EC conditions given in the previous EC with the site photographs which shall duly be certified by MoEF&CC, Regional Office, Chennai (or) the concerned DEE/TNPCB.	• This is a proposed quarry. As such no mining activities have been carried out in this lease area.	2-12
42	The PP shall prepare the EMP for the entire life of mine and also furnish the sworn affidavit stating to abide the EMP for the entire life of mine.	• EMP is prepared for the entire life of the mine. Affidavit will be provided along with the final EIA/ EMP report.	--
43	Concealing any factual information or submission of false/fabricated data and failure to comply with any of the conditions mentioned above may result in withdrawal of this Terms of Conditions besides attracting penal provisions in the Environment (Protection) Act, 1986.	• Agreed	--
3. SEIAA SPECIFIC CONDITIONS			
1	After detailed discussions, the Authority accepts the recommendation of SEAC-II and decided to grant Terms of Reference (ToR) along with Public Hearing for the quantity of 73,750 m ³ of Rough Stone & 10,614 m ³ of Gravel upto the depth of 48m BGL (including the existing depth of 38m BGL) as per the approved mining plan, under cluster for undertaking the combined Environment Impact Assessment Study and preparation of separate Environment Management Plan subject to the conditions as recommended by SEAC-II & normal conditions & the	• Agreed	--



DRAFT EIA/EMP REPORT FOR ROUGHSTONE & GRAVEL QUARRY OF THIRU.K.RAMARAJ IN S.F.NOS. 70/1(P) OVER AN AREA OF 1.06.50HA IN MYLERIPALAYAM VILLAGE, MADUKKARAI TALUK, COIMBATORE DISTRICT, TAMIL NADU.

S.No	ToR Points	Reply	Pg.No
	conditions mentioned in Annexure of this minutes.		
A. Additional ToR			
Cluster Management Committee			
1	Cluster Management Committee shall be framed which must include all the proponents in the cluster as members including the existing as well as proposed quarry.	• Details of the cluster management committee is provided under Section 10.2.2, Chapter-X.	10-2
2	The members must coordinate among themselves for the effective implementation of EMP as committed including Green Belt Development, Water sprinkling, tree plantation, blasting etc.,	• Agreed	-
3	The List of members of the committee formed shall be submitted to AD/Mines before the execution of mining lease and the same shall be updated every year to the AD/Mines.	• Agreed	-
4	Detailed Operational Plan must be submitted which must include the blasting frequency with respect to the nearby quarry situated in the cluster, the usage of haul roads by the individual quarry in the form of route map and network.	• Agreed	-
5	The committee shall deliberate on risk management plan pertaining to the cluster in a holistic manner especially during natural calamities like intense rain and the mitigation measures considering the inundation of the cluster and evacuation plan.	• Agreed	-
6	The Cluster Management Committee shall form Environmental Policy to practice sustainable mining in a scientific and systematic manner in accordance with the law. The role played by the committee in implementing the environmental policy' devised shall be given in detail. in the EIARreport.	• Agreed	-
7	The committee shall furnish action plan regarding the restoration strategy with respect to the individual quarry falling under the cluster in a holistic manner.	• Agreed	-
8	The committee shall deliberate on the health of the workers/staff involved in the mining as well as the health of the public in the vicinity.	• Agreed	-



DRAFT EIA/EMP REPORT FOR ROUGHSTONE & GRAVEL QUARRY OF THIRU.K.RAMARAJ IN S.F.NOS. 70/1(P) OVER AN AREA OF 1.06.50HA IN MYLERIPALAYAM VILLAGE, MADUKKARAI TALUK, COIMBATORE DISTRICT, TAMIL NADU.

Agriculture & Agro-Biodiversity			
9	Impact on surrounding agricultural fields around the proposed mining Area.	• Since the lease and its nearby area is of rocky type , it remain uncultivated and only in patches of land away from the lease area, agricultural activities are carried during monsoon rainfall. Due to poor quality of the soil, inconsistent rainfall, high agricultural labor cost, manpower shortage and less yield are reason for very little agricultural activity in this region. By adoption of systematic mining adhering to all the environmental mitigation measures as explained earlier, no adverse impact on the far away agricultural or surrounding environs envisaged.	4-17
10	Impact on soil flora & vegetation around the project site.	• The impact of mining on biological environment is provided under Table 4.14, Chapter-IV.	4-17
11	Details of type of vegetations including no. of trees & shrubs within the proposed mining area and. If so, transplantation of such vegetations all along the boundary of the proposed mining area shall committed mentioned in EMP.	• The details of flora in the core zone is provided in Table 3.24, Chapter-III. There is no major clearance of vegetation or transplantation involved.	3-35
12	The Environmental Impact Assessment should study the biodiversity, the natural ecosystem, the soil micro flora, fauna and soil seed banks and suggest measures to maintain the natural Ecosystem.	• An ecological survey of the study area was conducted with reference to listing of species and assessment of the existing baseline ecological conditions. Details are provided under Section 3.5.1, Chapter-III.	3-33
13	Action should specifically suggest for sustainable management of the area and restoration of ecosystem for flow of goods and services.	• The post mining land use has been provided in Table No. 4.14.	4-16
14	The project proponent shall study and furnish the impact of project on plantations in adjoining patta lands, Horticulture, Agriculture and livestock.	• Replied in sl no 13 above.	4-18
Forests			
15	The project proponent shall detailed study on impact of mining on Reserve forests free ranging wildlife.	• There are no reserve forest within 10km radius and as such no impact on this front envisaged.	--
16	The Environmental Impact Assessment should study impact on forest, vegetation, endemic, vulnerable and endangered indigenous flora and fauna.	• An ecological survey of the study area was conducted with reference to listing of species and assessment of the existing baseline ecological conditions. Details are provided under Section 3.5.1, Chapter-III.	3-33
17	The Environmental Impact Assessment should study impact on standing trees and the existing trees should be numbered and action suggested for protection.	• Replied in point 20. Above	--
18	The Environmental Impact Assessment should study impact on protected areas, Reserve Forests, National Parks, Corridors and Wildlife pathways,	• There are no national parks or corridors in the 10k radius. There are no reserve forest in the proximity of the lease area	3-2



**DRAFT EIA/EMP REPORT FOR ROUGHSTONE & GRAVEL QUARRY OF THIRU.K.RAMARAJ IN
S.F.NOS. 70/1(P) OVER AN AREA OF 1.06.50HA IN MYLERIPALAYAM VILLAGE, MADUKKARAI
TALUK, COIMBATORE DISTRICT, TAMIL NADU.**

	near project site.		
Water Environment			
19	Hydro-geological study considering the contour map of the water table detailing the number of ground water pumping & open wells, and surface water bodies such as rivers, tanks, canals, ponds etc. within 1 km (radius) so as to assess the impacts on the nearby waterbodies due to mining activity. Based on actual monitored data, it may clearly be shown whether working will intersect groundwater. Necessary data and documentation in this regard may be provided, covering the entire mine lease period.	•The details of hydrogeological study is provided under Section 3.6, Chapter-III.	3-39
20	Erosion Control measures.	•Since the entire material from the quarry face will be directly dispatched to the consumers, there will not be any stockpiles. There are no waste dumps in this quarry. As such there will not be any wash out due to stock pile or waste dumps. •Towards surface runoff management, a garland drain will be constructed around the quarry and will be connected to a settling pond with silt traps. The supernatant clear water from the settling pond will be flow to the downstream users	4-10
21	Detailed study shall be carried out in regard to impact of mining around the proposed mine lease area on the nearby Villages, Water-bodies/ Rivers, & any ecological fragile areas.	•There is no proposal to discharge any effluent into this waterbody. No major impact is envisaged on the nearby water bodies due to project operations	11-12
22	The project proponent shall study impact on fish habitats and the food WEB/ food chain in the water body and Reservoir.	•There is no major perennial waterbody in close proximity of the lease area.	7-3
23	The project proponent shall study and furnish the details on potential fragmentation impact on natural environment, by the activities.	•The post mining land use has been provided in Table No. 4.13. The post mining land use plan showing afforestation and water body is shown in Figure No- 4.5.	4-16&4-20
24	The project proponent shall study and furnish the impact on aquatic plants and animals in water bodies and possible scars on the landscape, damages to nearby caves, heritage site, and archaeological sites possible land form changes visual and aesthetic impacts.	•An ecological survey of the study area was conducted with reference to listing of species and assessment of the existing baseline ecological conditions. Details are provided under section 3.5.1, Chapter-III.	3-33
25	The Terms of Reference should specifically study impact on soil health, soil erosion, the soil physical, chemical components and microbial components.	•Soil samples were collected in 5 locations in the core and buffer zone to analyse the physiochemical characteristics of the soil in the area. The soil quality data is provided in Table No.3.18, Chapter-III.	3-27



DRAFT EIA/EMP REPORT FOR ROUGHSTONE & GRAVEL QUARRY OF THIRU.K.RAMARAJ IN S.F.NOS. 70/1(P) OVER AN AREA OF 1.06.50HA IN MYLERIPALAYAM VILLAGE, MADUKKARAI TALUK, COIMBATORE DISTRICT, TAMIL NADU.

26	The Environmental Impact Assessment should study on wetlands, water bodies, rivers streams, lakes and farmer sites.	• The nearest major water bodies is provided in Table No.3.1, Chapter-III. • There are no perineal water courses in lease areas. The mining area consists of hard compact rock, hence no major water seepage within the mine is expected from the periphery. The ground water table in this area is below the ultimate pit level. Hence, ground water intersection in not envisaged and ground water will not be affected appreciably due to the quarrying operation.	3-1
27	The EIA shall include the impact of mining activity on the following: a) Hydrothermal/Geothermal effect due to destruction in the Environment. b) Bio-geochemical processes and its foot prints including environmental stress. c) Sediment geochemistry in the surface streams.	d) As such the production from this lease is very low to cause any appreciable impact. e) No adverse impact on the surrounding environment is envisaged since the number of equipments to be used to achieve this small production is very less and the magnitude of operation is of very small level. f) Besides, as is it a mining project, no adverse generation of heat is envisaged. g) Certified vehicles with low carbon emissions will only be used. These equipments will be properly and regularly maintained. Besides, regular vehicular emission tests will be done for the transport vehicles to ensure minimal impact due to carbon emissions. To further mediate the carbon emissions, a good greenbelt and plantation plan has been planned. h) Geologically the area in and around the lease area contains charnokite type rock formation containing mostly fallow land. As such there no major vegetation or agricultural activities are observed. i) There are no Protected or Eco-Sensitive Zone or forest land nearby wherein it can have an impact. j) It will be ensured that mining will be carried out adhering to all the statutory rules and regulations and maintaining the environmental quality within the prescribed standards by effective implementation of varioius mitigative measures. k) These mitigative measures will be continued for the entire lease period ensuring no impact on the environment. As such release of Greenhouse gases (GHG), rise in temperature, affecting livelihood of the local people ,loss of Agriculture, Forestry and Traditional Practices is not envisaged. Such a limited scope will not induce any climatic	4-18



DRAFT EIA/EMP REPORT FOR ROUGHSTONE & GRAVEL QUARRY OF THIRU.K.RAMARAJ IN S.F.NOS. 70/1(P) OVER AN AREA OF 1.06.50HA IN MYLERIPALAYAM VILLAGE, MADUKKARAI TALUK, COIMBATORE DISTRICT, TAMIL NADU.

		change leading to droughts, floods etc.	
Energy			
28	The measures taken to control Noise, Air, Water, Dust Control and steps adopted to efficiently utilise the Energy shall be furnished.	•The dust control measures are listed under Table 4.1, Water pollution control measures under Section 4.3.2, and noise pollution control measures under Section 4.4.1.2, Chapter-IV. Besides, energy consumption in this project will be optimum and as per requirement.	4-2
Climate Change			
29	The Environmental Impact Assessment shall study in detail the carbon emission and also suggest the measures to mitigate carbon emission including development of carbon sinks and temperature reduction including control of other emission and climate mitigation activities.	•Certified vehicles with low carbon emissions will only be used. These equipments will be properly and regularly maintained. Besides, regular vehicular emission tests will be done for the transport vehicles to ensure minimal impact due to carbon emissions. To further mediate the carbon emissions, a good greenbelt and plantation plan has been planned wherein 500 number of plants will be planted in and around the lease area.	7-16
30	The Environmental Impact Assessment should study impact on climate change, temperature rise, pollution and above soil & below soil carbon stock, soil health and physical, chemical & biological soil features.	•Replied in point no.29 above	--
31	Impact of mining on pollution leading to GHGs emissions and the impact of the same on the local livelihood.	•Replied in point no.29 above	
Mine Closure Plan			
32	Detailed Mine Closure Plan covering the entire mine lease period as per precise area communication order issued.	•Details of Mine Closure Plan is provided under section 7.5, Chapter-VII.	7-4
EMP			
33	Detailed Environment Management Plan along with adaptation, mitigation & remedial strategies covering the entire mine lease period as per precise area communication order issued and the scope for achieving SDGs	•Detailed environmental management plan is provided under Chapter-X.	10-1
34	The Environmental Impact Assessment should hold detailed study on EMP with budget for Green belt development and mine closure plan including disaster management plan.	•Detailed environmental management plan is provided under Chapter-X.	10-1
Risk Assessment			
35	To furnish risk assessment and management plan including anticipated vulnerabilities during operational and post operational phases of Mining.	•Various risks likely to arise due to mining activities are detailed under section 7.3, Chapter-VII.	7-1
Disaster Management Plan			
36	To furnish disaster management plan and disaster	•The disaster management plan has been	7-3



**DRAFT EIA/EMP REPORT FOR ROUGHSTONE & GRAVEL QUARRY OF THIRU.K.RAMARAJ IN
S.F.NOS. 70/1(P) OVER AN AREA OF 1.06.50HA IN MYLERIPALAYAM VILLAGE, MADUKKARAI
TALUK, COIMBATORE DISTRICT, TAMIL NADU.**

	mitigation measures in regard to all aspects to avoid/reduce vulnerability to hazards & to cope with disaster/untoward accidents in & around the proposed mine lease area due to the proposed method of mining activity & its related activities covering the entire mine lease period as per precise area communication order issued.	provided under section 7.3.1, Chapter-VII.	
Others			
37	The project proponent shall furnish VAO certificate with reference to 300m radius regard to approved habitations, schools, Archaeological sites, Structures, railway lines, roads, water bodies such as streams, odai, vaari, canal, channel, river, lake pond, tank etc.	•Given in Vide Annexure No – 4 of EIA EMP report	A-7
38	As per the MoEF& CC office memorandum F.No.22-65/2017-IA.III dated: 30.09.2020 and 20.10.2020 the proponent shall address the concerns raised during the public consultation and all the activities proposed shall be part of the Environment Management Plan.	Will be provided in the Final EIA/EMP Report after completion of public hearing.	--
39	The project proponent shall study and furnish the possible pollution due to plastic and microplastic on the environment. The ecological risks and impacts of plastic & microplastics on aquatic environment and fresh water systems due to activities, contemplated during mining may be investigated and reported.	•Single use plastics/ use and throwaway plastics will be banned in the site as directed by the Tamil Nadu Government vide GO(Ms)No.84 regarding ban on use of plastic products. The employees will be encouraged to use compostable material or reusable material.	11-16
Standard Terms of Reference for (Mining of Minerals)			
1	Year-wise production details since 1994 should be given, clearly stating the highest production achieved in any one year prior to 1994. It may also be categorically informed whether there had been any increase in production after the EIA Notification 1994 came into force, w.r.t. the highest production achieved prior to 1994.	•The lease applied area is mostly minedout area and the remaining is plain barren area covered by Gravel formation.	2-11
2	A copy of the document in support of the fact that the Proponent is the rightful lessee of the mine should be given	•Precise Area Communication letter received from the Assistant Director, Dep. of Geology & Mining, Coimbatore vide Rc.No.778/Mines/2024 dated 27.12.2024 (Annexure-1)	A-1
3	All documents including approved mine plan, EIA and Public Hearing should be compatible with one another in terms of the mine lease area, production levels, waste generation and its management, mining technology etc. and should be in the name of the lessee.	•The production capacity, quantity of waste, its management and mining technology in mine plan and EIA, etc., are compatible with one another.	--
4	All corner coordinates of the mine lease area, superimposed on a High Resolution Imagery/ toposheet, topographic sheet,	•Project coordinates superimposed in satellite	2-6



**DRAFT EIA/EMP REPORT FOR ROUGHSTONE & GRAVEL QUARRY OF THIRU.K.RAMARAJ IN
S.F.NOS. 70/1(P) OVER AN AREA OF 1.06.50HA IN MYLERIPALAYAM VILLAGE, MADUKKARAI
TALUK, COIMBATORE DISTRICT, TAMIL NADU.**

	geomorphology and geology of the area should be provided. Such an Imagery of the proposed area should clearly show the land use and other ecological features of the study area (core and buffer zone).	imagery and given as Figure No - 2.4 in Chapter – II. •The geology and geomorphology map is provided in Figure No.3.16, 3.17, Chapter-III. The Lithology map and Soil map are provided under Figure No. 3.18, 3.19, Chapter-III. •The 10km Radius Index plan showing buffer zone is given in Figure No.3.1 in Chapter – III.	3-41 3-42 3-43 3-44 3-2
5	Information should be provided in Survey of India Topo sheet in 1:50,000 scale indicating geological map of the area, geomorphology of land forms of the area, existing minerals and mining history of the area, important water bodies, streams and rivers and soil characteristics.	•Replied in Standard ToR point no.4	--
6	Details about the land proposed for mining activities should be given with information as to whether mining conforms to the land use policy of the State; land diversion for mining should have approval from State land use board or the concerned authority.	•Not Applicable	--
7	It should be clearly stated whether the proponent Company has a well laid down Environment Policy approved by its Board of Directors? If so, it may be spelt out in the EIA Report with description of the prescribed operating process/procedures to bring into focus any infringement/deviation/ violation of the environmental or forest norms/ conditions? The hierarchical system or administrative order of the Company to deal with the environmental issues and for ensuring compliance with the EC conditions may also be given. The system of reporting of non-compliances / violations of environmental norms to the Board of Directors of the Company and/or shareholders or stakeholders at large, may also be detailed in the EIA Report.	•The proponent will frame a well-planned environmental policy. Its details are provided under Section 10.2.1, Chapter-X. •The Mines Manager will undertake effective monitoring and implementation of various environmental control measures promptly and effectively and to oversee various environmental management schemes for air quality control, water quality status, noise level control, plantation programme, social development schemes, etc in the mine. The organizational chart for the same has been provided in Figure No.10.1, Chapter-X.	10-1 10-3
8	Issues relating to Mine Safety, including subsidence study in case of underground mining and slope study in case of open cast mining, blasting study etc. should be detailed. The proposed safeguard measures in each case should also be provided.	•Various risks likely to arise due to mining activities are detailed under section 7.4, Chapter-VII. This being an opencast mine, subsidence is not applicable. The impact due to ground vibrations due to blasting is given in para 4.3.2, Chapter-IV.	7-4 4-9
9	The study area will comprise of 10 km zone around the mine lease from lease periphery and the data contained in the EIA such as waste generation etc. should be for the life of the	•The study area chosen for collecting existing environmental status covers 10 km radial distance from the project periphery (Figure No	3-2



**DRAFT EIA/EMP REPORT FOR ROUGHSTONE & GRAVEL QUARRY OF THIRU.K.RAMARAJ IN
S.F.NOS. 70/1(P) OVER AN AREA OF 1.06.50HA IN MYLERIPALAYAM VILLAGE, MADUKKARAI
TALUK, COIMBATORE DISTRICT, TAMIL NADU.**

	mine / lease period.	- 3.1). Data given in the report is for the life of the mine.	
10	Land use of the study area delineating forest area, agricultural land, grazing land, wildlife sanctuary, national park, migratory routes of fauna, water bodies, human settlements and other ecological features should be indicated. Land use plan of the mine lease area should be prepared to encompass preoperational, operational and post operational phases and submitted. Impact, if any, of change of land use should be given.	• The land use of the study area was studied to demarcate various LULC categories and its details are provided under section 3.4, Chapter-III. • The land use pattern at present and at the end of the quarrying period has been provided under section 4.5, Chapter-IV. • In the post mining stage, the mine pit area of 0.75.10 Ha will be left as a water body. Plantation will be carried out over 0.29.30Ha and 0.02Ha will be left as road and infrastructure..	3-27 4-18
11	Details of the land for any Over Burden Dumps outside the mine lease, such as extent of land area, distance from mine lease, its land use, R&R issues, if any, should be given.	• There is no waste generation anticipated in this quarry operation since the entire excavated material will be utilized. Hence, there is no external overburden dump involved. Besides, there is no proposal for overburden dump outside the lease area.	2-15
12	Certificate from the Competent Authority in the State Forest Department should be provided, confirming the involvement of forest land, if any, in the project area. In the event of any contrary claim by the Project Proponent regarding the status of forests, the site may be inspected by the State Forest Department along with the Regional Office of the Ministry to ascertain the status of forests, based on which, the Certificate in this regard as mentioned above be issued. In all such cases, it would be desirable for representative of the State Forest Department to assist the Expert Appraisal Committees.	• There is no forest land in the lease area.	--
13	Status of forestry clearance for the broken up area and virgin forestland involved in the Project including deposition of Net Present Value (NPV) and Compensatory Afforestation (CA) should be indicated. A copy of the forestry clearance should also be furnished.	• There is no forest land in the lease area.	--
14	Implementation status of recognition of forest rights under the Scheduled Tribes and other Traditional Forest Dwellers (Recognition of Forest Rights) Act, 2006 should be indicated.	• Not Applicable	--
15	The vegetation in the RF / PF areas in the study area, with necessary details, should be given.	• There is no forest land in the lease area.	--
16	A study shall be got done to ascertain the impact of the Mining Project on wildlife of the study area and details furnished. Impact of the project on the wildlife in the	• The mining lease area and the 10 km buffer zone from the periphery of the core zone is devoid of declared ecologically sensitive	4-19



**DRAFT EIA/EMP REPORT FOR ROUGHSTONE & GRAVEL QUARRY OF THIRU.K.RAMARAJ IN
S.F.NOS. 70/1(P) OVER AN AREA OF 1.06.50HA IN MYLERIPALAYAM VILLAGE, MADUKKARAI
TALUK, COIMBATORE DISTRICT, TAMIL NADU.**

	surrounding and any other protected area and accordingly, detailed mitigative measures required, should be worked out with cost implications and submitted.	features like national parks, biospheres, sanctuaries, etc.	
17	Location of National Parks, Sanctuaries, Biosphere Reserves, Wildlife Corridors, Ramsar site Tiger/ Elephant Reserves/(existing as well as proposed), if any, within 10 km of the mine lease should be clearly indicated, supported by a location map duly authenticated by Chief Wildlife Warden. Necessary clearance, as may be applicable to such projects due to proximity of the ecologically sensitive areas as mentioned above, should be obtained from the Standing Committee of National Board of Wildlife and copy furnished.	• Replied in Standard ToR point No.16	--
18	A detailed biological study of the study area [core zone and buffer zone (10 km radius of the periphery of the mine lease)] shall be carried out. Details of flora and fauna, endangered, endemic and RET Species duly authenticated, separately for core and buffer zone should be furnished based on such primary field survey, clearly indicating the Schedule of the fauna present. In case of any scheduled-I fauna found in the study area, the necessary plan along with budgetary provisions for their conservation should be prepared in consultation with State Forest and Wildlife Department and details furnished. Necessary allocation of funds for implementing the same should be made as part of the project cost.	• A detailed study of flora and fauna composition in the core and buffer zone of the project has been made through primary field surveys. The details are furnished in para 3.5, Chapter III.	3-36
19	Proximity to Areas declared as 'Critically Polluted' or the Project areas likely to come under the 'Aravali Range', (attracting court restrictions for mining operations), should also be indicated and where so required, clearance certifications from the prescribed Authorities, such as the SPCB or State Mining Department should be secured and furnished to the effect that the proposed mining activities could be considered.	• Not Applicable	--
20	Similarly, for coastal Projects, A CRZ map duly authenticated by one of the authorized agencies demarcating LTL, HTL, CRZ area, location of the mine lease w.r.t CRZ, coastal features such as mangroves, if any, should be furnished. (Note: The Mining Projects falling under CRZ would also need to obtain approval of the concerned Coastal Zone Management Authority).	• Not Applicable	--
21	R&R Plan/compensation details for the Project Affected People (PAP) should be furnished. While preparing the R&R Plan, the relevant State/National Rehabilitation & Resettlement Policy should be kept in view. In respect of SCs /STs and other weaker sections of the society in the study area, a need based sample survey, family-wise, should be undertaken to assess their requirements, and action	• The mining activities will be carried out within the mine lease area only. The entire mine lease area is a patta land in proponent's possession. There is no population within the ML area. Hence, the question of R& R does not arise.	7-4



DRAFT EIA/EMP REPORT FOR ROUGHSTONE & GRAVEL QUARRY OF THIRU.K.RAMARAJ IN S.F.NOS. 70/1(P) OVER AN AREA OF 1.06.50HA IN MYLERIPALAYAM VILLAGE, MADUKKARAI TALUK, COIMBATORE DISTRICT, TAMIL NADU.

	programmes prepared and submitted accordingly, integrating the sectoral programmes of line departments of the State Government. It may be clearly brought out whether the village(s) located in the mine lease area will be shifted or not. The issues relating to shilling of village(s) including their R&R and socio-economic aspects should be discussed in the Report.		
22	One season (non-monsoon) (i.e. March-May (Summer Season); October-December (post monsoon season) ; December-February (winter season) primary baseline data on ambient air quality as per CPCB Notification of 2009, water quality,: noise level, soil and flora and fauna shall be collected and the AAQ and other data so compiled presented date-wise in the EIA and EMP Report. Site-specific meteorological data should also be collected. The location of the monitoring stations should be such as to represent whole of the study area and justified keeping in view the pre-dominant downwind direction and location of sensitive receptors. There should be at least one monitoring station within 500 m of the mine lease in the pre-dominant downwind direction. The mineralogical composition of PM ₁₀ , particularly for free silica, should be given.	•The baseline data on micro- meteorology, ambient air quality, Water quality, noise level, soil and flora & fauna are collected during Summer Season (March 2025 to May 2025) and detailed in para 3.3 to 3.5 of Chapter-III. •Monitoring stations were selected taking into account, wind direction and location of sensitive receptors. •Free silica composition in PM₁₀ sample has been done and the values are found to be Below Detectable Limit (DL 0.05mg/m³) which is well within the prescribed limit of 5mg/m³.	3-1 & 3-16
23	Air quality modeling should be carried out for prediction of impact of the project on the air quality of the area. It should also take into account the impact of movement of Vehicles for transportation of mineral. The details of the model used and input parameters used for modeling should be provided. The air quality contours may be shown on a location map clearly indicating the location of the site, location of sensitive receptors, if any, and the habitation. The wind roses showing pre-dominant wind direction may also be indicated on the map.	• Air quality modeling details are furnished in para 4.2.2 and its continuous sub paras in Chapter-IV of EIA report. • The impact on air quality due to the proposed project is estimated using AERMOD View Gaussian Plume Air Dispersion Model developed by Lakes Environmental Software which is based on steady state Gaussian plume dispersion. • The model simulations are done for the air pollutant arising from the mining operations, namely, PM₁₀, PM_{2.5}. Ground Level Concentration (GLC) have been computed using hourly meteorological data. • The Isopleths of PM₁₀, PM_{2.5} concentrations for with control measures scenario have also been drawn and these are given in Figure No.4.1 and 4.2. • It can be seen that the resultant added concentrations with baseline figures even at worst scenario, show that the values of ambient air quality with respect to PM₁₀ are in the range of 58.0µg/m³ to 64.0µg/m³ and with respect to PM_{2.5} are in the range of 24.0µg/m³ to 28.0µg/m³ which are within the statutory limits in each case.	4-3 4-5 & 4-7



DRAFT EIA/EMP REPORT FOR ROUGHSTONE & GRAVEL QUARRY OF THIRU.K.RAMARAJ IN S.F.NOS. 70/1(P) OVER AN AREA OF 1.06.50HA IN MYLERIPALAYAM VILLAGE, MADUKKARAI TALUK, COIMBATORE DISTRICT, TAMIL NADU.

24	The water requirement for the Project, its availability and source should be furnished. A detailed water balance should also be provided. Fresh water requirement for the Project should be indicated.	The total water requirement for this project will be 8.0 KLD comprising 1.0 KLD for drinking water and domestic use, 5.0 KLD for dust suppression and 2.0 KLD for greenbelt. The water will be sourced initially from outside agencies. Later the rainwater collected in the mine pit sump will be used for this purpose. The water balance diagram for the same is shown in Figure No 4.3.	4-8
25	Necessary clearance from the Competent Authority for drawl of requisite quantity of water for the Project should be provided.	Not Applicable.	--
26	Description of water conservation measures proposed to be adopted in the Project should be given. Details of rainwater harvesting proposed in the Project, if any, should be provided.	- The rain water falling in the quarry will be harvested in the sump at the lowest level of the quarry. This sump will act as a settling pond to prevent solids escaping along with discharge, before outlet. etc. - Towards surface runoff management, a garland drain of length 450m will be constructed around the quarry and will be connected to a settling pond with silt traps. The supernatant clear water from the settling pond will be flow to the downstream users. The surface runoff management structures diagram is given in Figure No 4.4, Chapter-IV. - The methods for reducing water consumption and rainwater harvesting is provided in section 4.3.4, Chapter-IV.	4-11 4-9 4-11
27	Impact of the Project on the water quality, both surface and groundwater. should be assessed and necessary safeguard measures, if any required, should be provided.	- There will be no generation of effluent or its discharge from the mining operation in this lease area and as such no impact on surface or ground water is expected. - The ultimate pit depth of mining is 48m. The ground water table in this area is below this level. Hence, ground water intersection in not envisaged and ground water will not be affected appreciably due to the quarrying operation.	4-10 2-18
28	Based on actual monitored data, it may clearly be shown whether working will intersect groundwater. Necessary data and documentation in this regard may be provided. In case the working will intersect groundwater table, a detailed Hydro Geological Study should be undertaken and Report furnished. The Report inter-alia, shall include details of the aquifers present and impact of mining activities on these aquifers. Necessary permission from Central Ground Water Authority for working below ground	The occurrence of groundwater mainly in the porous soil are weathered layers, very negligible amount of groundwater percolated through the poorly fractured layer, after that there is no existence of groundwater. Since the mining area consists of hard compact rock, no major water seepage within the mine is expected from the periphery.	2-12 3-46



**DRAFT EIA/EMP REPORT FOR ROUGHSTONE & GRAVEL QUARRY OF THIRU.K.RAMARAJ IN
S.F.NOS. 70/1(P) OVER AN AREA OF 1.06.50HA IN MYLERIPALAYAM VILLAGE, MADUKKARAI
TALUK, COIMBATORE DISTRICT, TAMIL NADU.**

	water and for pumping of ground water should also be obtained and copy furnished.	• The ultimate pit depth of mining is 48m. The ground water table in this area is below this level. Hence, ground water intersection in not envisaged and ground water will not be affected appreciably due to the quarrying operation. • Details of hydro geological study are given in Para 3.6.2 Chapter – III.	
29	Details of any stream, seasonal or otherwise, passing through the lease area and modification / diversion proposed, if any, and the impact of the same on the hydrology should be brought out.	• There are no streams passing through the lease area.	--
30	Information on site elevation, working depth, groundwater table etc. Should be provided both in AMSL and bgl. A schematic diagram may also be provided for the same.	• The area applied for mining lease is a gentle plain terrain.. • The ultimate pit depth of mining is 48m. The ground water table in this area is below this level.	2-2
31	A time bound Progressive Greenbelt Development Plan shall be prepared in a tabular form (indicating the linear and quantitative coverage, plant species and time frame) and submitted, keeping in mind, the same will have to be executed up front on commencement of the. Project. Phasc-wise plan of plantation and compensatory afforestation should be charted clearly indicating the area to be covered under plantation and the species to be planted. The details of plantation already done should be given. The plant species selected for green belt should have greater ecological value and should be of good utility value to the local population with emphasis on local and native species and the species which are tolerant to pollution.	• Greenbelt / Plantation will be carried out to enhance the vegetative growth and aesthetic in the safety zone area. About 500 trees will be planted in and around the lease area. Details of the same is provided under TableNo.4.16, Chapter-IV.	4-19
32	Impact on local transport infrastructure due to the Project should be indicated. Projected increase in truck traffic as a result of the Project in the present road network (including those outside the Project area) should be worked out, indicating whether it is capable of handling the incremental load. Arrangement for improving the infrastructure, if contemplated (including action to be taken by other agencies such as State Government) should be covered. Project Proponent shall conduct Impact of Transportation study as per Indian Road Congress Guidelines.	• From this proposed quarry the entire output will be transported to the crusher units and other buyers etc. Details of the traffic study is provided under section 4.9, Chapter-IV.	4-23
33	Details of the onsite shelter and facilities to be provided to the mine workers should be included in the EIA Report.	• This is a proposed project. Site services like mine office, first aid room, rest shelters, toilets etc. will be provided as semi-permanent structures.	2-17
34	Conceptual post mining land use and Reclamation and Restoration of mined out areas (with plans and with	In the post mining stage, the mine pit area of 0.75.10 Ha will be left as a water body.	4-19



**DRAFT EIA/EMP REPORT FOR ROUGHSTONE & GRAVEL QUARRY OF THIRU.K.RAMARAJ IN
S.F.NOS. 70/1(P) OVER AN AREA OF 1.06.50HA IN MYLERIPALAYAM VILLAGE, MADUKKARAI
TALUK, COIMBATORE DISTRICT, TAMIL NADU.**

	adequate number of sections) should be given in the EIA report.	Plantation will be carried out over 0.29.30Ha and 0.02Ha will be left as road and infrasturcture. Overall about 500 trees will be planted in and around the lease area during the plan period.	
35	Occupational Health impacts of the Project should be anticipated and the proposed preventive measures spelt out in detail. Details of pre-placement medical examination and periodical medical examination schedules should be incorporated in the EMP. The project specific occupational health mitigation measures with required facilities proposed in the mining area may be detailed	• Details of occupational health and safety aspects are given under the subsections of Para 4.8, Chapter-IV.	4-22
36	Public health implications of the Project and related activities for the population in the impact zone should be systematically evaluated and the proposed remedial measures should be detailed along with budgetary allocations	• Details of the socio economic survey conducted in the buffer zone has been provided in Para 3.2.4, Chapter-III. • Public health facilities will be further aimed to be developed through CER activities wherein periodic health checkups, medical camps for the locals will be conducted.	3-9
37	Measures of socio economic significance and influence to the local community proposed to be provided by the Project Proponent should be indicated. As far as possible, quantitative dimensions may be given with time frames for implementation.	• Towards the socio economic development of the surrounding area, the proponent has earmarked an amount of Rs 3 Lakhs under Corporate Environmental Responsibility. The activities identified under CER will be implemented in a phased manner in the nearby Government schools. In consultation with the locals based on the need & priority it will be implemented. Its details are provided in Para 4.7, Chapter-IV	4-21
38	Detailed environmental management plan (EMP) to mitigate the environmental impacts which, should inter-alia include the impacts of change of land use, loss of agricultural and grazing land, if any, occupational health impacts besides other impacts specific to the proposed Project.	• Detailed Environmental Management plan and its implementation, etc., are furnished in Chapter X.	10-1
39	Public Hearing points raised and commitment of the Project Proponent on the same along with time bound Action Plan with budgetary provisions to implement the same should be provided and also incorporated in the final EIA/EMP Report of the Project.	• This draft EIA/EMP report will be exposed to public consultation as per mandatory procedures through the District Collector and State Pollution Control Board officials after giving 30 days advance notice in two local newspapers about the scheduled date and time for conduct of the public hearing procedures. • The opinions, concerns and objections of stakeholders will be recorded during the public hearing. All the public queries and the replies to the query by the project proponent and officials concerned will be recorded and	7-1



**DRAFT EIA/EMP REPORT FOR ROUGHSTONE & GRAVEL QUARRY OF THIRU.K.RAMARAJ IN
S.F.NOS. 70/1(P) OVER AN AREA OF 1.06.50HA IN MYLERIPALAYAM VILLAGE, MADUKKARAI
TALUK, COIMBATORE DISTRICT, TAMIL NADU.**

		incorporated in the EIA/EMP report for approval by SEIAA, Tamil Nadu.	
40	Details of litigation pending against the project, if any, with direction /order paced by any Court of Law against the Project should be given.	• PP informed that there is no litigation pending against the project.	--
41	The cost of the Project (capital cost and recurring cost) as well as the cost towards implementation of EMP should be clearly spelt out.	• The cost of the project is Rs. 1,03,30,000/- Towards EMP measures, Rs.Rs.16.40 Lakhs is allocated under capital cost. Besides, Rs.12.77 lakhs per annum will be spent under recurring cost. All the recurring cost of maintenance of pollution control measures, environmental monitoring etc., will be met from revenue.	4-21 10-12
42	A Disaster management Plan shall be prepared and included in the EIA/EMP Report.	• The disaster management plan has been provided under section 7.3.1, Chapter-VII.	7-3
43	Benefits of the Project if the Project is implemented should be spelt out. The benefits of the Project shall clearly indicate environmental, social, economic, employment potential, etc.	• The proposed Rough Stone Quarry will benefit this region in the fields of employment opportunities, improved per capita income for local people, improved social welfare facilities in respect of education, health, infrastructural etc. • Direct employment to 20 people and indirect employment to scores of people. • By means of carrying out the socio economic development activities, local community development is expected. Towards the same, the proponent has planned to allocate Rs. 3 Lakhs for various activities under CER. From the CER activities allocated for various social welfare activities, the villages near the lease area will be benefited.	8-1



CHAPTER - I

INTRODUCTION

CHAPTER 1

INTRODUCTION

1.1 PURPOSE OF THE REPORT:

Thiru. K. Ramaraj proposed to operate a Roughstone and Gravel Quarry over an area of 1.06.50Ha in Survey No. 70/1(P) for 5 years in Myleripalayam Village, Madukkarai Taluk, Coimbatore District, Tamil Nadu and has initiated action towards obtaining environmental clearance.

Although the individual lease area of this project is less than 5 Ha, the proposal falls under Category B1 forming a cluster situation as per the EIA Notification 2006, its subsequent amendments and MoEF& CC Notification S.O. 2269(E) Dated 01.07.2016 (With total cluster area of 21.7188Ha). This necessitates preparation of EIA/EMP report for appraisal to SEAC.

This EIA/EMP report is prepared based on standard Terms of Reference issued by SEIAA, Tamil Nadu vide ToR Identification No. TO25B0108TN5570602N dated 16.07.2025 and is in conformance of the generic structure prescribed by MoEFCC in their notification of September 2006 and the approved mining plan.

1.2 IDENTIFICATION OF PROJECT &PROJECT PROPONENT:

Table 1.1Identification of project

1	Project Name	Rough Stone and Gravel Quarry of Thiru. K. Ramaraj
2	Extent	1.06.50Ha
3	Production for 5 years	Roughstone – 73,750m ³ , Gravel – 10,614m ³ for 5 years with the peak production capacity of 10,614 (Year 1) of Gravel & 14970m ³ of Rough stone (Year 4)
4	Ultimate Depth	48m
5	Land Classification	Patta Land in proponent's posession
6	Location	Survey No. 70/1(P) in Myleripalayam Village, Madukkarai Taluk, Coimbatore District, Tamil Nadu



DRAFT EIA/EMP REPORT FOR ROUGHSTONE & GRAVEL QUARRY OF THIRU.K.RAMARAJ IN S.F.NOS. 70/1(P) OVER AN AREA OF 1.06.50HA IN MYLERIPALAYAM VILLAGE, MADUKKARAI TALUK, COIMBATORE DISTRICT, TAMIL NADU.

Table 1.2: Identification of Project Proponent

1	Proponent Name	Thiru. K. Ramaraj
2	Address	2/395-1, Venkateshwara Nagar, Premier Nagar West, Othakalmandapam, Coimbatore District, Tamilnadu- 641 032
3	Contact Number	9842202515
4	Email-ID	ramarajrst2023@gmail.com

The Proponent can meet the financial requirement of this project and will ensure that the mining activities are carried out as per statutory requirements.

Table 1.3: Statutory Approvals

Name	Issuing Authority	Status	Letter number	Date	Reference
Precise Area Communication	Assistant Director, Department of Geology & Mining	Received	Rc.No.778/Mines/2024	27.12.2024	Annexure-1
Mining Plan Approval	Assistant Director, Department of Geology & Mining	Approved	Rc.No.778/Mines/2024	09.01.2025	Annexure-2
Details of other quarries within 500m radius	Assistant Director, Department of Geology & Mining	Obtained	Rc.No.778/Mines/2024	09.01.2025	Annexure-3
District survey report	Collector, Assistant director, Geology & Mining	Authenticated	As per S.O. 3611(E) dated 25.07.2018	-	--
VAO Letter	VAO	Obtained	--	08.07.2024	Annexure-4
Previous pit dimensions and production	Assistant Director, Geology & Mining	Received	Rc.No.778/Mines/2024	09.01.2025	Annexure-5
Consent Register documents	-	Obtained	-	19.05.2025	Annexure-6
Previous Environmental Clearance	DEIAA, Coimbatore	Granted	DEIAA-CBE/F.No.358/1(a)/EC.No.53/2018	10.12.2018	Annexure-7
Certified EC Compliance Report	Ministry of Environment, Forest & Climate change, Nungambakkam, Chennai-06	Obtained	EP/12.1/2025-26/SEIAA/79/TN/1302	22.08.2025	Annexure-8
Lease Deed Agreement Copy	District Collector, Coimbatore	Obtained	-	-	Annexure-8A



DRAFT EIA/EMP REPORT FOR ROUGHSTONE & GRAVEL QUARRY OF THIRU.K.RAMARAJ IN S.F.NOS. 70/1(P) OVER AN AREA OF 1.06.50HA IN MYLERIPALAYAM VILLAGE, MADUKKARAI TALUK, COIMBATORE DISTRICT, TAMIL NADU.

1.3 BRIEF DESCRIPTION OF NATURE, SIZE, LOCATION & PROJECT IMPORTANCE

Table 1.4: Brief Description of Nature of project

1.	Sector	1(a), Non-Coal Mining
2.	Type	Brown field Project
3.	Category	B1
4.	Mineral Mined	Roughstone & Gravel Quarry
5.	Major/Minor Mineral	Minor
6.	Mining method	Opencast Semi Mechanized Mining
7.	End use	Top gravel shall be excavated and transported by tippers for supply to prospective customers. The underlying rough stone shall be systematically quarried and dispatched in tippers to authorized buyers for use in the production of crusher aggregates and manufactured sand (M-Sand).

Table 1.5: Location of the project

S.No	Particulars	Details
1.	Location	Survey No. 70/1(P) in Myleripalayam Village, Madukkarai Taluk, Coimbatore District, Tamil Nadu
2.	Corner Coordinates	Latitude : 10°52'00.56" N to 10°52'04.76" N Longitude : 77°02'02.14" E to 77°02'06.02" E
3.	Toposheet Number	58 -B/13 & 58 F/1

Location details are elaborated in Para 2.3, Chapter-II.

1.3.1 IMPORTANCE TO THE COUNTRY AND REGION:

Rough stone from this quarry will meet the domestic demand. The production and method of mining is planned considering the geological factors, availability of proven technology, demand for the material etc. Safety barriers as per State Government order is left in the planning stage itself. Systematic and scientific mining will be carried out. This project will provide employment opportunities to many people. The proponent will carry out CER activities which will help the surrounding villages to derive socio economic benefits. The activities will be customized based on local needs and prioritized. Hence, livelihood development and employment will arise due to this project.



DRAFT EIA/EMP REPORT FOR ROUGHSTONE & GRAVEL QUARRY OF THIRU.K.RAMARAJ IN S.F.NOS. 70/1(P) OVER AN AREA OF 1.06.50HA IN MYLERIPALAYAM VILLAGE, MADUKKARAI TALUK, COIMBATORE DISTRICT, TAMIL NADU.

1.4 SCOPE OF THE STUDY:

Particulars	Details
Proposal no	SIA/TN/MIN/528033/2025 dated 14.05.2025
File no	12187
SEAC meeting Reference	578th Meeting of SEAC held on 13.06.2025
SEIAA meeting Reference	849th Meeting of Authority held on 10.07.2025
Terms of Reference	TO25B0108TN5570602N dated 16.07.2025
Baseline Data Collection	Summer Season (March – May 2025)

Based on the terms of reference, data collection, the Environmental Impact Assessment was carried out for the project area (core zone and the buffer zone (10km radius from the core zone) and the following studies were covered:

- Collection of primary and secondary data relevant to the project.
- One-Season baseline monitoring for environmental parameters such as air, water, noise, soil, flora & fauna, etc. Analysis of parameters in in-house laboratory.
- Documentation of EIA/EMP report with inclusion of relevant studies conducted by other bodies into the EIA/EMP report.
- Identification of significant environmental parameters that are prone to get affected due to pollution. Namely, Air, Water, Noise, Soil, Biological and Land Environment.
- Evaluation and determination of suitable mitigation measures to reduce and control the said pollution.
- Prediction of post project concentration (baseline + incremental) with respect to air environment for core zone and buffer zone. (on Individual as well as cumulative basis)
- Formulation of an Environmental Management plan including administrative aspects for proposed implementation of mitigative measures in time.



DRAFT EIA/EMP REPORT FOR ROUGHSTONE & GRAVEL QUARRY OF THIRU.K.RAMARAJ IN S.F.NOS. 70/1(P) OVER AN AREA OF 1.06.50HA IN MYLERIPALAYAM VILLAGE, MADUKKARAI TALUK, COIMBATORE DISTRICT, TAMIL NADU.

This draft EIA/EMP report will be submitted for public consultation, as per rules and procedures in this respect, as per the EIA notification 2006. The opinions, concerns and objections, if any, of the surrounding public and other stake holders connected, will be taken into consideration and compliance report thereon will be submitted to SEIAA, Tamil Nadu in the final EIA/EMP report.

* * * * *



CHAPTER - II

PROJECT DESCRIPTION

CHAPTER 2

PROJECT DESCRIPTION

2.1 TYPE OF PROJECT:

This proposal is a Roughstone and Gravel Quarry over an area of 1.06.50Ha in Survey No. 70/1(P) in Myleripalayam Village, Madukkarai Taluk, Coimbatore District, Tamil Nadu. The method of mining is proposed to be opencast mechanized mining upto a depth of 48m (BGL) for the TOR issued production capacity of 10614m³ of Gravel & 73750m³ of rough stone with the peak production capacity of 10,614 (Year 1) of Gravel & 14970m³ of Rough stone (Year 4) for five years lease period.

2.2 NEED & JUSTIFICATION FOR THE PROJECT:

There is a huge demand for construction material and the entire material produced from this quarry will be used in the local construction/ infrastructure sector. Considering the following favorable factors it is practically possible to achieve the proposal within the planned period and this proposal is fully justified.

- Availability of good quality proved reserves
- Techno economic viability of the scheme
- Better approachability to the project, availability of logistic facility in proximity to the site
- Economic and Socio Economic Benefits to the region

2.3 LOCATION:

A brief description of the mining area, along with the location, coordinates, accessibility, etc. has been details below in Table No.2.1.

Table 2.1: Mine site description

Location	Myleripalayam Village, Madukkarai Taluk, Coimbatore District, Tamil Nadu
Survey No.	70/1(P)
Coordinates	Latitude : 10°52'00.56" N to 10°52'04.76" N Longitude : 77°02'02.14" E to 77°02'06.02" E
Nearest Village	Maileripalaiyam -1.1km – (NW)




DRAFT EIA/EMP REPORT FOR ROUGHSTONE & GRAVEL QUARRY OF THIRU.K.RAMARAJ IN S.F.NOS. 70/1(P) OVER AN AREA OF 1.06.50HA IN MYLERIPALAYAM VILLAGE, MADUKKARAI TALUK, COIMBATORE DISTRICT, TAMIL NADU.

Nearest Town	Chettipalayam - 4.3km (N)
Nearest Highway	NH-83 (Coimbatore – kinathukadavu)– 2.4Km – W,
Nearest Railway Station	Kinathukadavu RS – 4.3km – (SW)
Nearest Airport	Coimbatore - 18km (N)
Accessibility	The lease area can be approached through village road on the southern side of the lease area which joins NH-83 Coimbatore – kinathukadavu highway at a distance of 2.4Km on the western side of the lease area.
Topography	The lease applied area is exhibits plain area covered by Rough stone & Gravel formation. The remaining land in the proposed area is partially covered with shrubs, herbs, grass, climbers, bushes, etc.

Location map is provided in **Figure No.2.1**.The approachability map is provided in **Figure No.2.2**. Corner co-ordinates of the lease area and satellite imagery are shown in **Figure No. 2.3 & 2.4** respectively. Village map for 500m radius from the lease is shown in **Figure No. 2.5**.

Figure 2.1: Location Map

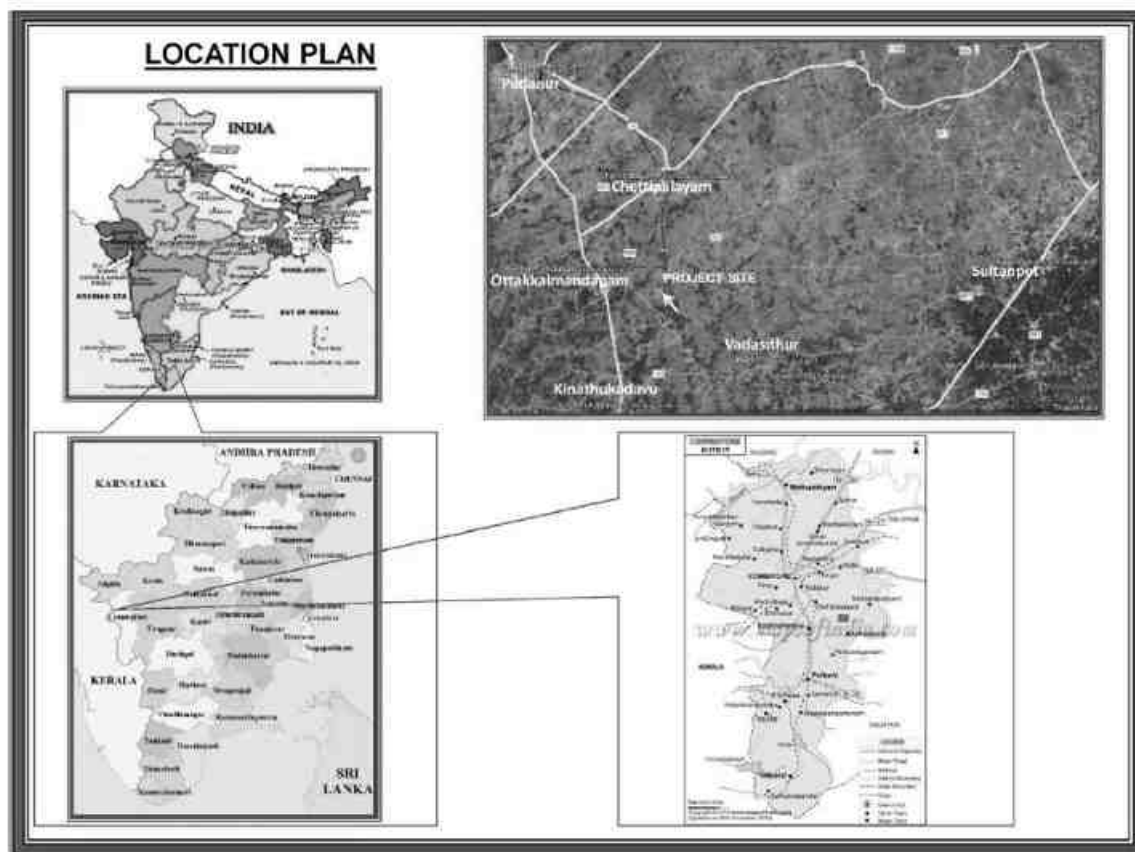

DRAFT EIA/EMP REPORT FOR ROUGHSTONE & GRAVEL QUARRY OF THIRU.K.RAMARAJ IN S.F.NOS. 70/1(P) OVER AN AREA OF 1.06.50HA IN MYLERIPALAYAM VILLAGE, MADUKKARAI TALUK, COIMBATORE DISTRICT, TAMIL NADU.

Figure 2.2: Approachability Map



Source: Google Earth



Creative Engineers & Consultants

PROJECT DESCRIPTION


PRO CODE: CEC-EMP-MI-254

REV NO : 00/OCT/25

2-3

DRAFT EIA/EMP REPORT FOR ROUGHSTONE & GRAVEL QUARRY OF THIRU.K.RAMARAJ IN S.F.NOS. 70/1(P) OVER AN AREA OF 1.06.50HA IN MYLERIPALAYAM VILLAGE, MADUKKARAI TALUK, COIMBATORE DISTRICT, TAMIL NADU.

Figure 2.3: Lease Plan

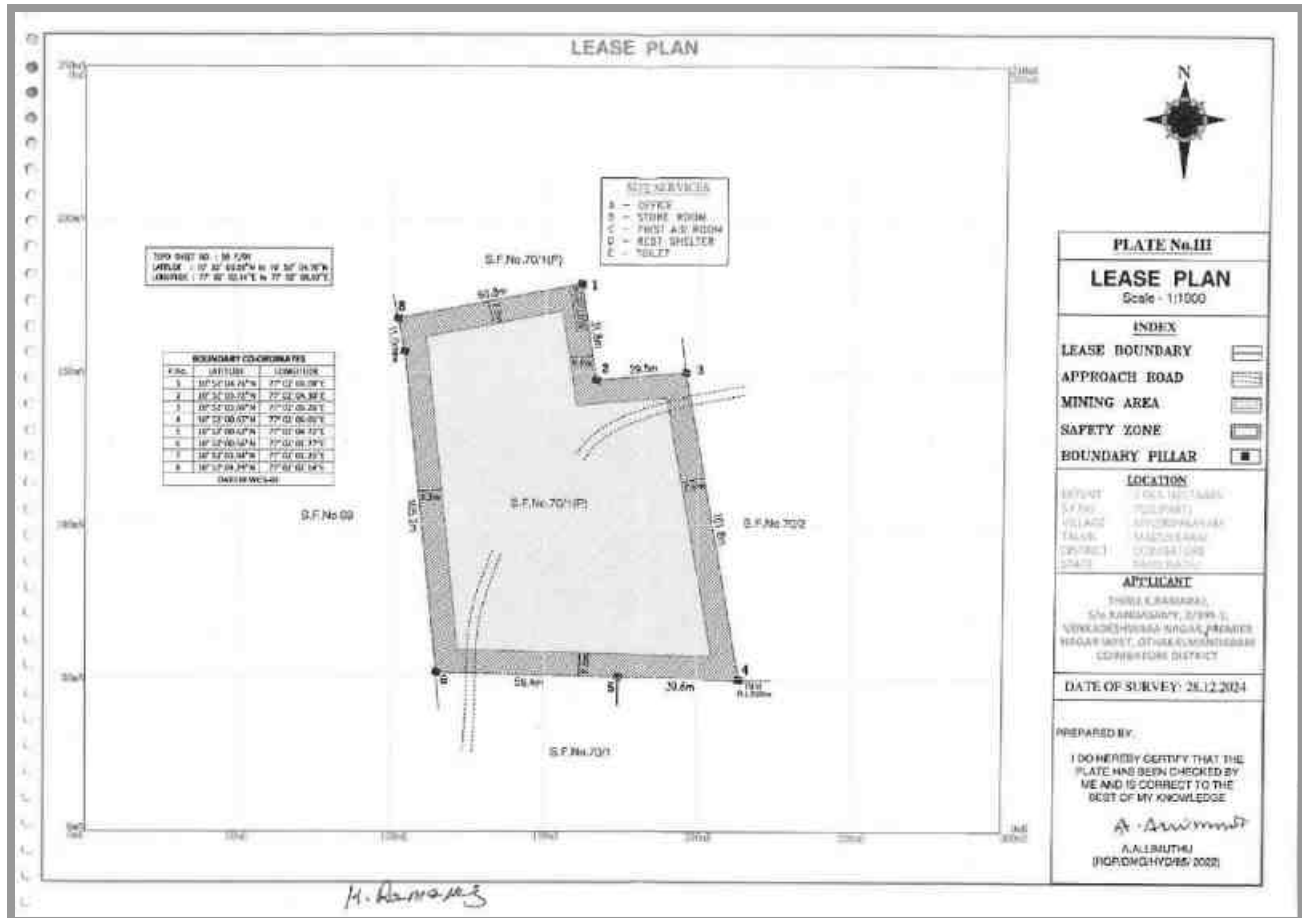

Source: Approved Mining Plan



Creative Engineers & Consultants

PROJECT DESCRIPTION


PRO CODE: CEC-EMP-MI-254

REV NO : 00/OCT/25

2-4

DRAFT EIA/EMP REPORT FOR ROUGHSTONE & GRAVEL QUARRY OF THIRU.K.RAMARAJ IN S.F.NOS. 70/1(P) OVER AN AREA OF 1.06.50HA IN MYLERIPALAYAM VILLAGE, MADUKKARAI TALUK, COIMBATORE DISTRICT, TAMIL NADU.

Figure 2.4: Satellite Imagery Showing Corner Co-ordinates of the Project Area

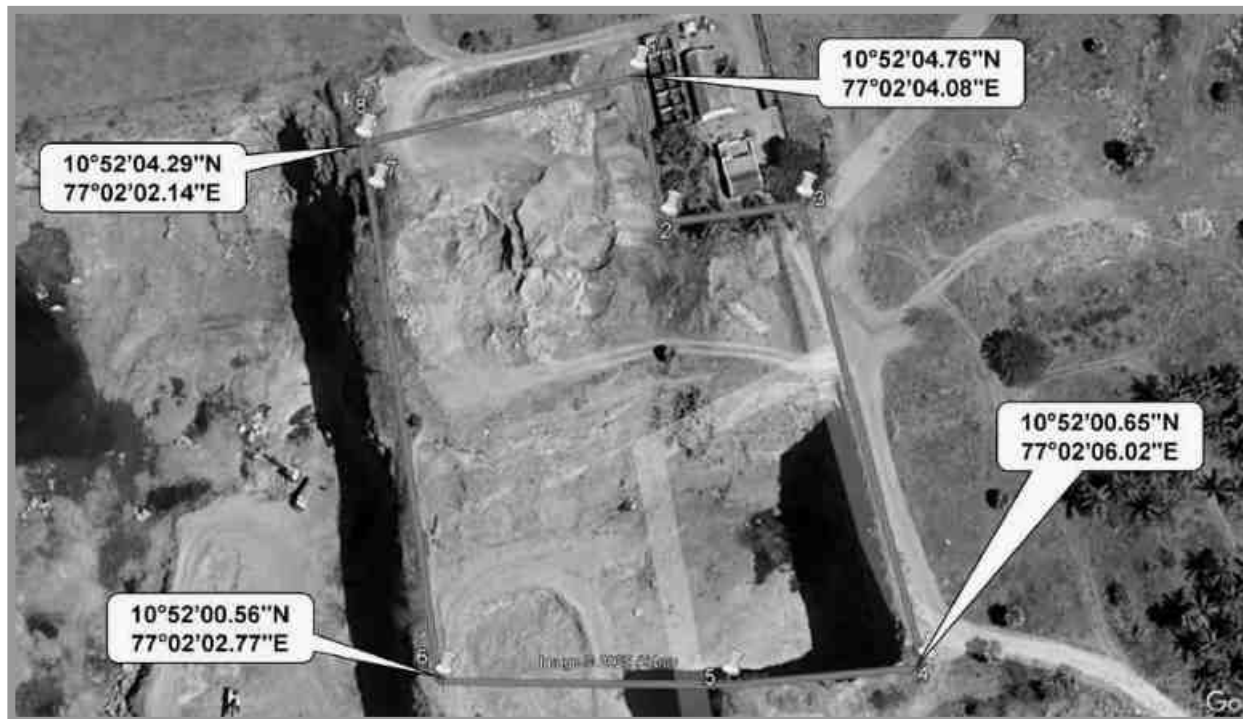

Source: Google Earth



Creative Engineers & Consultants

PROJECT DESCRIPTION

PRO CODE: CEC-EMP-MI-254

REV NO : 00/OCT/25

2-6

DRAFT EIA/EMP REPORT FOR ROUGHSTONE & GRAVEL QUARRY OF THIRU.K.RAMARAJ IN S.F.NOS. 70/1(P) OVER AN AREA OF 1.06.50HA IN MYLERIPALAYAM VILLAGE, MADUKKARAI TALUK, COIMBATORE DISTRICT, TAMIL NADU.

SITE PHOTOGRAPHS



Creative Engineers & Consultants

PROJECT DESCRIPTION


PRO CODE: CEC-EMP-MI-254

REV NO : 00/OCT/25

2-7

DRAFT EIA/EMP REPORT FOR ROUGHSTONE & GRAVEL QUARRY OF THIRU.K.RAMARAJ IN S.F.NOS. 70/1(P) OVER AN AREA OF 1.06.50HA IN MYLERIPALAYAM VILLAGE, MADUKKARAI TALUK, COIMBATORE DISTRICT, TAMIL NADU.

Figure 2.5: Village Map

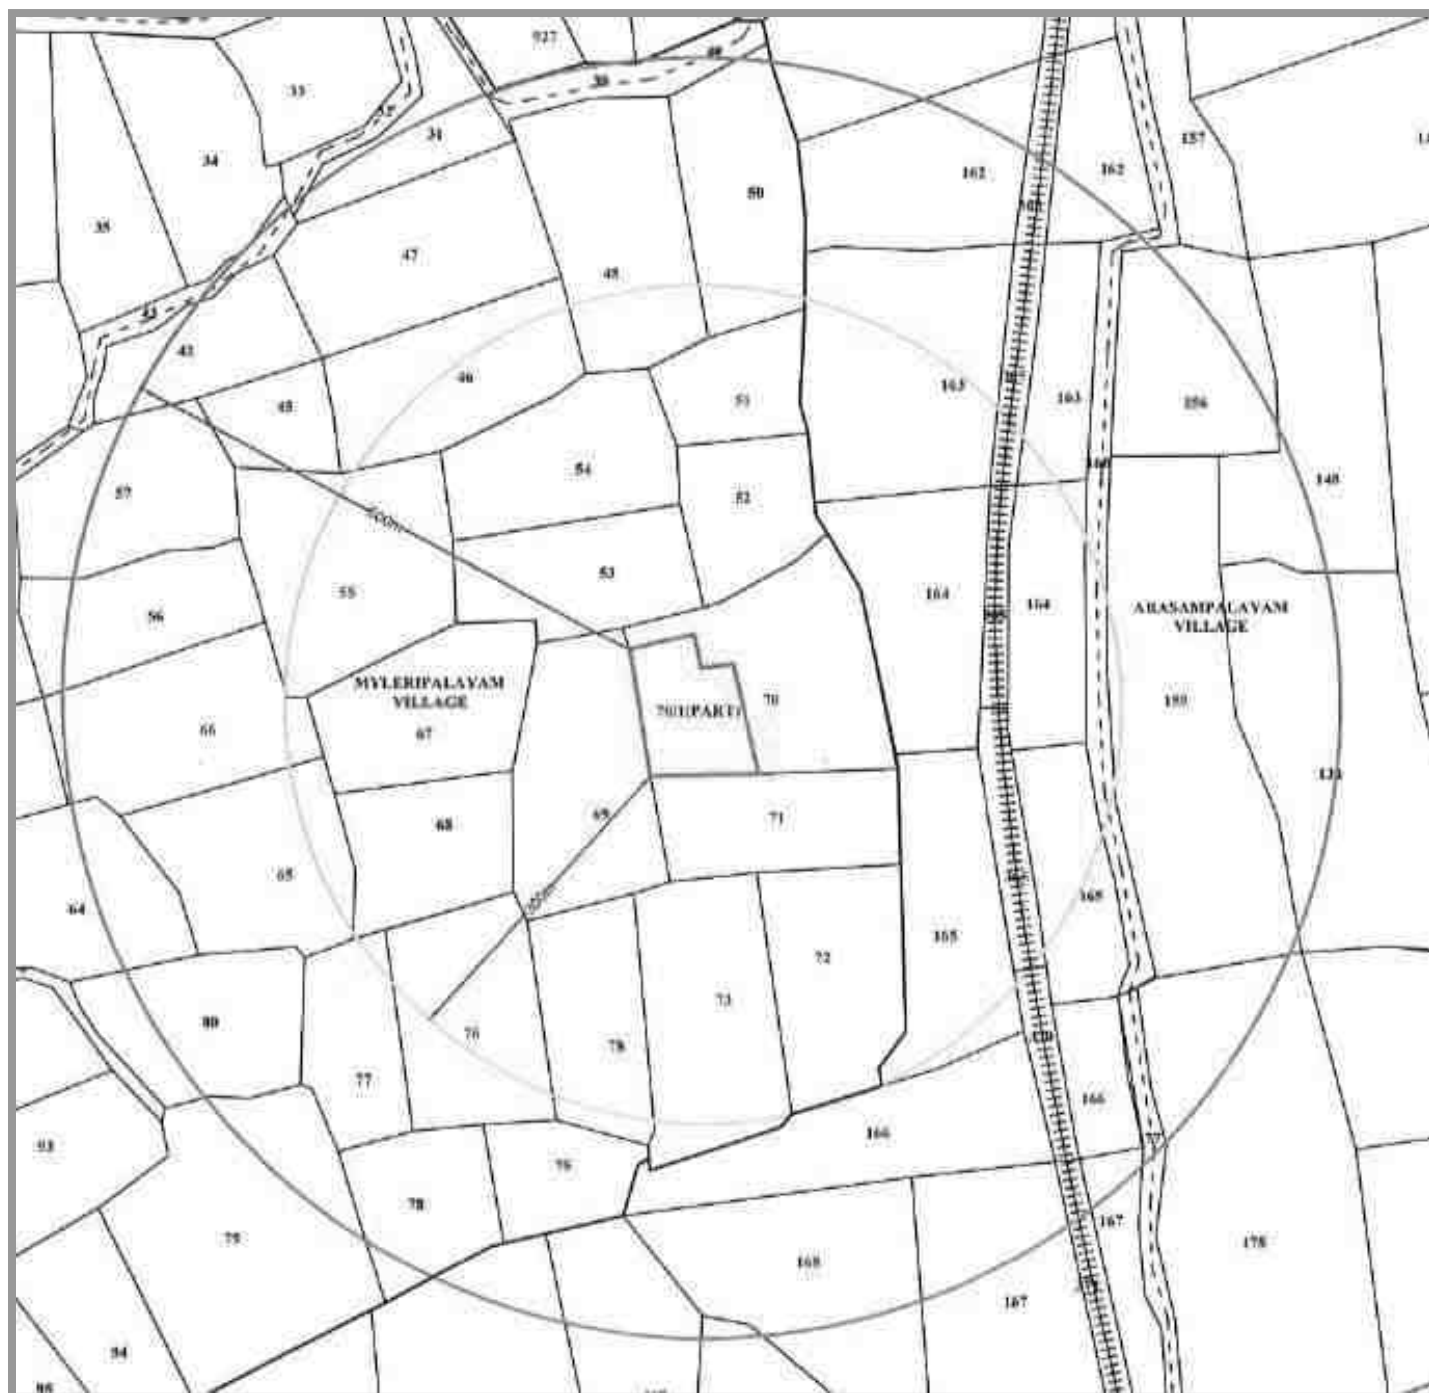

Creative Engineers & Consultants


PROJECT DESCRIPTION

PRO CODE: CEC-EMP-MI-254

REV NO : 00/OCT/25

2-8

Figure 2.6: Details of features within 500m radius

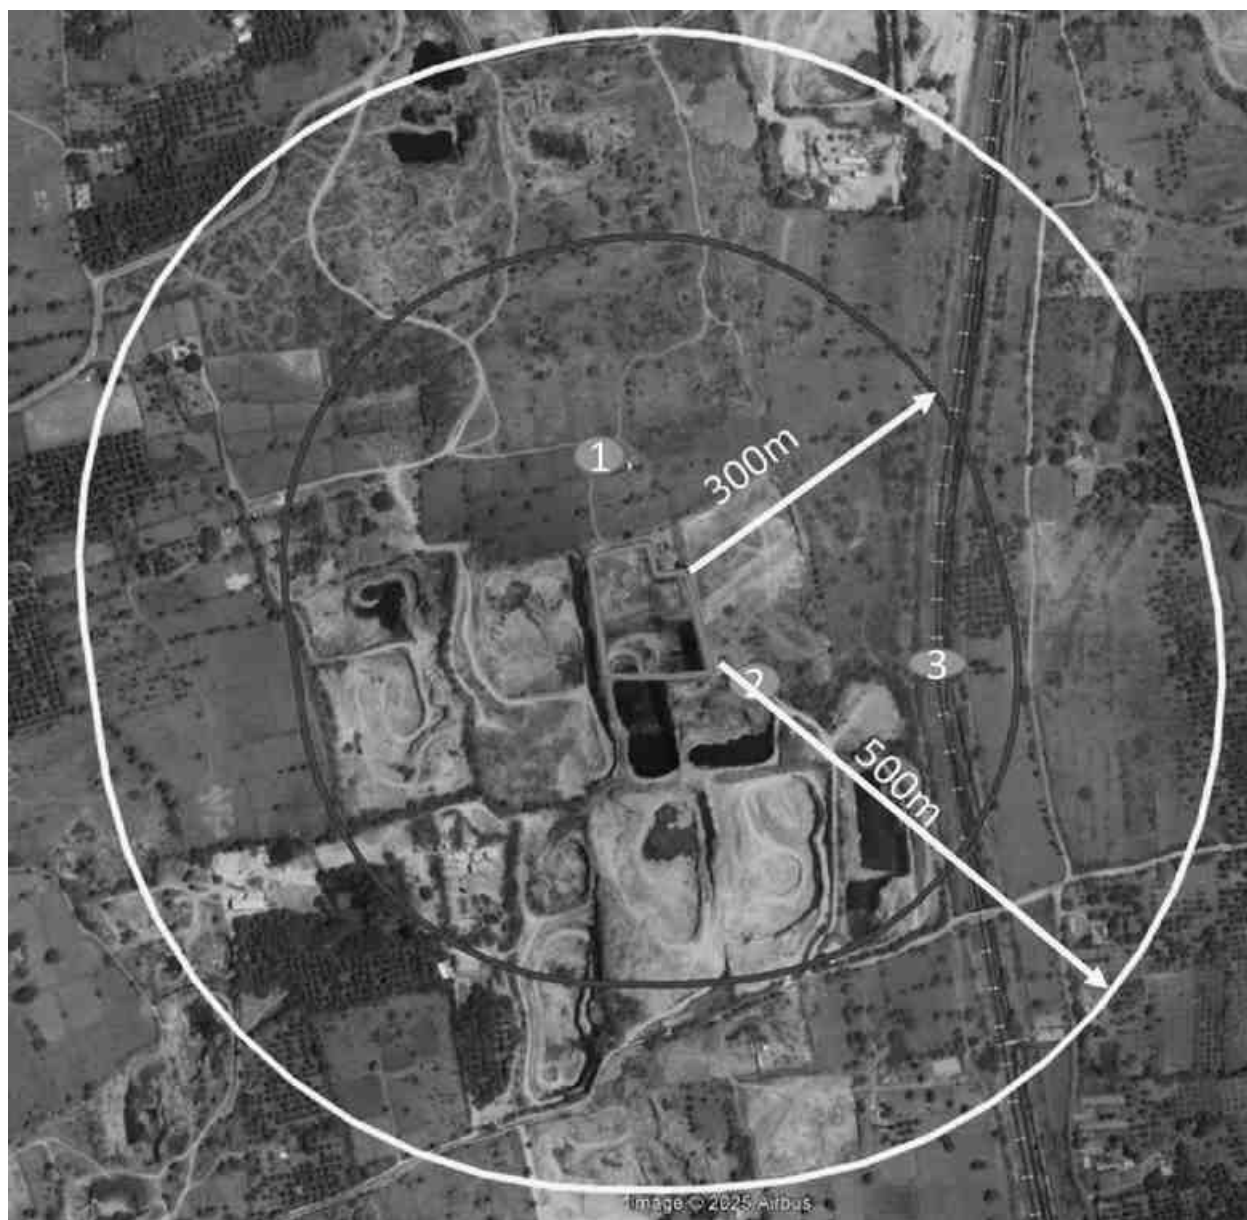

Source: Google Earth

As per the conditions of the Terms of Reference, the details of structures located within the 100m, 200m, 300m, radius are provided below.

DRAFT EIA/EMP REPORT FOR ROUGHSTONE & GRAVEL QUARRY OF THIRU.K.RAMARAJ IN S.F.NOS. 70/1(P) OVER AN AREA OF 1.06.50HA IN MYLERIPALAYAM VILLAGE, MADUKKARAI TALUK, COIMBATORE DISTRICT, TAMIL NADU.

Table 2.2: Features within 300m radius

S.No	Structure	Distance	Photograph
1	Shed	80m, N	
2	Cart Track	SE	
3	Railway Track	220m, E	



DRAFT EIA/EMP REPORT FOR ROUGHSTONE & GRAVEL QUARRY OF THIRU.K.RAMARAJ IN S.F.NOS. 70/1(P) OVER AN AREA OF 1.06.50HA IN MYLERIPALAYAM VILLAGE, MADUKKARAI TALUK, COIMBATORE DISTRICT, TAMIL NADU.

2.4 LAND CLASSIFICATION:

The lease area of 1.06.50Ha in S.F.Nos. 70/1(P) is a patta land, partly owned by the applicant and for the remaining, applicant got consent from the other pattadhar. The survey no. wise area breakup has been provided below:

Table 2.3: Survey Number wise Area Breakup


District	Taluk	Village	Survey Nos	Area in Ha	Ownership
Coimbatore	Madukkarai	Myleripalayam village	70/1(P)	1.06.50	It is a Patta Land in S.F.No70/1(P), registered in the name of Thiru. Ramaraj, Suppathal & kalaiselvi patta no.986. Consent from Pattadhars register under process.
Total Area in (Hectares)				1.06.50	

2.5 GEOLOGY:

The area is mainly composed of crystalline metamorphic complex. The rock type majorly noticed in the area for lease is Biotite Gneiss. Which is mainly composed Hornblende, biotite mica, Quartz, and Feldspar with some ferromagnesian minerals. The grain size is medium to course. The strike of the Charnockite formation is N35°E-S35°W with dipping towards 60°S.


The biotite gneiss is part of peninsular gneisses, a high grade metamorphic rock. It is typically brown to black color and the grain size is course grained. It is suitable for construction purposes because of its high strength, color, high density and low porosity.

The geological sequence:

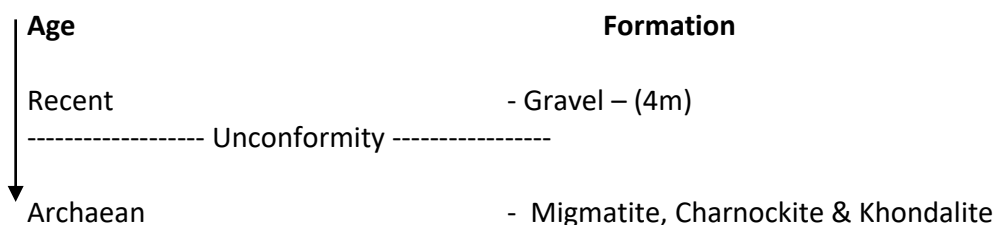

DRAFT EIA/EMP REPORT FOR ROUGHSTONE & GRAVEL QUARRY OF THIRU.K.RAMARAJ IN S.F.NOS. 70/1(P) OVER AN AREA OF 1.06.50HA IN MYLERIPALAYAM VILLAGE, MADUKKARAI TALUK, COIMBATORE DISTRICT, TAMIL NADU.

Figure 2.7: Surface & Geological Plan

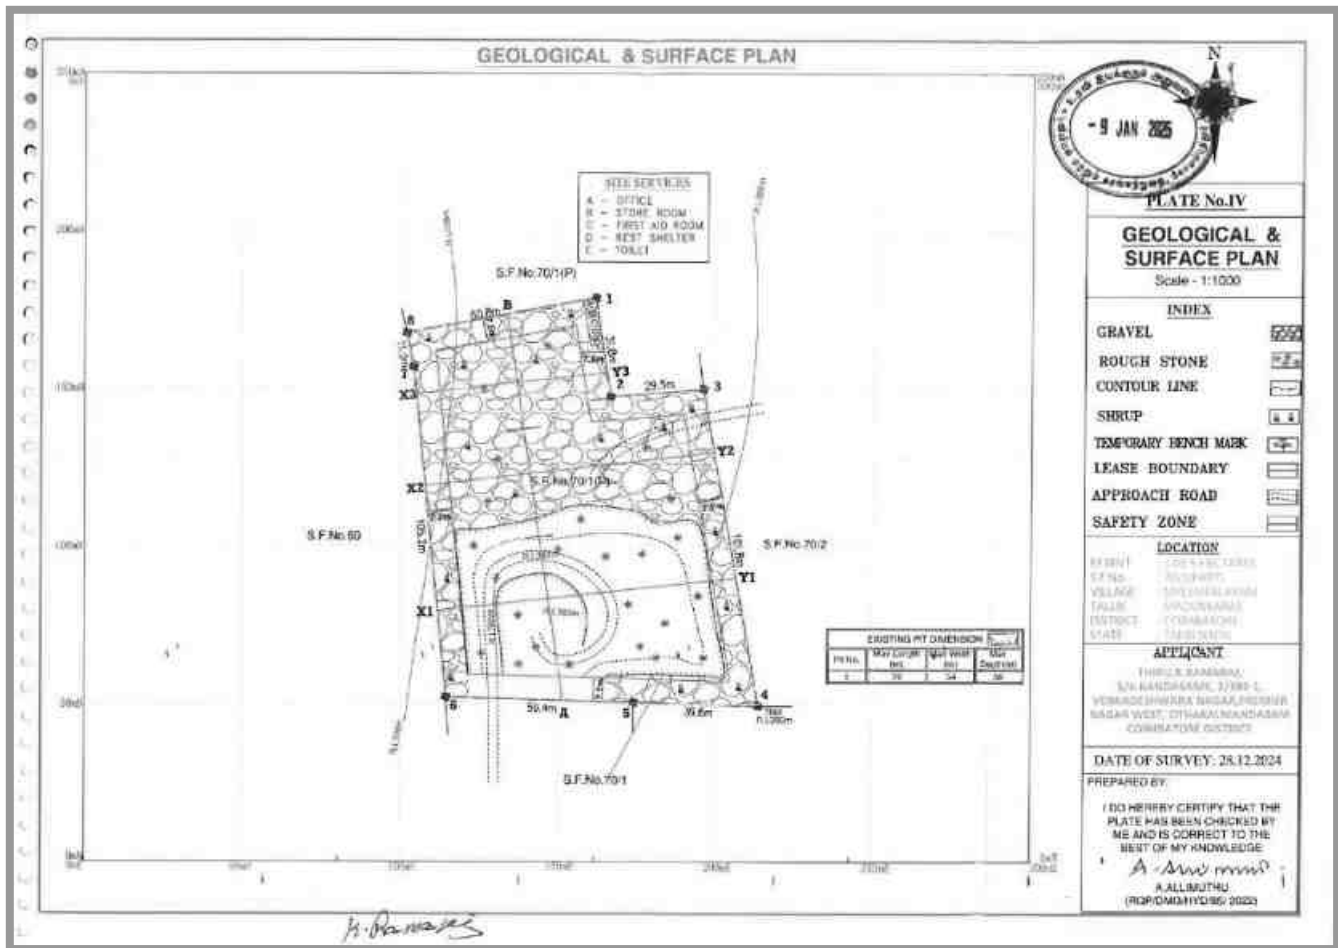

Source: Approved Mining Plan



Creative Engineers & Consultants

PROJECT DESCRIPTION


PRO CODE: CEC-EMP-MI-254

REV NO : 00/OCT/25

2-12

DRAFT EIA/EMP REPORT FOR ROUGHSTONE & GRAVEL QUARRY OF THIRU.K.RAMARAJ IN S.F.NOS. 70/1(P) OVER AN AREA OF 1.06.50HA IN MYLERIPALAYAM VILLAGE, MADUKKARAI TALUK, COIMBATORE DISTRICT, TAMIL NADU.

Figure 2.8: Geological Cross Section

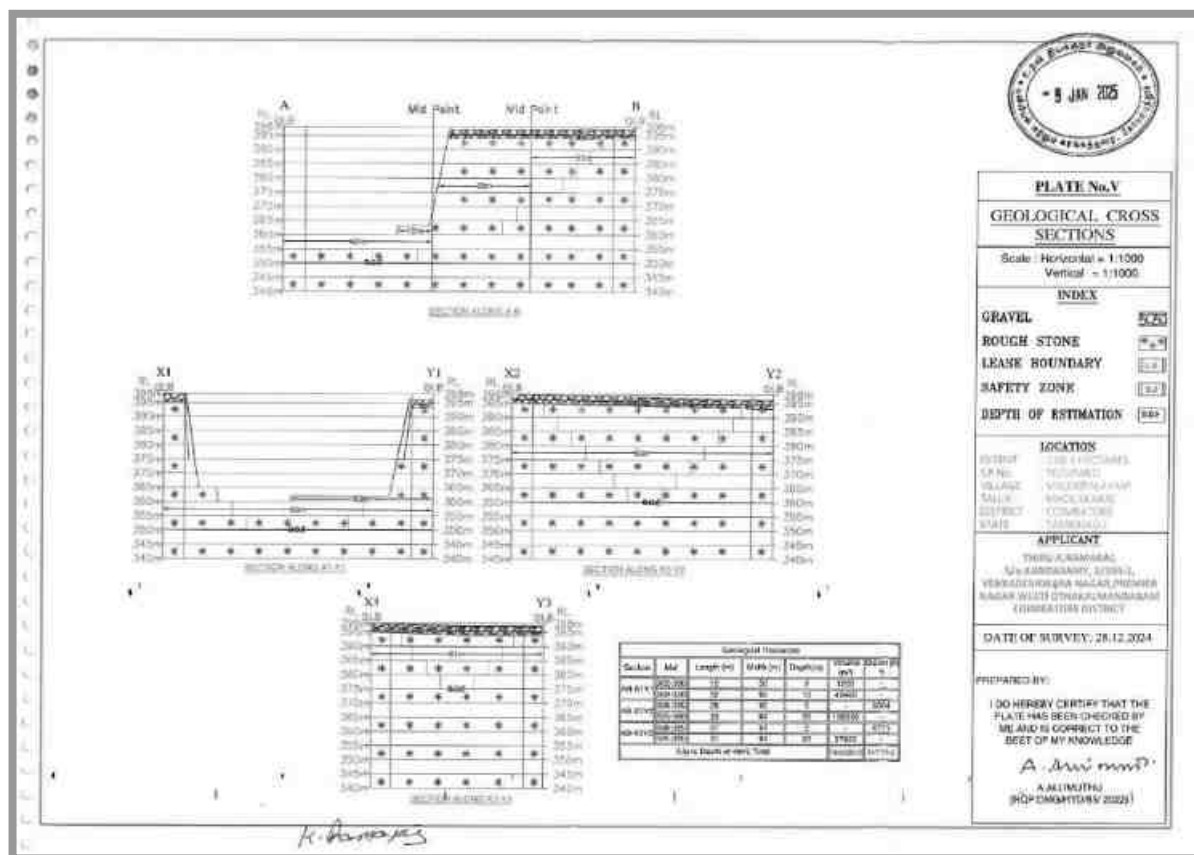

Source: Approved Mining Plan

2.6 SIZE AND MAGNITUDE OF THE OPERATION:

- The proposed mining will be done by open cast semi mechanized mining method.
- Life of mine will be 5 years.
- The Proposed Production for the 73,750m³ of Roughstone and 10,614m³ of Gravel for the depth of 48 meter.
- There is no waste generation anticipated in this quarry operation since the entire excavated material will be utilized.



Creative Engineers & Consultants

PROJECT DESCRIPTION

PRO CODE: CEC-EMP-MI-254

REV NO : 00/OCT/25

2-13

DRAFT EIA/EMP REPORT FOR ROUGHSTONE & GRAVEL QUARRY OF THIRU.K.RAMARAJ IN S.F.NOS. 70/1(P) OVER AN AREA OF 1.06.50HA IN MYLERIPALAYAM VILLAGE, MADUKKARAI TALUK, COIMBATORE DISTRICT, TAMIL NADU.

2.6.1 RESERVES:

Table 2.4: Details of reserves

S. No	Type of reserves	Roughstone (m3)	Gravel (m3)
1	Geological Resources	194680	14775
2	Mineable Reserves	73750	10614

The mineable reserves is arrived after considering the safety distance of 7.5m for adjacent patta lands, 10m for Government lands from the lease boundary as indicated in the precise area communication letter.

2.6.2 MINING METHOD:

Open cast semi mechanized mining using shot hole drilling with the help of compressor and jack hammer for smooth blasting. The raw materials are removed using Hydraulic Excavator and loaded directly into the tippers. The mineral is transported to the nearby crushing plants where it is crushed to the required sizes. The height and width of the benches is 5m.

Table 2.5: Details of Equipments

NAME OF THE EQUIPMENT	CAPACITY	REQUIREMENT
Jack Hammer	33mm dia	2
Compressor	400psi	1
Excavator	1.2m3	1
Tippers	10/20T	1

2.7 PROPOSED SCHEDULE FOR APPROVAL AND IMPLEMENTATION:

The proponent propose to implement the production immediately after obtaining all the statutory approvals such as CTE, CTO, etc. The proponent will comply with the environmental clearance conditions during mining operations. The schedule of project implementation envisaged for this project is provided below. This is a tentative schedule subject to various factor, hence unforeseen variations may occur.

Table 2.6: Proposed Schedule of Implementation


Activities	Months					
	Zero Date	1	2	3	4	5
Obtaining Environmental Clearance						
Obtaining Consent from State Pollution Control Board						
Lease Execution						
Equipment mobilization and Commencement of Mining activity after following all the Statutory Requirements						



2.8 TECHNOLOGY AND PROCESS DESCRIPTION:

The quarry operations involve drilling, blasting, excavation, loading and transportation of Rough stone to buyers. The production of Rough stone in this quarry involves jackhammer drilling and blasting. The primary boulders are removed from the pits by excavators and further made to smaller sizes by rock breakers attached in excavators. It is a conventional opencast mechanized method of mining. The process flow diagram of this project is provided below.

Figure 2.9: Process Flow Diagram

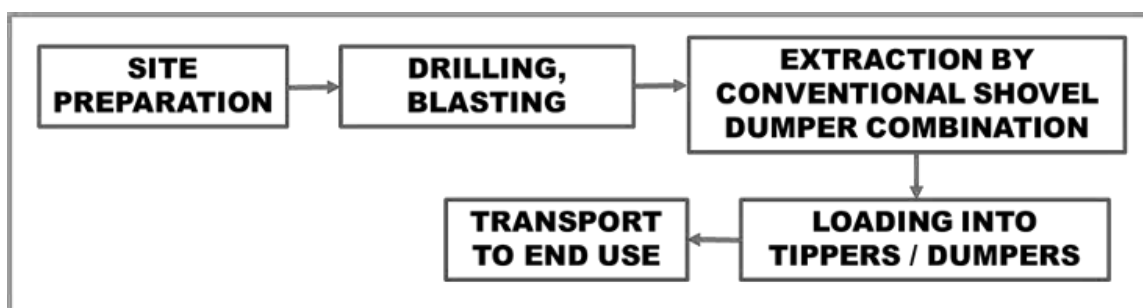

2.9 PROJECT DESCRIPTION:

2.9.1 PAST PRODUCTION:

Thiru K. Ramaraj, the proponent has carried out mining in this area during the following lease periods:

Table 2.7: Previous lease details

S.No	S.F.No	Extent (Ha)	District Collectors Proceedings	Lease Period
1	71/1	0.53.5 Ha	153/94/X1 dated 12.04.1995	12.04.1995 – 11.04.2000
2	71/1	0.53.5 Ha	-	19.06.2003 – 18.06.2008
3	70/1,71/1	1.85.0 Ha	773/2008/mm1 dated 07.10.2008	07.10.2008 – 06.10.2013
4	70/1(P),71/1	1.00.0 Ha	358/mines/2018 dated 22.01.2019	22.01.2019 – 21.01.2024

During this period, Environmental Clearance was obtained from SEIAA, Tamil Nadu by the proponent for only Survey No.70/1(P) over an area of 1.06.50Ha vide Lr.No.DEIAA-CBE-V/F.No.358/1(a)/EC.No.53/2010 dated 10.12.2018 (**Annexure-5**)



DRAFT EIA/EMP REPORT FOR ROUGHSTONE & GRAVEL QUARRY OF THIRU.K.RAMARAJ IN S.F.NOS. 70/1(P) OVER AN AREA OF 1.06.50HA IN MYLERIPALAYAM VILLAGE, MADUKKARAI TALUK, COIMBATORE DISTRICT, TAMIL NADU.

This EC was issued for the production quantity of 73,750m³ of Roughstone and 10,614m³ of Gravel upto a depth of 48m for a period of 5 years.

A letter is obtained from the Assistant Director, Geology & Mining vide Rc.No.778/Mines/2024 dated 09.01.2025 wherein the existing pit dimensions and the production quantities mined out has been furnished. **(Annexure-6)** The details of the same are provided below:

Table 2.8: Existing Pit Dimensions

Length (m)	Width (m)	Depth (m)
79	54	38

Table 2.9: Production during earlier lease period (22.01.2019 – 21.01.2024)

Details	Roughstone(m3)	Gravel(m3)	Total (m3)	Depth (m)
As per approved EC	90,353	-	90,353	38
Achieved Quantity	79583	-	79583	38

From the above table it is evident that the achieved quantity during the lease period was adhering to the production approved in the Environmental Clearance. Letter issued by the Assistance Director, Geology & Mining, Coimbatore Letter No – RC.No.778/Mines/2024 dated 09.01.2025

2.9.2 PRODUCTION & WASTE DISPOSAL:

Based on the approved Terms of Reference, the production 73,750m³ of Roughstone and 10,614m³ of Gravel upto a total depth of 48m. The year wise production as per the approved mining plan is as follows:

Table 2.10: Production Schedule During Plan Period

Year	Roughstone (m3)	Gravel (m3)
1	14,700	10,614
2	14,830	--
3	14,900	--
4	14,970	--
5	14,350	--
Total	73,750	10,614

Waste Disposal during Plan Period:


No waste generation is anticipated from this quarry operation, as the entire excavated material will be fully utilized. The overburden in the form of gravel will be loaded into tippers and supplied to customers upon payment of the prescribed fees to the Government. The rough stone will be



DRAFT EIA/EMP REPORT FOR ROUGHSTONE & GRAVEL QUARRY OF THIRU.K.RAMARAJ IN S.F.NOS. 70/1(P) OVER AN AREA OF 1.06.50HA IN MYLERIPALAYAM VILLAGE, MADUKKARAI TALUK, COIMBATORE DISTRICT, TAMIL NADU.

excavated and transported to buyers for use in the production of crusher aggregates and M-sand.

Figure 2.10: Year wise Plan

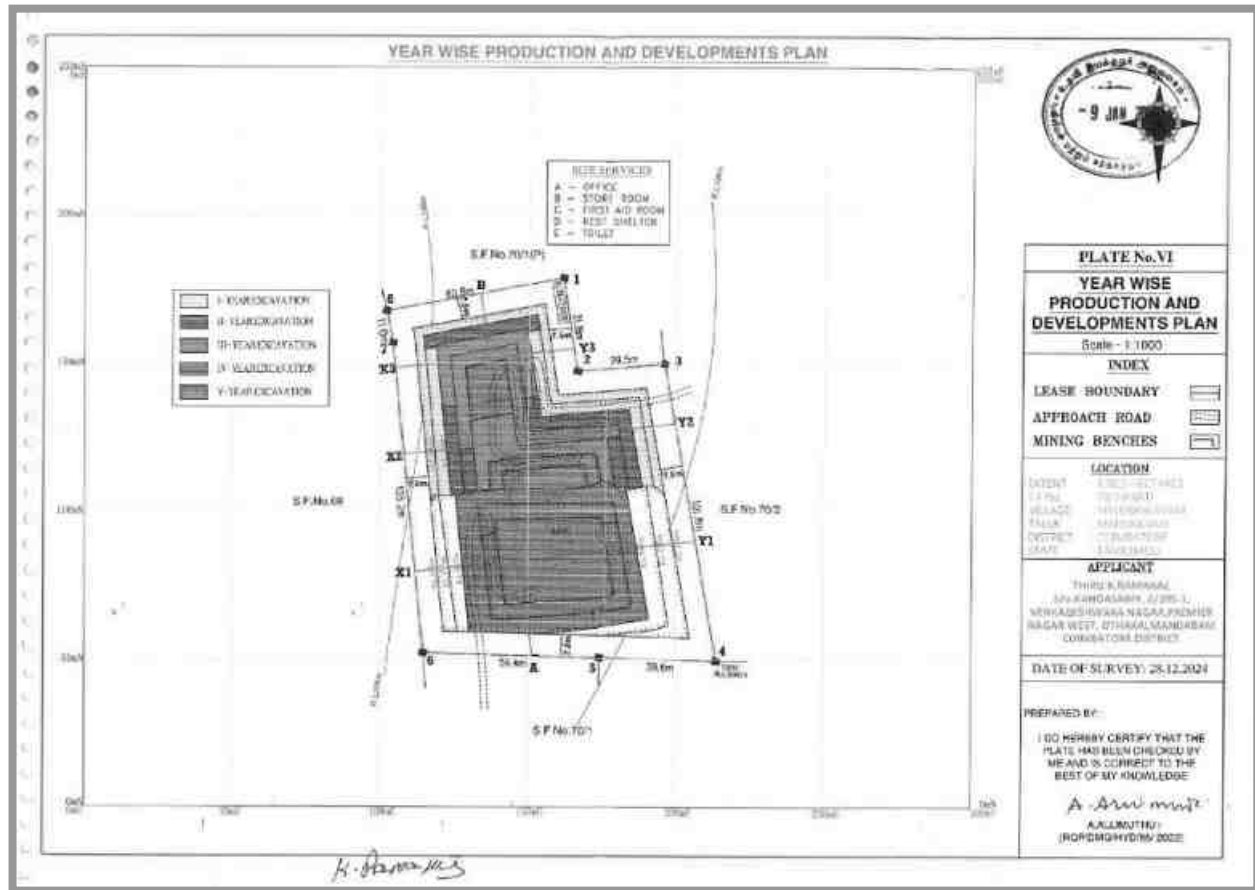

Source: Approved Mining Plan



Creative Engineers & Consultants

PROJECT DESCRIPTION


PRO CODE: CEC-EMP-MI-254

REV NO : 00/OCT/25

2-17

DRAFT EIA/EMP REPORT FOR ROUGHSTONE & GRAVEL QUARRY OF THIRU.K.RAMARAJ IN S.F.NOS. 70/1(P) OVER AN AREA OF 1.06.50HA IN MYLERIPALAYAM VILLAGE, MADUKKARAI TALUK, COIMBATORE DISTRICT, TAMIL NADU.

Figure 2.11: Year wise Cross Section

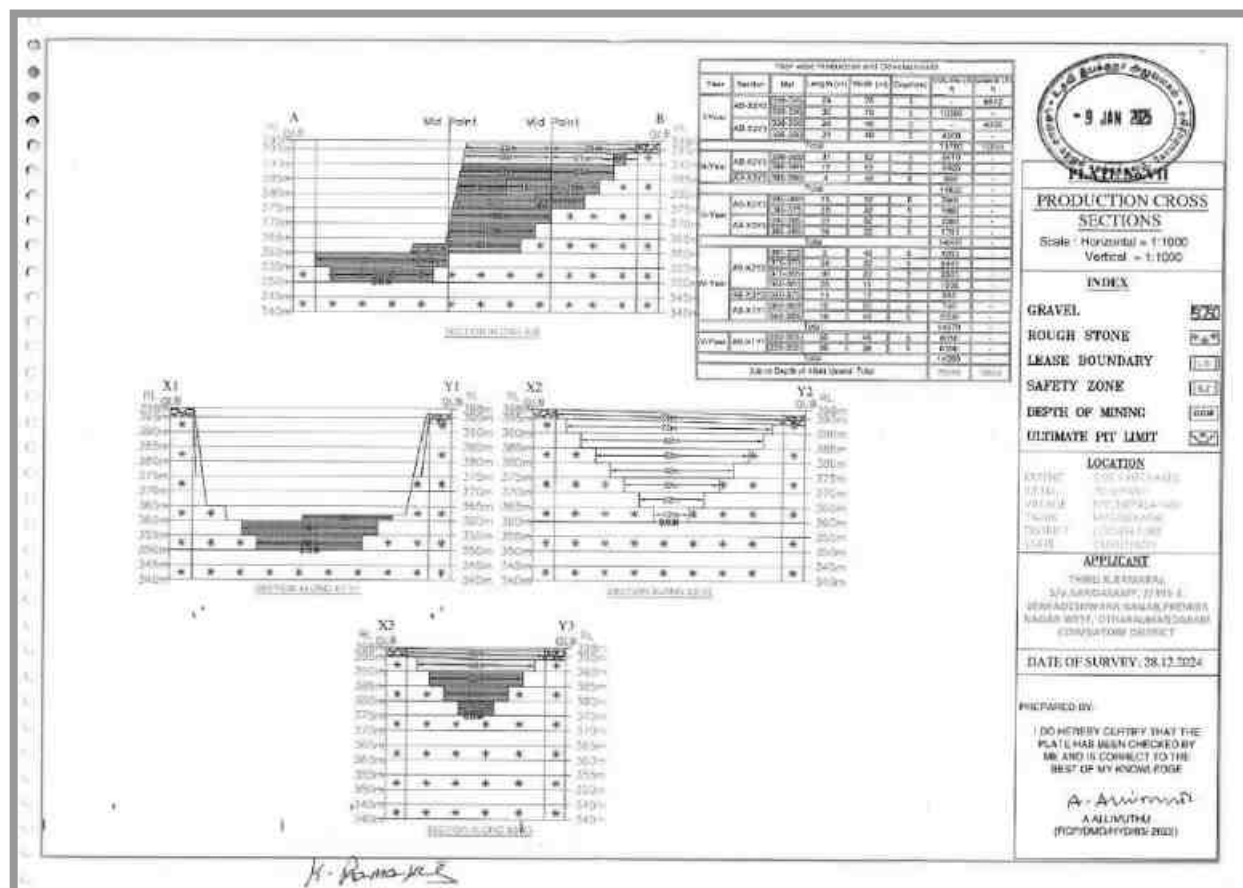

Source: Approved Mining Plan

The production will be carried out over the period of 5 years. During the conceptual stage, the pit dimensions will be as follows:

Table 2.11: Ultimate Pit Dimensions

Length in m	Width in m	Depth in (m)
109	77	48

The ground water table on the surface in this area is ranging below 60 – 65mBGL Hence, ground water intersection in not envisaged. The Conceptual Plan & Cross section are shown in Figure No. 2.11& 2.12.



Creative Engineers & Consultants

PROJECT DESCRIPTION


PRO CODE: CEC-EMP-MI-254

REV NO : 00/OCT/25

2-18

DRAFT EIA/EMP REPORT FOR ROUGHSTONE & GRAVEL QUARRY OF THIRU.K.RAMARAJ IN S.F.NOS. 70/1(P) OVER AN AREA OF 1.06.50HA IN MYLERIPALAYAM VILLAGE, MADUKKARAI TALUK, COIMBATORE DISTRICT, TAMIL NADU.

Figure 2.12: Conceptual Plan

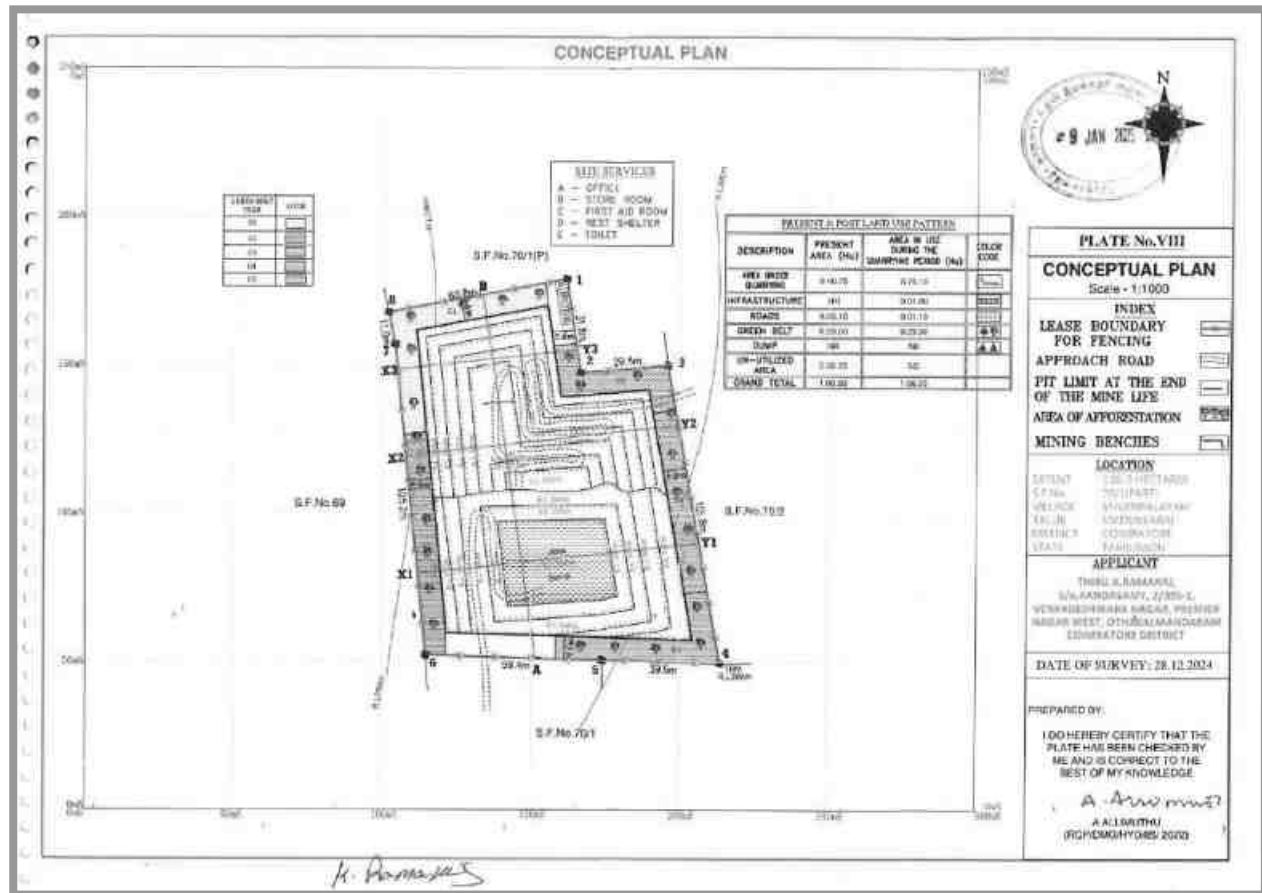

Source: Approved Mining Plan



Creative Engineers & Consultants

PROJECT DESCRIPTION


PRO CODE: CEC-EMP-MI-254

REV NO : 00/OCT/25

2-19

DRAFT EIA/EMP REPORT FOR ROUGHSTONE & GRAVEL QUARRY OF THIRU.K.RAMARAJ IN S.F.NOS. 70/1(P) OVER AN AREA OF 1.06.50HA IN MYLERIPALAYAM VILLAGE, MADUKKARAI TALUK, COIMBATORE DISTRICT, TAMIL NADU.

Figure 2.13: Conceptual Cross Section

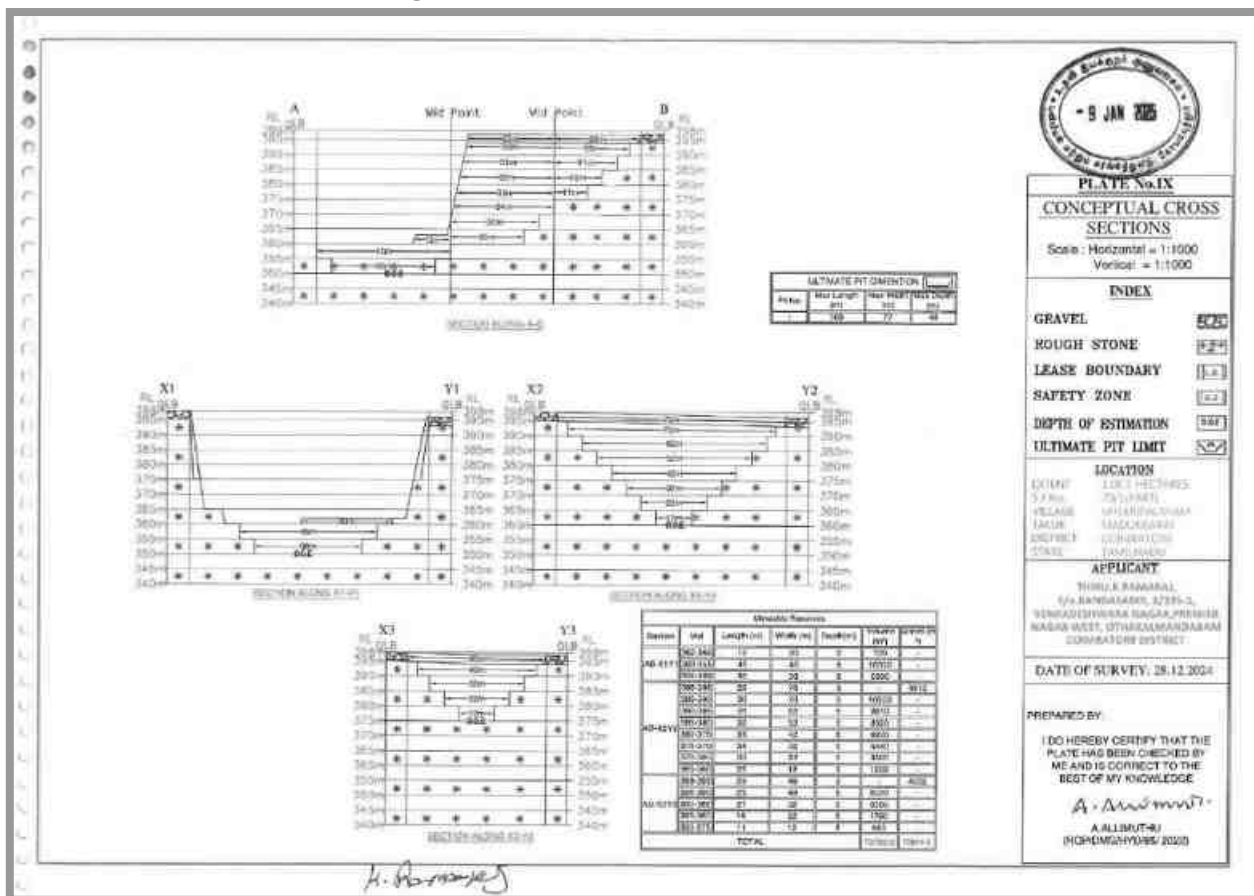

Source: Approved Mining Plan

LAND DEGRADATION/UTILIZATION:

The land use pattern at present and at the end of the 5 years period has been provided below:

Table 2.12: Land Use

S.No	Land Use	Present Land Use (Ha)	At the end of lease period(Ha)
1	Quarrying Pit	0.40.75	0.75.10
2	Infrastructure	--	0.01.00
3	Roads	0.00.10	0.01.10
4	Green Belt	0.29.30	0.29.30
5	Unutilized	0.36.35	--
	Total	1.06.50	1.06.50



Creative Engineers & Consultants

PROJECT DESCRIPTION

PRO CODE: CEC-EMP-MI-254

REV NO : 00/OCT/25

2-20

DRAFT EIA/EMP REPORT FOR ROUGHSTONE & GRAVEL QUARRY OF THIRU.K.RAMARAJ IN S.F.NOS. 70/1(P) OVER AN AREA OF 1.06.50HA IN MYLERIPALAYAM VILLAGE, MADUKKARAI TALUK, COIMBATORE DISTRICT, TAMIL NADU.

In the post mining stage, the mine pit area of 0.75.10 Ha will be left as a water body. Plantation will be carried out over 0.29.30Ha and 0.02Ha will be left as road and infrastructure. Overall about 500 trees will be planted in and around the lease area during the plan period.

2.9.3 PROJECT REQUIREMENTS:

Table 2.13: Project Requirements

Manpower	The project will provide employment opportunities totally to 20 people. Priority of employment will be provided to the locals based on skill.	
Water Requirement and Source	Water Requirement: 8 KLD	
	Details	Quantity (KLD)
	Drinking water and Domestic Use	1.0
	Dust Suppression	5.0
	Green belt	2.0
	Total	8.0
	Source: The required water will be sourced from outside agencies.	
Power Requirement	All the equipment will be diesel operated. No electricity is needed for mining operation. The minimum power requirement for office, etc are and will be met from state grid.	
Site Services	Site services like mine office, first aid room, rest shelters, toilets etc. are provided as semi-permanent structures.	
Project Cost	Rs. 1,03,30,000 (Including operational + Fixed Asset + EMP cost).	
Funds allocated for socio-economic development	Rs. 3 Lakhs is allocated under CER budget.	

2.10 DESCRIPTION OF MITIGATION MEASURES:

Scientific and systematic development of mines will be carried out by the project authorities for preserving as well as improving the environmental conditions in and around the mining lease area. Elaborate analysis on impacts and mitigation measures to be adopted on implementation of this project and the same has been dealt in Chapter- IV.



2.11 ASSESSMENT OF NEW & UNTESTED TECHNOLOGY:

There is no new technology that is being implemented. Opencast method of mining which is the proposed method of mining is a proven technology which is technologically and economically viable. No major technological failures are anticipated. A disaster management plan shall be put into place to take care of any unforeseen situation.

As good environmental preservation is one of the prime motive of the project proponent. It is expected that the project activity will not have any major impact on environmental equilibrium in the study area.

* * * * *



CHAPTER - III

DESCRIPTION OF ENVIRONMENT

CHAPTER 3

DESCRIPTION OF ENVIRONMENT

3.1 GENERAL:

The existing environmental baseline data for the various environmental components were collected in the study area for the purpose of assessing the impact on present environment due to the project activities.

Monitoring was carried out systematically and meticulously as per relevant IS codes, CPCB, MoEF&CC guidelines during Summer Season (March 2025 to May 2025) by Enviro Solutions & Labs, Coimbatore. The details of the study are given in this chapter.

For the purposes of this study, the area has been divided into two zones, namely, core and buffer zones. The entire lease area is considered to be the core zone while the buffer zone encompasses a 10 km radius from the periphery of the core zone. The details of villages falling in the study area and other features are given in Index Plan in Figure No - 3.1


The primary data collection was done by means of field monitoring and the secondary data collection was obtained from published sources and government documents. The details of the baseline data collection which has been elaborated through the course of this chapter has been concised below:

Table 3.1: Type of Baseline Data

S.No	Studies	Parameters / Study	Location
1	Socio Economy	Demographic Data from Census 2011	Core and Buffer Zone
		Sample Survey	Buffer Zone
2	Micro Meteorology	Rainfall Data from IMD, Coimbatore	Coimbatore
		Temperature, Humidity, Wind Speed, Wind Direction	1 Representative Location
3	Ambient Air Quality	PM10, PM2.5, SO2, NOx, CO	1 Core Zone, 5 Buffer Zone
4	Water Quality	Physical and Chemical Parameters	1 Core Zone, 5 Buffer Zone
5	Noise Levels	Ambient Noise	1 Core Zone, 5 Buffer Zone
6	Soil Quality	Physical and Chemical Parameters	1 Core Zone, 5 Buffer Zone
7	Land Use and Land Cover	Land use pattern within 10km study area using RS Satellite	Buffer Zone
		Land use based on Census 2011	Core and Buffer Zone
8	Biological Environment	Flora and Fauna	Core Zone and Buffer Zone
9	Hydrology & Hydro Geology	Hydrogeological profile of the area	Core Zone and Buffer Zone

DRAFT EIA/EMP REPORT FOR ROUGHSTONE & GRAVEL QUARRY OF THIRU.K.RAMARAJ IN S.F.NOS. 70/1(P) OVER AN AREA OF 1.06.50HA IN MYLERIPALAYAM VILLAGE, MADUKKARAI TALUK, COIMBATORE DISTRICT, TAMIL NADU.

Figure 3.1: Study Area Map

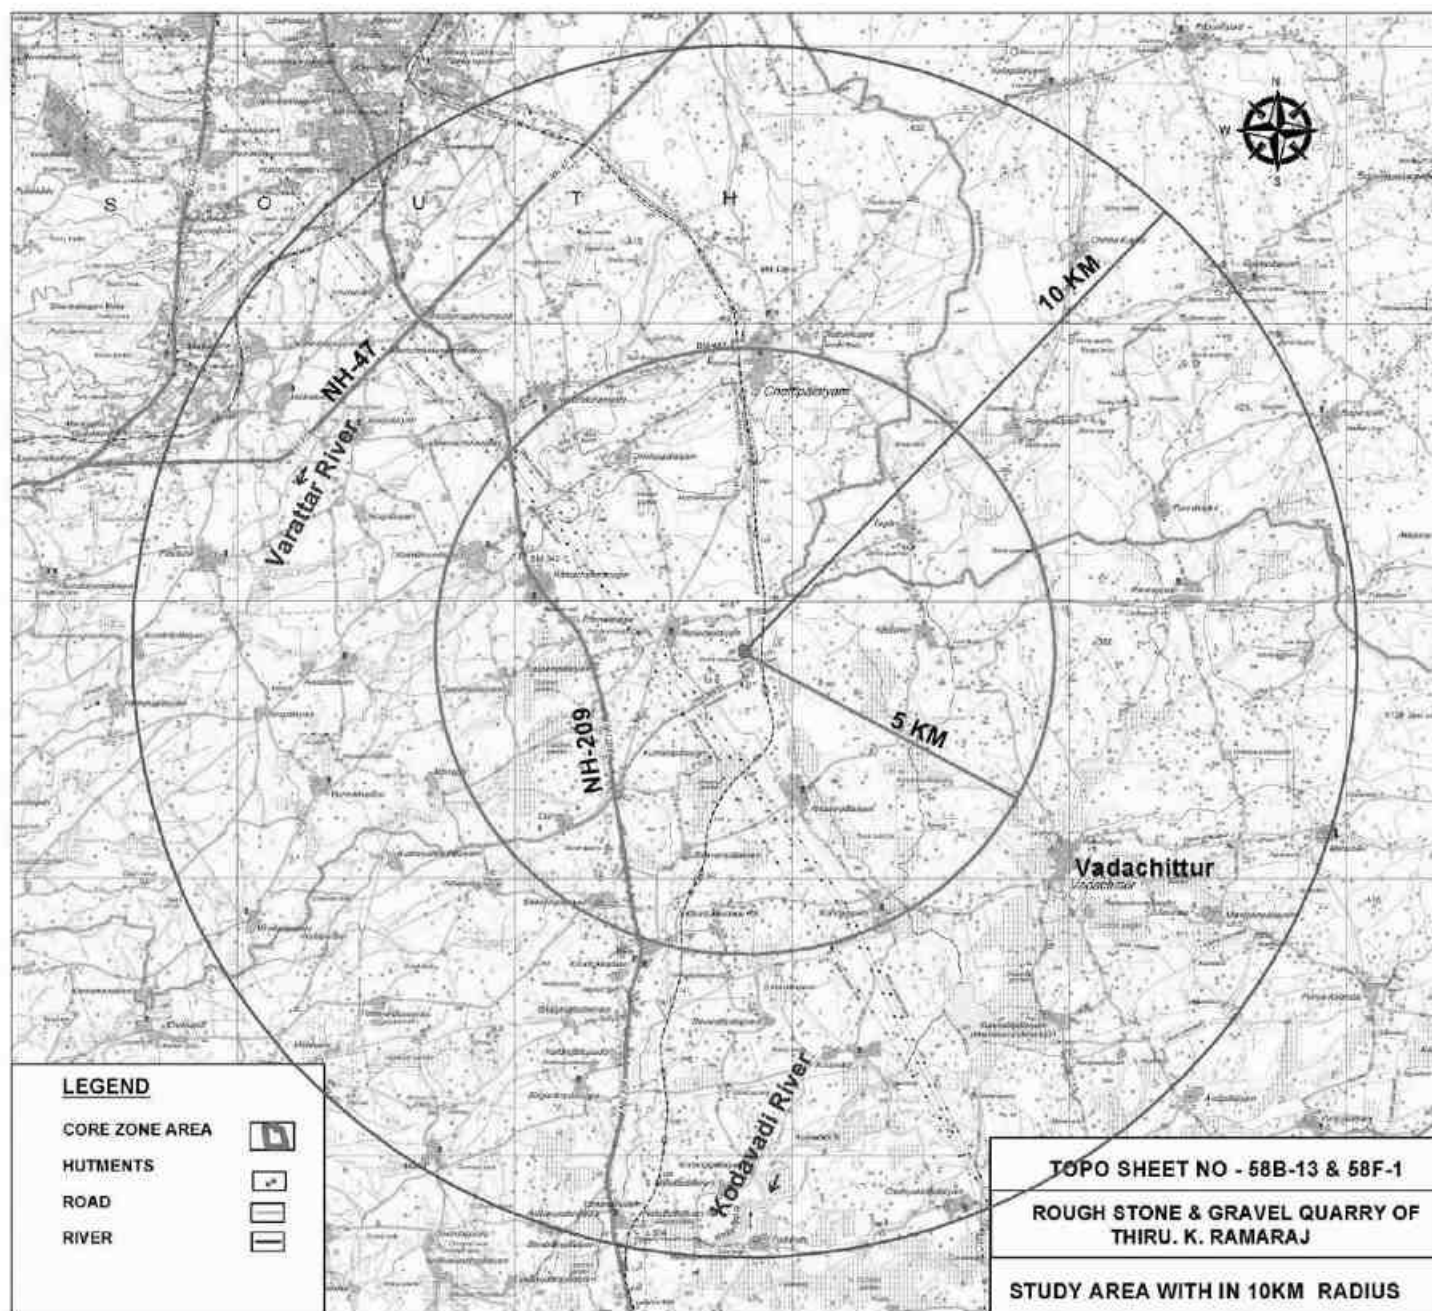

DRAFT EIA/EMP REPORT FOR ROUGHSTONE & GRAVEL QUARRY OF THIRU.K.RAMARAJ IN S.F.NOS. 70/1(P) OVER AN AREA OF 1.06.50HA IN MYLERIPALAYAM VILLAGE, MADUKKARAI TALUK, COIMBATORE DISTRICT, TAMIL NADU.

Table 3.2: Environmental Setting of the Study Area

S.No	PARTICULARS	Details
1	Nearest Highway	NH-83 – 2.5km - (W) MDR – 988 – 1.2km-W
2	Nearest Railway station	Kinathukadavu RS – 4.3km – (SW)
3	Nearest Airport	Coimbatore Airport - 18km – (N)
4	Nearest major water bodies	Kodavadi River – 7.3km – (S) Varattar River – 7.9km – (W)
5	Nearest villages	Myleripalayam – 1.1km- (NW) Kumaarapalayam – 1.8km – (SW) Tegani -3.2km – (NE) Karachery -2.8km – (E)
6	Hills / valleys	Nil within 10m radius
7	Notified Archaeologically important places, Monuments	Nil within 10m radius
8	Local Places of Historical and Tourism Interest	Nil within 10m radius
9	Environmental sensitive areas, Protected areas as per Wildlife Protection Act, 1972 (Tiger reserve, Elephant reserve, Biospheres, National parks, Wildlife sanctuaries, community reserves and conservation reserves)	Nil within 10Km radius
10	Reserved / Protected Forests	Nil within 10 km radius
11	Defence Installations	Nil within 10 km radius
12	Seismic Zone	Zone – II (Least Active)
13	Other Industries in the study area	Other than rough stone quarry & crushers there are numerous ware houses, other industries like glass, textile mills, foundries, engineering units, Upcoming CODISSIA Industrial Park B (Kallapalayam), etc in the area.

3.2 SOCIO-ECONOMIC CONFIGURATIONS OF THE AREA:

3.2.1 GENERAL:

The Socio-Economic details of the study area are collected through:

- Identification of villages falling from the study area map with combined Taluk map.
- Collection of primary data through sample survey, village people meetings and discussion.
- Collection of the demographic pattern of villages falling in the area through NIC 2011 census data.
- Occupational structure of villages falling in the study area through NIC 2011 census data.
- Details of the amenities available in villages falling in the study area through NIC 2011 census data. The findings of the study are illustrated below:

3.2.2 SECONDARY DATA DESCRIPTION:

The proposed Rough stone and gravel quarry is located in in Myleripalayam Village, Kinathukadavu Taluk, Coimbatore District. Based on 2011 census data, in the 10km radius there are 36 Rural Villages 7 Urban areas from Three Taluks namely Coimbatore South, Sulur, Pollachi of Coimbatore District. The demographic profile of the study area is given below:

Table 3.3: Social, Economic and Demographic Profile of the Study Area

Details	Population	Percentage
A. Gender-wise distribution		
Male Population	174613	50.09
Female Population	173985	49.91
Total	348598	100
B. Caste-wise population distribution		
Scheduled Caste	56402	16.18
Scheduled Tribes	1942	0.56
Other	290254	83.26
Total	348598	100
C. Literate and Illiterate population		
Literate Males	139164	39.92
Literate Females	121238	34.78

DRAFT EIA/EMP REPORT FOR ROUGHSTONE & GRAVEL QUARRY OF THIRU.K.RAMARAJ IN S.F.NOS. 70/1(P) OVER AN AREA OF 1.06.50HA IN MYLERIPALAYAM VILLAGE, MADUKKARAI TALUK, COIMBATORE DISTRICT, TAMIL NADU.



Details	Population	Percentage
Total Literate Population	260402	74.70
Others Males	35449	10.17
Others Females	52747	15.13
Others Population	88196	25.30
Total	348598	100
D. Occupational structure		
Main workers	142221	40.80
Marginal workers	16772	4.80
Total Workers	158993	45.60
Total Non-workers	189605	54.40
Total	348598	100

The total population of these 36 rural villages 348598 in which the male population is 174613 (50.09%) and the female population is 173985 (49.91%). This shows that the male and female population ratio is almost equal. Among the total population 0.56% belong to Scheduled Tribes, 16.18% are Scheduled Caste and the balance 83.26% people belong to other castes. Among the total population, 74.70% of the people are literate.



Among the total population, 39.92% are literate males and 34.78% are literate females. This shows that the male literates are slightly more than the female literates. Totally, the illiterate constitute 25.30% of which the female cover 15.13% and the male 10.17%. Illiteracy in women is more than in the male population.

The village wise population, literacy levels and occupational structure details are given in **Annexures 9 and 10**. The demographic structure within the buffer zone is shown diagrammatically in **Figure No – 3.2**.

Figure 3.2: Demographic Structure in Buffer Zone

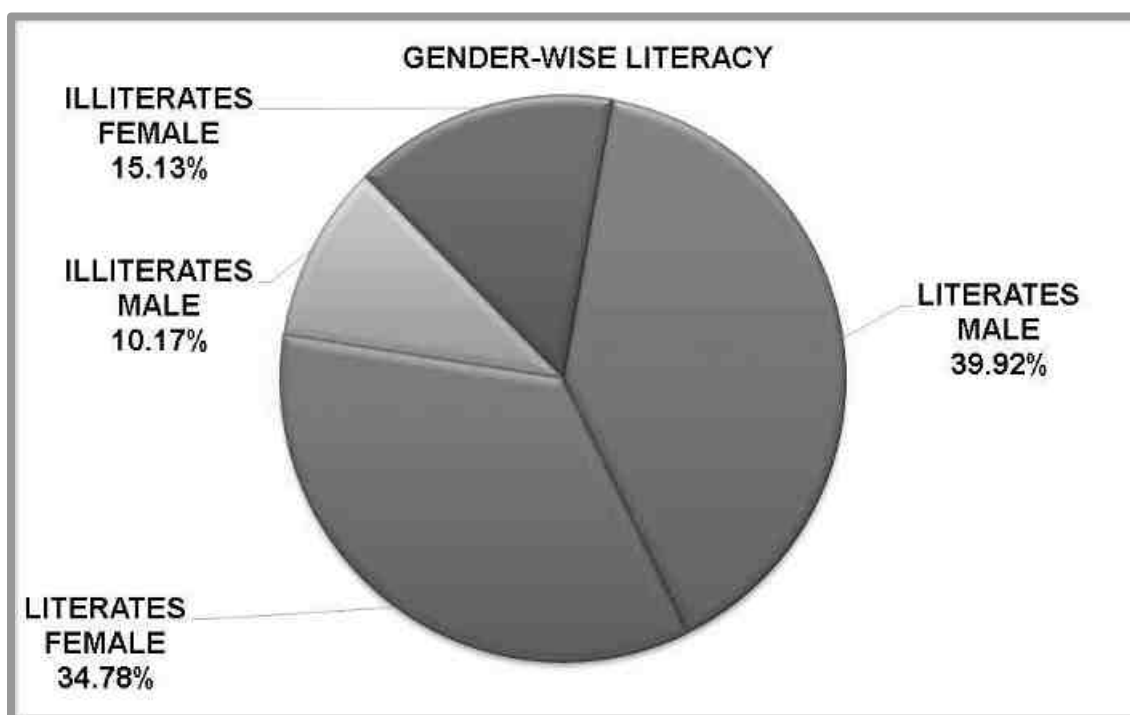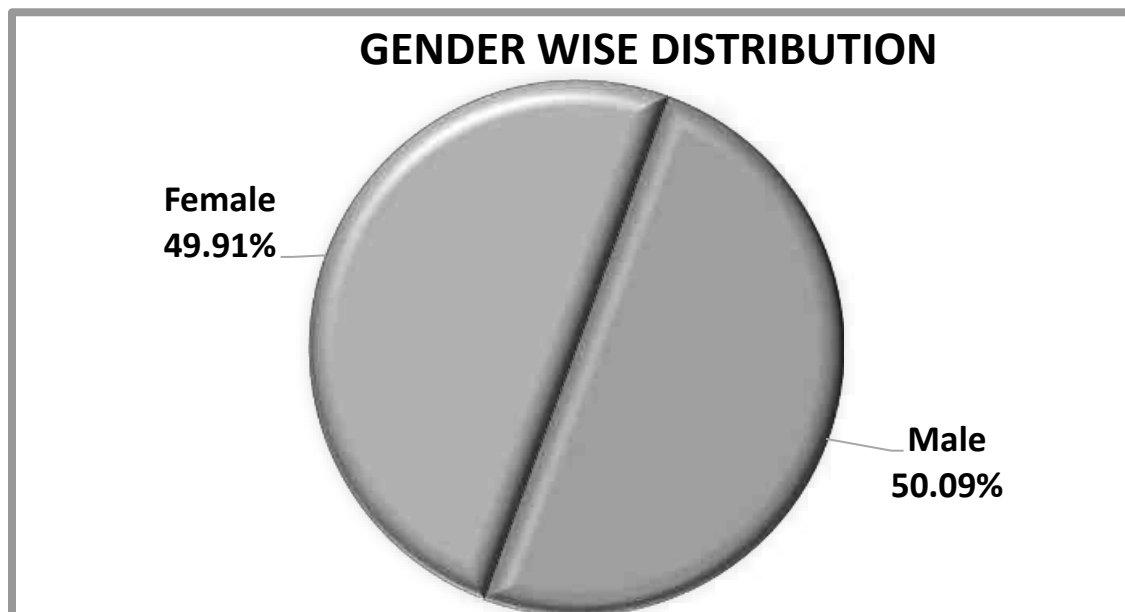

DRAFT EIA/EMP REPORT FOR ROUGHSTONE & GRAVEL QUARRY OF THIRU.K.RAMARAJ IN S.F.NOS. 70/1(P) OVER AN AREA OF 1.06.50HA IN MYLERIPALAYAM VILLAGE, MADUKKARAI TALUK, COIMBATORE DISTRICT, TAMIL NADU.

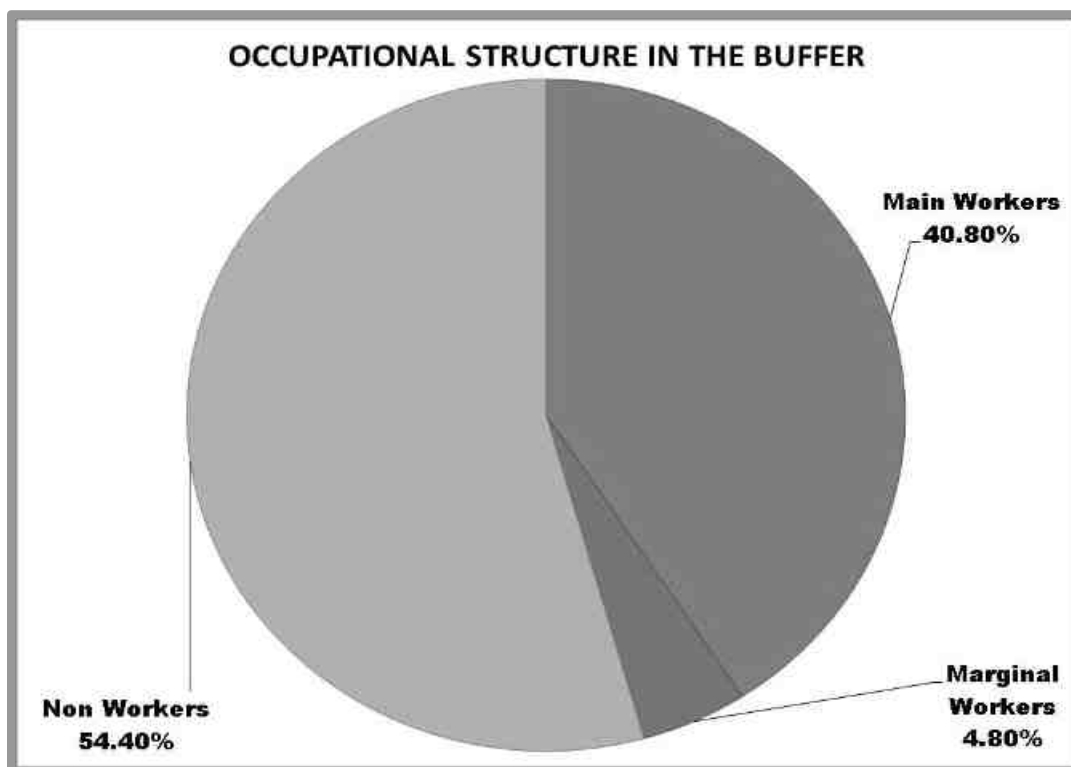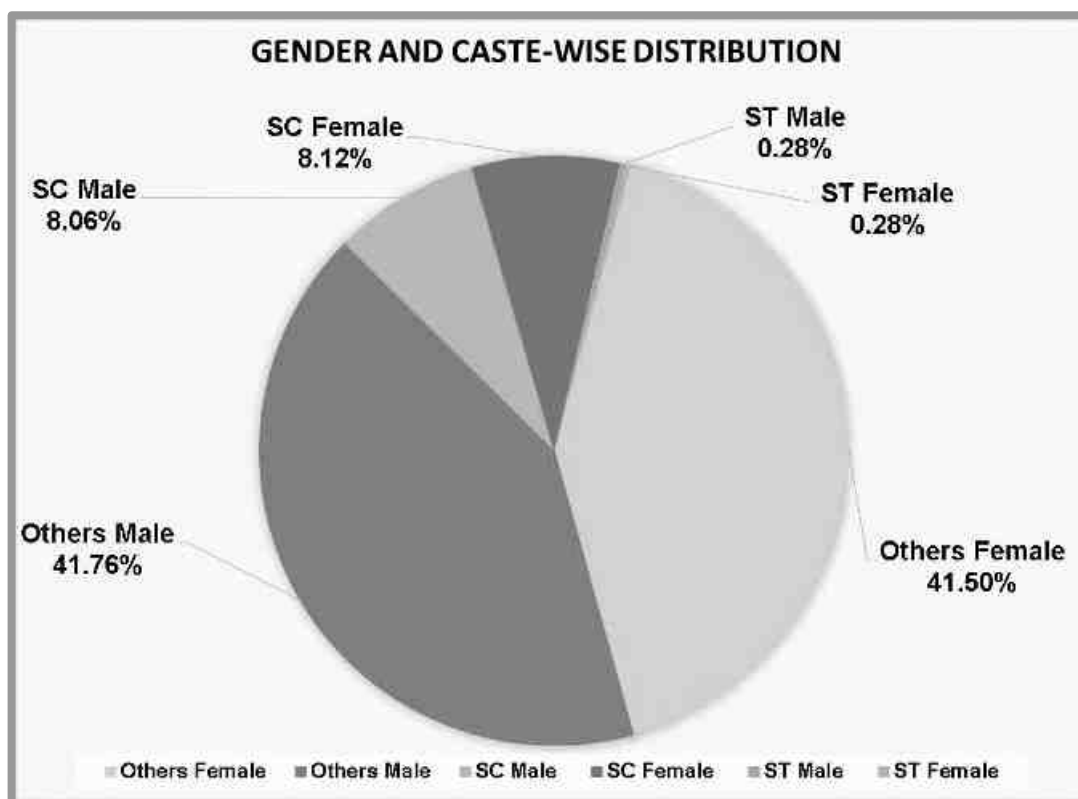

DRAFT EIA/EMP REPORT FOR ROUGHSTONE & GRAVEL QUARRY OF THIRU.K.RAMARAJ IN S.F.NOS. 70/1(P) OVER AN AREA OF 1.06.50HA IN MYLERIPALAYAM VILLAGE, MADUKKARAI TALUK, COIMBATORE DISTRICT, TAMIL NADU.

3.2.3 DETAILS OF AMENITIES:

Based on 2011 census data, regarding the educational facilities, 36 rural villages out of 36 rural villages have educational facilities. There are totally 71 Primary Schools functioning in these 36 rural villages. Among them 14 villages have one primary school, 9 villages have 2 primary schools, 9 villages have 3 primary schools, 3 villages have 4 primary schools. With regards to educational facilities, from Primary School level to Senior Secondary School level, there is availability of some schools in the area. However, beyond this, college level education is not available in the buffer zone. Out of 36 villages, 23 villages have primary health sub centers. Better medical facilities are available in the nearby larger towns.

Table 3.4: Primary Schools in the Buffer Zone Rural Villages

S.No	No of Rural Villages	Number of primary schools	Totals
1	1	0	0
2	14	1	14
3	9	2	18
4	9	3	27
5	3	4	12
Total	36		71

Table 3.5: Education Facility Availability

PARTICULARS	Available in village
Govt Primary School	35
Govt Middle School	24
Govt Secondary School	13
Govt Senior Secondary School	5
Govt Arts and Science Degree College	0
Govt Engineering College	0
Govt Medicine College	0
Govt Management Institute	0
Govt Polytechnic	0
Govt Vocational Training School/ITI	0

DRAFT EIA/EMP REPORT FOR ROUGHSTONE & GRAVEL QUARRY OF THIRU.K.RAMARAJ IN S.F.NOS. 70/1(P) OVER AN AREA OF 1.06.50HA IN MYLERIPALAYAM VILLAGE, MADUKKARAI TALUK, COIMBATORE DISTRICT, TAMIL NADU.

Table 3.6: Healthcare Amenities Availability

PARTICULARS	Available in village
Community Health Centre	1
Primary Health Centre	4
Primary Health Sub Centre	23
Maternity And Child Welfare Centre	6
TB Clinic	4
Hospital Allopathic	0
Hospital Alternative Medicine	0
Dispensary	4
Veterinary Hospital	6
Mobile Health Clinic	0
Family Welfare Centre	4

Table 3.7: Infrastructure Facilities

Particulars	Available in village
Tap Water-Treated	36
Covered Well	32
Hand Pump	23
Tube Wells/Borehole	33
Post office	0
Bus services	34
Railway station	1
Commercial Bank	5
Cooperative bank	9

The details of the educational, medical and infrastructural facilities available in the buffer zone is provided in **Annexures- 11-13**. The above figures are based on 2011 census data, however drastic improvements in the above said amenities are observed in the area.

3.2.4 SOCIO ECONOMIC SURVEY:

Study of the area to know about socio-economic conditions, including aspirations and requirements of the people show the following:

- Lease and its surrounding environment is dominated with quarry and its related activities.
- Due to rocky land formation, undependable rainfall, poor soil condition, absence of irrigational source or water bodies, deep ground water occurrence, little seasonal agricultural activities are carried out in the area. Only patches of coconut cultivation is observed.



DRAFT EIA/EMP REPORT FOR ROUGHSTONE & GRAVEL QUARRY OF THIRU.K.RAMARAJ IN S.F.NOS. 70/1(P) OVER AN AREA OF 1.06.50HA IN MYLERIPALAYAM VILLAGE, MADUKKARAI TALUK, COIMBATORE DISTRICT, TAMIL NADU.

- Numerous ware houses, other industries like glass, textile mills, foundaries, engineering units, Upcoming CODISSIA Industrial Park B (Kallapalayam), etc serve as the main occupation for the young workforce.
- Industrialisation & harmony with locals are observed.
- Other allied activities like livestock rearing and poultry farming are also found.
- Reasonably better amenities like approach road bus facility, electricity, mobile phone connectivity, Public Distribution System, Co operative bank. Scheduled banks etc are available.

Bore well is the main source for drinking water. There are OHT's, Ground level tanks, public taps are available



Tekani Village –Ration Shop




Kumarapalayam Village – Primary School



Arasampalayam Village –Water tank



Tekani Village – Primary School

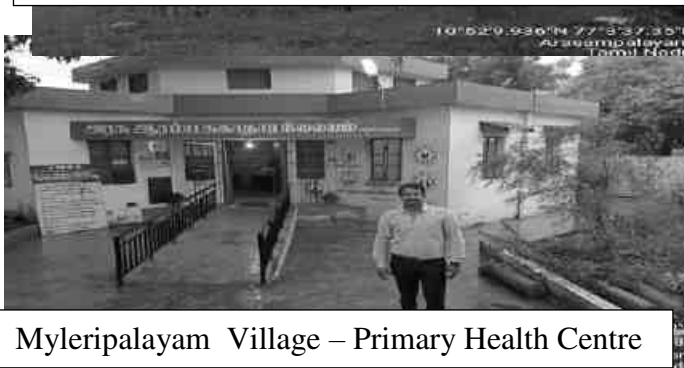

Myleripalayam Village – Primary Health Centre



Myleripalayam Village – Primary School



3.3 EXISTING ENVIRONMENTAL QUALITY

3.3.1 MICRO-METEOROLOGY

3.3.1.1 General:

The meteorological conditions in an area regulate the dispersion of air pollutants being released into the atmosphere. The principal variables are horizontal convective transport i.e. wind speed and direction and vertical convective transport, i.e. mixing height, stability class and topography of the area.


3.3.1.2 Historical Meteorological Data:

A. Cyclones And Depressions

Cyclonic storms and depressions in Bay of Bengal affect the East Coast of India. Isolated ones, forming in January to March in the South Bay of Bengal move West-North-westwards and hit Tamil Nadu coast. In April and May, cyclonic storms and depressions form in the South and adjoining Central Bay and move initially to the Northwest, then North and then recurve to the Northeast striking the Arakan coasts in April and Andhra Pradesh (AP)-Orissa-West Bengal (WB) – Bangladesh coasts in May. Most of the monsoon (June – September) storms develop in the central and in the north bay and move west – north - westwards affecting AP – Orissa – WB coasts. Post monsoon (October – December) storms form mostly in the south and central Bay, recurve between 150 and 180 N affecting Tamil Nadu – AP – Orissa – WB – Bangladesh coasts. **Figure No - 3.3** depicts the history of cyclonic storms, which have struck the Indian coast during the months of October, November and December during the last 75 years. (**Source: Vulnerability Atlas of India series, above figure accessed from www.maps of india.com**). East coast is prone to cyclonic storms round the year but mostly these occur prior to SW i.e., in May and after SW monsoon i.e., in October and November.

DRAFT EIA/EMP REPORT FOR ROUGHSTONE & GRAVEL QUARRY OF THIRU.K.RAMARAJ IN S.F.NOS. 70/1(P) OVER AN AREA OF 1.06.50HA IN MYLERIPALAYAM VILLAGE, MADUKKARAI TALUK, COIMBATORE DISTRICT, TAMIL NADU.


Figure 3.3: Cyclone Prone Areas

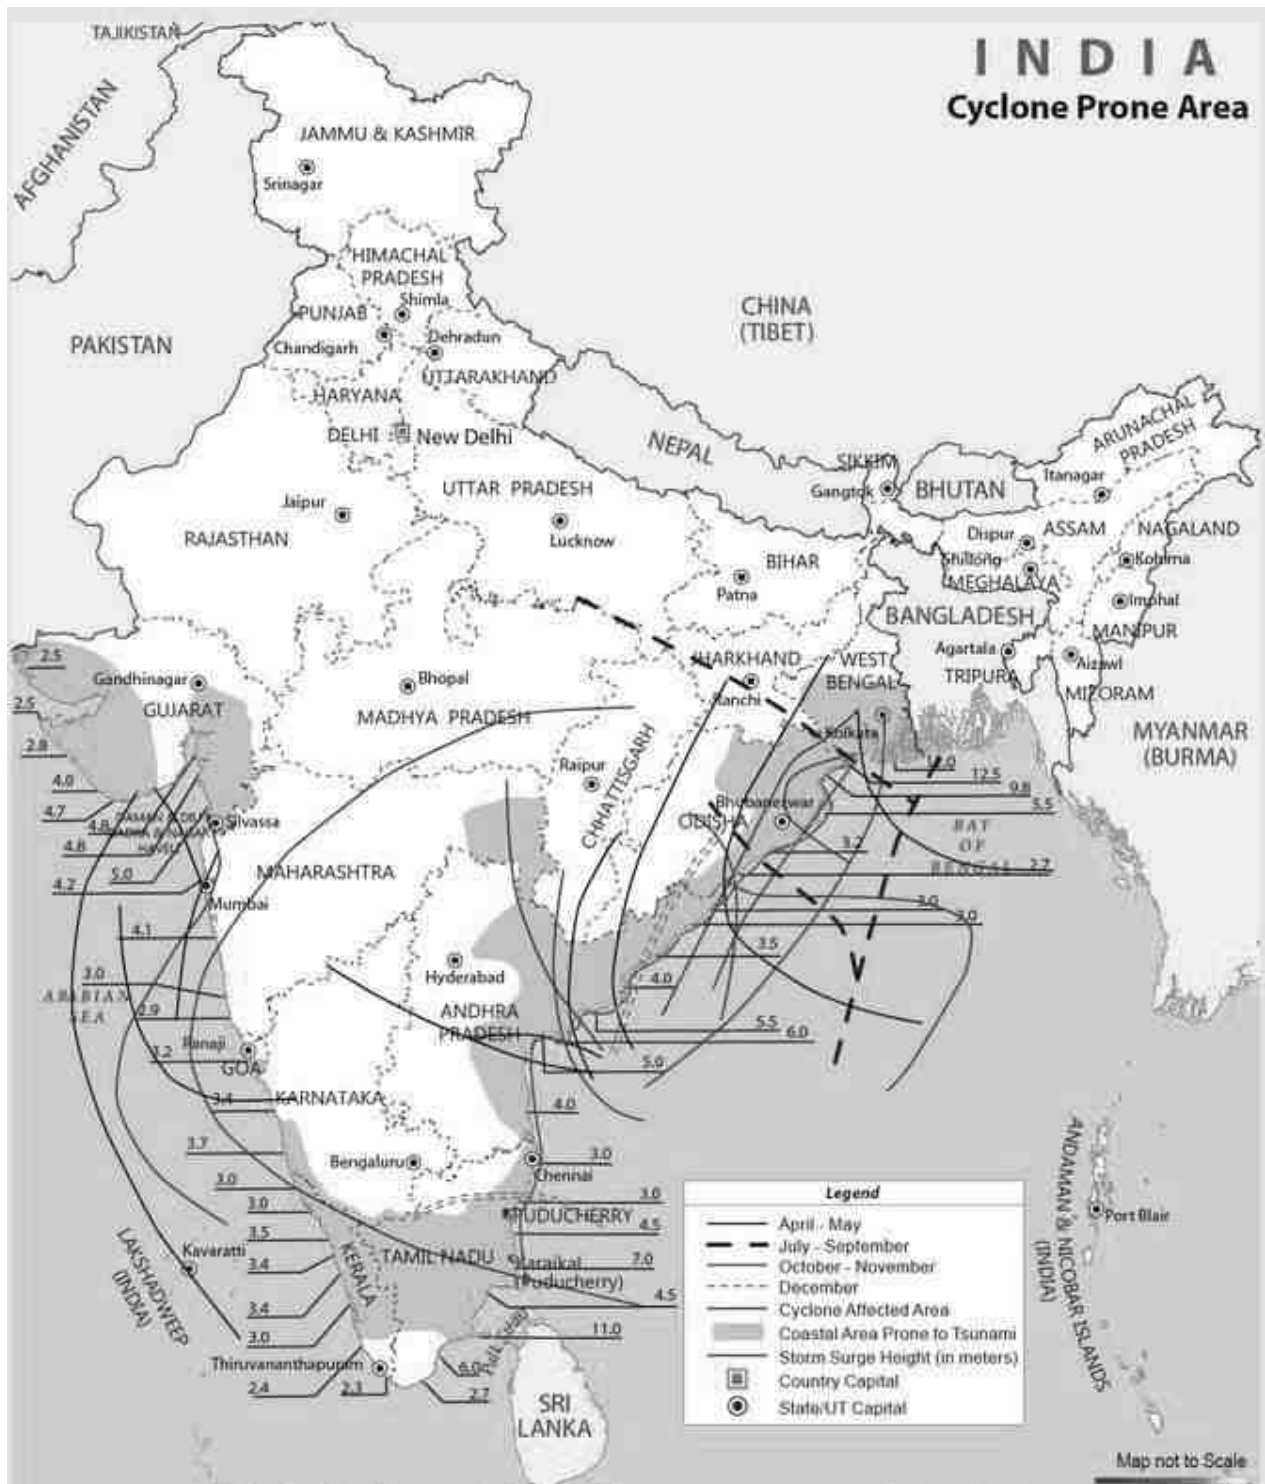

B. SEISMIC DATA

From the seismic zone map of India as depicted in the **Figure No - 3.4**, it can be seen that the project site and study area falls in the Zone – II and is described as least active zone.

Figure 3.4: Seismic Zone Map of India

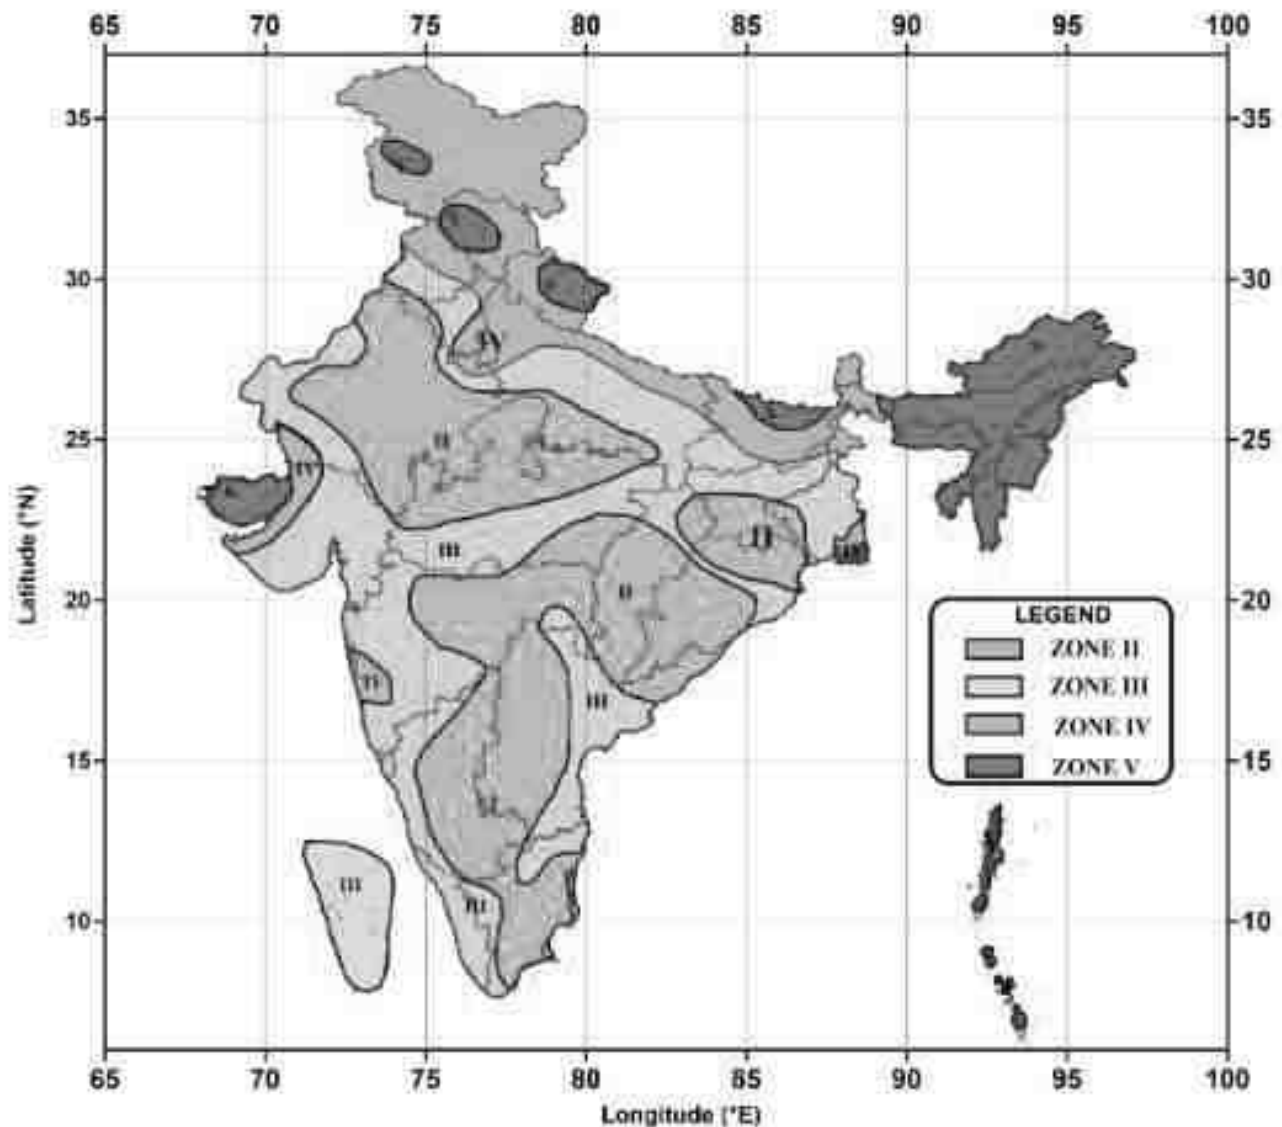

C. Climate and Rainfall Data:

Coimbatore has a tropical wet and dry climate. It experiences hot and humid summers from March to June with temperatures ranging from 25 °C to 38 °C. The monsoon season starts from July and lasts till October. The city receives moderate rainfall from the south-west monsoon and occasional heavy rainfall from the north-east monsoon. The winter season starts from November and ends in February.

Due to the south-west monsoon winds passing through the Palghat gap, elevated regions of the city receive rainfall in the months from June to August. After a warm and foggy September, the north-east monsoon starts from October, lasting until early November. The average annual rainfall is around 600 mm (23.6 in) with the northeast and the southwest monsoons contributing to 47% and 28% respectively to the total rainfall.[36] This periodic rainfall does not satisfy the city's water requirements throughout the year and water supply schemes drawn from Siruvani and Pilloor help supplant the requirements during low rainfall months

Table 3.8: Average Annual Rainfall Data

The average annual rainfall and the 5 years rainfall collected from twadboard, Coimbatore as follows:

Actual Rainfall In mm						Normal Rainfall In Mm
2019	2020	2021	2022	2023	2024(as on 30.09.24)	
272.4	1572.3	2119.1	2151.7	1480.9	1287.7	1205.8

Source – <https://www.twadboard.tn.gov.in/content/coimbatore>

3.3.1.3 SITE SPECIFIC METEOROLOGICAL DATA:

Micrometeorology and microclimatic parameters like wind velocity, wind direction, ambient temperature, relative humidity, were collected throughout the monitoring period.

DATA ANALYSIS:

The temperature in the area during the study period ranged from 21.0°C to 38.1°C while the relative humidity varied between 18 – 98.0%. The wind speed during the study period ranged from <1.8 to 38.9 Km/hr. The predominant wind direction is from SW. The meteorological data are presented in **Table no – 3.9**. The average wind rose is depicted in **Figure No - 3.5**.


DRAFT EIA/EMP REPORT FOR ROUGHSTONE & GRAVEL QUARRY OF THIRU.K.RAMARAJ IN S.F.NOS. 70/1(P) OVER AN AREA OF 1.06.50HA IN MYLERIPALAYAM VILLAGE, MADUKKARAI TALUK, COIMBATORE DISTRICT, TAMIL NADU.

Table 3.9: Meteorological Data

Season: Summer Season (March 2025 – May 2025)			
S.NO	PARAMETERS	MIN	MAX
1	Temperature In °c	21.0	38.0
2	Humidity in %	18.0	98.0
3	Wind speed in km/hr	<1.8	38.9
4	Predominant wind direction from	SW	



DRAFT EIA/EMP REPORT FOR ROUGHSTONE & GRAVEL QUARRY OF THIRU.K.RAMARAJ IN S.F.NOS. 70/1(P) OVER AN AREA OF 1.06.50HA IN MYLERIPALAYAM VILLAGE, MADUKKARAI TALUK, COIMBATORE DISTRICT, TAMIL NADU.

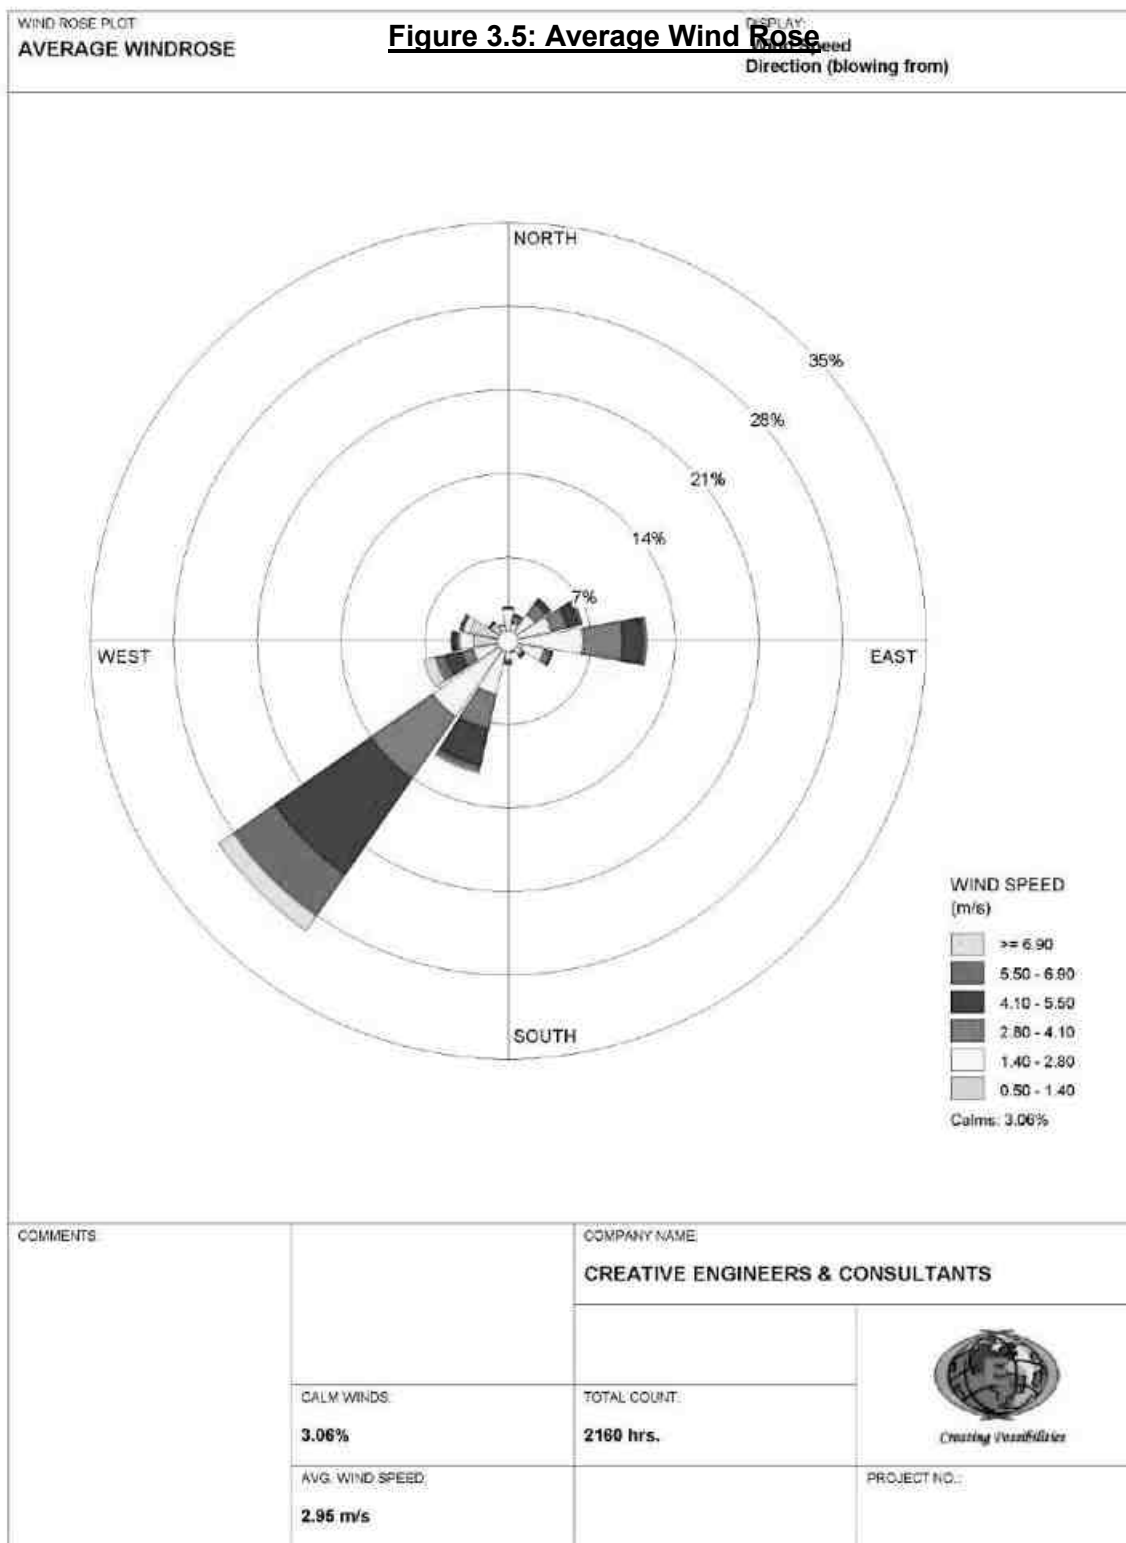

DRAFT EIA/EMP REPORT FOR ROUGHSTONE & GRAVEL QUARRY OF THIRU.K.RAMARAJ IN S.F.NOS. 70/1(P) OVER AN AREA OF 1.06.50HA IN MYLERIPALAYAM VILLAGE, MADUKKARAI TALUK, COIMBATORE DISTRICT, TAMIL NADU.

3.3.2 AMBIENT AIR QUALITY (AAQ):

Ambient Air quality has been assessed through a network of 6 ambient air quality stations. The following methodology has been considered for design of ambient air quality monitoring network in the area. Based on these criteria, 6 numbers of air sampling stations were selected in the area as shown below in Table No.3.10.

- ❖ Topography / terrain of study area.
- ❖ Populated areas within study area.
- ❖ Residential /sensitive areas within study area.
- ❖ Magnitude of surrounding industries.0.9
- ❖ Representation of regional background levels.
- ❖ Representation of cross sectional distribution in down wind direction.
- ❖ Predominant wind direction and wind pattern.

Table 3.10: Air Quality Monitoring

1.	Monitoring Period	Summer Season (March 2025 – May 2025)
2.	Monitoring Location	The location map showing Ambient Air Quality study stations are shown in Figure No- 3.6 .
3.	Methodology	
	Parameter	Protocol
	a. Particulate Matter (PM10)	Gravimetric (IS 5182: Part 23:2017)
	b. Particulate Matter PM2.5	Gravimetric (IS 5182: Part 24:2019)
	c. Sulphur Dioxide	Colorimetric (West & Gaeke Method) (IS 5182: Part 02: 2017)
	d. Nitrogen Dioxide	Colorimetric(Modified Jacob & Hocheiser Method) (IS 5182: Part 06:2017)
	e. Carbon Monoxide	CO Monitor
4.	f. Silica	Colorimetric (Molybdate Method) NIOSH 7601 -2003
	Monitoring Frequency	2 days in a week, 4 weeks in a month for 3 months in a season.

Table 3.11: Air Quality Monitoring Locations

S.NO	LOCATION CODE	LOCATION	DISTANCE FROM CORE ZONE (KM)	DIRECTION
1	A1	Project Site	-	-
2	A2	Myleripalayam Village	1.1km	W
3	A3	Kumaarapalayam Village	1.8km	SW
4	A4	Tegani Village	3.2km	NE
5	A5	Karachery Village	2.8km	E
6	A6	Near Shanmugam Quarry	1.0km	NE



DRAFT EIA/EMP REPORT FOR ROUGHSTONE & GRAVEL QUARRY OF THIRU.K.RAMARAJ IN S.F.NOS. 70/1(P) OVER AN AREA OF 1.06.50HA IN MYLERIPALAYAM VILLAGE, MADUKKARAI TALUK, COIMBATORE DISTRICT, TAMIL NADU.

Figure 3.6: Ambient Air Quality Study Stations




DRAFT EIA/EMP REPORT FOR ROUGHSTONE & GRAVEL QUARRY OF THIRU.K.RAMARAJ IN S.F.NOS. 70/1(P) OVER AN AREA OF 1.06.50HA IN MYLERIPALAYAM VILLAGE, MADUKKARAI TALUK, COIMBATORE DISTRICT, TAMIL NADU.

Table 3.12: Ambient Air Quality Data

All Value in $\mu\text{g}/\text{m}^3$													
PARAMETERS	Cat.*	PM ₁₀			PM _{2.5}			SO ₂			NO ₂		
LOCATIONS		MIN	AVG	MAX	MIN	AVG	MAX	MIN	AVG	MAX	MIN	AVG	MAX
A1-Project Site		49.0	55.6	63.0	18.0	21.4	25.0	5.0	6.4	8.0	12.0	15.4	19.0
A2- Myleripalayam Village	R	49.0	55.8	62.0	18.0	21.5	24.0	5.0	5.9	8.0	10.0	12.6	15.0
A3-Kumaarapalayam Village	R	47.0	51.4	58.0	17.0	19.7	23.0	5.0	6.7	8.0	11.0	15.5	18.0
A4-Tegani Village	R	48.0	51.2	57.0	18.0	22.7	27.0	5.0	5.5	7.0	13.0	15.7	19.0
A5-Karachery Village	R	48.0	51.9	57.0	18.0	20.5	24.0	7.0	9.2	12.0	14.0	17.8	23.0
A6-Near Shanmugam Quarry	R	46.0	50.9	55.0	16.0	20.0	24.0	7.0	9.0	11.0	13.0	17.6	23.0
NAAQ Limits		PM ₁₀			PM _{2.5}			SO ₂			NO ₂		
	*	100			60			80			80		
	**	100			60			80			80		

***Note:** Category: * - Industrial, Residential, Rural and other area, ** – Ecologically Sensitive Area (notified by Central Government)

Figure 3.7: Ambient Air Quality Data

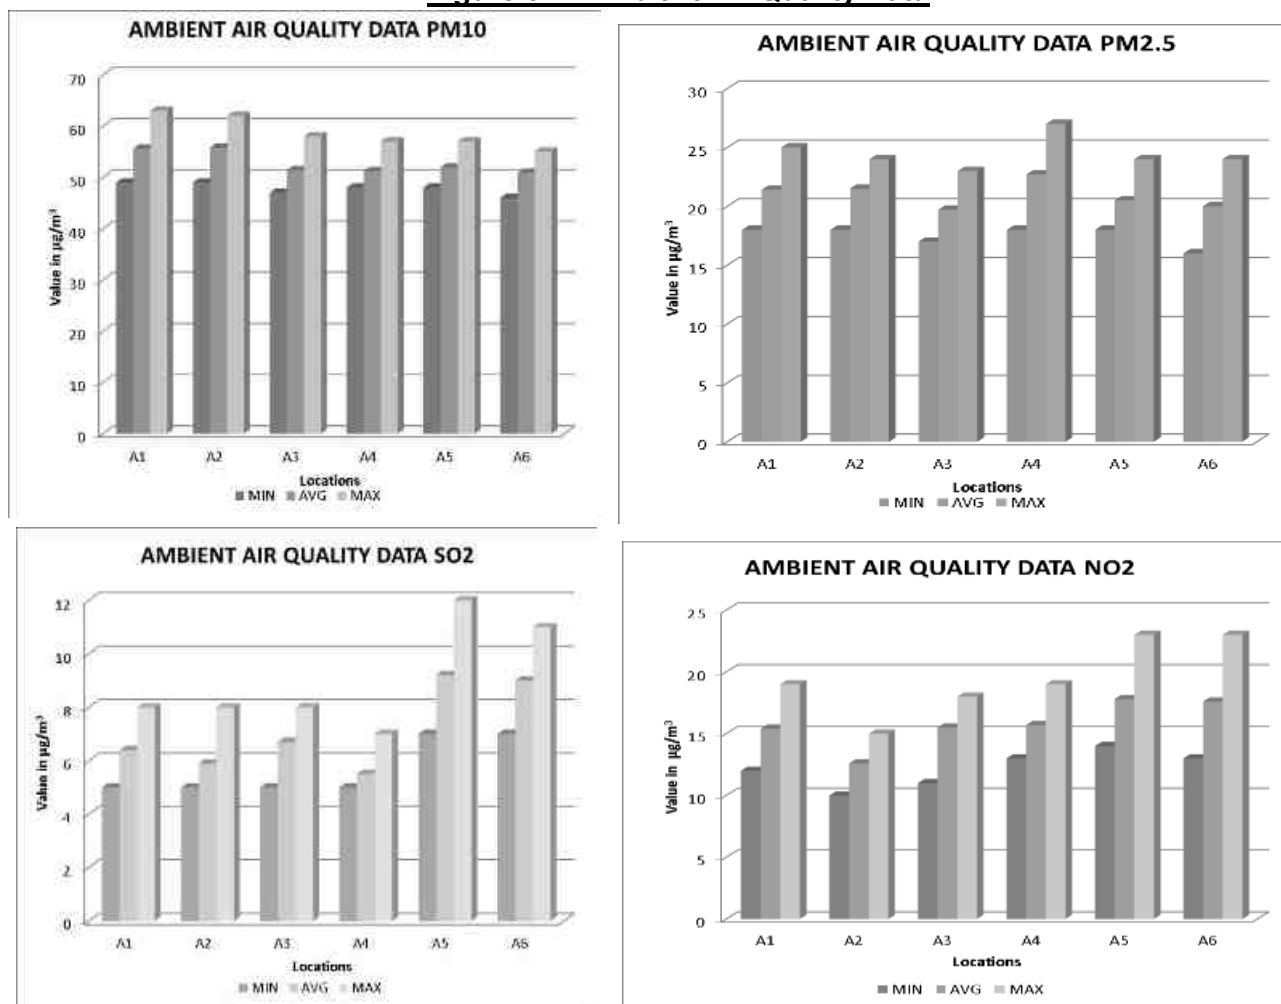

DRAFT EIA/EMP REPORT FOR ROUGHSTONE & GRAVEL QUARRY OF THIRU.K.RAMARAJ IN S.F.NOS. 70/1(P) OVER AN AREA OF 1.06.50HA IN MYLERIPALAYAM VILLAGE, MADUKKARAI TALUK, COIMBATORE DISTRICT, TAMIL NADU.

3.3.2.1 Results and Discussion:

The AAQ monitored data for all locations for above parameters are shown in **Table No - 3.12** and in **Figure No - 3.7**. Ambient Air Quality data during the study period is given in **Annexure-14**. From the table it is seen that, in the ambient air, the PM₁₀ values were in the range of 46.0-63.0 µg/m³. PM_{2.5} values were in the range of 16.0-27.0 µg/m³. SO₂ levels were ranging from 5.0–12.0 µg/m³. NO₂ levels were ranging from 10.0-23.0 µg/m³.

The existing Ambient Air Quality levels for PM₁₀, PM_{2.5}, SO₂ and NO₂, are within the NAAQ standards prescribed CPCB limits of 100 µg/m³, 60 µg/m³, 80 µg/m³ & 80 µg/m³. The CO values in all the locations were found to be below detectable limit. Silica values in the study area are found to be below detectable limit. (Detection limit – 0.05 mg/m³)

3.3.3 WATER ENVIRONMENT:

Assessment of baseline data on water environment includes Identification of water resources, Collection of water samples and Analyzing water samples collected for physico-chemical parameters as per standards. The water sampling was carried out for 6 locations. Details of the same has been provided below:

Table 3.13: Water Quality Monitoring

1.	Monitoring Period		Summer Season (March 2025 – May 2025)		
2.	Monitoring Location		The location map showing water sampling locations are given in Figure No.3.8 .		
	Code	Location	Sample Type	Distance	Direction
	W1	Near Project Site	Bore well	-	-
	W2	Myleripalayam Village	Bore well	1.1km	W
	W3	Kumaarapalayam Village	Bore well	1.8km	SW
	W4	Tegani Village	Bore well	3.2km	NE
	W5	Karachery Village	Bore well	2.8km	E
	W6	Near Shanmugam Quarry	Bore well	1.0km	NE
3.	Methodology		Sampling - IS 3025 Part - I		
			Analysis – IS 3025 relevant parts / APHA 23rd Edition		



DRAFT EIA/EMP REPORT FOR ROUGHSTONE & GRAVEL QUARRY OF THIRU.K.RAMARAJ IN S.F.NOS. 70/1(P) OVER AN AREA OF 1.06.50HA IN MYLERIPALAYAM VILLAGE, MADUKKARAI TALUK, COIMBATORE DISTRICT, TAMIL NADU.

Figure 3.8: Location of Water Sampling Stations



Table 3.14: Summary of Water Quality Data

Season	Summer Season (March 2025 – May 2025)	
Monitoring Locations	6 locations	
Parameters	Range of values	Limits*
pH at 25 °C	7.33 – 8.02	6.5-8.5
Total Dissolved Solids, mg/L	415 – 789	2000
Chloride as Cl ⁻ , mg/L	38.7 – 168	1000
Total Hardness (as CaCO ₃), mg/L	128 – 269	600
Total Alkalinity (as CaCO ₃), mg/L	212– 265	600
Sulphates as SO ₄ ²⁻ , mg/L	12.8 – 55.3	400
Iron as Fe, mg/L	BDL	0.3
Nitrate as NO ₃ , mg/L	4.1 – 6.63	45
Fluoride as F, mg/L	BDL – 0.2	1.5

3.3.3.1 Results and Discussion:

The results of the water sample analysis are shown in **Table No - 3.14**. The pH values of bore well water were ranging in between 7.33 – 8.02, TDS values were in the range of 415 – 789mg/L. Chloride values were ranging from 38.7 – 168mg/L. Iron content was found to be in the range BDLmg/L. The water quality of ground water is found to be within the prescribed Permissible limits of IS: 10500 Norms in the absence of an alternative source as per Drinking Water Specifications. The water quality data is provided in **Annexure-15**.

3.3.4 NOISE ENVIRONMENT:

Opearional phase of this project may lead to increase noise levels from the existing levels at least in and around the project area. As noise level beyond permissible limits will cause adverse impacts on the environment, it has become imperative to assess the noise levels in and around the mine area. Noise level measurements were taken at the 6 locations during the monitoring period. Details of the same are provided below:

DRAFT EIA/EMP REPORT FOR ROUGHSTONE & GRAVEL QUARRY OF THIRU.K.RAMARAJ IN S.F.NOS. 70/1(P) OVER AN AREA OF 1.06.50HA IN MYLERIPALAYAM VILLAGE, MADUKKARAI TALUK, COIMBATORE DISTRICT, TAMIL NADU.

Table 3.15: Noise Level Monitoring

1.	Monitoring Period	Summer Season (March 2025 – May 2025)		
2.	Monitoring Location	The location map showing noise monitoring locations are given in Figure No.3.9.		
	Code	Location	Distance	Direction
	N1	Project Site	-	-
	N2	Myleripalayam Village	1.1km	W
	N3	Kumaarapalayam Village	1.8km	SW
	N4	Tegani Village	3.2km	NE
	N5	Karachery Village	2.8km	E
	N6	Near Shanmugam Quarry	1.0km	NE
3.	Methodology	Noise levels were measured using sound level meter manufactured by (Model No - SL- 4001, Make - Lutron). Sound Pressure Level (SPL) measurements were measured at all locations where ambient air quality monitored; one reading for every hour was taken for 24 hours.		
4.	Monitoring Frequency	Once during monitoring period		



DRAFT EIA/EMP REPORT FOR ROUGHSTONE & GRAVEL QUARRY OF THIRU.K.RAMARAJ IN S.F.NOS. 70/1(P) OVER AN AREA OF 1.06.50HA IN MYLERIPALAYAM VILLAGE, MADUKKARAI TALUK, COIMBATORE DISTRICT, TAMIL NADU.


Figure 3.9: Location of Noise Sampling Stations



Table 3.16: Ambient Noise Level in dB (A)

Date and time of monitoring	N1	N2	N3	N4	N5	N6
Day Equivalent	53.8	54.6	49.6	50.7	50	52.4
Night Equivalent	43.5	43.8	40.7	42.9	41.2	43.2
Day & Night Equivalent	52.5	53	48.1	49.3	48.6	50.9
Limits: As per CPCB: Work zone Exposure in 8 hr - 90 dB(A)						
As per MoEF&CC: Residential: Day equivalent - 55 dB(A); Night equivalent - 45 dB(A)						

Figure 3.10: Noise Level Data

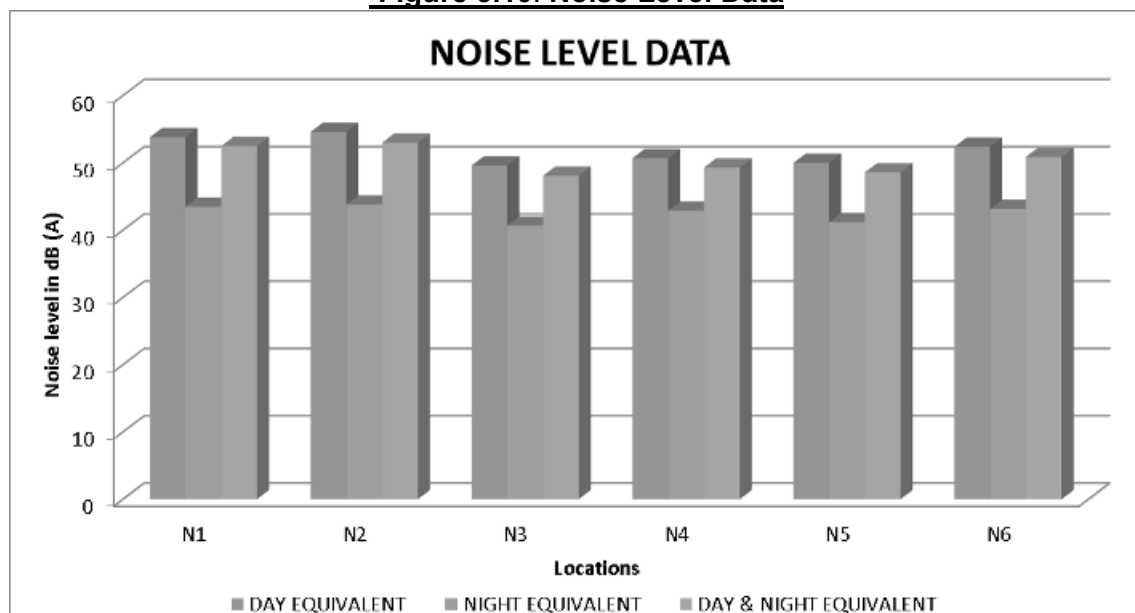

3.3.4.1 Results and Discussion:

The results of noise levels for all locations are given in **Table No-3.16**. The noise values for all above locations are shown in a comparative chart given in **Figure No - 3.10**. Day Equivalent Noise (Leq-d levels were ranging from 49.6 dB(A) to 54.6 dB(A) and night Equivalent Noise (Leq-d) levels ranged between 40.7 dB(A) to 43.8 dB(A). While comparing with the MOEF&CC Norm of 55 dB(A) for day time and 45 dB(A) for night time, the monitored ambient noise levels were within the limit values for Residential areas.

3.3.5 SOIL CHARACTERISTICS:

Soil samples were collected in 6 locations in the core and buffer zone to analyse the physiochemical characteristics of the soil in the area. Elaborate details of the same has been provided below.

DRAFT EIA/EMP REPORT FOR ROUGHSTONE & GRAVEL QUARRY OF THIRU.K.RAMARAJ IN S.F.NOS. 70/1(P) OVER AN AREA OF 1.06.50HA IN MYLERIPALAYAM VILLAGE, MADUKKARAI TALUK, COIMBATORE DISTRICT, TAMIL NADU.


Table 3.17: Soil Quality Monitoring

1.	Monitoring Period	Summer Season (March 2025 – May 2025)		
2.	Monitoring Location	The location map showing soil sampling locations are given in Figure No.3.11.		
	Code	Location	Distance	Direction
	S1	Project Site	-	-
	S2	Myleripalayam Village	1.1km	W
	S3	Kumaarapalayam Village	1.8km	SW
	S4	Tegani Village	3.2km	NE
	S5	Karachery Village	2.8km	E
	S6	Near Shanmugam Quarry	1.0km	NE
3.	Methodology	Composite soil samples using sampling augers and field capacity apparatus.		
4.	Monitoring Frequency	Once during monitoring period		



DRAFT EIA/EMP REPORT FOR ROUGHSTONE & GRAVEL QUARRY OF THIRU.K.RAMARAJ IN S.F.NOS. 70/1(P) OVER AN AREA OF 1.06.50HA IN MYLERIPALAYAM VILLAGE, MADUKKARAI TALUK, COIMBATORE DISTRICT, TAMIL NADU.

Figure 3.11: Location of Soil Sampling Stations

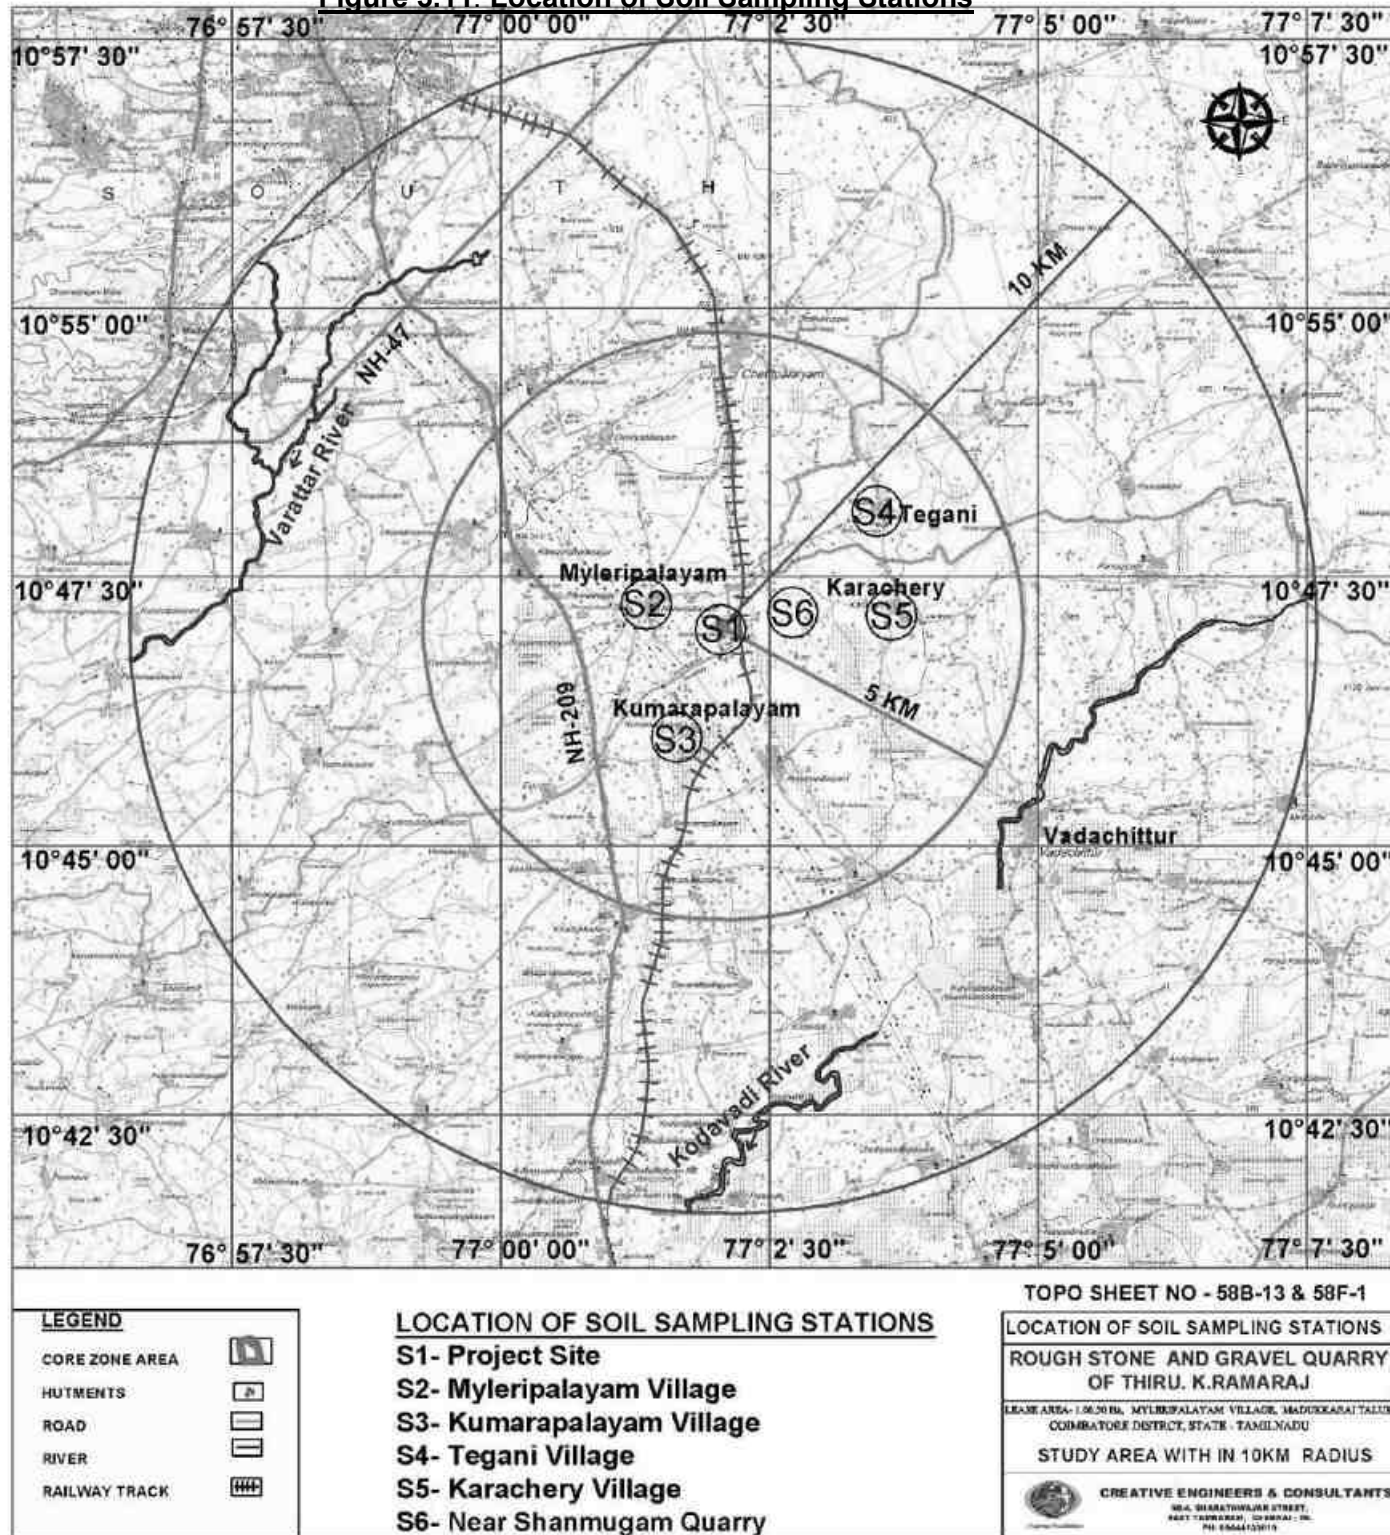

DRAFT EIA/EMP REPORT FOR ROUGHSTONE & GRAVEL QUARRY OF THIRU.K.RAMARAJ IN S.F.NOS. 70/1(P) OVER AN AREA OF 1.06.50HA IN MYLERIPALAYAM VILLAGE, MADUKKARAI TALUK, COIMBATORE DISTRICT, TAMIL NADU.

Table 3.18: Soil Quality Data

S.No	Parameters	Unit	S1	S2	S3	S4	S5	S6
1	pH at 25°C	-	6.72	6.54	6.75	6.86	6.85	6.75
2	Electrical Conductivity	(µmhos/cm)	0.102	0.089	0.106	0.073	0.102	0.096
3	Organic Matter	%	1.42	0.87	1.49	0.59	1.25	1.21
4	Soil texture	-	SANDY	SANDY	SANDY	SANDY	SANDY	SANDY
5	Grain Size Distribution i. Sand	%	85.8	86.9	87.8	87.4	86.1	87.9
6	ii. Silt	%	5	2.6	3.3	4.5	4.7	3.4
7	iii. Clay	%	9.2	10.5	8.9	8.1	9.2	8.7
8	Phosphorous	µg/g	21.9	28.2	38.9	50.2	34.6	33.5
9	Sodium	mg/kg	2.37	1.58	2.67	1.26	1.96	1.91
10	Potassium	mg/kg	275	235	367	403	338	331
11	Total Nitrogen	mg/kg	169	136	238	278	207	202

3.3.5.1 Results and Discussion:

Results of the soil samples show that the pH values were ranging between 6.54 to 6.86 and Electrical Conductivity values were ranging between 0.073 – 0.106 µmhos/cm. Soils are generally Sandy type. Organic matter values were ranging between 0.59 – 1.49%. Total Nitrogen values were ranging between 136 - 278 mg/kg. Phosphorus values were ranging between 21.9 – 50.2 µg/g. Potassium values were ranging between 235 - 403 mg/kg. Sodium values were ranging between 1.26- 2.67 mg/kg. Total Sulphur values were observed to be BDL. The soil quality data for the 3 samples collected and analyzed are provided in **Table No – 3.18.**



3.4 LAND ENVIRONMENT - LANDUSE & LAND COVER

For preparing an impact statement, aspects of the land conditions are covered under land use. An industrial project / mine can cause changes in land use, soil process in different intensities depending upon the size of the project and distance involved between the industries and the area. Here, land use status for a radius of 10 km has been studied.

3.4.1 DATA USED AND METHODOLOGY

For the present study on land use pattern of buffer area around the proposed stone and gravel quarry, an archived historical data of Landsat 8 data shas been used as base data (Figure No.3.12) has been used to generate the require landuse map showing their spatial pattern within the buffer area. The table showing data used for generation of information on landuse and subsequent GIS analysis is given below

Table 3.19: RS satellite image used for the present study

S.No	Type of Data	Date	Generated Map
1.	Landsat 8	April 2025	Landuse (LU) Map showing 10 Km buffer zone

Interpretation of satellite image requires understanding of relationship between image elements and their respective terrain elements. Since, in the present study, the landuse information is obtained using visual interpretation, an interpretation key is generated. The image elements such as color, tone, texture, size, shape and associated elements have been used to delineate various landuse categories. The landuse categorization and nomenclature used in the present study is based on the national level landuse classification system, which is adopted for the entire country as recommended by National Remote Sensing Centre (NRSC), Department of Space, Government of India.

Figure 3.12 : Landsat 8 Satellite Data of the Study Area

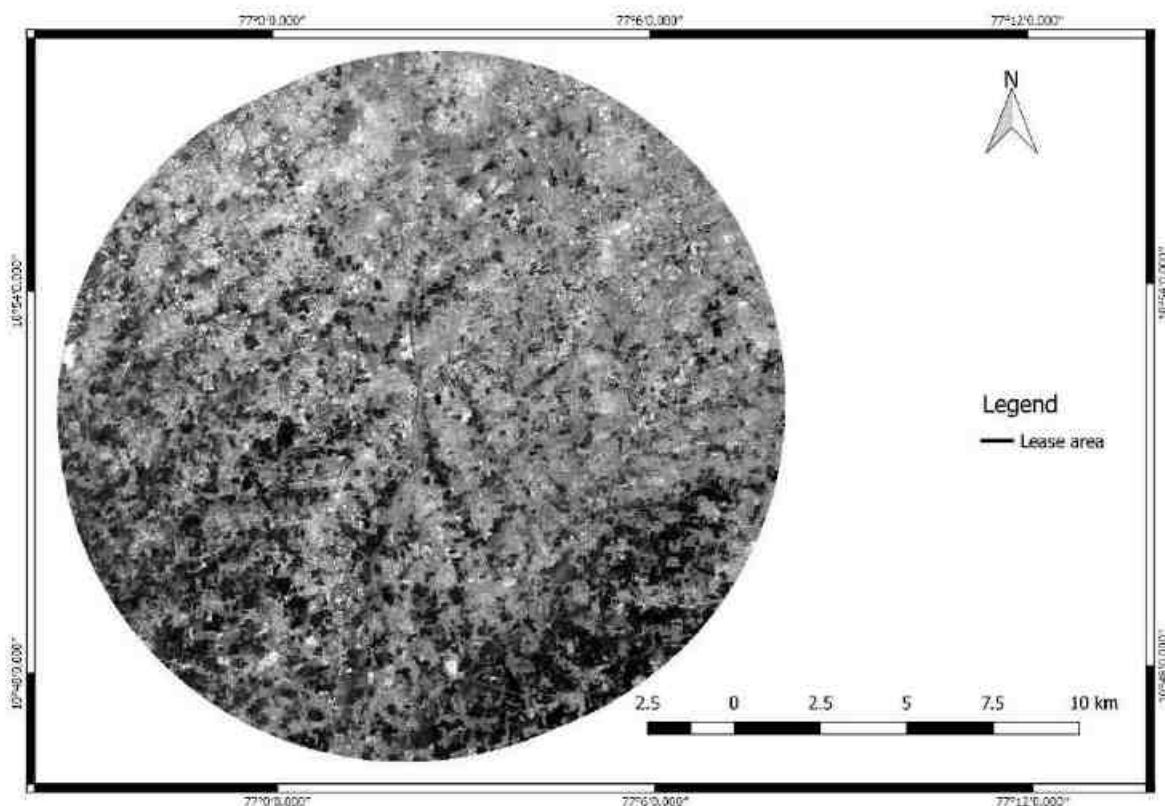


Table 3.20: Major Landuse Units of the Study Area

S.No	Major Category	Landuse unit
1	Built-Up Land	Village, Town, Industrial / Vacant Area
2	Agricultural Land	Crop Land Fallow Land Plantation Farm Land
3	Forest Land	Open Scrub Forest
4	Waste Land Mining Area	Land With Scrub/ Land Without Scrub Barren Rocky/ Stony Waste Quarries / Abandoned Quarries
5	Waterbodies	Tanks/ Rivers / Streams

Such LandUse and Land cover (LULC) categories have been verified using field check and identified sample sites within the buffer area, verified on field and transferred into gis geo-coordinates using observation coordinates received from hand held GPS (global positioning system) instrument. Thus, an interpreted final landuse map has been generated (Figure No. 3.13) using above such elaborate procedure and transformed into GIS environment for its spatial

DRAFT EIA/EMP REPORT FOR ROUGHSTONE & GRAVEL QUARRY OF THIRU.K.RAMARAJ IN S.F.NOS. 70/1(P) OVER AN AREA OF 1.06.50HA IN MYLERIPALAYAM VILLAGE, MADUKKARAI TALUK, COIMBATORE DISTRICT, TAMIL NADU.

distribution and area estimation. Spatial nature and extent of various landuse categories within the buffer area is discussed is given below:

Figure 3.13: Map Showing Land Use Categories around 10km Buffer

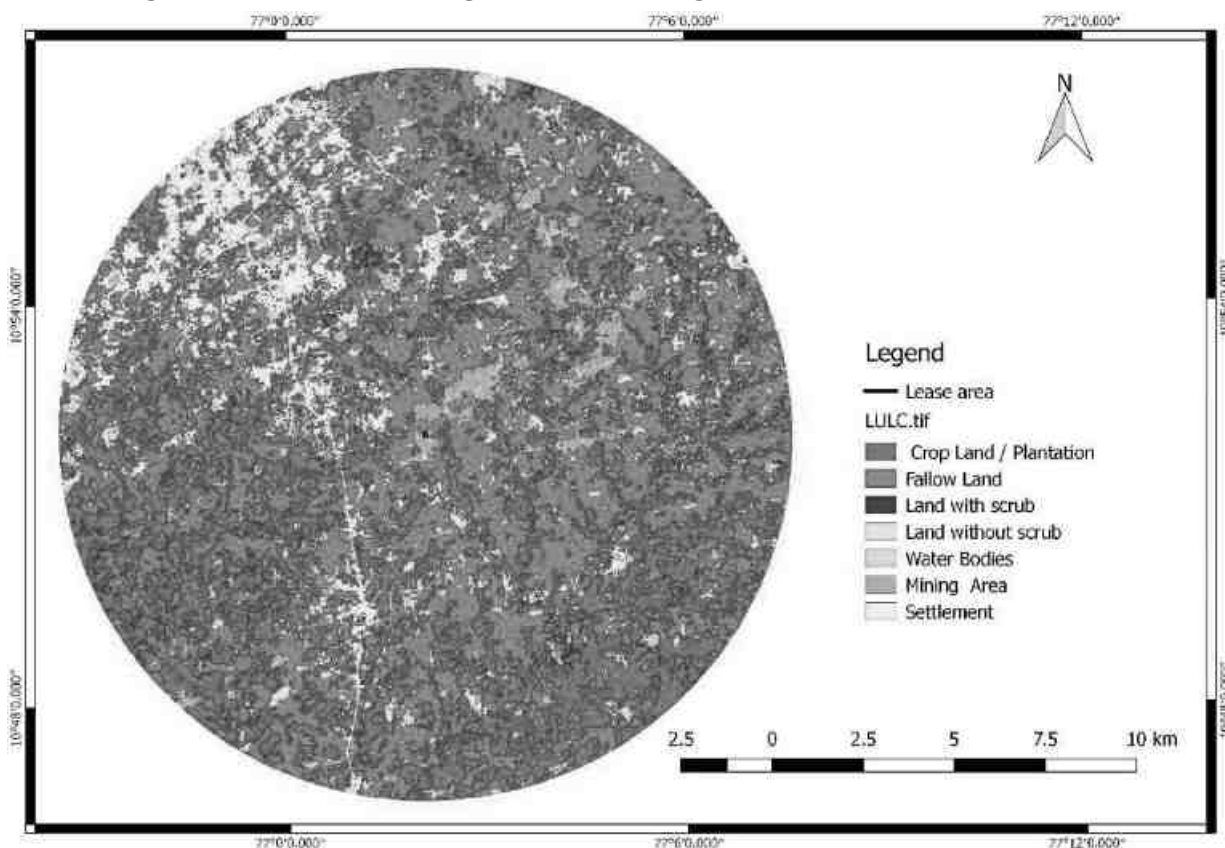


Table 3.21: Area Estimation of Landuse Categories in Buffer Zone

S.No	Landuse Feature	Area (Sq.Km)	Percentage
1	Agriculture/ Plantation	108.81	34.16
2	Fallow Land	151.32	47.50
3	Land With Scrub	7.30	2.29
4	Land Without Scrub	10.05	3.16
5	Water bodies	0.99	0.31
6	Mining	8.03	2.52
7	Settlement	32.07	10.07
	Total	318.58	100

From the above table it is seen that 47.50 % of the buffer area is classified under fallow land, 34.16 % of Agriculture/ Plantation land, 2.29 % constitutes land with scrub, 3.16 % constitutes land without scrub and the balance falls under other land use categories.

.LAND USED BASED ON REVENUE RECORDS:


The lease area falls in Arasampalayam Village, Kinathukadavu Taluk, Coimbatore District,, Tamil Nadu state and the study area for the land use pattern (10 km radius) has been divided into four zones viz. Zone-I (0-2 km), Zone-II (2-5 km), Zone-III (5-10 km) and Zone-IV (0-10 km) respectively. The land use pattern of the study area falling within 10 km radius around the proposed project area is presented in Table no - 3.22. Village wise land use pattern is provided in **Annexure-16**.

DRAFT EIA/EMP REPORT FOR ROUGHSTONE & GRAVEL QUARRY OF THIRU.K.RAMARAJ IN S.F.NOS. 70/1(P) OVER AN AREA OF 1.06.50HA IN MYLERIPALAYAM VILLAGE, MADUKKARAI TALUK, COIMBATORE DISTRICT, TAMIL NADU.

Table 3.22. Land Use Pattern of the Study Area Falling Within 10 Km Area in (Ha)

VILLAGE NAME	Total Geographic al Area	Forest Area	Area under Non-Agricultural Uses	Barren & Un-cultivable Land Area	Permanent Pastures and Other Grazing Land Area	Land Under Miscellaneous Tree Crops etc. Area	Culturable Waste Land Area	Fallows Land other than Current Fallows Area	Current Fallows Area	Total Un irrigated Land Area	Area Irrigated by Source
2 - 5 KM	16533.73	0	3004.06	49.27	0	1.81	549.09	955.96	5953.32	2508.35	3511.87
5-10 KM	21168.66	0	3427.34	68.85	0	952.24	780.57	1591.92	6939.45	3156.88	4251.41
0-10 KM	100.00	0.00	16.19	0.33	0.00	4.50	3.69	7.52	32.78	14.91	20.08
2 - 5 KM	16533.73	0	3004.06	49.27	0	1.81	549.09	955.96	5953.32	2508.35	3511.87

Figure 3.14: Landuse within the Buffer Zone Area

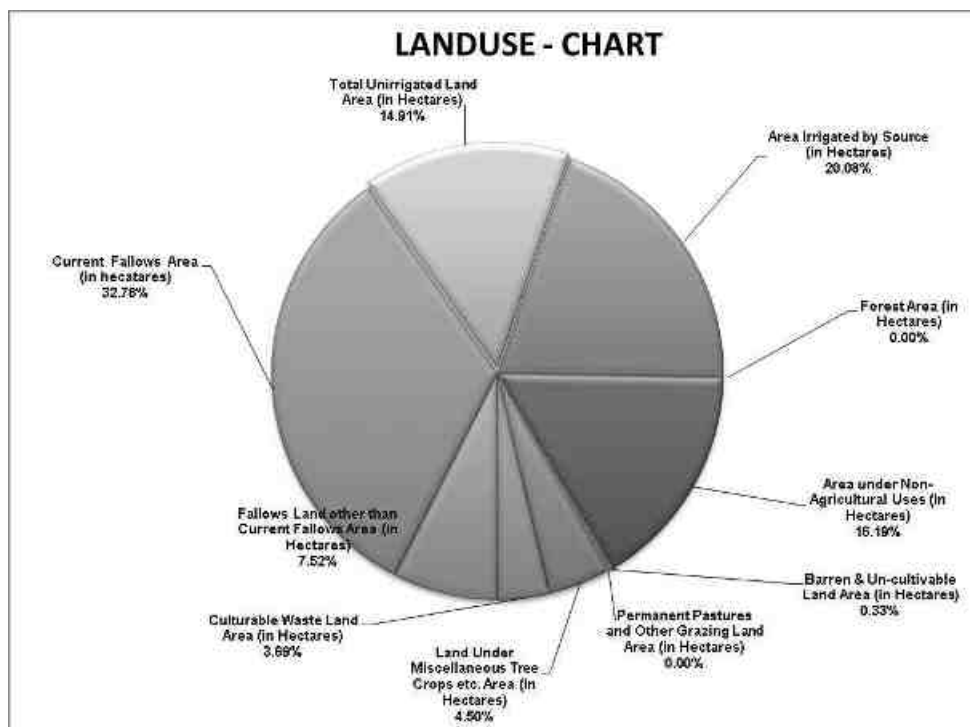

3.5 BIOLOGICAL ENVIRONMENT:

Study of the biological environment of any area comprises of well-planned ecological survey for the floristic and faunal composition of the areas through various scientifically planned techniques.

3.5.1 FLORA:

An ecological survey of the study area was conducted with reference to listing of species and assessment of the existing baseline ecological conditions. The objective of the survey is as follows:

- ❖ Generate existing data from field observations of various terrestrial floristic occurrences.
- ❖ Collect secondary data from Government records as well as through discussion with Forest officials, knowledgeable public etc.,
- ❖ Compare the data with authentic past records to identify changes, if any.
- ❖ Identify the impact of project operations on the biological aspects.

To accomplish the above objectives, a general ecological survey covering an area of 10 km radius was conducted. The locations were identified for phyto-sociological aspects to assess the current status.

3.5.1.1 Sampling Methodology:

In order to provide representative ecological status for the study area, the 10-km radius buffer area has been divided into four quartiles for biodiversity sampling, i.e., NE (Q-1), NW (Q-2) SW (Q-3) and SE (Q-4). Each of the quartiles have been examined for representative flora on randomly sampled quadrats for trees (10x10 m), shrubs (5x5 m) and herbs (1x1 m) depending upon prevailing geographical conditions and bio-diversity aspects of study area.

Phyto-sociological Survey: Phyto-sociological parameters, viz., Abundance (i.e., density), average and minimum stems were measured to determine the distribution and ecological aspects of the species. Abundance is a measure of the density of distribution of an individual species within a given area. It is calculated by summed individuals of a species. Average species number is calculated for all quadrates; similarly, minimum number of individuals represented is recorded

DRAFT EIA/EMP REPORT FOR ROUGHSTONE & GRAVEL QUARRY OF THIRU.K.RAMARAJ IN S.F.NOS. 70/1(P) OVER AN AREA OF 1.06.50HA IN MYLERIPALAYAM VILLAGE, MADUKKARAI TALUK, COIMBATORE DISTRICT, TAMIL NADU.

at quadrats level. A total of 5 quadrats were laid down in core area and a total of 20 quadrats were laid out in four quartiles (5 each) of buffer area.

Quadrats method for flora : A total of 100 x 100 m Grid was laid for buffer zone of 300m from Core Zone. In that grid 10 × 10m sub-quadrat were laid down randomly within core, PIZ and 10kms buffer area; each quadrat was laid to assess the trees (>5 cm GBH) and 5 × 5 m sub-quadrat nested within the quadrat for shrubs and two plot 1 × 1 m for herbs. The quadrats were laid apart to maximize the sampling efforts and minimize the species homogeneity, such as small stream area, Mining area, Working pit, Old quarries, agricultural areas, tank bunds, farm forestry plantations, natural forest area, avenue plantations, house backyards, etc. In each sample quadrat, individuals belonging to tree, shrub and herb species were recorded separately, and have been identified on the field. The prevailing land use and habitat quality has been noted down for each location on the field.

Vegetation Analysis using index: Species diversity will be calculated by using Shannon and Wiener (1963) formula as follows:

$$H' = - \sum_{i=1}^R p_i \ln p_i$$

Whereas,

H' is Shannon index of general diversity,

p_i is often the proportion of individuals belonging to the i th species in the dataset of interest.

Evenness index was calculated as: $E = H'/H_{max}$,

Whereas $H_{max} = \log_2$ (number of species in the plot)

A.CORE ZONE:

The proposed lease area is a non forest, private land. Part of the lease area is already mined and exposed with rock. The detailed list of plants found in the core zone are given in Table no – 3.23.



DRAFT EIA/EMP REPORT FOR ROUGHSTONE & GRAVEL QUARRY OF THIRU.K.RAMARAJ IN S.F.NOS. 70/1(P) OVER AN AREA OF 1.06.50HA IN MYLERIPALAYAM VILLAGE, MADUKKARAI TALUK, COIMBATORE DISTRICT, TAMIL NADU.

Table 3.23: List of Floristic Species in the Core Zone

Sl.No	Species Name	Family	Common Name
Trees			
1	Vachellia nilotica	Fabaceae	Karuvelam
2	Borassus flabellifer	Arecaceae	Panai
3	Morinda tinctoria	Rubiaceae	Nuna
4	Azadirachta indica	Meliaceae	Neem
Shrubs			
1	Abutilon indicum	Meliaceae	Thuthi
2	Jatropha curcas	Euphorbiaceae	Kattamanakku
3	Calotropis gigantea	Apocynaceae	Erukku
Herbs			
1	Leucas aspera	Lamiaceae	Thumbai
2	Celome viscosa	Capparidaceae	Nai kadugu
3	Ocimum tenuiflorum	Lamiaceae	Thulasi
4	Acalypha indica	Euphorbiaceae	Kuppamani
5	Parthenium hysterophorus	Asteraceae	Parttiniyam
6	Tridax procumbens	Asteraceae	Veetukaayapoondur
7	Achyranthes aspera	Amaranthaceae	Nayuruvi
8	Phyllanthus niruri	Phyllanthaceae	Keelaneeli

DRAFT EIA/EMP REPORT FOR ROUGHSTONE & GRAVEL QUARRY OF THIRU.K.RAMARAJ IN S.F.NOS. 70/1(P) OVER AN AREA OF 1.06.50HA IN MYLERIPALAYAM VILLAGE, MADUKKARAI TALUK, COIMBATORE DISTRICT, TAMIL NADU.

PHOTOS OF CORE ZONE



DRAFT EIA/EMP REPORT FOR ROUGHSTONE & GRAVEL QUARRY OF THIRU.K.RAMARAJ IN S.F.NOS. 70/1(P) OVER AN AREA OF 1.06.50HA IN MYLERIPALAYAM VILLAGE, MADUKKARAI TALUK, COIMBATORE DISTRICT, TAMIL NADU.

B.BUFFER ZONE:

The Dominated species are *Acacia auriculiformis*, *Azadirachta indica*, , *Borassus flabellifer*, *Acacia nilotica*, *Leucaena leucocephala*, *Prosopis juliflora*, *Acacia leucophloea*, *Cocus nucifera*, *Albizia lebbeck*, etc. The detailed list of plants found in the Buffer zone is given in Table no – 3.24.

Table 3.24: List of Floristic Species in the Buffer Zone

Sl.No	Scientific Name	Family Name	Common Name
Trees			
1	<i>Casuarina equisetifolia</i>	Casuarinaceae	Savukku
2	<i>Citrus lemon</i>	Rutaceae	Ezhumuchaipalam
3	<i>Morinda tinctoria</i>	Rubiaceae	Nuna
4	<i>Lawsonia inermis</i>	Lythraceae	Marudaani
5	<i>Moringa oleifera</i>	Moringaceae	Murunga
6	<i>Pithecellobium dulce</i>	Fabaceae	Kudukapuli
7	<i>Ficus religiosa</i>	legume	Asoka
8	<i>Mangifera indica</i>	Anacardiaceae	Mango
9	<i>Phoenix sylvestris</i>	Arecaceae	Icham
10	<i>Cocos nucifera</i>	Arecaceae	Thennai
11	<i>Thespesia Populnea</i>	Malvaceae	Poovarasan
12	<i>Annona reticulata</i>	Annonaceae	Seethapazham
13	<i>Bambusoideae</i>	Poaceae	Moongil
14	<i>Syzygium cumini</i>	Myrtaceae	Naval maram
15	<i>Ficus benghalensis</i>	Moraceae	Alamaram
16	<i>Muntingia calabura</i>	Muntingiaceae	Ten Pazham
17	<i>Ceiba pentandra</i>	Malvaceae	Ilavam Panju
18	<i>Tamarindus indica</i>	Legumes	Puliyamaram
19	<i>Peltophorum pterocarpum</i>	Fabaceae	Perunkondrai
20	<i>Millettia pinnata</i>	Fabaceae	Pongai
21	<i>Borassus flabellifer</i>	Arecaceae	Panai
22	<i>Musa acuminata</i>	Musaceae	Vazhaimaram
23	<i>Carica papaya L</i>	Caricaceae	Pappali
24	<i>Azadirachta indica</i>	Meliaceae	Vembu
25	<i>Eucalyptus tereticornis</i>	Myrtaceae	Thailam
26	<i>Murraya koenigii</i>	Rutaceae	Karuveppilai
27	<i>Artocarpus heterophyllus</i>	Moraceae	Palamaram
28	<i>Artocarpus integrifolia</i>	Moraceae	Pala maram
29	<i>Samanea saman</i>	Fabaceae	Thungumoonchi

DRAFT EIA/EMP REPORT FOR ROUGHSTONE & GRAVEL QUARRY OF THIRU.K.RAMARAJ IN S.F.NOS. 70/1(P) OVER AN AREA OF 1.06.50HA IN MYLERIPALAYAM VILLAGE, MADUKKARAI TALUK, COIMBATORE DISTRICT, TAMIL NADU.

Sl.No	Scientific Name	Family Name	Common Name
30	Terminalia catappa	Combretaceae	Inguti
31	Prosopis juliflora	Fabaceae	karuvalam
32	Vachellia nilotica	Fabaceae	Karuvelam
33	Leucaena leucocephala	Fabaceae	Soundal
34	Tectona grandis	Verbenaceae	Thekku
Shrubs			
1	Nerium indicum	Apocynaceae	Arali
2	Lantana camara	Verbenaceae	Unni chedi
3	Ixora coccinea	Rubiaceae	Idly Poo
4	Calotropis gigantea	Apocynaceae	Erukku
5	Datura metel	Solanaceae	Umathai
6	Hibiscu rosa-sinensis	Malvaceae	Chemparuthi
7	Senna auriculata	Fabaceae	Avarai
8	Phoenix sp	Arecaceae	Icham
9	Ricinus communis	Euphorbiaceae	Amanakku
10	Mimosa pudica	Mimosaceae	Thottalchinungi
11	Jatropha curcas	Euphorbiaceae	Kattamanakku
12	Anisomeles malabarica	Lamiaceae	Pei veratti
13	Abrus precatorius	Fabaceae	Kundumani
14	Euphorbia antiquorum	Euphorbiaceae	Chaturakalli
15	Cathranthus roseus	Apocynaceae	Nithyakalyani
16	Abutilon indicum	Meliaceae	Thuthi
17	Opuntia	Cactaceae	Nagathali
Herbs			
1	Parthenium hysterophorus	Asteraceae	Parttiniyam
2	Ocimum tenuiflorum	Lamiaceae	Thulasi
3	Tridax procumbens	Asteraceae	Veetukaayapoond
4	Argemone mexicana	Papaveraceae	Eli-yotti
5	Aloe vera	Asphodelaceae	Katrashai
6	Phyllanthus niruri	Phyllanthaceae	Keelaneeli
7	Boerhavia diffusa	Nyctaginaceae	Mukurattai
8	Solanum nigrum	Solanaceae	Manathakkali
9	Amaranthus spinosus	Amaranthaceae	Mullukkeerai
10	Achyranthes aspera	Amaranthaceae	Nayuruvi
11	Acalypha indica	Euphorbiaceae	Kuppamani
12	Leucas aspera	Lamiaceae	Thumbai
13	Celome viscosa	Capparidaceae	Nai kadugu

DRAFT EIA/EMP REPORT FOR ROUGHSTONE & GRAVEL QUARRY OF THIRU.K.RAMARAJ IN S.F.NOS. 70/1(P) OVER AN AREA OF 1.06.50HA IN MYLERIPALAYAM VILLAGE, MADUKKARAI TALUK, COIMBATORE DISTRICT, TAMIL NADU.

Sl.No	Scientific Name	Family Name	Common Name
14	Solanum melongena	Solanaceae	kathirikai
15	Amaranthus polygonoides	Amaranthaceae	Sirukeerai
16	Euphorbia hirta	Euphorbiaceae	Amman pacharisi
Climber			
1	Abrus precatorius L	Fabaceae	Kuntumani
2	Cissus quadrangularis	Vitaceae	Perandai
3	Momordica charantia	Cucurbitaceae	Pavakkai
4	Coccinia grandis	Cucurbitaceae	Kovai
5	Jasminum augustifolium	Oleaceae	Malli
Grasses			
1	Chloris barbata	Amaranthaceae	Chevvarakupul
2	Chloris dolichostachya	Poaceae	Kuruthupillu
3	Dichanthium annulatum	Poaceae	Marvel grass
4	Cyperus rotandus	Poaceae	Korai

3.3.1 FAUNA:

Methodology: Both direct and indirect observation methods were used to survey the fauna. Point Survey Method was used to study the Bird diversity. Besides, discussion with local villagers Collection secondary data from Government records, published reports as well as through discussion with Forest officials, knowledgeable public were used for the study.

Observation: There is no Wild Life Sanctuary or National Park within the study area of 10 km. Domesticated animals are commonly found. No wild mammalian species was directly sighted during the field survey. The list of fauna within the study area is given in Table No – 3.25.

DRAFT EIA/EMP REPORT FOR ROUGHSTONE & GRAVEL QUARRY OF THIRU.K.RAMARAJ IN S.F.NOS. 70/1(P) OVER AN AREA OF 1.06.50HA IN MYLERIPALAYAM VILLAGE, MADUKKARAI TALUK, COIMBATORE DISTRICT, TAMIL NADU.

Table 3.25: List of Fauna in the Buffer Zone

Sl. No	Common Name	Family Name	Scientific Name	Schedule list WPA 1972
Mammals				
1.	Indian palm squirrel	Sciuridae	<i>Funambulus palmarum</i>	Schedule IV
2.	Indian Field Mouse	Muridae	<i>Mus booduga</i>	Schedule IV
3.	Asian Small Mongoose	Herpestidae	<i>Herpestes javanicus</i>	Schedule (Part II)
4.	Indian hare	Leporidae	<i>Lepus nigricollis</i>	Schedule (Part II)
5.	Brown rat	Muridae	<i>Rattus norvegicus</i>	Schedule IV
Birds				
1.	Asian Koel	Cuculidae	<i>Eudynamys</i>	Schedule IV
2.	Cattle egret	Ardeidae	<i>Bubulcus ibis</i>	Schedule IV
3.	Rock pigeon	Columba livi	<i>Columbidae</i>	Schedule IV
4.	Common myna	Sturnidae	<i>Acridotheres tristis</i>	Schedule IV
5.	House crow	Corvidae	<i>Corvus splendens</i>	Schedule V
6.	Sunbird	Nectariniidae	<i>Nectariniidae</i>	Schedule IV
7.	Red Vented Bulbul	Pycnonotidae	<i>Pycnonotus cafer</i>	Schedule IV
8.	Small Bee Eater	Meropidae	<i>Merops orientalis</i>	Schedule IV
9.	Small blue Kingfisher	Alcedinidae	<i>Alcedo atthis</i>	Schedule IV
10.	Rose-ringed parakeet	Psittaculidae	<i>Psittacula krameri</i>	Schedule IV
11.	Asian Palm Swift	Apodidae	<i>Cypsiurus balasiensis</i>	Schedule IV
12.	Common quail	Phasianidae	<i>Coturnix coturnix</i>	Schedule IV
13.	Black drongo	Dicruridae	<i>Dicrurus macrocercus</i>	Schedule IV
14.	Woodpecker bird	Picidae	<i>Picidae</i>	Schedule IV
15.	Two-tailed Sparrow	Dicruridae	<i>Dicrurus macrocercus</i>	Schedule IV
16.	Grey Francolin	Phasianidae	<i>Francolinus pondicerianus</i>	Schedule IV
17.	Wood Sandpiper	Scolopacidae	<i>Tringa glareola</i>	Schedule IV
18.	Blue-Tailed Bee Eater	Meropidae	<i>Merops philippinus</i>	Schedule IV
19.	Indian Roller	Coraciidae	<i>Coracias benghalensis</i>	Schedule IV
20.	Common Swallow	Hirundinidae	<i>Hirundo rustica</i>	Schedule IV
21.	Purple Rumped Sunbird	Nectariniidae	<i>Leptocoma zeylonica</i>	Schedule IV
22.	Common Tailor Bird	Cisticolidae	<i>Orthotomus sutorius</i>	Schedule IV
23.	Purple Sunbird	Chordata	<i>Cinnyris asiaticus</i>	Schedule IV
24.	Lesser Golden Backed Woodpecker	Picidae	<i>Dinopium benghalense</i>	Schedule IV
REPTILES				
1.	Oriental garden lizard	Agamidae	<i>Calotes versicolor</i>	NL
2.	House lizards	Gekkonidae	<i>Hemidactylus flaviviridis</i>	Schedule IV
3.	Indian cobra	Elapid snakes	<i>Naja naja</i>	Sch II (Part II)
4.	Green vine snake	Colubridae	<i>Ahaetulla nasuta</i>	Schedule IV
5.	Rat snake	Colubridae	<i>Ptyas mucosa</i>	Sch IV (Part II)
6.	Common krait	Elapid snakes	<i>Bungarus caeruleus</i>	Schedule IV
7.	Common skink	Scincidae	<i>Mabuya carinatus</i>	NL


3.6 HYDROGEOLOGICAL STUDY:

This section delves into the study of the hydrogeological scenario of the study area to evaluate the impact of mining activities on the nearby areas. The study area is considered to understand the nature of the general hydrogeological conditions of the area.

3.6.1 PHYSIOGRAPHY AND DRAINAGE:

Physiography: The area applied for mining lease is a gentle plain terrain. Part of the lease area has already been mined out.


Drainage: The drainage map prepared from the survey of India topographic maps shows the presence of few streams running in a dendritic pattern. These are mostly rainwater drains and It remains dry for most of the year.

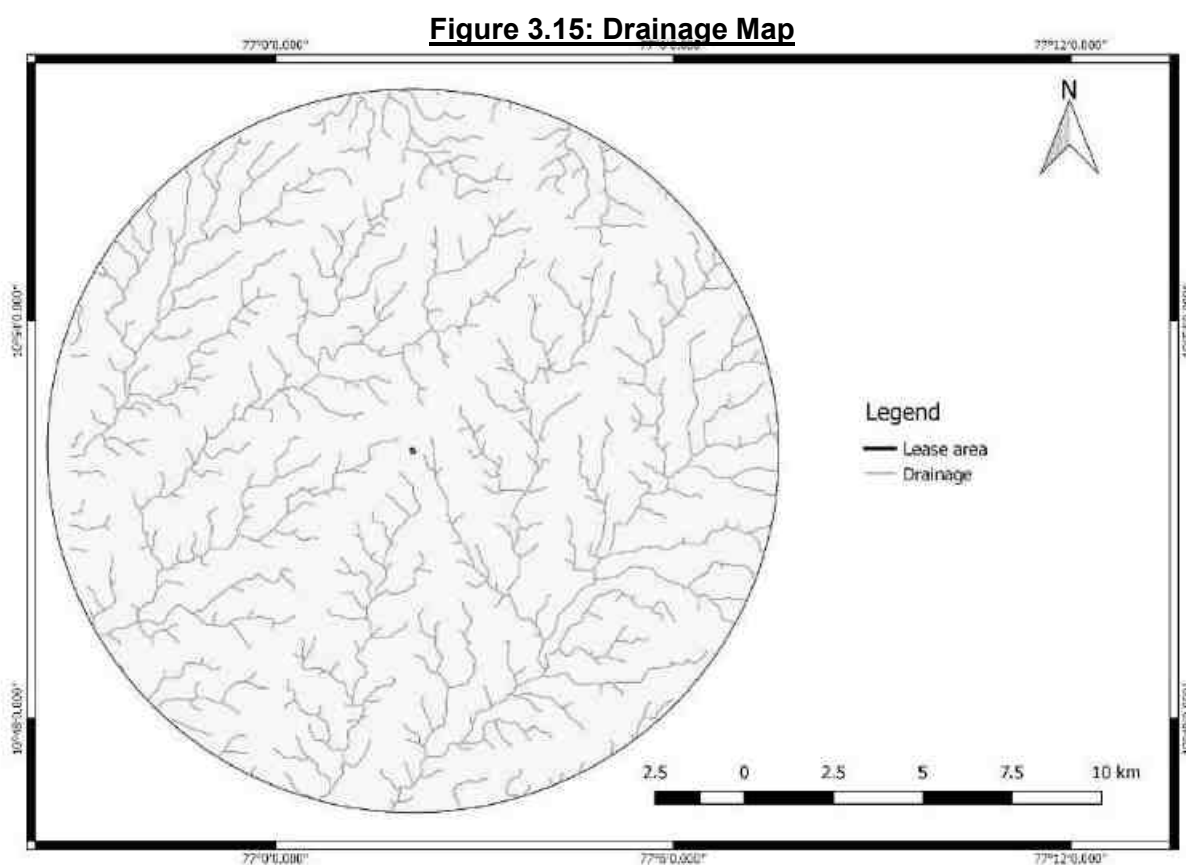

3.6.2 GEOLOGY AND GEOMORPHOLOGY


Geology: The type of rock formation in the study area is composed of Migmatite Gneissic complex and Charnockite Gneissic complex. The lease area falls under Migmatite Gneissic complex category. The geological map is provided below in Figure No.3.16.

Figure 3.16: Geology Map

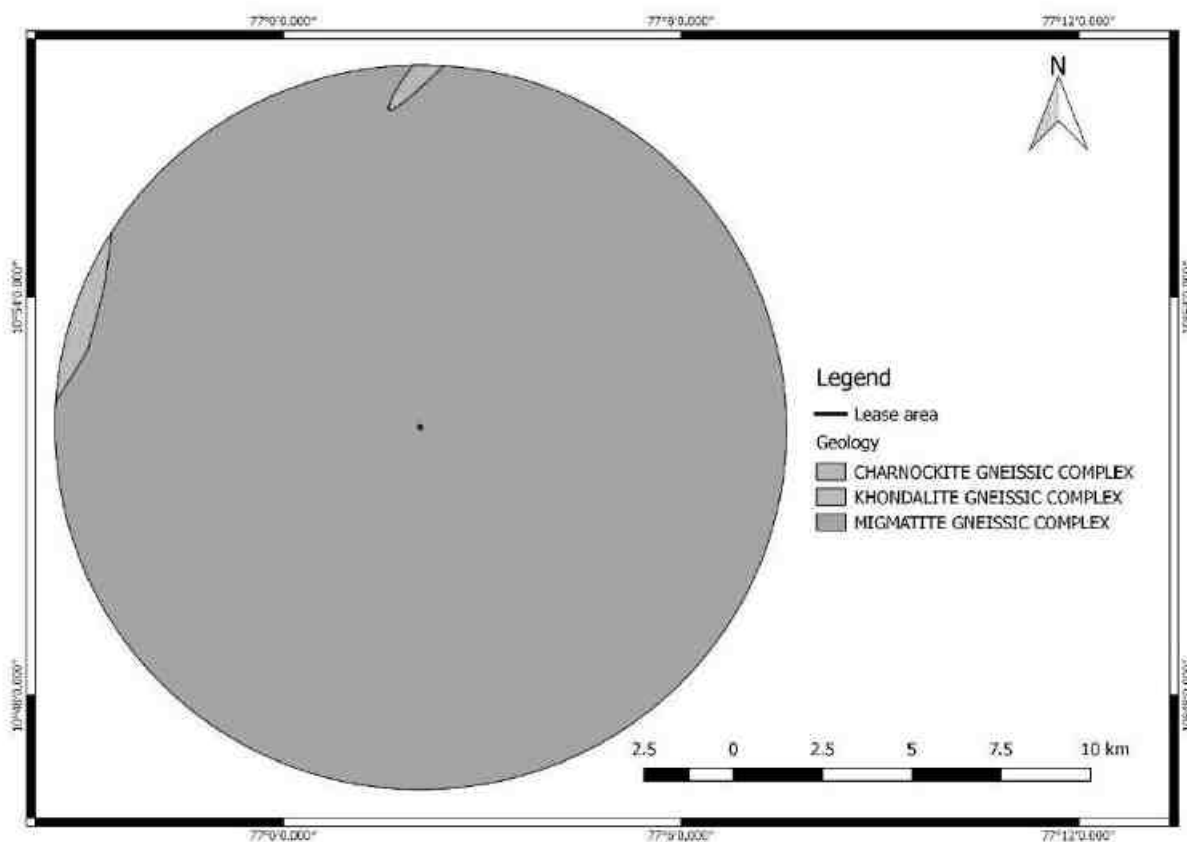


Geomorphology: The geomorphology map of the study derived from the satellite imagery using remote sensing and GIS technique. Predominantly the buffer zone is dominated by Pediment Plain complex, and it is the same category that the lease area also falls under.

Figure 3.17: Geomorphology Map

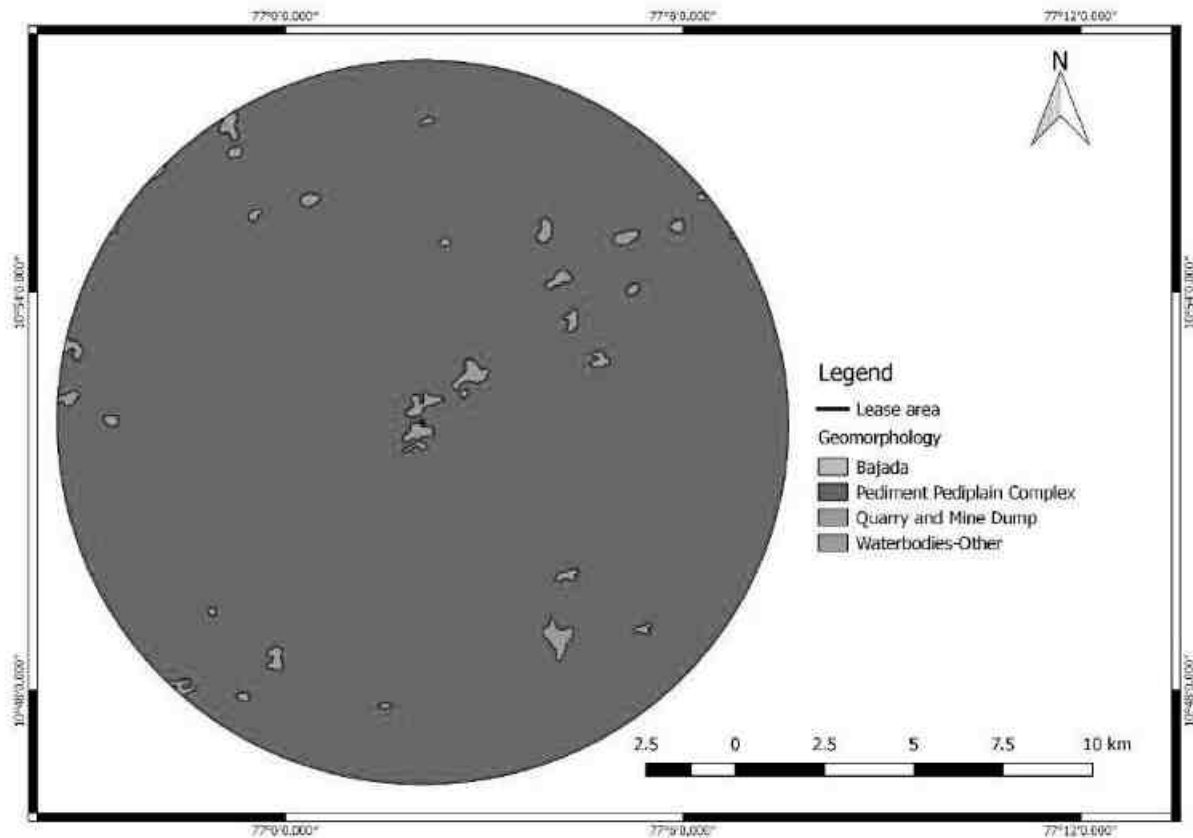


Lithology: The lithological map of the buffer zone has been provided in Figure No.3.18. From this, it is seen that the study area is mainly dominated by Hornblende Biotite Gneiss. The lease area falls under by Hornblende Biotite Gneiss with regards to lithology.

Figure 3.18: Lithology Map

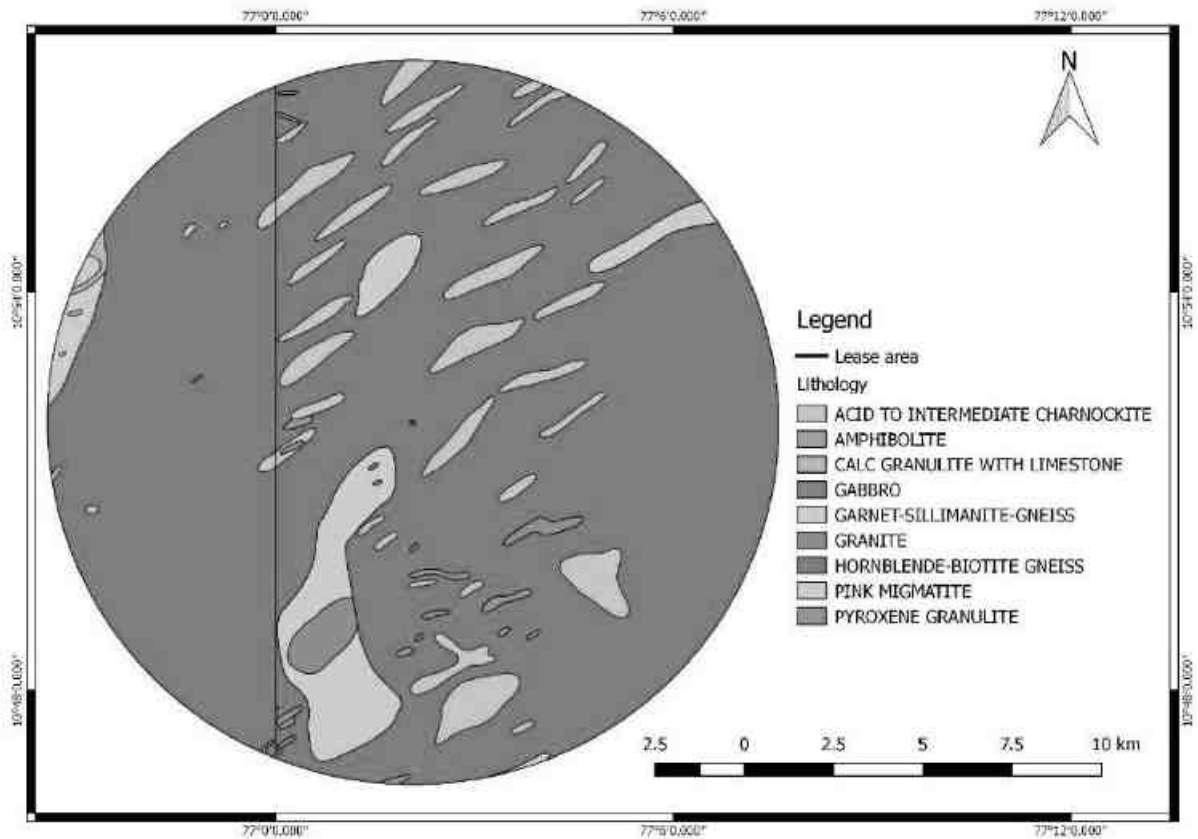

Soil: The study area is characterized by Inceptisol followed by Alfisols, Entisols and Vertisols,.The lease are falls under the category of Inceptisol. The soil map is provided in Figure No.3.19.

Figure 3.19: Soil Map

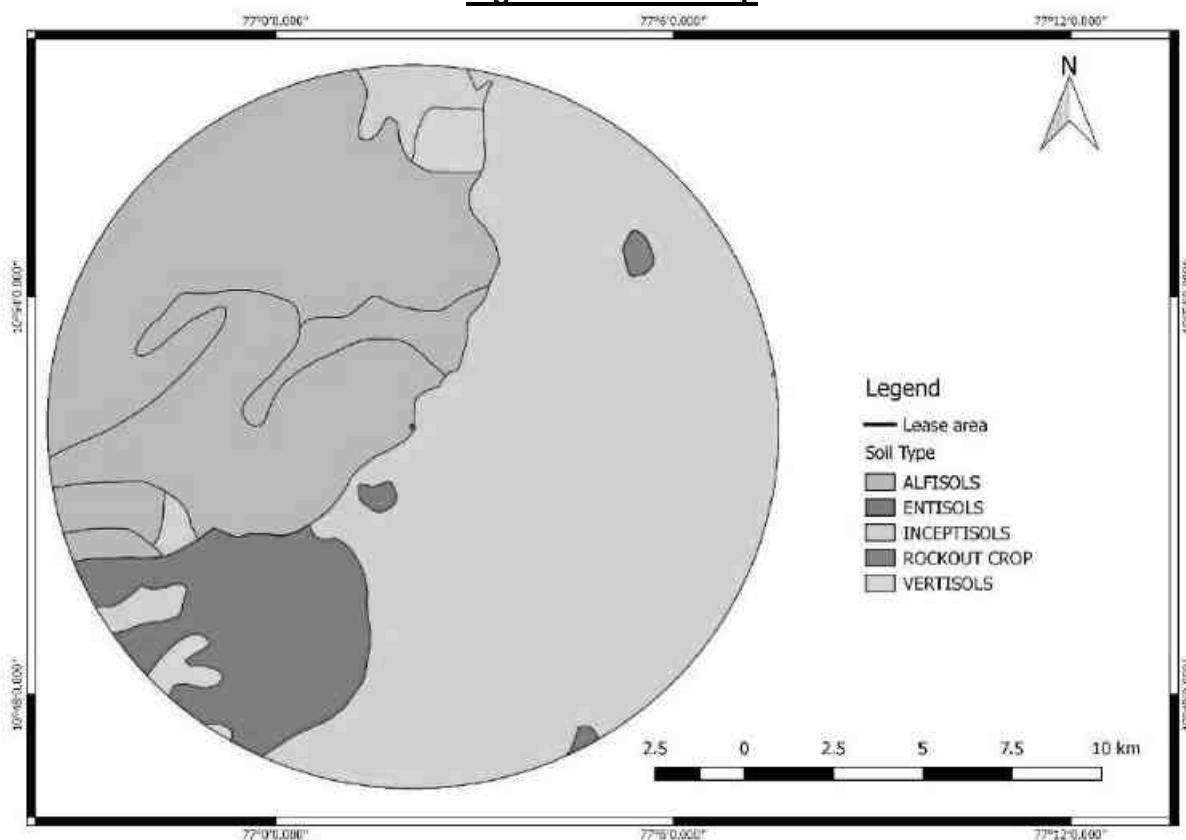

Field investigation:

The district is underlain by hard rock formation fissured and fractured crystalline rocks constitute the important aquifer systems in the district. Study area is dominated with hard Charnockite rock formation.

There are no streams, canals or water bodies within the lease area. The drainage pattern of the area is dendritic – sub dendritic. Drainage pattern is the pattern formed by the streams, rivers, and lakes in a particular drainage basin.

In the study area, the shallow aquifer is developed through dug wells and deeper aquifer through tube wells. Based on the well inventory of the nearby wells & borewells, it is observed that the average water level in the open well is varies from 12m to 15 m BGL whereas the water level in the bore well varies generally from 50m to 55m BGL.

Study of the area shows that the sub-surface formations reveal low to medium recharge potentials. Subsequently hard and massive formations of rock are found. Based on the available information and the geophysical investigations it is observed that the study area is

DRAFT EIA/EMP REPORT FOR ROUGHSTONE & GRAVEL QUARRY OF THIRU.K.RAMARAJ IN S.F.NOS. 70/1(P) OVER AN AREA OF 1.06.50HA IN MYLERIPALAYAM VILLAGE, MADUKKARAI TALUK, COIMBATORE DISTRICT, TAMIL NADU.

of poor to moderate groundwater potential up to 50m to 55m. Besides, the mining area consists of hard compact rock, no major water seepage within the mine is expected. There is no water seepage noticed in to the already quarried deeper pits situated nearby the proposed quarry area. Hence, the quarrying rough stone up to the proposed depth may not have any adverse impact in the area over ground water conditions.

Direct rainfall falling into the mine pit during monsoon season and intermittent seepage from phreatic top layer if any will be collected in the bottom of the mine pit and gainfully used for Greenbelt development, Dust suppression etc.

* * * * *



CHAPTER - IV

ANTICIPATED ENVIRONMENTAL IMPACTS & MITIGATION MEASURES

CHAPTER 4

ANTICIPATED ENVIRONMENTAL IMPACTS AND MITIGATION MEASURES

4.1 GENERAL

In this project, mechanized open cast mining will be undertaken for the extraction of Rough Stone and Gravel. The potential impacts arising from mining and its associated activities have been assessed with respect to various environmental components such as air, water, noise, vibration, land, and transportation. The detailed findings are presented in this chapter.

4.2 AIR ENVIRONMENT:

4.2.1 IMPACTS DUE TO PROJECT OPERATION:

The existing ambient air quality in the area has been described in Chapter-III. The proposed mining and allied operations may cause deterioration of air quality due to pollution arising from the project operation if prompt care is not taken. The principal sources of air pollution in general due to mining and allied activities will be:

- ❖ Excavation of material.
- ❖ Movement of HEMM such as Excavators, tippers etc.
- ❖ Loading and unloading operation
- ❖ Transportation

Besides, Gas emission will occur as a result of operation of diesel driven mining equipment, compressors, transporting vehicles, etc.

Particulate matter smaller than 10 microns, referred to as PM₁₀, can settle in the bronchi and lungs and cause health problems like Bronchitis, Emphysema, Bronchial Asthma, Irritation of mucus membranes of eyes, etc. Particles smaller than 2.5 micrometers (PM_{2.5}), tend to penetrate into the lungs and very small particles (<100 nanometers) may pass through the lungs to affect other organs.

Besides the above mentioned fugitive dust emissions, atmospheric pollution can occur as a result of emission of SO₂, NO_x, CO etc., from diesel driven mining equipment, generator sets, etc. Larger suspended particles are generally filtered in the nose and throat and do not cause problems.



DRAFT EIA/EMP REPORT FOR ROUGHSTONE & GRAVEL QUARRY OF THIRU.K.RAMARAJ IN S.F.NOS. 70/1(P) OVER AN AREA OF 1.06.50HA IN MYLERIPALAYAM VILLAGE, MADUKKARAI TALUK, COIMBATORE DISTRICT, TAMIL NADU.

Higher concentration of SO₂, NO_x, CO may cause some health effect on the human beings exposed to it.

In case of this mine, since the production from this lease is less, the number of equipment to be used, magnitude of operation & consequent impact on the environment will be less. Besides, the following measures will be adopted to control impact on the air quality due to mining operations in the lease area:

Table 4.1: Impact and Mitigation Measures – Air Environment

S.No	Activity	Consequence	Mitigation Measures
1	Drilling	Dust Emanation	Usage of Drill bits in good condition
			Covering of drill holes with wet cloth
			Usage of sharp drill bits for drilling of holes.
			Provision of dust filters / mask to workers working at highly dust prone and affected areas.
2	Blasting	Instantaneous dust emanation	Well-designed blasting parameter, effective stemming to achieve optimum breakage occurs without generating fines.
			Use of appropriate explosives for blasting and avoiding overcharging of blast holes.
			Avoiding blasting during high wind periods where the fine dust is carried out away easily affecting the ambient air quality.
			Use of controlled blasting techniques with Nonel to keep the dust generation, noise as well as vibration level within the prescribed limits.
3	Excavation and Loading	Dust emanation, Gaseous Emission	HEMM will be operated as per the manufacturer's guidelines
			Enclosures for operator cabin.
			Imparting sufficient training to operators on safety and environmental parameters.
			Proper maintenance of hauling equipments.
4	Transportation	Dust emanation, Gaseous Emission	Avoiding overloading of dumpers.
			Regular wetting of transport road using mobile water tanker.
			Proper maintenance of haul road and other roads
			Setting up of tyre wash facility in the transport road.
			Avoiding overloading of tippers
			Covering of loaded tippers with tarpaulins during transportation



DRAFT EIA/EMP REPORT FOR ROUGHSTONE & GRAVEL QUARRY OF THIRU.K.RAMARAJ IN S.F.NOS. 70/1(P) OVER AN AREA OF 1.06.50HA IN MYLERIPALAYAM VILLAGE, MADUKKARAI TALUK, COIMBATORE DISTRICT, TAMIL NADU.

			Vehicular emissions will be controlled through regular and proper preventive maintenance schedules and emissions tests are done with diesel smoke meter equipment to ensure emission values.
5	Others	Dust emanation, Gaseous Emission	Development of greenbelt / barriers around mine in the safety zone and carrying out plantation within the lease area.

Due to adoption of all these measures, no major impact on air quality is envisaged due to this proposed opencast mining operation.

Considering that the quantum of production is less, only 1 excavator, 1 tipper will be engaged. These equipment's will be properly and regularly maintained. Besides, as mentioned earlier, regular vehicular emission tests will be done for the transport vehicles to ensure minimal impact due to carbon emissions. To further mediate the carbon emissions, a good greenbelt and plantation plan has been planned wherein 500 number of plants will be planted in and around the lease area.

The impact on air quality due to the proposed project is estimated using AERMOD View Gaussian Plume Air Dispersion Model developed by Lakes Environmental Software which is based on steady state Gaussian plume dispersion. Details of the modeling study / estimation including the modeling technique and post project air quality values are elaborated in the following paras.

4.2.2 AIR QUALITY IMPACT PREDICTION:

The model simulations are done for the air pollutant arising from the mining operations, namely, PM₁₀, PM_{2.5}. **Ground Level Concentration (GLC)** have been computed using hourly meteorological data.

Table 4.2: Emission Sources

ACTIVITY	SOURCE TYPE
A. Mining operations	Open pit
B. Transportation	Line

4.2.2.1 Emission Factors

Quantification of particulate emissions has been carried out by the emission factor technique. Emission factor is a statistical average of the rate at which a pollutant is released during an activity. This factor when multiplied by the level of that activity in a given situation will give the



DRAFT EIA/EMP REPORT FOR ROUGHSTONE & GRAVEL QUARRY OF THIRU.K.RAMARAJ IN S.F.NOS. 70/1(P) OVER AN AREA OF 1.06.50HA IN MYLERIPALAYAM VILLAGE, MADUKKARAI TALUK, COIMBATORE DISTRICT, TAMIL NADU.

overall effect. Fugitive emissions have been predicted by using standard equations given and suggested by AP-42, USEPA(1998), Coal S&T Project and for mining & allied activities and other factors. The modeling is done for the peak production to know the worst case scenario. The details of the emission factors used for the same is provided below:

Table 4.3: Emission Factors

S.No	Activity	PM10	PM2.5	Unit
1	Ore Loading	1.5×10^{-3}	2.1×10^{-4}	Kg/T
2	OB Loading	1.4×10^{-4}	1.5×10^{-5}	Kg/T
3	Hauling inside lease area	0.19	0.019	g/VKT
4	Drilling	0.1	0.04	Kg/hole

4.2.2.2 Emission Rates:

Based on the emission factors, after adopting necessary control measures like dust suppression, Proper maintenance of HEMM, using better quality diesel, using latest equipment, proper maintenance of roads, etc. the expected emission rate due to various operations in this project is calculated and is given below:

Table 4.4: Emission Rate

ACTIVITIES/POLLUTANTS	PM ₁₀ (g/sec)	PM _{2.5} (g/sec)
Ore Loading	0.02	0.00
Drilling	0.04	0.02
Hauling inside lease area	0.04	0.01
Total	0.11	0.03

- A. Emission Source Coordinates:** The center of mine was assumed (0, 0) in the mathematical modeling.
- B. Meteorological Conditions Used In Predictions:** The hourly meteorological data has been generated for the monitoring period and the same has been used in the predictions.

4.2.2.3 Results and Discussions

Table 4.5: Peak Incremental Concentration

S.No	Parameters	Peak incremental concentration $\mu\text{g}/\text{m}^3$
1	PM ₁₀	0.61
2	PM _{2.5}	0.25




DRAFT EIA/EMP REPORT FOR ROUGHSTONE & GRAVEL QUARRY OF THIRU.K.RAMARAJ IN S.F.NOS. 70/1(P) OVER AN AREA OF 1.06.50HA IN MYLERIPALAYAM VILLAGE, MADUKKARAI TALUK, COIMBATORE DISTRICT, TAMIL NADU.

It is observed that the peak incremental concentration for PM_{10} , $PM_{2.5}$ occurring very near the source. At away from the source the values are getting reduced due to dispersion effects. The Isopleths of PM_{10} , $PM_{2.5}$ concentrations with control measures scenario have also been drawn and these are given in **Figure No.4.1 and 4.2**. The incremental and predicted concentrations at the locations of ambient air quality have been discussed in the following section.




DRAFT EIA/EMP REPORT FOR ROUGHSTONE & GRAVEL QUARRY OF THIRU.K.RAMARAJ IN S.F.NOS. 70/1(P) OVER AN AREA OF 1.06.50HA IN MYLERIPALAYAM VILLAGE, MADUKKARAI TALUK, COIMBATORE DISTRICT, TAMIL NADU.

Figure 4.1: Isopleth of GLC Prediction for PM₁₀

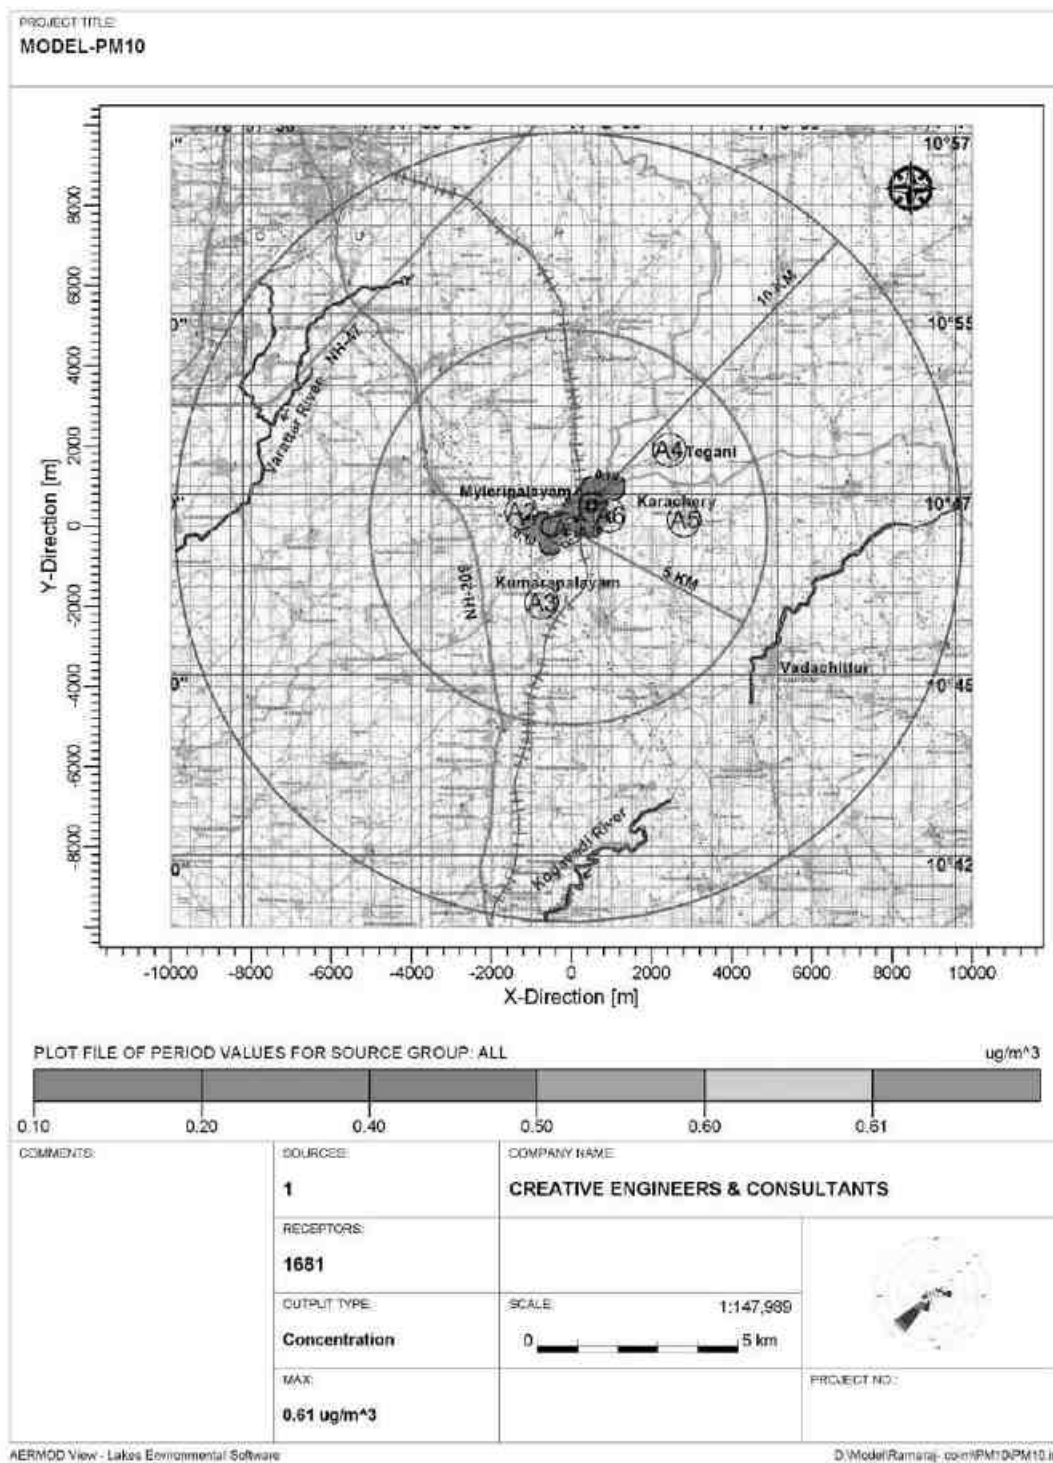

DRAFT EIA/EMP REPORT FOR ROUGHSTONE & GRAVEL QUARRY OF THIRU.K.RAMARAJ IN S.F.NOS. 70/1(P) OVER AN AREA OF 1.06.50HA IN MYLERIPALAYAM VILLAGE, MADUKKARAI TALUK, COIMBATORE DISTRICT, TAMIL NADU.

Figure 4.2: Isopleth of GLC Prediction for PM_{2.5}

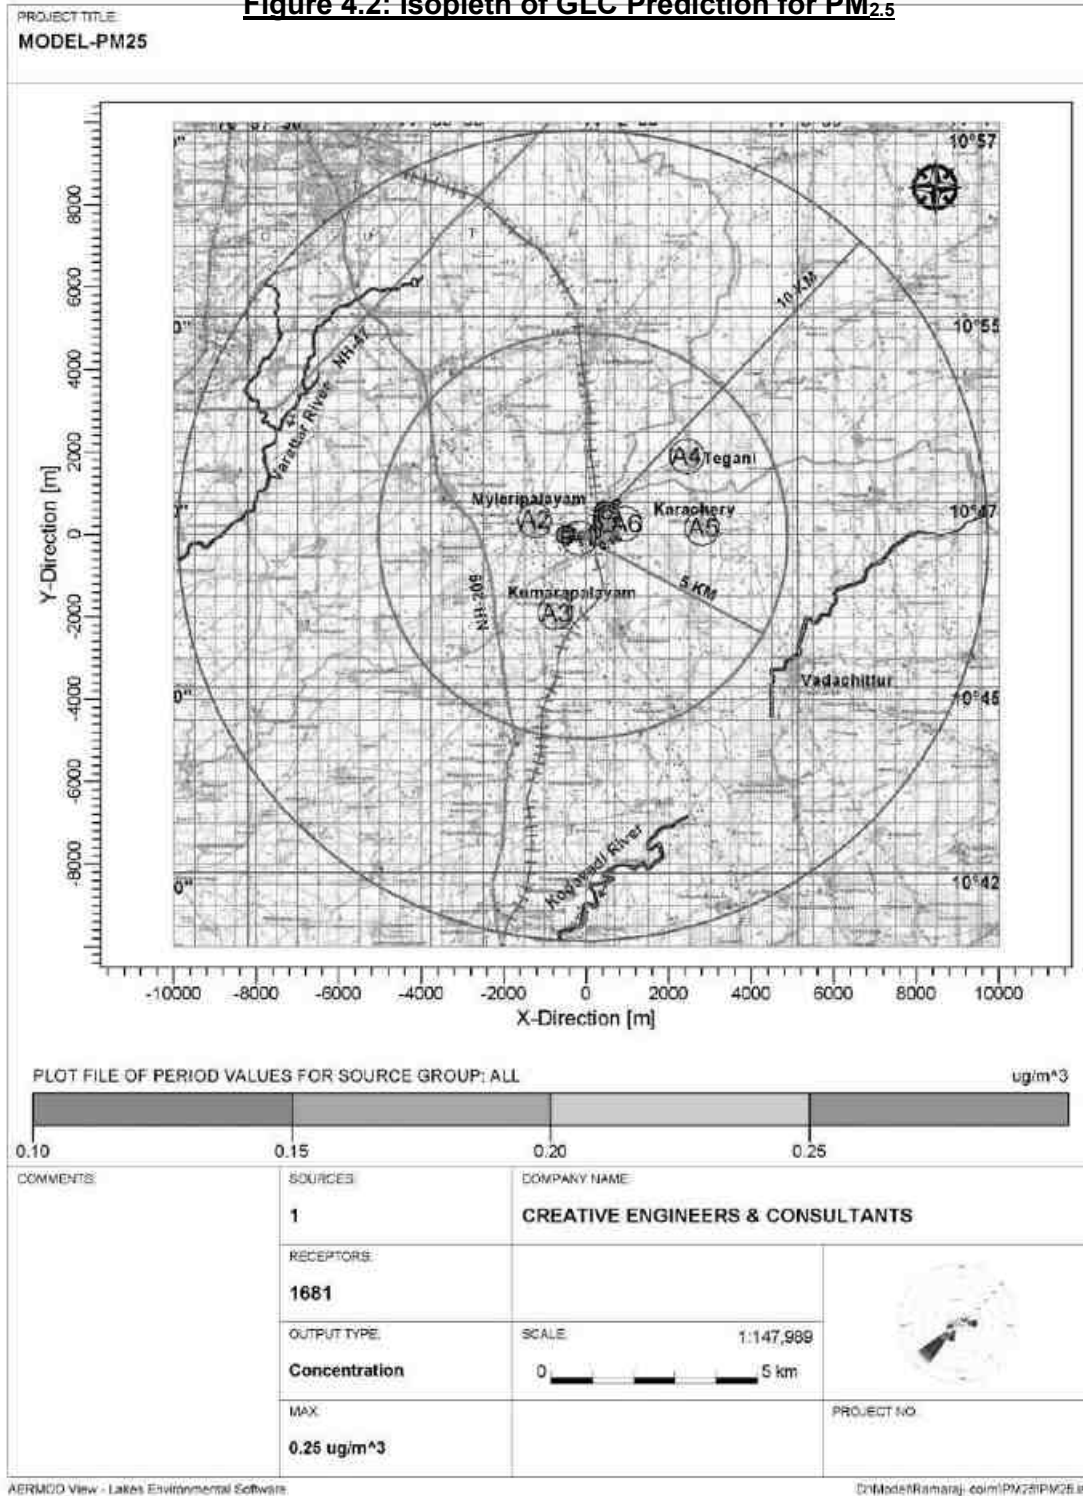

DRAFT EIA/EMP REPORT FOR ROUGHSTONE & GRAVEL QUARRY OF THIRU.K.RAMARAJ IN S.F.NOS. 70/1(P) OVER AN AREA OF 1.06.50HA IN MYLERIPALAYAM VILLAGE, MADUKKARAI TALUK, COIMBATORE DISTRICT, TAMIL NADU.

Predicted Ambient Air Quality:

The post project Concentrations of PM₁₀, PM_{2.5}, (GLC) (base line + incremental) after adopting necessary control measures is given in Table No - 4.6 to 4.7.

Table 4.6: Concentrations Of PM₁₀ after Project Implementation

Values in $\mu\text{g}/\text{m}^3$

S. No	Location	Background Concentration	Predicted Incremental Concentration	Post Project Concentration	Statutory Limits
1	A1-Project Site	63.0	<1.0	64.0	-
2	A2- Myleripalayam Village	62.0	<1.0	63.0	100
3	A3-Kumaarapalayam Village	58.0	<1.0	59.0	
4	A4-Tegani Village	57.0	<1.0	58.0	
5	A5-Karachery Village	57.0	<1.0	58.0	
	A6-Near Shanmugam Quarry	55.0	<1.0	56.0	

Table 4.7: Concentrations Of PM_{2.5} after Project Implementation

Values in $\mu\text{g}/\text{m}^3$

S. No	Location	Background Concentration	Predicted Incremental Concentration	Post Project Concentration	Statutory Limits
1	A1-Project Site	25.0	<1.0	26.0	-
2	A2- Myleripalayam Village	24.0	<1.0	25.0	60
3	A3-Kumaarapalayam Village	23.0	<1.0	24.0	
4	A4-Tegani Village	27.0	<1.0	28.0	
5	A5-Karachery Village	24.0	<1.0	25.0	
6	A6-Near Shanmugam Quarry	24.0	<1.0	26.0	

The ambient air quality assessment carried out for PM₁₀ and PM_{2.5} indicates that the background concentrations in the study area are within the prescribed National Ambient Air Quality Standards (NAAQS). The predicted incremental concentrations due to the proposed mining operations are negligible. Consequently, the post-project concentrations are estimated to remain in the range of 58.0–64.0 $\mu\text{g}/\text{m}^3$ for PM₁₀ and 24.0–28.0 $\mu\text{g}/\text{m}^3$ for PM_{2.5}, which are well below the statutory limits of 100 $\mu\text{g}/\text{m}^3$ and 60 $\mu\text{g}/\text{m}^3$ respectively. This clearly demonstrates that the proposed mechanized quarrying activities will not cause any significant deterioration in the ambient air quality of the surrounding villages and the impact on the environment is expected to be minimal provided the suggested mitigative measures are followed.




4.3 WATER ENVIRONMENT:

4.3.1 WATER REQUIREMENT:

The total water requirement for this project will be 8.0 KLD comprising 1.0 KLD for drinking water and domestic use, 5.0 KLD for dust suppression and 2.0 KLD for greenbelt. The water will be sourced initially from outside agencies. Later the rainwater collected in the mine pit sump will be used for this purpose. The water balance diagram for the same is shown in **Figure No 4.3.**

Figure 4.3: Water Balance Diagram

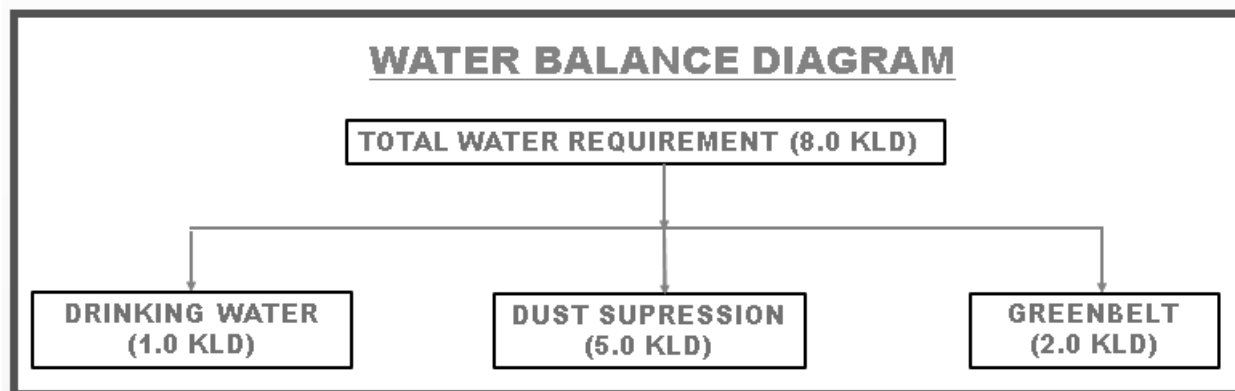

4.3.2 SOURCES OF WATER POLLUTION:

The existing water environment showing water quality at different sampling stations in the area has been described in Chapter-III.

Direct impact on human beings due to poor water quality consequent to mining operation can lead to various water borne diseases like diarrhea, jaundice, dysentery, typhoid, etc. Besides, the polluted water may not be useful for animal or human consumption, vegetation and may affect aquatic life, if effluents are not properly treated to remove the harmful pollutants.

The major sources of water pollution normally associated due to mining and allied operations are:

- a. Domestic effluent.
- b. Washouts from stockpile if any.
- c. Disturbance to drainage course in the project area
- d. Generation of mine pit water pumped out from deeper workings if any.

4.3.3 TREATMENT SCHEME:

A. Generation of domestic effluent:


The domestic sewage to be generated from the project will be collected in septic tank with soak pits.

B. Washouts from overburden, ore stockpile, etc.

Since the entire material from the quarry face will be directly dispatched to the consumers, there will not be any stockpiles. There are no waste dumps in this quarry. As such there will not be any wash out due to stock pile or waste dumps.

The rain water falling in the quarry will be harvested in the sump at the lowest level of the quarry. This sump will act as a settling pond to prevent solids escaping along with discharge, before outlet. etc. "To manage surface runoff, a garland drain of approximately 450 m length will be constructed encircling the quarry and directed towards a settling pond proposed at the north east corner, provided with silt traps to arrest suspended solids. The clarified supernatant from the settling pond will be systematically discharged for utilization by downstream users, thereby ensuring effective stormwater management and prevention of siltation in the surrounding areas. This design approach is in line with statutory guidelines and best environmental management practices, as it facilitates controlled drainage, minimizes soil erosion, prevents contamination of nearby water bodies, and promotes safe reuse of stormwater. The surface runoff management structures diagram is given in **Figure No 4.4.**

Figure 4.4: Surface Runoff Management Structures

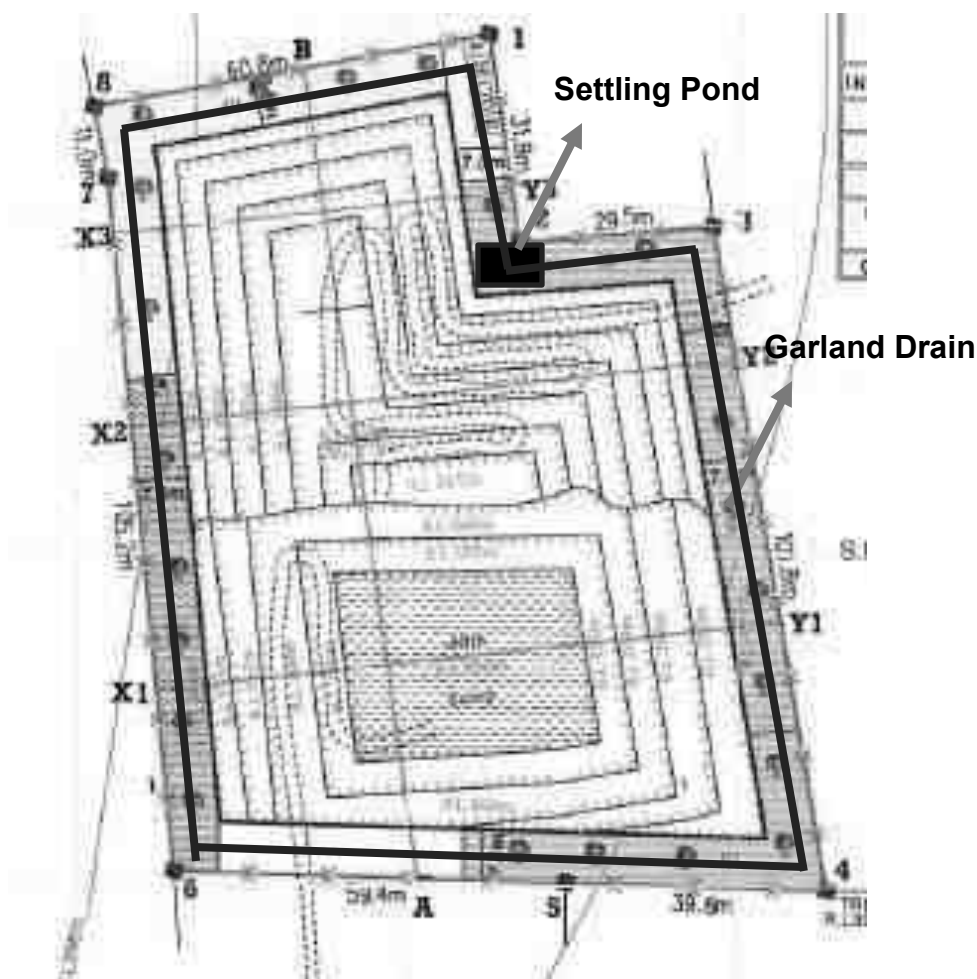

C. Disturbance to drainage courses

There are no streams, canals or water bodies in and around the lease area. There is no proposal to discharge any effluent into these water bodies. No major impact is envisaged on the nearby water bodies due to project operations.

D. Generation of mine pit water pumped out from deeper workings if any.

The occurrence and movement of groundwater in hard rock formations are restricted to the porous zones of weathered formations and the open systems of fractures, fissures and joints. Generally, in hard rock regions, occurrence of weathered thickness is discontinuous both in space and depth.

Hence recharge of groundwater in hard rock formations is influenced by the intensity and depth of weathering.

Study of the area shows that the sub-surface formations are compact with less intergranular porosity and fractures leading to less permeability and transmissivity values and as such the ground water level in this area is deep from surface. Subsequently hard and massive formations of rock are found. Based on the available information and the geophysical investigations it is observed that the study area is of poor to moderate groundwater potential up to 60m to 65m. Besides, the mining area consists of hard compact rock, no major water seepage within the mine is expected. The ultimate pit depth of mining is 48m. The ground water table in this area is below this level. Hence, ground water intersection is not envisaged and ground water will not be affected appreciably due to the quarrying operation. There is no water seepage noticed in the already quarried deeper pits situated nearby the proposed quarry area. Hence, the quarrying rough stone up to the proposed depth may not have any adverse impact in the area over ground water conditions.

As mentioned earlier, the rainfall will be collected in the mine floor sump and advantageously used. Excess water if any in the sump will be pumped to settling pond for downstream users.

4.3.4 REDUCING WATER CONSUMPTION OVER THE YEARS:

4.3.4.1 GENERAL METHODS:

Use of water will be monitored and used to the minimum required. Awareness will be spread to the employees about the importance of water conservation. Tap and showers will be turned off immediately after use and any leaks will be monitored and immediately controlled. Water requirement for greenbelt and dust suppression can be reduced by choosing the native plants/trees species with low water requirement and which can sustain in such conditions for greenbelt/ plantation and also optimum usage to the required minimum. While the dust suppression itself is an important method of pollution control for air pollution due to dust, the water consumption will be monitored strictly. The water tanker will be examined for any sources of leaks and if found will be immediately sealed so that water can be utilized for dust suppression effectively without loss.



4.3.4.2 RAINWATER HARVESTING PLAN

Since the lease proximate areas are with less water potential and the rainwater is the major source for replenishment of ground water, effective rainwater harvesting and other water augmentation measures are proposed in this project.

- a) Development of garland drain around the quarry connected to settling tank.
- b) Cleaning of drain periodically to prevent siltation
- c) The supernatant clear water from the settling pond will drain into the nearby drainage.
- d) Utilizing the rainwater harvested in the mine pit to meet the water requirement of the project.
- e) Excess water, if any in consultation with local villagers and in line with government practices shall be provided to the downstream users.

4.4 NOISE AND VIBRATION:

4.4.1 NOISE ENVIRONMENT:

The ambient noise levels in the study area have been discussed in Chapter - III. The data shows that the existing noise levels are within statutory tolerable limits. The impact prediction and control measure for noise environment due to mining and allied activities is described below:

4.4.1.1 IMPACT PREDICTION DUE TO NOISE:

Noise is one of the inevitable causes of pollution in mining operations, largely due to the extensive mechanization adopted. Besides, other operations such as drilling, blasting, movement of vehicles, etc., also produce noise of considerable magnitude in mining operations. The main sources of noise and expected levels are given below in **Table no – 4.8.**

Table 4.8: Main Sources of Noise

Sl. No.	Source	Inside Cabin	Noise level at dB(A) 10 m. from source
1	Shovel	84-91	59-68
2.	Dumpers/Tippers	87-96	75-85
3.	Drill	88- 95	75-83



DRAFT EIA/EMP REPORT FOR ROUGHSTONE & GRAVEL QUARRY OF THIRU.K.RAMARAJ IN S.F.NOS. 70/1(P) OVER AN AREA OF 1.06.50HA IN MYLERIPALAYAM VILLAGE, MADUKKARAI TALUK, COIMBATORE DISTRICT, TAMIL NADU.

Prolonged exposure to a high noise level is harmful to the human auditory system and can create mental fatigue, rebellious attitude, annoyance and carelessness, which may lead to neglect of work and also result in accidents. The impact of noise level as per World Health Organization's 1986 notification is given below in **Table No - 4.9**.

Table 4.9: Impact of Noise Levels

NOISE LEVELS	ADVERSE EFFECTS
90-115 dB	Partial deafness and nervous irritability
> 115 dB	Permanent deafness
Impulsive noise (>90dB)	Frightens livestock grazing in the nearby areas

OSHA (Occupational Safety and Health Administration), USA and other similar organisations stipulate that noise level up to 90 dB(A) is acceptable for eight hours exposure Leq (Equivalent sound level) (8hrs) per day. The Directorate General of Mines Safety, in circular No. DG (Tech)/18 of 1975, has prescribed the noise level in mining occupations (TLV) for workers, in an 8 hour shift period with unprotected ear as 90 dB(A) or less.

The noise will be felt only near the active sources. There will be considerable reduction in the noise level due to the absorption factor, environmental surroundings and other attenuation factors. As far as absorption factor is concerned, If the ground cover is vegetated or has a soft texture, sound will decrease at the rate of 4.5 dB(A) every time the distance between the source and the observer is doubled. Besides, there will be shielding factor, which takes into account the environmental surroundings. With every 30m of dense land scape vegetation, 5 dB(A) of additional attenuation can be obtained up to a maximum of 10 dB(A). As such at away places the effect of noise will not be felt.

Anticipated noise levels resulting from operation of the various machineries like excavator, tippers, drill have been computed using point source model. Computation of cumulative noise levels at the nearby villages is made based on the assumption that there are no attenuation paths between the source and the boundary.

Noise modeling is carried out using the following formula:



DRAFT EIA/EMP REPORT FOR ROUGHSTONE & GRAVEL QUARRY OF THIRU.K.RAMARAJ IN S.F.NOS. 70/1(P) OVER AN AREA OF 1.06.50HA IN MYLERIPALAYAM VILLAGE, MADUKKARAI TALUK, COIMBATORE DISTRICT, TAMIL NADU.

$Lp2 = Lp1 - 20 \log R2/R1$, Where, $Lp1$ and $Lp2$ are sound pressure levels at points located at distances $R1$ and $R2$ respectively from the source. The study results are as follows:

Table 4.10: Post Project Noise Levels

Sl.No	Location	Baseline Day Eq.in dB(A)	Post project noise Eq in dB(A)	Limit dB(A) as per MoEF&CC
1.	A1-Project Site	53.8	54.0	90
2.	A2- Myleripalayam Village	54.6	54.7	55
3	A3-Kumaarapalayam Village	49.6	49.8	55
4	A4-Tegani Village	50.7	50.9	55
5	A5-Karachery Village	50.0	50.2	55
6	A6-Near Shanmugam Quarry	52.4	52.8	90

From the studies, it is found that the predicted Noise Levels due to mining operations at the periphery of the mine lease itself will be less even without considering any attenuation factor. However, practically there will be attenuation due to vegetation etc., and as such there will not be any adverse noise propagation outside the lease boundary. Since the habitations are also away the effect of noise due to mining operations will not be felt at all in the surrounding villages.

4.4.1.2 CONTROL MEASURES FOR NOISE ENVIRONMENT:

Hence, by following mitigative measures for noise control, the impact on noise levels will be insignificant:

- Planting rows of native trees along roads, around mine area and other noise generating centers to act as acoustic barriers.
- Sound proof operator's cabin for equipments like shovel, tippers, etc.
- Proper and regular maintenance of equipments may lead to less noise generation.
- Providing in-built mechanism for reducing sound emissions.
- Providing earplugs to workers exposed to higher noise level.
- Conducting regular health check-up of workers including Audiometry test for the workers engaged in noise prone area.



- Displaying the noise level status of operational machinery on the machines to know the extent of noise level and to control the time to which the worker is exposed to higher noise levels.
- Provision of tin net on the southern side and green net along the lease periphery on the other sides.

Further green belt and afforestation will be planned and executed to abate noise and dust propagation in the area.

4.4.2 GROUND VIBRATIONAL DUE TO BLASTING EFFECTS:

Vibrations due to blasting may cause damage to nearby structures, if appropriate control measures are not adopted. Flyrock is another possible damage causing outcome of blasting. There are many factors, which influence these, like long explosive column with little stemming column, improper burden, loose material or pebbles near holes and long water columns in the holes.

Since the production from this lease is very low, the no of holes and the quantum of explosives to be used for blasting will be negligible .

The following control measures will be planned to reduce ground vibratory conditions to sustainable statutory limits:

- 1) Carrying out controlled blasting using Nonel delay detonator.
- 2) Optimum design for burden and spacing.
- 3) Reducing explosive charge per delay to minimum.
- 4) The peak particle velocity (PPV) of ground vibration will be kept very low through optimally controlled blasting techniques, after necessary field trials.
- 5) To contain fly rocks, stemming column to be less than burden of the hole. Blasting area will also be muffled, if necessary, to stop fly rocks propagation.
- 6) Blasting will not be carried out when strong winds are. Blasting will be done during midday time.



- 7) Controlled blasting to avoid tension cracks which may endanger the stability of bench slopes in the mine.
- 8) Proper care and supervision during blasting by a competent and experienced person to be carried out.
- 9) Having different blasting time for the leases in the cluster.

By adoption of above measures, it will be ensured that the ground level vibration due to blasting are maintained within the limits prescribed by DGMS, Dhanbad at the mining areas vide Circular No. 7 dated 29 -08-1997 as given below

Table 4.11: Permissible Peak Particle Velocity (PPV) In Mining Areas

In mm/sec

Type of structure	Dominant excitation frequency Hz		
	<8 Hz	8-25 Hz	>25 Hz
A. Buildings/structures not belonging to owner			
Domestic houses /structures (Kuchha brick and cement)	5	10	15
Industrial buildings (RCC and framed structures)	10	20	25
Objects of historical importance and sensitive structures.	2	5	10
B. Building belonging to owner with limited span of life			
Domestic houses/structures (Kuchha brick and cement)	10	15	25
Industrial buildings (RCC and framed structures)	15	25	50

Besides, different blasting time for the projects in the vicinity is suggested and the timing is to be mentioned in the display board in the respective mines entrance.

4.5 LAND ENVIRONMENT:

The lease area of 1.06.50Ha in S.F.Nos.70/1(P) is a patta land, applicant got consent from the pattadhar and got registered. The proponent has operated this lease in the previous lease periods also. As such part of the lease area is already mined and exposed with rock. The present land use pattern, and the post mining land use pattern is shown below:



Table 4.12: Land Use Table

S.No	Land Use	Present Land Use (Ha)	At the end of lease period(Ha)
1	Quarrying Pit	0.40.75	0.75.10
2	Infrastructure	--	0.01.00
3	Roads	0.00.10	0.01.10
4	Green Belt	0.29.30	0.29.30
5	Unutilized	0.36.35	--
	Total	1.06.50	1.06.50

4.5.1 LAND RECLAMATION:

There is no waste generation anticipated in this quarry operation since the entire excavated material will be utilized. Hence, there is no external overburden dump involved. At the end of the period, In the post mining stage, the mine pit area of 0.75.10 Ha will be left as a water body. Plantation will be carried out over 0.29.30Ha and 0.01Ha will be left as road and infrasturcture. Overall about 500 trees will be planted in and around the lease area during the plan period.

Table 4.13: Land Use During Post Operational Period

S.No	Description	Land use (Ha.)			
		Plantation	Water body	Others	Total
1	Quarrying Pit	-	0.75.10	-	0.75.10
2	Infrastructure	0.01.00	-	-	0.01.00
3	Road		-	0.01.10	0.01.10
4	Green Belt	0.29.30	-	-	0.29.30
	TOTAL	0.30.40	0.75.10	0.01.10	1.06.50

Entire mined out area will be properly fenced to prevent inadvertent entry of men and animals. In the post mining stage the entire mined out area shall be used as a rainwater harvesting pond.

4.6 BIOLOGICAL ENVIRONMENT:

4.6.1 EXISTING FLORA AND FAUNA:

Major part of the lease area is already mined and exposed with rock. The remaining area is also free from vegetation other than plantation carried out by the lessee. Details of flora/fauna pattern in core and buffer zones have been described in chapter - III.



4.6.2 IMPACT OF MINING ON BIOLOGICAL ENVIRONMENT:

The significance of impact on biological environment due to mining and allied activities on various fronts is described below:

Table 4.14: Impact on Biological Environment

S. No	IMPACTS	OBSERVATIONS
1	Clearance of vegetation due to mining and allied activities	Part of the lease area is already mined out during the previous lease & the remaining land is barren without any major vegetation other than peripheral safety zone plantation carried out by the PP.
2	Retardation of tree growth, tip burning, etc, due to deposition of dust and the Particulate matter generated from the mining operation.	Necessary mitigative measures like dust suppression, proper maintenance of equipment's, roads will be carried out to prevent dust generation.
3	Proximity to national park/ wildlife sanctuary/reserve forest/ mangroves/ Coastline /estuary/sea	The mining lease area and the 10 km buffer zone from the periphery of the core zone is devoid of declared ecologically sensitive features like national parks, biospheres, sanctuaries, etc.
4	Release of effluents into water body that also supplies water to wildlife	There is no proposal to discharge any effluent into nearby water bodies.
5	Proposed project could increase siltation that would affect nearby biodiversity area	Surface runoff management structures like garland drain, settling pond etc. as explained above will be constructed and as such there will not be any appreciable impact on surface water quality which in turn can affect the bio diversity of the area.
6	Activities of the project affects the breeding/nesting sites of birds and animals	In the present ML area, there is no wetland. A migratory bird needs sufficient wetlands with sufficient food, shelter, roosting places and nesting places which is not possible here.



DRAFT EIA/EMP REPORT FOR ROUGHSTONE & GRAVEL QUARRY OF THIRU.K.RAMARAJ IN S.F.NOS. 70/1(P) OVER AN AREA OF 1.06.50HA IN MYLERIPALAYAM VILLAGE, MADUKKARAI TALUK, COIMBATORE DISTRICT, TAMIL NADU.

7	Located near an area populated by rare or endangered species	There are no rare or endangered species in the nearby area
8	Risk of fall/slip or cause death to wild animals due to project activities	In the post mining stage fencing is proposed all around the mined-out void to prevent falling of animals in the mine pits.
9	Project affects the forest-based livelihood/any specific forest product on which local livelihood depends	Not applicable
10	Project likely to affect migration routes	No migration routes are in the area.
11	Project likely to affect flora of an area, which have medicinal value	No such significantly important medicinal value species within the ML area and its nearby region.
12	The project likely to affect wetlands, fish breeding grounds, marine ecology	There are no any wetlands, fish breeding grounds, marine ecology nearby the ML area which will be affected due to this project.
13	Project affects the Agriculture, Forestry and Traditional Practices	Due to rocky land formation, undependable rainfall, poor soil condition, absence of irrigational source or water bodies, deep ground water occurrence, little seasonal agricultural activities are carried out in the area. Only patches of coconut cultivation is observed
14	Impact on soil health and biodiversity	The lease area is Plain topography land only (Photograph of the site attached in Chapter-II). Besides, there is no waste generation, disposal or stacking involved in this project. As such no loss of soil health and Bio-diversity is expected.
15	Climate change leading to droughts, floods, etc.	•As such the production from this lease is very low to cause any appreciable impact.
16	Pollution leading to release of greenhouse gases (GHG) rise in temperature (Hydrothermal/ Geothermal effect due to destruction in environment, Bio-geochemical processes and its foot prints including	•No adverse impact on the surrounding environment is envisaged since the number of equipment's to be used to achieve this small production is very less and the magnitude of operation is of very small level. •Besides, as is it a mining project, no adverse generation of heat is envisaged.



DRAFT EIA/EMP REPORT FOR ROUGHSTONE & GRAVEL QUARRY OF THIRU.K.RAMARAJ IN S.F.NOS. 70/1(P) OVER AN AREA OF 1.06.50HA IN MYLERIPALAYAM VILLAGE, MADUKKARAI TALUK, COIMBATORE DISTRICT, TAMIL NADU.

	environmental stress) and livelihood of local people.	• Certified vehicles with low carbon emissions will only be used. These equipment's will be properly and regularly maintained. Besides, regular vehicular emission tests will be done for the transport vehicles to ensure minimal impact due to carbon emissions. To further mediate the carbon emissions, a good greenbelt and plantation plan has been in and around the lease area. • Geologically the area in and around the lease area contains charnokite type rock formation containing mostly fallow land. As such there no major vegetation or agricultural activities are observed. • There are no Protected or Eco-Sensitive Zone or forest land nearby wherein it can have an impact. • It will be ensured that mining will be carried out adhering to all the statutory rules and regulations and maintaining the environmental quality within the prescribed standards by effective implementation of various mitigative measures. • These mitigative measures will be continued for the entire lease period ensuring no impact on the environment. • As such release of Greenhouse gases (GHG), rise in temperature, affecting livelihood of the local people, loss of Agriculture, Forestry and Traditional Practices is not envisaged. Such a limited scope will not induce any climatic change leading to droughts, floods etc.
17	Possibilities of water contamination and impact on aquatic ecosystem health and impact on Sediment geochemistry in the surface streams	• This being a mining project no process effluent will be generated. • Water generation is expected to be due to ✓ Direct rainfall falling within the pit ✓ Rain water draining near the lease area.



	•Direct rain fall will be collected in the mine floor sump. Water from sump will be pumped to settling pond for downstream users. •Rainwater from the mine periphery will be collected through peripheral garland drain. Garland drain will be connected to a settling pond. Supernatant clear water from settling pond confirming to applicable limits will be let out to downstream users for agricultural or other purposes. •Due to above mentioned reasons and absence of perennial water bodies nearby where in any marine ecosystem is observed, no effect on this front is expected.
--	--

There are no migratory corridors, migratory avian-fauna, rare endemic and endangered species. Therefore, there shall be no impacts due to mining activity on them. Even though there are no adverse impact on bio diversity and flora/fauna status due to project operations, positive impacts will arise due to well-planned reclamation measures for restoration of land status in the area ultimately to productive land category with elaborately planned green belt development activities.

4.6.3 CONTROL MEASURES FOR BIOLOGICAL ASPECTS:

To reduce the adverse effects on flora/fauna status of the area due to deposition of dust generated from mining operations, mobile water tanker systems will be ensured in all dust prone areas to arrest dust generation. Methodical and well-planned plantation scheme will be carried out depending upon the immediate need, priority and availability of land. The plantation will be done along the lease boundary in a phased manner.

4.6.4 GREEN BELT & PLANTATION:

In the safety zone within the lease area and in the nearby areas including mineral transport road plantation of local tree species like Pungai, Vagai, Vembu etc. will be carried out about 500 trees will be planted in and around the lease area.

Table 4.15: Proposed Plantation



DRAFT EIA/EMP REPORT FOR ROUGHSTONE & GRAVEL QUARRY OF THIRU.K.RAMARAJ IN S.F.NOS. 70/1(P) OVER AN AREA OF 1.06.50HA IN MYLERIPALAYAM VILLAGE, MADUKKARAI TALUK, COIMBATORE DISTRICT, TAMIL NADU.

Year	No of Trees
1	100
2	100
3	100
4	100
5	100
Total	500

In the post mining stage, the mine pit area of 0.75.10 Ha will be left as a water body. Plantation will be carried out over 0.29.30 Ha and 0.021Ha will be left as road and infrastructure.

4.7 SOCIO ECONOMIC ENVIRONMENT:

The entire lease area is in the proponent's possession. There are no habitations or hutments in the core zone area and no rehabilitation or resettlement is involved.

The mining operations in the proposed mine will employ about 20 persons directly and about 50 persons on indirect basis through allied opportunities in logistics, trading, repairing works etc. good employment potential will arise in this area, which will provide raising income levels and standards of living in the area through various service related activities connected with the project operations as shown under.

- Project related logistical operations for transport of Rough Stone, etc,
- Various trading services for consumer goods, spare parts, sundry items, etc.
- Contractual services connected with the project.
- Green belt and horticultural works in the project.
- Casual labor needs for various activities.

Besides, there will be improvement in the following aspects due to project operation:

- ❖ Improvement in infrastructural facilities, providing education aids etc. in nearby schools
- ❖ Betterment of drinking water facilities.
- ❖ Benefit to the State and the Central governments through financial revenues by way of royalty, tax, duties, etc from this project directly and also indirectly.



DRAFT EIA/EMP REPORT FOR ROUGHSTONE & GRAVEL QUARRY OF THIRU.K.RAMARAJ IN S.F.NOS. 70/1(P) OVER AN AREA OF 1.06.50HA IN MYLERIPALAYAM VILLAGE, MADUKKARAI TALUK, COIMBATORE DISTRICT, TAMIL NADU.

From above details, it is clear that the project operations will have highly beneficial positive impact in the area.

Table 4.16: CER Cost

Project Cost (Rs.)	Rs. 1,03,30,000 (Including operational + Fixed Asset + EMP cost).
2% of the Project Cost	Rs. 2,06,600/-
Cost allocated for Socio Economic Development (Rs.)	Rs. 3,00,000/-

However, towards the socio-economic development of the surrounding area, the proponent has earmarked an amount of Rs.3.0 Lakhs under Corporate Environmental Responsibility. The activities identified under CER will be implemented in a phased manner in provision of facilities in nearby Government School.

4.8 OCCUPATIONAL HEALTH AND SAFETY:

4.8.1 BASELINE STATUS:

Primary data collection through field survey conducted in the study area reveals that there is no reported incident of any occupational diseases in the area. Hazardous jobs like blasting, loading, etc. are planned to be executed safely and with all precautionary measures as prescribed in Metalliferous Mines Regulations of 1961, so as to minimize hazards and incidences of health problems.

4.8.2 IMPACTS ON OCCUPATIONAL HEALTH DUE TO PROJECT OPERATIONS:

Anticipated occupational illness sequel to mining activities can be as follows:

- Dust related pneumonia
- Tuberculosis
- Rheumatic arthritis
- Segmental vibration
- Miner's Nystagamus



4.8.3 MITIGATIVE MEASURES FOR OCCUPATIONAL HEALTH:

To reduce pollution emanation from the project, following measures are being and will be taken:

- Water sprinkling on haul roads etc.
- Green belt creation to arrest dust and reduce noise propagation.
- Acceptance of good control measures for reducing air pollution, as mentioned earlier in the chapter.
- Control of noise levels through good preventive maintenance of machineries, green belt creation, provision of ear plug to workers, etc.
- In addition to above measures, the following remedial steps are being and will be enforced to ensure minimization of occupational health and safety problems.
- Medical examination of workers by qualified doctors, as per DGMS circulars.
- Regular awareness campaigns amongst staff and workers
- Staff will be provided with PPE to guard against excess noise levels, Dust generation and inhalation, etc., as per standards prescribed by DGMS.

4.8.4 MITIGATIVE MEASURES FOR SAFETY ASPECTS:

The following safety gadgets will be provided to the staff and workers based on their area of operation and work & requirement:

Sl No	Safety Equipments
1.	Helmets
2.	Shoes
3.	Goggles
4.	Dust Mask
5.	Hand Gloves
6.	Reflective Jackets
7.	Ear Muffs
8.	Signal Lights/Flags

4.9 LOGISTICAL SYSTEM:

From this proposed quarry the entire output will be transported to the crusher units for producing stone aggregates of different sizes or construction of roads, bridges, buildings and other buyers etc. The expected peak transport will be as follows:

Table 4.17: Details of Transportation

Sl.no	Particulars of activity	Quantity
A	Maximum Rough stone Transported (m3/year)	14970
B	No of days in a year	300
C	Transport hours per day	8
D	Truck capacity in m3	8
	Trips per hour	<1 Trip/hr

From the above table it is seen that there will be less than 1 trip per hour additional truck traffic. The existing road can absorb this traffic due to this project. However, the following mitigative measures are suggested:

- ❖ Water sprinkling on material in the transport vehicles before transporting, so that no dust nuisance during transport will arise.
- ❖ Plantation on either side of the transport road in consultation with the concerned department.
- ❖ Proper maintenance of transport roads
- ❖ Proper maintenance of transport vehicles.
- ❖ Avoiding overloading of material
- ❖ Covering of loaded vehicles with tarpaulins sheet.
- ❖ Limiting of speed
- ❖ Provision of tyre washing facility at the mine outlet

4.10 WASTE MANAGEMENT:

Solid Waste: Since the entire mined out material will be used there will not be any solid waste generation from this project.



DRAFT EIA/EMP REPORT FOR ROUGHSTONE & GRAVEL QUARRY OF THIRU.K.RAMARAJ IN S.F.NOS. 70/1(P) OVER AN AREA OF 1.06.50HA IN MYLERIPALAYAM VILLAGE, MADUKKARAI TALUK, COIMBATORE DISTRICT, TAMIL NADU.

Liquid waste: There is no process effluent generation from this mine. Hence no liquid waste is generated.

Hazardous waste management: In this project the following management practices will be followed:

- Ensuring availability of different colour bins for collection of different types of waste.
- Storing of Hazardous waste material in a separate storage area with impervious containers for waste oil, oil contaminated clothes, used lead acid batteries, scraps, tyre storage etc.
- Ensure that there are no leakages/spillages of hazardous wastes.
- Ensuring that the fire extinguisher system is available at hazardous material storage area.

The hazardous waste if any will be disposed through authorized recyclers or re-processors periodically. The hazardous wastes will be transported in accordance with the provisions of rules. By effective implementation of above said mitigation measures no major impact due to Hazardous waste is expected.

Plastic waste: Single use plastics/ use and throwaway plastics will be banned in the site as directed by the Tamil Nadu Government vide GO(Ms)No.84 regarding ban on use of plastic products. The employees will be encouraged to use compostable material or reusable material.

* * * * *



CHAPTER - V

ANALYSIS OF ALTERNATIVES (TECHNOLOGY & SITE)

CHAPTER 5

ANALYSIS OF ALTERNATIVES

5.1 ALTERNATE TECHNOLOGY:

The proposed project involves the development of a Rough Stone and Gravel Quarry through mechanized open cast mining. The mining operations will comprise jackhammer drilling, controlled blasting, excavation, loading, and transportation of the quarried material to crushing units. This method is well-established, technically feasible, and economically viable; hence, consideration of alternative technologies is not warranted.

5.2 ALTERNATE SITE:

The mineral deposits are inherently site-specific, making the consideration of an alternative location unnecessary



**DRAFT EIA/EMP REPORT FOR ROUGHSTONE & GRAVEL QUARRY OF THIRU.K.RAMARAJ IN
S.F.NOS. 70/1(P) OVER AN AREA OF 1.06.50HA IN MYLERIPALAYAM VILLAGE, MADUKKARAI
TALUK, COIMBATORE DISTRICT, TAMIL NADU.**



CHAPTER - VI

ENVIRONMENTAL MONITORING PROGRAMME

CHAPTER 6

ENVIRONMENTAL MONITORING PROGRAMME

6.1 GENERAL

In this project, appropriate environmental monitoring programme are framed. Regular, systematic and sustained programme schedules for implementation and monitoring of various control measures are devised with clear cut guidelines of various concerned plans for keeping a continuous surveillance on the various environmental quality parameters in the area.

The monitoring schedules are planned to aim at regular and systematic study of various pollution levels with respect to air and water quality, noise levels etc., to ensure that they conform to the standards laid down by the Environment Protection Act, 1986 and various Central and State Pollution Control Board Limits.

The various methodologies and frequency of studies of all environmental quality parameters will be as per prescribed norms laid down by MOEF&CC and State Pollution Control Board. This being a small quarry operation, the Mines in-charge will take care of all the environmental related works also.

Environmental control measures include components like air, water and soil quality, noise levels, afforestation measures, etc. For monitoring of environment over the life of the mine, a set of stations for study of quality parameters are fixed as per the actual requirements and prevailing conditions of environmental factors, as dictated from time to time, depending on the prevailing pollution levels.

6.2 MONITORING SCHEDULES FOR VARIOUS PARAMETERS

The monitoring schedules are planned for systematic study of various pollution levels with respect to air and water qualities, noise levels, etc. to ensure that they conform to the standards laid down by Environmental Protection Act and various statutory Limits. However, based on the need and priority it may be suitably modified / improved in consultation with local authorities. The monitoring schedules to be adopted in this quarry are given below.



**DRAFT EIA/EMP REPORT FOR ROUGHSTONE & GRAVEL QUARRY OF THIRU.K.RAMARAJ IN
S.F.NOS. 70/1(P) OVER AN AREA OF 1.06.50HA IN MYLERIPALAYAM VILLAGE, MADUKKARAI
TALUK, COIMBATORE DISTRICT, TAMIL NADU.**

Table 0.1: Environmental Monitoring Schedule

S.No	Environmental Parameters	Parameters to be monitored	Monitoring area coverage /locations	Frequency of monitoring
1	Air Quality	Sulphur dioxide (SO ₂), Oxides of Nitrogen (NO ₂), Respirable Particulate Matter (PM _{2.5} and PM ₁₀).	2 locations in the buffer zone and 1 work zone locations.	As per SPCB requirement
2	Water Quality	General, Physical, and chemical parameters	Ground Water samples (around the project area) and Mine Pit water samples	As per SPCB requirement
3	Water Table Fluctuations	Water Levels	Nearby wells and Borewells	On seasonal basis pre and post monsoon level
4	Noise	Leq. Lmax Lmin, Leq Day & Leq Night dB(A)	Work zone locations and buffer zone villages	As per SPCB requirement
5	Vibration	Peak Particle Velocity	Mine periphery	Once to arrive at optimum blasting parameters
6	Socio Economic Environment	Socio Economic Survey, Review of implementation of CER activities proposed	Buffer Zone	2 years once
7	Occupational Health	Occupational health survey to detect early incidence of diseases, Audiometry Test for workers in noise prone area and review of safety matters.	Staff and Workers involved in the project	2 years once
8	Greenbelt	Maintenance	Within the lease area	Regularly

6.3 LEGISLATIVE AND REGULATORY FRAME WORK:

The project will have environmental policy declaring its responsibility and commitment to protect the environment and to ensure public safety. The existing policy will be available with all concerned officials of the plant. The following environmental standards as per methodologies prescribed, by MOEF/CPCB/TNPCB will be enforced in this project:



DRAFT EIA/EMP REPORT FOR ROUGHSTONE & GRAVEL QUARRY OF THIRU.K.RAMARAJ IN S.F.NOS. 70/1(P) OVER AN AREA OF 1.06.50HA IN MYLERIPALAYAM VILLAGE, MADUKKARAI TALUK, COIMBATORE DISTRICT, TAMIL NADU.

Table 0.2: Environmental Standards

Standards	Issued By	Reference
National Ambient Air Quality Standards	Central Pollution Control Board	Table No. 6.3
Water quality standards per IS 10500:2012	Bureau of Indian Standards	Table No.6.4
Noise Standards	CPCB / MoEF&CC	Table No.6.5
Permissible Peak Particle Velocity	DGMS, Dhanbad	Table No.6.6

Table 0.3: National Ambient Air Quality Standards

[NEPI III - Page 4]

मानक वायु गुणवत्ता : पर्यावरण

3

NATIONAL AMBIENT AIR QUALITY STANDARDS
CENTRAL POLLUTION CONTROL BOARD
NOTIFICATION
New Delhi, the 18th November, 2009

No. B-29016/2009/PCI-I.—In exercise of the powers conferred by Sub-section (2) (b) of section 16 of the Air (Prevention and Control of Pollution) Act, 1981 (Act No.14 of 1981), and in supersession of the Notification No(s). S.O. 384(E), dated 11th April, 1994 and S.O. 935(E), dated 14th October, 1998, the Central Pollution Control Board hereby notify the National Ambient Air Quality Standards with immediate effect, namely:-

NATIONAL AMBIENT AIR QUALITY STANDARDS

S. No.	Pollutant	Time Weighted Average	Concentration in Ambient Air		
			Industrial, Residential, Rural and Other Area	Ecologically Sensitive Area (notified by Central Government)	Methods of Measurement
(1)	(2)	(3)	(4)	(5)	(6)
1	Sulphur Dioxide (SO ₂), µg/m ³	Annual* 24 hours**	50 80	20 80	- Improved West and Gaeke - Ultraviolet fluorescence
2	Nitrogen Dioxide (NO ₂), µg/m ³	Annual* 24 hours**	40 80	30 80	- Modified Jacob & Hoelbhauser (Na-Arsenite) - Chemiluminescence
3	Particulate Matter (size less than 10µm) or PM ₁₀ , µg/m ³	Annual* 24 hours**	60 100	60 100	- Gravimetric - TOEM - Beta attenuation
4	Particulate Matter (size less than 2.5µm) or PM _{2.5} , µg/m ³	Annual* 24 hours**	40 60	40 60	- Gravimetric - TOEM - Beta attenuation
5	Ozone (O ₃), µg/m ³	8 hours** 1 hour**	100 180	100 180	- UV photometric - Chemiluminescence - Chemical Method
6	Lead (Pb), µg/m ³	Annual* 24 hours**	0.50 1.0	0.50 1.0	- AAS/ICP method after sampling on EPA 2000 or equivalent filter paper - ED-XRF using Teflon filter
7	Carbon Monoxide (CO), mg/m ³	8 hours** 1 hour**	02 04	02 04	- Non Dispersive Infra Red (NDIR) spectroscopy
8	Ammonia (NH ₃), µg/m ³	Annual* 24 hours**	100 400	100 400	- Chemiluminescence - Indophenol blue method



DRAFT EIA/EMP REPORT FOR ROUGHSTONE & GRAVEL QUARRY OF THIRU.K.RAMARAJ IN S.F.NOS. 70/1(P) OVER AN AREA OF 1.06.50HA IN MYLERIPALAYAM VILLAGE, MADUKKARAI TALUK, COIMBATORE DISTRICT, TAMIL NADU.

4

THE GAZETTE OF INDIA : EXTRAORDINARY

[PART III—Sec. 4]

(1)	(2)	(3)	(4)	(5)	(6)
9	Benzene (C ₆ H ₆) µg/m ³	Annual*	05	05	- Gas chromatography based continuous analyzer - Adsorption and Desorption followed by GC analysis
10	Benzo[0]Pyrene (BaP) - particulate phase only, ng/m ³	Annual*	01	01	- Solvent extraction followed by HPLC/GC analysis
11	Arsenic (As), ng/m ³	Annual*	06	06	- AAS /ICP method after sampling on EPM 2000 or equivalent filter paper
12	Nickel (Ni), ng/m ³	Annual*	20	20	- AAS /ICP method after sampling on EPM 2000 or equivalent filter paper

* Annual arithmetic mean of minimum 104 measurements in a year at a particular site taken twice a week 24 hourly at uniform intervals.

** 24 hourly or 08 hourly or 01 hourly monitored values, as applicable, shall be complied with 98% of the time in a year. 2% of the time, they may exceed the limits but not on two consecutive days of monitoring.

Note. — Whenever and wherever monitoring results on two consecutive days of monitoring exceed the limits specified above for the respective category, it shall be considered adequate reason to institute regular or continuous monitoring and further investigation.

SANT PRASAD GAUTAM, Chairman
[ADVT-III/4/184/09/Exy.]

Note: The notifications on National Ambient Air Quality Standards were published by the Central Pollution Control Board in the Gazette of India, Extraordinary vide notification No(s). S.O. 384(E), dated 11th April, 1994 and S.O. 935(E), dated 14th October, 1998.



Creative Engineers & Consultants

ENVIRONMENTAL MONITORING PROGRAM

PRO CODE: CEC-EMP-MI-254

REV NO : 00/OCT/25

6-4

DRAFT EIA/EMP REPORT FOR ROUGHSTONE & GRAVEL QUARRY OF THIRU.K.RAMARAJ IN S.F.NOS. 70/1(P) OVER AN AREA OF 1.06.50HA IN MYLERIPALAYAM VILLAGE, MADUKKARAI TALUK, COIMBATORE DISTRICT, TAMIL NADU.

Table 0.4: IS – 10500 :2012 Standards

Table 1 Organoleptic and Physical Parameters
(Foreword and Clause 4)

Sl No.	Characteristic	Requirement (Acceptable Limit)	Permissible Limit in the Absence of Alternate Source	Method of Test, Ref to Part of IS 3025	Remarks
(1)	(2)	(3)	(4)	(5)	(6)
i)	Colour, Hazen units, <i>Max</i>	5	15	Part 4	Extended to 15 only, if toxic substances are not suspected in absence of alternate sources
ii)	Odour	Agreeable	Agreeable	Part 5	a) Test cold and when heated b) Test at several dilutions
iii)	pH value	6.5-8.5	No relaxation	Part 11	—
iv)	Taste	Agreeable	Agreeable	Parts 7 and 8	Test to be conducted only after safety has been established
v)	Turbidity, NTU, <i>Max</i>	1	5	Part 10	—
vi)	Total dissolved solids, mg/l, <i>Max</i>	500	2 000	Part 16	—

NOTE — It is recommended that the acceptable limit is to be implemented. Values in excess of those mentioned under 'acceptable' render the water not suitable, but still may be tolerated in the absence of an alternative source but up to the limits indicated under 'permissible limit in the absence of alternate source' in col 4, above which the sources will have to be rejected.



DRAFT EIA/EMP REPORT FOR ROUGHSTONE & GRAVEL QUARRY OF THIRU.K.RAMARAJ IN S.F.NOS. 70/1(P) OVER AN AREA OF 1.06.50HA IN MYLERIPALAYAM VILLAGE, MADUKKARAI TALUK, COIMBATORE DISTRICT, TAMIL NADU.

Table 2 General Parameters Concerning Substances Undesirable in Excessive Amounts
(Foreword and Clause 4)

Sl No.	Characteristic	Requirement (Acceptable Limit)	Permissible Limit in the Absence of Alternate Source	Method of Test, Ref to	Remarks
(1)	(2)	(3)	(4)	(5)	(6)
i)	Aluminium (as Al), mg/l, <i>Max</i>	0.03	0.2	IS 3025 (Part 55)	—
ii)	Ammonia (as total ammonia-N), mg/l, <i>Max</i>	0.5	No relaxation	IS 3025 (Part 34)	—
iii)	Anionic detergents (as MBAS) mg/l, <i>Max</i>	0.2	1.0	Annex K of IS 13428	—
iv)	Barium (as Ba), mg/l, <i>Max</i>	0.7	No relaxation	Annex F of IS 13428* or IS 15302	—
v)	Boron (as B), mg/l, <i>Max</i>	0.5	1.0	IS 3025 (Part 57)	—
vi)	Calcium (as Ca), mg/l, <i>Max</i>	75	200	IS 3025 (Part 40)	—
vii)	Chloramines (as Cl ₂), mg/l, <i>Max</i>	4.0	No relaxation	IS 3025 (Part 26)* or APHA 4500-Cl G	—
viii)	Chloride (as Cl), mg/l, <i>Max</i>	250	1 000	IS 3025 (Part 32)	—
ix)	Copper (as Cu), mg/l, <i>Max</i>	0.05	1.5	IS 3025 (Part 42)	—
x)	Fluoride (as F) mg/l, <i>Max</i>	1.0	1.5	IS 3025 (Part 60)	—
xi)	Free residual chlorine, mg/l, <i>Min</i>	0.2	1	IS 3025 (Part 26)	To be applicable only when water is chlorinated. Tested at consumer end. When protection against viral infection is required, it should be minimum 0.5 mg/l
xii)	Iron (as Fe), mg/l, <i>Max</i>	0.3	No relaxation	IS 3025 (Part 53)	Total concentration of manganese (as Mn) and iron (as Fe) shall not exceed 0.3 mg/l
xiii)	Magnesium (as Mg), mg/l, <i>Max</i>	30	100	IS 3025 (Part 46)	—
xiv)	Manganese (as Mn), mg/l, <i>Max</i>	0.1	0.3	IS 3025 (Part 59)	Total concentration of manganese (as Mn) and iron (as Fe) shall not exceed 0.3 mg/l
xv)	Mineral oil, mg/l, <i>Max</i>	0.5	No relaxation	Clause 6 of IS 3025 (Part 39) Infrared partition method	—
xvi)	Nitrate (as NO ₃), mg/l, <i>Max</i>	45	No relaxation	IS 3025 (Part 34)	—
xvii)	Phenolic compounds (as C ₆ H ₅ OH), mg/l, <i>Max</i>	0.001	0.002	IS 3025 (Part 43)	—
xviii)	Selenium (as Se), mg/l, <i>Max</i>	0.01	No relaxation	IS 3025 (Part 56) or IS 15303*	—
xix)	Silver (as Ag), mg/l, <i>Max</i>	0.1	No relaxation	Annex J of IS 13428	—
xx)	Sulphate (as SO ₄) mg/l, <i>Max</i>	200	400	IS 3025 (Part 24)	May be extended to 400 provided that Magnesium does not exceed 30
xxi)	Sulphide (as H ₂ S), mg/l, <i>Max</i>	0.05	No relaxation	IS 3025 (Part 29)	—
xxii)	Total alkalinity as calcium carbonate, mg/l, <i>Max</i>	200	600	IS 3025 (Part 23)	—
xxiii)	Total hardness (as CaCO ₃), mg/l, <i>Max</i>	200	600	IS 3025 (Part 21)	—
xxiv)	Zinc (as Zn), mg/l, <i>Max</i>	5	15	IS 3025 (Part 49)	—

NOTES

1 In case of dispute, the method indicated by '*' shall be the reference method.

2 It is recommended that the acceptable limit is to be implemented. Values in excess of those mentioned under 'acceptable' render the water not suitable, but still may be tolerated in the absence of an alternative source but up to the limits indicated under 'permissible limit in the absence of alternate source' in col 4, above which the sources will have to be rejected.



DRAFT EIA/EMP REPORT FOR ROUGHSTONE & GRAVEL QUARRY OF THIRU.K.RAMARAJ IN S.F.NOS. 70/1(P) OVER AN AREA OF 1.06.50HA IN MYLERIPALAYAM VILLAGE, MADUKKARAI TALUK, COIMBATORE DISTRICT, TAMIL NADU.

Table 0.5: Noise Level Standards

Area Code	Category of Area	Limits in dB(A) Leq	
		Day Time	Night Time
(A)	Industrial area	75	70
(B)	Commercial area	65	55
(C)	Residential area	55	45
(D)	Silence Zone	50	40

Note :

1. Day time shall mean from 6 a.m. and 10.0 p.m.
2. Night time shall mean from 10.0 p.m. and 6 a.m.
3. Silence zone is an area comprising not less than 100 meters around hospitals, educational institutions, courts, religious places or any other area which is declared as such by the competent authority.
4. Mixed categories of areas may be average as one of the four above mentioned categories by the competent authority.

* dB(A) Leq denotes the time weighted average of the level of sound in decibels on scale A which is relatable to human hearing.

A “decibel” is a unit in which noise is measured.

“A”, in dB(A) Leq, denotes the frequency weighting in the measurement of noise and corresponds to frequency response characteristics of the human ear.

Leq: It is energy mean of the noise level over a specified period.

Table 0.6: Permissible Noise For Industrial Workers As Laid Down By CPCB

Exposure time (in hr. per day)	Limit in dB(A)
8	90
4	93
2	96
1	99
1/2	102
1/4	105
1/8	108
1/16	111
1/32	114



DRAFT EIA/EMP REPORT FOR ROUGHSTONE & GRAVEL QUARRY OF THIRU.K.RAMARAJ IN S.F.NOS. 70/1(P) OVER AN AREA OF 1.06.50HA IN MYLERIPALAYAM VILLAGE, MADUKKARAI TALUK, COIMBATORE DISTRICT, TAMIL NADU.

Table 0.7: Permissible Peak Particle Velocity (PPV) In Mining Areas

In mm/sec.

Type of structure	Dominant excitation frequency Hz		
	<8 Hz	8-25 Hz	>25 Hz
A. Buildings/structures not belonging to owner			
Domestic houses /structures (Kuchha brick and cement)	5	10	15
Industrial buildings (RCC and framed structures)	10	20	25
Objects of historical importance and sensitive structures.	2	5	10
B. Building belonging to owner with limited span of life			
Domestic houses/structures (Kuchha brick and cement)	10	15	25
Industrial buildings (RCC and framed structures)	15	25	50

The above said monitoring location and the frequency of monitoring shall be suitably modified in consultation with the nodal agency as per the actual requirements and prevailing conditions of the mine and environmental factors, as dictated from time to time, depending on the prevailing pollution levels, if required.

6.4 ENVIRONMENTAL MONITORING COST:

Towards environmental monitoring it is proposed to allocate a budget of Rs. 50,000 per annum for this project. Further details of the capital and recurring cost of environmental management has been provided in in Table No. 10.2, Chapter-X.

* * * * *



Creative Engineers & Consultants

ENVIRONMENTAL MONITORING PROGRAM

PRO CODE: CEC-EMP-MI-254

REV NO : 00/OCT/25

6-8

CHAPTER - VII

ADDITIONAL STUDIES

CHAPTER 7

ADDITIONAL STUDIES

7.1 GENERAL:

The additional studies covered for this EIA / EMP report are:

1. Public consultation of the project as per MoEF&CC mandates.
2. Risk Assessment
3. Cumulative Impact Study
4. R&R Plan
5. Mine closure planning

7.2 PUBLIC CONSULTATION:

This draft EIA/EMP report will be made available for public consultation in accordance with the prescribed procedures. A 30-day advance notice regarding the date and time of the public hearing will be published in two local newspapers. The hearing will be conducted under the supervision of the District Collector and officials from the State Pollution Control Board. During the public consultation, the opinions, concerns, and objections of stakeholders will be documented. All queries raised by the public, along with responses provided by the project proponent and relevant authorities, will be duly recorded and incorporated into the final EIA/EMP report submitted for approval to the SEIAA, Tamil Nadu.

7.3 RISK ASSESSMENT:

For the various risks, likely to arise, detailed analysis of causes and control measures is given in below:

S.No	Factors	Causes of risks	Control measures
1.	Removal of material	a) Bench may slide due to its unconsolidated nature. b) Vibration due to movement of vehicles in the benches.	Overall bench slope angle will be maintained optimally as per DGMS requirement. Working bench width will be more than bench height.
2.	Drilling	a) Due to high pressure of compressed air hoses may burst. b) Down the hole drill rod may break due to improper	• Periodical preventative maintenance and replacement of worn out accessories in the compressor and drill equipment.



DRAFT EIA/EMP REPORT FOR ROUGHSTONE & GRAVEL QUARRY OF THIRU.K.RAMARAJ IN S.F.NOS. 70/1(P) OVER AN AREA OF 1.06.50HA IN MYLERIPALAYAM VILLAGE, MADUKKARAI TALUK, COIMBATORE DISTRICT, TAMIL NADU.

S.No	Factors	Causes of risks	Control measures
		maintenance of rod.	As per manufacturers recommendation rod to be replaced and bits will be changed.
3.	Blasting	a) Fly rock, ground vibration, noise etc. b) Improper charging of explosives	- Burden and spacing will be kept optimum on trial basis. - Explosive charge per delay will be minimized. - Controlled blasting with Nonel will be used.
4.	Excavation	a) Hauling and loading equipment are in such proximity while excavation b) Swinging of bucket over the body of tipper c) Driving of unauthorized person	- Operator shall not operate the machine when person & vehicles are in such proximity. - Shall not swing the bucket over the cab and operator leaves the machine after ensuring the bucket is on ground. - Shall not allow any unauthorized person to operate the machine by effective supervision.
5.	Transportation	a) Operating the vehicle "nose to tail" b) Overloading of material c) While reversal & overtaking of vehicle d) Operator of truck leaving his cabin when it is loaded	- It will be ensured that all these causes will be nullified by giving training to the operators. - No over loading will be done. - Audio visual reverse horn will be provided. - Proper training will be given.
6.	Fire due to electricity and Oil	a) Due to the short circuit of cables & other electrical parts b) Due to the leakage of inflammable liquid like diesel, oil etc.	- Electrical parts shall be cleaned frequently with the help of dry air blower - All fastening parts and places will be tightening. Suitable fire suppression equipment shall be provided.
7.	Natural calamities	Unexpected happenings	The mine management is capable to deal with the situation.

This being a small rough stone project that too working in a safe area, no major disaster is expected.

7.3.1. DISASTER MANAGEMENT PLAN:

In General, following natural/industrial hazards may occur during normal operation.

- Inundation of mine pit due to flood/excessive rains :
- Slope failure of the pit and waste dumps
- Accident due to heavy mining equipment and



DRAFT EIA/EMP REPORT FOR ROUGHSTONE & GRAVEL QUARRY OF THIRU.K.RAMARAJ IN S.F.NOS. 70/1(P) OVER AN AREA OF 1.06.50HA IN MYLERIPALAYAM VILLAGE, MADUKKARAI TALUK, COIMBATORE DISTRICT, TAMIL NADU.

➤ **Blasting and use of Explosives**

Mining operation in this lease will be carried out under the management control and direction of a qualified mine manager. The DGMS have been issuing a number of standing orders, model standing orders and circulars to be followed by the mine management in case of disaster. All these orders statutory rules and regulations will be followed. Seismically project site and study area falls in the Zone – II and is described as least active zone. There are no perennial water body near the lease area to cause any flooding. As such no disaster due to this project is envisaged.

In order to take care of above hazard / disasters the following control measures have been adopted.

- Checking and regular maintenance of garland drains and earthen bunds to avoid any inflow of surface water in the mine pit.
- Avoiding mining during heavy monsoon period and marching of all the HEMM to the top benches during rainy period.
- Provision of high capacity standby pumps with generator sets with sufficient quantity of diesel for emergency pumping especially during monsoon.
- All safety precautions and provisions of regulations will be strictly followed during all mining operations
- Prohibiting entry of unauthorized persons.
- Provision of Fire fighting and first-aid provisions in the mines.
- Provisions of all the safety appliances such as safety boot, helmets, goggles, dust masks, ear plugs and ear muffs etc. are made available to the employees for their use.
- Training and refresher courses for all the employees working in hazardous premises
- Observance of all safety precautions for blasting and storage of explosives as per MMR 1961.
- Working of mine, as per approved plans and regularly updating the mine plans
- Cleaning of mine faces regularly



- Proper storage, usage of explosives through competent persons.
- Regular maintenance and testing of all mining equipment as per manufacturers guidelines
- Suppression of dust on the haulage roads with frequent water sprinkling, etc.
- Increasing the awareness of safety and disaster through competitions, posters and annual safety weeks and environmental weeks, encouraged through suitable rewards and other similar drives.

The management and the EMC will be able to deal with the situations efficiently keeping in view of the likely sources of dangers in the mine.

7.4 REHABILITATION AND RESETTLEMENT (R & R) PLAN:

The mining activities will be carried out within the mine lease area only. The entire mine lease area is a Patta land. There is no population within the ML area. Hence, the question of R&R does not arise.

7.5 MINE CLOSURE PLAN:

In the mine closure stage all necessary measures will be taken as per Act & Rules, There is no proposal for back filling, reclamation and rehabilitation. The quarried pits after the end of life of mine will be properly fenced all around to prevent inherent entry of public and cattle and all the statutory requirements will be fulfilled. As already explained, in the post mining stage the rainwater harvested in the mined out void shall be utilized for irrigation and domestic needs locally. The mine closure plan is provided in Figure 4.5 in chapter – IV of the EIA/EMP Report.

7.6 CUMULATIVE IMPACT STUDY:

The lease area is located in Myleripalayam village, Madukkarai Taluk, Coimbatore District, Tamil Nadu. The details of the other quarries located within the 500m radius of the project considered for cumulative impact study now **(Annexure-3)** has been provided below:

DRAFT EIA/EMP REPORT FOR ROUGHSTONE & GRAVEL QUARRY OF THIRU.K.RAMARAJ IN S.F.NOS. 70/1(P) OVER AN AREA OF 1.06.50HA IN MYLERIPALAYAM VILLAGE, MADUKKARAI TALUK, COIMBATORE DISTRICT, TAMIL NADU.

Table 0.1: Details of quarries within 500m radius

S.No	Quarry Details	Village	S.F.No.	Extent (Ha)	Lease Period
a	Existing Quarries				
1.	S.Shanmuga Sundaram	Myleripalayam	73/1, 73/2, 73/386 73/4	2.95.50	23.02.2023 - 22.02.2028
2.	A.Ammasaiappan	Myleripalayam	72/1, 72/2 8672/3	2.35.50	26.09.2023 - 25.09.2028
3.	S.Selvamani	Myleripalayam	67/2 86 69	3.47.50	26.09.2023- 25.09.2028
4.	M/s.Vetri Velan Blue Metals	Myleripalayam	70/2 8570/3	2.39.00	07.08.2024 -06.08.2029
5.	M.Sarojini	Myleripalayam	1 86 68	3.48.00	16.12.2024 - 15.12.2029
b	Expired Quarries				
	Nil				
c	Abandoned Quarries				
1.	K.M.Nanjappan	Myleripalayam	71/2	0.90.50	11.08.2009 - 10.08.2014
2.	M.Balasubramaniam	Myleripalayam	64/1, 64/2, 80/1 86, 80/2	3.14.00	12.12.2008 -11.12.2013
3.	Radhakrishnan	Myleripalayam	48/1B	0.98.5	06.07.2009 -05.07.2014
4.	Saravanan	Myleripalayam	31/2	1.21.5	20.03.2010 - 19.03.2015
5.	K.Shanmuugam	Myleripalayam	948s 79/2A(P)	2.88.0	09.12.2010 - 08.12.2015
6.	R.Srinivasamoorthy	Myleripalayam	3B1	1.31.5	14.06.2005 - 13.06.2010
7.	S.Jothimani	Myleripalayam	46/ I(Pt), 47/2A	1.88.5	20.03.2004 - 19.03.2009
8.	P.Kannan	Myleripalayam	31/1, 47/1	1.99.5	12.12.2008 -11.12.2013
d	Present proposed Quarries				
1	K.Ramaraj	Myleripalayam	70/1 (P) & 71/1	1.06.50	Applied area Precise area communicated
2	S.Kalaikumar	Myleripalayam	65/1A, 65/1C, 66/1C	2.16.70	Precise area communicated
3	A.Saravanakumar	Myleripalayam	74/1, 74/2&75/2	2.52.00	Land availability report awaited
4	S.Vignesh Ramkumar	Myleripalayam	65/2B	1.31.18	Land availability report awaited


From the above table, it is seen that there are 5 existing quarries in the lease area with lease periods upto 2029 and 4 proposed quarries of which is the subject project. The individual lease area of this project is less than 5Ha, however the cumulative area of the existing and proposed projects add up to greater than 5Ha. The present baseline monitoring carried out for this project during the Summer Season (March – May 2025) reflects the pollution contribution of the existing leases also. The predictive modelling carried out in Chapter-IV shows that despite the present



DRAFT EIA/EMP REPORT FOR ROUGHSTONE & GRAVEL QUARRY OF THIRU.K.RAMARAJ IN S.F.NOS. 70/1(P) OVER AN AREA OF 1.06.50HA IN MYLERIPALAYAM VILLAGE, MADUKKARAI TALUK, COIMBATORE DISTRICT, TAMIL NADU.

environmental status being within statutory norms, there is no adverse impact envisaged from the proposed mining operations with the implementation of the suggested mitigative measures.

Figure 0.1: Vicinity Map

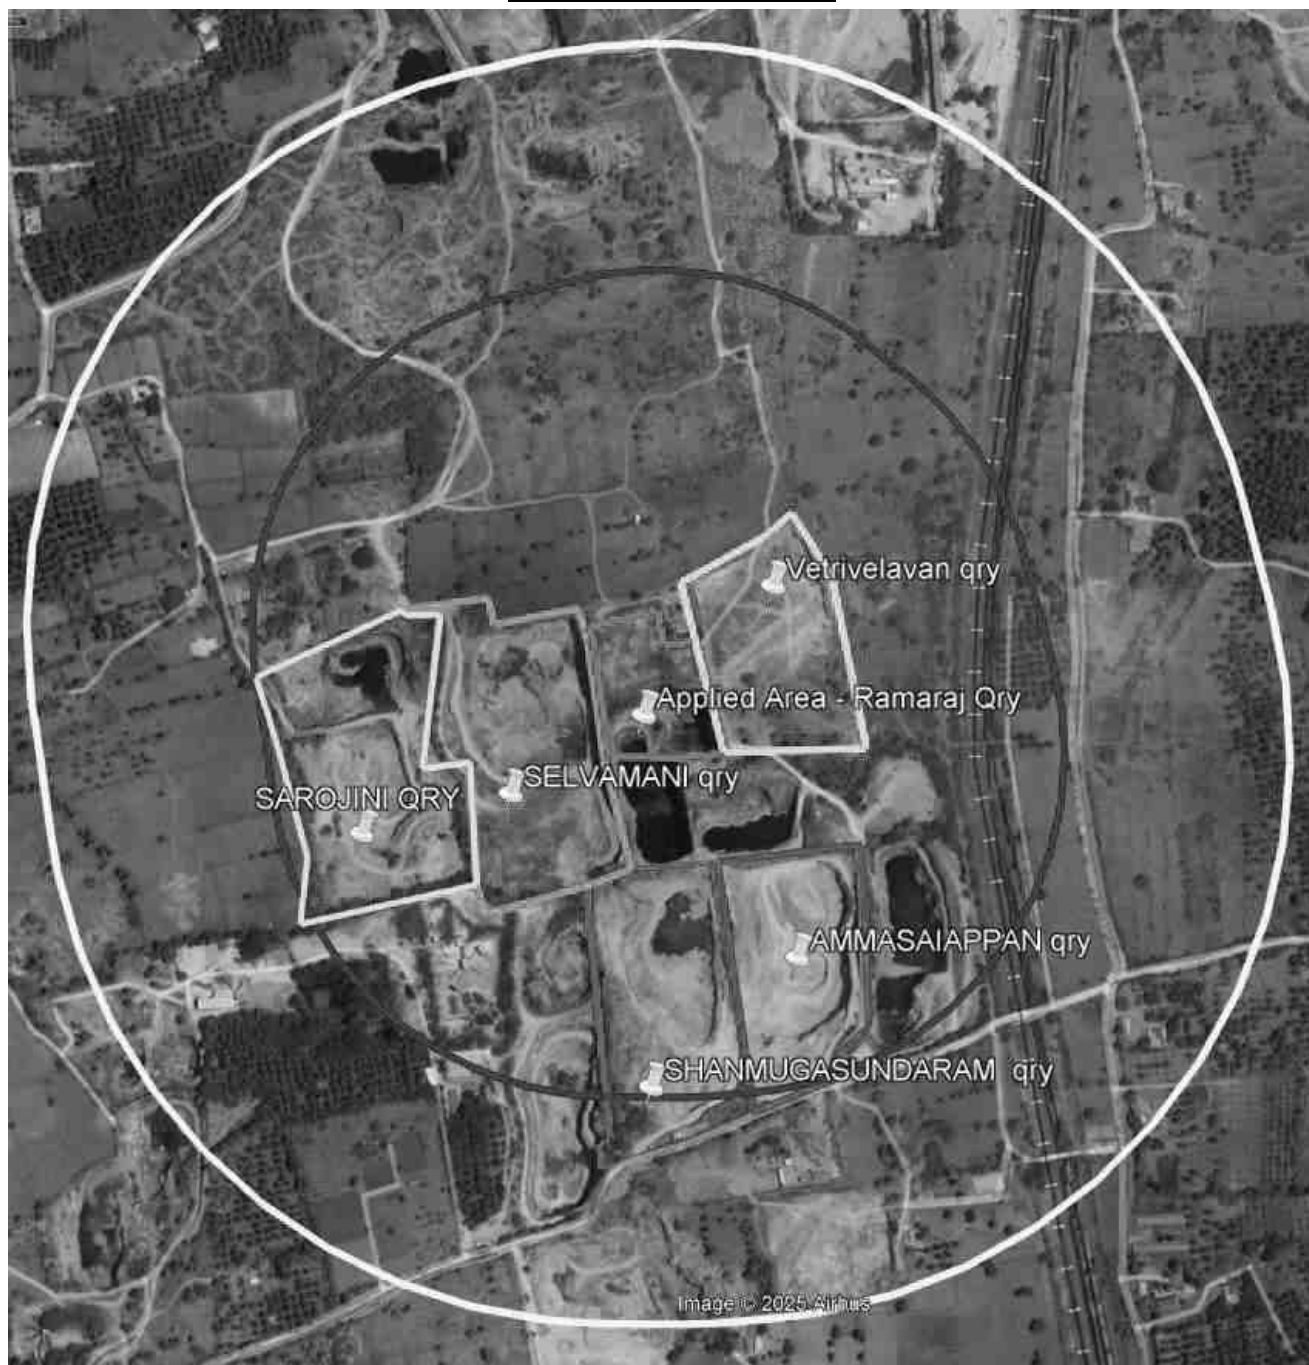

DRAFT EIA/EMP REPORT FOR ROUGHSTONE & GRAVEL QUARRY OF THIRU.K.RAMARAJ IN S.F.NOS. 70/1(P) OVER AN AREA OF 1.06.50HA IN MYLERIPALAYAM VILLAGE, MADUKKARAI TALUK, COIMBATORE DISTRICT, TAMIL NADU.

Table 0.2: Salient details of the Existing quarries

S.No	Project Name	S.SHANMUG ASUNDARAM	AMMASAIA PPAN	SELVAMANI	SRI VETRI VELAVAN BLUE METALS	SAROJINI
1	Survey No.	73/1, 3/2, 73/386, 73/4	72/1, 72/2 8672/3	67/2 86 69	70/2 8570/3	67/1 & 68
2	Village	Myleripalayam	Myleripalayam	Myleripalayam	Myleripalayam	Myleripalayam
3	Taluk	Madukkarai	Madukkarai	Madukkarai	Madukkarai	Madukkarai
4	District	Coimbatore	Coimbatore	Coimbatore	Coimbatore	Coimbatore
5	State	Tamilnadu	Tamilnadu	Tamilnadu	Tamilnadu	Tamilnadu
6	Lease Area in Ha	2.95.50	2.35.50	3.47.50	2.39.00	3.48.00
7	Mineable reserves in m3	2,42,779	2,16,315	441,026	3,27,148	3,20,754
8	Peak Production	46,128	40,288	65,339	62,643	66,217
9	Method of mining	Opencast mechanized mining	Opencast mechanized mining	Opencast mechanized mining	Opencast mechanized mining	Opencast mechanized mining
10	Lease Period	5 years	5 years	5 years	5 years	5 years
11	Ultimate Depth	38m	32m	38 m	34m	32
12	Project cost	Rs. 83,00,000/-	Rs. 36,10,000 /-	Rs.44,10,000 /-	Rs.81,05,000 /-	Rs.95.00 Lakhs

7.6.2 WATER ENVIRONMENT:

Water requirement for all the projects is mainly for dust suppression and green belt development. Only negligible quantity of water is required for this purpose. Initially it will be procured from outside agencies for these projects and later rainwater collected in the mine pit will be used. Groundwater intersection is not envisaged due to the quarrying operations in these mines. These being mining project there will not be any effluent discharge outside. There are no streams passing through the lease areas. Hence, no major impact is expected on groundwater and surface water regime due to the cumulative project operations.

7.6.3 NOISE ENVIRONMENT:

Normally noise is felt only near the active source and at away places it gets dissipated rapidly. Besides, due to attenuation at mine benches, elevation difference in pits, green belt and dissipation effect, noise levels due to mining operations at its periphery itself become insignificant.



DRAFT EIA/EMP REPORT FOR ROUGHSTONE & GRAVEL QUARRY OF THIRU.K.RAMARAJ IN S.F.NOS. 70/1(P) OVER AN AREA OF 1.06.50HA IN MYLERIPALAYAM VILLAGE, MADUKKARAI TALUK, COIMBATORE DISTRICT, TAMIL NADU.

Post project noise in the core zone has already been provided under para 4.4, Chapter-IV where it is seen that the predicted Noise Levels due to mining operations at the periphery of the mine lease itself will be less even without considering any attenuation factor. However, practically there will be attenuation due to vegetation etc., and as such there will not be any adverse noise propagation outside the lease boundary. Hence, the cumulative post project noise levels is also expected to be insignificant.

7.6.4 VIBRATION:

By Carrying out controlled blasting using Nonel milli second delay detonators, Optimum design for burden and spacing, reducing the explosive charge per delay to minimum in all the projects no adverse impact due to blasting vibration is expected.

7.6.5 TRAFFIC:

The mined out minerals will be transported by means of trucks to the consumers like crusher units for producing stone aggregates of different sizes or construction of roads, bridges, buildings and other buyers etc. The cumulative impact on traffic due to transportation of minerals are provided below:

Table 0.3: Cumulative number of trips

Details	S.SHANMUGA SUNDARAM	AMMASAIAPPAN	SELVAMANI	SRI VETRI VELAVAN BLUE METALS	SAROJINI
Maximum Roughstone Transported (m3/year)	46,128	40,288	65,339	62,643	66217
No of days in a year	300	300	300	300	300
Transport hours per day	8	8	8	8	8
Truck capacity in m3	12.5	12.5	12.5	12.5	12.5
Trips per hour	2 Trip/hr	2 Trip/hr	3 Trips/hr	3 Trips/hr	3Trips/hr

Totally there will be about 13trips per hour. The existing road can absorb this traffic due to this project. Various measures like proper maintenance of road, covering of the loaded truck with tarpaulin, water sprinkling will be carried out to ensure no adverse impact on the logistical .

7.6.6 LAND ENVIRONMENT:

In the post mining stage, entire mined out area of all the leases will be left as water body. Safety zone will be developed with plantation. It will be ensured that the entire mined out area will be



properly fenced to prevent inadvertent entry of men and animals. The rainwater harvested in the mined-out void shall be utilized to meet the water requirement.

7.7 ACTION PLAN FOR CARRYING OUT THE REALIGNMENT OF THE BENCHES & SLOPE STABILITY PLAN FOR THE QUARRY

Factors affecting mine slope stability include the geological structure (such as dip, shear zones, clay intrusions, joints, and faults), the lithology of the rock formations, the geometry of the slopes, and groundwater conditions, which can increase lateral pressure on the slope faces.

Mining activity in part of the lease area was already carried out in the earlier different stages of mining lease periods. However, more virgin area is available nearby the existing pit on the northern side. As such there is sufficient scope for realignment of the benches in the proposed quarry lease, & according slope stability plan is prepared and given below:

- Lease area is a massive hard rocky terrain of homogeneous rock formation and hence the probability of slope failure is low and can be avoided if proper measures are adopted.
- There is an existing pit. Mining operation only in the southern part of the lease area is carried out and as such there is further scope of proper development of benches in the future course of mining.
- Future mining operation is planned advancing from the existing 38m in the southern part of the lease area to ultimate overall 48 m in the lease area.
- In year 1 of the proposed mining operation, before commencement of mine production, pruning of top mine benches in the existing mine pit on the southern, eastern and western side will be carried out.
- No further production mining is planned in the existing southern portion on the top benches.

DRAFT EIA/EMP REPORT FOR ROUGHSTONE & GRAVEL QUARRY OF THIRU.K.RAMARAJ IN S.F.NOS. 70/1(P) OVER AN AREA OF 1.06.50HA IN MYLERIPALAYAM VILLAGE, MADUKKARAI TALUK, COIMBATORE DISTRICT, TAMIL NADU.

- This area will be declared as no mining zone, it will be properly barricaded and no movement of men or machineries or further mine progress other than pruning of top benches will be carried. Active mining is proposed only on the virgin southern side of the lease area.
- Progressive systematic and scientific mining will be made subsequently and the benches of 5m ultimate height and 5m wide will be developed. Working bench width will be at least 2.5 times the bench height. Ultimate pit slope is kept at 45° to ensure slope stability.
- Haul road formation will be formed at 1 in 16 slope with adequate road width.
- There will be no ground water table intersection since the mining is above the GL. There is no danger due to flooding or inundation as the working is above the GL.
- No seepage is expected due to formation. Adequate drainage management system comprising peripheral garland drain, settling pond to regulate monsoon water will be created to prevent saturation of compact layers, apparent drainage over the bench slope to avert damages to quarry face and manage the water flow.
- Following Run off management is suggested:
 - 1) Direct rainfall falling within the pit
 - 2) Rain water draining near the lease area.

Direct rain fall will be collected in the mine floor sump. Water from sump will be pumped to settling pond for down stream users. Rainwater from the mine periphery will be collected through peripheral garland drain. Garland drain will be connected to a settling pond. Supernatant clear water from settling pond will be let out to downstream users



DRAFT EIA/EMP REPORT FOR ROUGHSTONE & GRAVEL QUARRY OF THIRU.K.RAMARAJ IN S.F.NOS. 70/1(P) OVER AN AREA OF 1.06.50HA IN MYLERIPALAYAM VILLAGE, MADUKKARAI TALUK, COIMBATORE DISTRICT, TAMIL NADU.

- No top soil or loose top earth or boulders cover is observed on the top of the mine pit. Besides, the safety zone which will form a ridge which can also take care of the section and as such no risk is envisaged on this front.
- Regular inspection of the mine faces to be carried out by mines manager for ensuring absence of any structural features like faults, joints, dyke, intrusive material in the rock strata which may affect the slope stability and cleared.
- No loose material or boulders is to be stacked on the mine top or pit benches.
- Lease periphery on all sides will be properly fence and erected with green netting.

Implementation of the above measures and consideration of these factors will help to ensure that the mining operations are conducted in a safe and controlled manner, maintaining the stability of the mine slopes and minimizing the risk of accidents or structural failures.

* * * * *



CHAPTER - VIII

PROJECT BENEFITS

CHAPTER 8

PROJECT BENEFITS

The proposed Rough stone and Gravel Quarry of Thiru.K.Ramaraj will improve physical and social infrastructures in the area like:

- Direct employment to 20 people.
- Indirect employment to scores of people.
- Financial gains for the governments, through collection of various taxes like royalty, GST, etc.,
- Increase in General Awareness of the People.
- Continual improvements of the local amenities for the local society
- Improvement of the General Living Standard of the People in the Vicinity
- Overall Improvement in HDI (Human Development Index)
- Growth of Allied Industries in the Area.
- Improvement in Per Capita Income.
- Providing certain facilities for the local schools and panchyats

In short, the proposed Rough Stone & Gravel Quarry will benefit this region in the fields of employment opportunities, improved per capita income for local people, and improved social welfare facilities in respect of education, medical systems, infrastructural build-up, etc in its own way.

By means of carrying out the socio-economic development activities, local community development is expected. Towards the same, the proponent has planned to allocate Rs.3 Lakhs for various activities under CER. From the CER activities allocated for various social welfare activities, the villages near the lease area will be benefited.

* * * * *



CHAPTER - IX

ENVIRONMENTAL COST BENEFIT ANALYSIS

CHAPTER 9

ENVIRONMENTAL COST BENEFIT ANALYSIS

Appendix-III of the MoEF notification S.O. 1533 dated 14.09.2006, which describes the generic structure of Environmental Impact Assessment document, states that the chapter 'Environmental cost benefit analysis' is applicable if it is recommended during scoping stage.

ToR for this project has been received from SEIAA, Tamil Nadu vide their letter No. TO25B0108TN5570602N dated 16.07.2025. Environmental cost benefit analysis is not prescribed in the terms of reference. Hence, it is not applicable for this project.

* * * * *



CHAPTER - X

ENVIRONMENTAL MANAGEMENT PLAN

CHAPTER 10

ENVIRONMENTAL MANAGEMENT PLAN

10.1 INTRODUCTION:

This chapter describes the implementation strategies of the environmental management measures described through the course of this EIA/EMP report for the purpose of mitigating significant impacts due to the proposed mining operations.

10.2 COMPONENTS OF THE ENVIRONMENTAL MANAGEMENT PLAN:

The environmental management plan comprises identification of the major impacts due to project operations and their suitable mitigative measures. (Provided in an elaborate manner in Chapter-IV) Based on the environmental policy of the company, the environmental management cell will oversee the implementation of these mitigative measures. The details of the proponent's environmental policy, environmental management cell and also the budgetary allocation towards various environmental management measures has been elaborated in this chapter.

10.2.1 ENVIRONMENTAL POLICY:

The proponent will frame a well-planned environmental policy. The salient features of this policy will be.

- ❖ Ensuring risk-free and safe mining operations by following all rules and conditions prescribed in the Indian mines Act, metalliferous mining regulation, mineral conservation and development rules, etc,
- ❖ Ensuring environmental preservation by adoption of remedial measures for control of air, water quality, noise status, biological improvements, green belt creation, etc.,
- ❖ Extending CER activities to cater to the needs of local community for various benefits like improvement of physical and social infrastructures for the welfare of local community.

DRAFT EIA/EMP REPORT FOR ROUGHSTONE & GRAVEL QUARRY OF THIRU.K.RAMARAJ IN S.F.NOS. 70/1(P) OVER AN AREA OF 1.06.50HA IN MYLERIPALAYAM VILLAGE, MADUKKARAI TALUK, COIMBATORE DISTRICT, TAMIL NADU.


- ❖ Ensuring that all mining operations such as deployment of HEMM, conduct of drilling and blasting operations, etc are strictly conducted keeping with regulatory standards & maintaining safe working environment in the area.
- ❖ Providing periodical training on safety, Health, & Environment to all employers.
- ❖ Any infringement / violation of any rule or unsafe mining operations should be reported mines manager, should be reported by the foremen/ blaster mate etc, who will take immediate corrective measures for avoiding major disasters. The report will ultimately reach the owner through upwardly hierarchical communicative channels from the lowest level to superior levels in a quick time bound duration.
- ❖ The mines manager will exercise overall control over entire mining and connected operations and all infringements / violations on any count pertaining to unsafe operations, environmental degradation, etc, should be brought to the notice of the owner of the quarry. Remedial measures for such violations and deviations should be taken care by the mines manager to avoid any hazards or disasters in the mine and nearby areas. The persons responsible for such violations will be punished through appropriate disciplinarily penal actions.
- ❖ The EC conditions and stipulations will be strictly observed by Mines manager of the mine in various issues like prescribed environmental monitoring schedules conducting of vibratory studies due to blasting, creation of green belt, management of mined area, occupational health review, etc.
- ❖ Penalty actions will be taken by the proponent in cases of continuous negligence resulting in violations deviations in this respect.
- ❖ A time schedule of once in 90 days for review of all operational factors as mentioned above is to be enforced, for proper and quick corrective actions needed in the matter.



10.2.2 ENVIRONMENTAL MANAGEMENT CELL:

The Mines Manager/Mine Incharge will undertake effective monitoring and implementation of various environmental control measures promptly and effectively and to oversee various environmental management schemes for air quality control, water quality status, noise level control, plantation programme, social development schemes, etc in the mine. The organizational chart for the same has been provided below:

Figure 0.1: Organization Chart

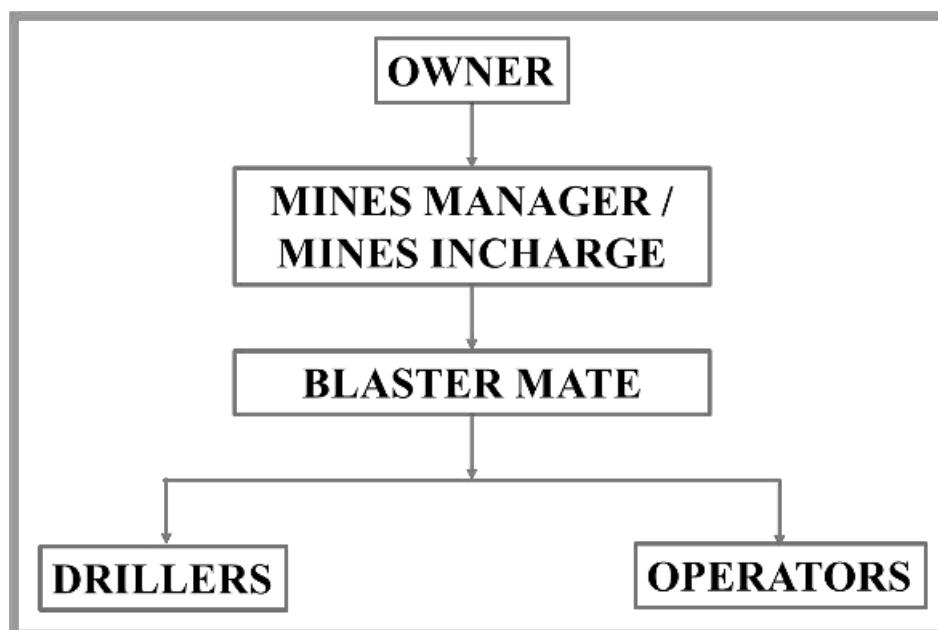

The Mines Manager/Mines In charge in the mine project site will be directly responsible for various environmental activities in the mine. The owner will correlate and oversee the environmental activities and their effective implementation in consonance with the guidelines in the EMP. The Mines Manager/Mines In charge will oversee the environmental administration at the mine and he will directly supervise all activities of environmental administration on environmental issues. Necessary assistance from sub ordinates, external consultants and laboratories shall be taken.

Environmental control measures will span various factors like land degradation, air, water and soil quality, noise levels, effective land reclamation for excavated areas, afforestation measures, etc. The administrative functions are given below.

DRAFT EIA/EMP REPORT FOR ROUGHSTONE & GRAVEL QUARRY OF THIRU.K.RAMARAJ IN S.F.NOS. 70/1(P) OVER AN AREA OF 1.06.50HA IN MYLERIPALAYAM VILLAGE, MADUKKARAI TALUK, COIMBATORE DISTRICT, TAMIL NADU.

- ❖ To observe the implementation of environmental control measures.
- ❖ To study the effects of project activities on the environment.
- ❖ To ensure implementation of Plantation Programme. Regular monitoring of survival rate of plants is carried out to achieve the desired result.
- ❖ To keep records of monitoring etc., in a systematic way, so as to facilitate easy access, when needed by statutory agencies, etc. Also send prescribed returns to statutory authorities.
- ❖ To ensure that adequate fencing and plantation is carried out in the safety zones.
- ❖ Conducting environmental studies and reporting to SPCB.
- ❖ To interact and liaise with Government Departments.
- ❖ To evaluate the performance of existing pollution control equipment and systems periodically and take timely action to keep the equipment at its optimum performance condition.
- ❖ To take immediate preventive action in case of some unforeseen environmental pollution attributable to the project.
- ❖ Conducting safety audits and programmes to create safety awareness in workers/ staff.
- ❖ Conducting annual health audits to detect any health problems promptly in the workers/staff. This will reduce occupational health problems.
- ❖ Imparting training on safety and conduct safety drills to educate employees. Firefighting equipment and system has to be kept in 'ready-to-fight' condition.
- ❖ Carrying out socio economic study in the surrounding areas to find out the benefits derived by the society due to the project and also to fulfill the deficiency, if any, immediately.
- ❖ Ensuring proper mine closure arrangements



DRAFT EIA/EMP REPORT FOR ROUGHSTONE & GRAVEL QUARRY OF THIRU.K.RAMARAJ IN S.F.NOS. 70/1(P) OVER AN AREA OF 1.06.50HA IN MYLERIPALAYAM VILLAGE, MADUKKARAI TALUK, COIMBATORE DISTRICT, TAMIL NADU.

Considering the other mines in the cluster, the Environmental Management Cell of this project will also act as a Cluster Management Committee. The various activities undertaken to be undertaken by this committee are detailed below:

- Effective implementation of the environmental management measures in a holistic manner
- Devising an operation plan for mining and transportation activities.
- Various natural calamities like rain, flooding, evacuation plans etc. will also be deliberated by this committee to form risk management and emergency management plan pertaining to the cluster.
- The environmental policy of the company will be implemented and proper sustainable mining in accordance with statutory regulations will be enforced for the quarries in the cluster.
- Furnishing action plan regarding restoration strategy
- Deliberate on the health of the workers involved in the mining and also the health of the public
- Carrying out detailed study on the impact of mining on:
 - Soil health & biodiversity
 - Climate change leading to droughts, floods, etc.
 - Pollution leading to release of greenhouse gases (GHG) rise in temperature and livelihood of local people
 - Possibilities of water contamination and impact on aquatic ecosystem health.
 - Agriculture, Forestry & Traditional practices.
 - Hydro geothermal /Geothermal effect due to destruction in the Environment.
 - Bio-geochemical process and its footprints including environmental stress.
 - Sediment geochemistry



- Furnishing action plan to achieve sustainable development goals with regards to water, sanitation and safety.
- Furnishing fire safety and evacuation plans in case of fire accidents.
- Implementation of steps to effectively utilize energy.

10.2.3 ENVIRONMENTAL MANAGEMENT PLAN:

10.2.3.1 General:

Systematic monitoring systems and well-conceived and efficient Environment Management Plan will ensure that during the project operations, the various environmental parameters, are well within the statutorily sustainable limits. The environmental control measures proposed to keep various environmental parameters of the project in terms of air, water, noise, land, biological environment, etc. has been described below.

10.2.3.2 Air Quality:

With regards to air quality, to mitigate the fugitive and gaseous emission resulting from mining and allied activities, the following control measures are proposed to be undertaken:

- Regular water sprinkling in the transport roads using mobile tankers for dust suppression.
- Controlled blasting techniques with NONEL.
- Provision of dust filters / mask to workers working at highly dust prone and affected areas.
- Covering of drill holes with wet cloth, using sharp drill bits
- Avoiding blasting during high wind periods where the fine dust is carried out away easily affecting the ambient air quality.
- Proper maintenance of haul roads, HEMM and dumpers.
- Covering of loaded tippers with tarpaulins during transportation

DRAFT EIA/EMP REPORT FOR ROUGHSTONE & GRAVEL QUARRY OF THIRU.K.RAMARAJ IN S.F.NOS. 70/1(P) OVER AN AREA OF 1.06.50HA IN MYLERIPALAYAM VILLAGE, MADUKKARAI TALUK, COIMBATORE DISTRICT, TAMIL NADU.

- Vehicular emissions will be controlled through regular and proper preventive maintenance schedules and emissions tests are done with diesel smoke meter equipment to ensure emission values.
- Besides, there will be good green belt cover will be developed around mine periphery and in safety zone.

10.2.3.3 Water Environment:

There will be no process effluent generated from this project. The domestic sewage to be generated will be collected in septic tank with soak pit arrangements. Besides, there will be no waste dumps or stockpiles within the lease area as the entire material will be directly dispatched to the consumers.

Surface runoff management structures such as garland drain connected to a settling pond will be constructed around the quarry to collect the rain water. The supernatant clear water from the settling pond will be provided to nearby downstream users. Towards rainwater harvesting, the rainwater harvested in the mine will be used to meet the water requirements during mining and excess water in consultation with villagers and in line with government practices will be out in to the nearby stream or shall be distributed to the nearby villages as per their need

10.2.3.4 Noise Environment:

During the project operations, various control measures as listed below will be carried out to mitigate adverse impact due to the noise generated due to mining and allied activities:

- Good plantation will be carried out in the safety zone areas
- Noise protectors, insulation of operator cabins, installation of silencers in machineries, etc.
- Proper and regular maintenance of equipment's
- Providing earplugs to workers exposed to higher noise level.
- Providing in-built mechanism for reducing sound emissions.
- Conducting regular health check-up of workers including Audiometry test for the workers engaged in noise prone area.



- Displaying the noise level status of operational machinery on the machines to know the extent of noise level and to control the time to which the worker is exposed to higher noise levels.

10.2.3.5 Ground Vibration

Since the production from this lease is less, the no of holes and the quantum of explosives to be used will also be negligible. During the project operations, various control measures as listed below will be carried out to mitigate adverse impact due to the ground vibration caused due to blasting activities:

- ❖ Controlled blasting techniques to maintain the peak particle velocity (PPV) below DGMS prescribed levels.
- ❖ Ideally formulating drilling and charging pattern and ensuring using less charge per delay.
- ❖ To contain fly rocks, stemming column will not be less than burden of the hole. Blasting area will also be muffled, if necessary, to stop fly rocks propagation.
- ❖ Blasting will not be carried out when strong winds are blowing towards the inhabited areas. Blasting will be done during midday time and never at night.
- ❖ Safety tools and implements near blasting site at the time of charging.
- ❖ Proper warning system before blasting and clearance of the area before blasting will be ensured.
- ❖ Proper care and supervision during blasting by a competent and experienced person.
- ❖ Besides, different blasting time for the projects in the vicinity is suggested and the timing is to be mentioned in the display board in the respective mines entrance.

Further details regarding the same has been provided under section 4.4.2, Chapter-IV.

10.2.2.6 Biological Environment:

The mining lease area and 10km buffer zone are devoid of declared ecologically sensitive features such as national parks, sanctuaries etc. Besides, endangered or endemic species are observed in the core and buffer zone. There will be no major clearance of vegetation involved in

DRAFT EIA/EMP REPORT FOR ROUGHSTONE & GRAVEL QUARRY OF THIRU.K.RAMARAJ IN S.F.NOS. 70/1(P) OVER AN AREA OF 1.06.50HA IN MYLERIPALAYAM VILLAGE, MADUKKARAI TALUK, COIMBATORE DISTRICT, TAMIL NADU.

this project. However, good greenbelt and plantation programmes are planned in and around the lease area.. Greenbelt / Plantation will be carried out to enhance the vegetative growth and aesthetic in the safety zone area. This will boost the biological, visual and aesthetic outlook of the area. Elaborate details regarding the same is provided under section 4.6.4, Chapter-IV..

10.2.2.7 Socio-Economic Environment:

The proposed project operation will provide positive impacts in the region on the employment area as well as on physical and social infrastructural status. Many other tangible benefits will be gained by the local people in the surrounding areas due to ancillary units, trading operations, contractual needs, casual labor, green belt development, etc. Towards the socio economic development of the surrounding area, the proponent has earmarked an amount of Rs.3.0 Lakhs under Corporate Environmental Responsibility. The activities identified under CER will be implemented in a phased manner.

10.3 ENVIRONMENTAL POLLUTION CONTROL COST:

In this proposed quarry Implementation of environmental control measures as stated above involves capital as well as recurring expenses. The probable capital and recurring environmental control cost are calculated and given below **Table No – 10.1**

Table 0.1: Environmental Control Cost

Rs. In lakhs			
S.No	Particulars	Capital Cost (Rs.in Lakhs)	Recurring Cost (Rs.in Lakhs)
A. Air Environment			
1	Compaction, gradation and drainage on both sides for Haulage Road	0.11	0.11
2	Water Sprinkling Arrangements	8.00	0.50
3	Muffled blasting	0.00	0.01
4	Wet drilling procedure / Latest eco-friendly drill machine with separate dust extractor unit	0.25	0.01
5	Manual Monitoring of trucks/tippers/tractors to ensure no overloading	0.00	0.00
6	Tarpaulin Sheets	0.00	0.10
7	Speed Governors	0.03	0.01
8	Regular monitoring of exhaust fumes as per RTO norms	0.00	0.05
9	Regular sweeping and maintenance of approach roads	0.00	0.21
10	Installing wheel wash system near gate of quarry	0.50	0.20



DRAFT EIA/EMP REPORT FOR ROUGHSTONE & GRAVEL QUARRY OF THIRU.K.RAMARAJ IN S.F.NOS. 70/1(P) OVER AN AREA OF 1.06.50HA IN MYLERIPALAYAM VILLAGE, MADUKKARAI TALUK, COIMBATORE DISTRICT, TAMIL NADU.

S.No	Particulars	Capital Cost (Rs.in Lakhs)	Recurring Cost (Rs.in Lakhs)
Sub-Total (A)		8.88	1.19
B.Noise Environment			
11	HEMM Maintenance	In-built in OPEX	In-built in OPEX
12	Oiling & greasing of Transport vehicles and HEMM at regular interval	In-built in OPEX	In-built in OPEX
13	Adequate silencers in all the diesel engines of vehicles.	In-built in OPEX	In-built in OPEX
14	Fitness certificate for transport vehicles	In-built in OPEX	In-built in OPEX
15	Line Drilling all along the boundary to reduce the PPV from blasting activity and implementing controlled blasting.	In-built in OPEX	In-built in OPEX
16	Portable blaster shed	0.50	0.02
17	NONEL Blasting to control Ground vibration and fly rocks	-	1.95
Sub-Total (B)		0.50	2.15
C.Waste Management			
18	Provision for domestic waste collection and disposal through authorized agency	0.25	0.20
19	Installation of dust bins	0.05	0.02
20	Bio toilets	In-built in OPEX	In-built in OPEX
Sub-Total (C)		0.30	0.22
D. Mine Closure			
21	Construction and Maintenance of Garland Drains	0.11	0.05
22	Barbed Wire Fencing	2.13	0.11
23	Green belt development - 500 Trees (200 Inside Lease Area & 300 Outside Lease Area)	0.65	0.15
24	Implementation of Final Mine Closure Actity as per Approved Mining Plan on Last Year	0.43	-
25	Contribution towards Green Fund. As per TNMMCR 1959, Rule 35 (The Contribution towards Green Funds @ 10% of peak production Seigniorage fee are indicated as part of EMP Budge and not necessarily implemented in the Project Site)	1.35	-
Sub-Total (D)		2.89	0.31
E. Implementation of EC, Mining Plan & DGMS Condition			
26	Fixed Display Board at the Quarry Entrance as permanent structure mentioning Environmental Conditions	0.10	0.01
27	Submission of 2 Half Yearly Compliance - Lab Monitoring Report as per CPCB norms	0.00	0.5
28	Provision of PPE to workers	0.80	0.2
29	IME & PME Health check up	0.00	0.2
30	First aid facility	0.00	0.02
31	Slope stability action plan	2.00	0.00



DRAFT EIA/EMP REPORT FOR ROUGHSTONE & GRAVEL QUARRY OF THIRU.K.RAMARAJ IN S.F.NOS. 70/1(P) OVER AN AREA OF 1.06.50HA IN MYLERIPALAYAM VILLAGE, MADUKKARAI TALUK, COIMBATORE DISTRICT, TAMIL NADU.

S.No	Particulars	Capital Cost (Rs.in Lakhs)	Recurring Cost (Rs.in Lakhs)
32	Safety precaution signages boards.	0.1	0.02
33	Parking area with shelter and flags	0.53	0.10
34	Installation of CCTV cameras in the mines and mine entrance	0.3	0.05
35	Mines Manager (1st Class / 2nd Class / Mine Foreman) and Mining Mate for Implementation as per Mining Plan and ensure safe quarry working	0.00	7.80
Sub-Total (E)		3.83	8.90
Grand Total (A+B+C+D+E)		16.40	12.77

For implementation of Environmental Management Plan (EMP) measures, a capital cost of Rs. 16.40 lakhs has been earmarked. In addition, an annual recurring expenditure of Rs. 12.77 lakhs will be incurred. The recurring costs, which include maintenance of pollution control systems, environmental monitoring, and other related activities, will be met from the project revenue and sustained throughout the entire lease period.

10.4 CONCLUSION:

As the production from this lease is relatively low, the requirement for equipment and the scale of mining operations will be minimal, and consequently, the anticipated environmental impacts are expected to be negligible. As such no adverse impact on environment is expected. Systematic mining and ensuring adoption of various mitigative measures given in the report will ensure that the future environmental quality in the area will be maintained within statutory limits. The environmental management strategy as explained above will prove that industrial growth, if properly planned with all environmental concerns and appropriate remedial measures can go a long way to improve life pattern and living conditions of the local community around the project.



CHAPTER-XI

SUMMARY AND CONCLUSION

CHAPTER 11

SUMMARY & CONCLUSION

11.1 INTRODUCTION:

Thiru. K. Ramaraj proposed to operate a Roughstone and Gravel Quarry over an area of 1.06.50Ha in Survey No. 70/1(P) for 5 years in Myleripalayam Village, Madukkarai Taluk, Coimbatore District, Tamil Nadu and has initiated action towards obtaining environmental clearance.

Although the individual lease area of this project is less than 5 Ha, the proposal falls under Category B1 forming a cluster situation as per the EIA Notification 2006, its subsequent amendments and MoEF& CC Notification S.O. 2269(E) Dated 01.07.2016 (With total cluster area of 21.7188Ha). This necessitates preparation of EIA/EMP report for appraisal to SEAC. This EIA/EMP report is prepared based on standard Terms of Reference issued by SEIAA, Tamil Nadu vide ToR Identification No. TO25B0108TN5570602N dated 16.07.2025 and is in conformance of the generic structure prescribed by MoEFCC in their notification of September 2006 and the approved mining plan.

It is proposed to quarry out TOR issued production capacity of 10614m³ of Gravel & 73750m³ of rough stone for a period of 5 years upto a depth of 48m with the peak production capacity of 10,614 (Year 1) of Gravel & 14970m³ of Rough stone (Year 4) for five years lease period. The entire lease area is a patta land which is in applicants possession

11.1.1 STATUTORY APPROVALS:

Name	Issuing Authority	Status	Letter number	Date	Reference
Precise Area Communication	Assistant Director, Department of Geology & Mining	Received	Rc.No.778/Mines/2024	27.12.2024	Annexure-1
Mining Plan Approval	Assistant Director, Department of Geology & Mining	Approved	Rc.No.778/Mines/2024	09.01.2025	Annexure-2
Details of other quarries within 500m radius	Assistant Director, Department of Geology & Mining	Obtained	Rc.No.778/Mines/2024	09.01.2025	Annexure-3
District survey	Collector,	Authenticate	As per S.O. 3611(E)	-	--



DRAFT EIA/EMP REPORT FOR ROUGHSTONE & GRAVEL QUARRY OF THIRU.K.RAMARAJ IN S.F.NOS. 70/1(P) OVER AN AREA OF 1.06.50HA IN MYLERIPALAYAM VILLAGE, MADUKKARAI TALUK, COIMBATORE DISTRICT, TAMIL NADU.

report	Assistant director, Geology & Mining	d	dated 25.07.2018		
VAO Letter	VAO	Obtained	--	08.07.2024	Annexure-4
Previous pit dimensions and production	Assistant Director, Geology & Mining	Received	Rc.No.778/Mines/2024	09.01.2025	Annexure-5
Consent Register documents	-	Obtained	-	19.05.2025	Annexure-6
Previous Environmental Clearance	DEIAA, Coimbatore	Granted	DEIAA-CBE/F.No.358/1(a)/EC.No.53/2018	10.12.2018	Annexure-7
Certified EC Compliance Report	Ministry of Environment, Forest & Climate change, Nungambakkam, Chennai-06	Obtained	EP/12.1/2025-26/SEIAA/79/TN/1302	22.08.2025	Annexure-8
Lease Deed Agreement Copy	District Collector, Coimbatore	Obtained	-	-	Annexure-8A

In the precise area communication letter, the following lease conditions were placed and the same will be followed:

No hindrance shall be caused to the adjacent patta land and public while carrying out quarrying operations. A safety distance of 7.5m patta land for periphery, **Lessee has agreed to abide by all these conditions**

11.1.2 ENVIRONMENTAL CLEARANCE APPLICATION:

Particulars	Details
Terms of Reference	Received from SEIAA, Tamil Nadu vide TO25B0108TN5570602N dated 16.07.2025
Baseline Data Collection	Carried out by Enviro Solutions & Labs, Coimbatore, Summer Season (March – May 2025)

11.2 SALIENT FEATURES OF THE PROJECT:

Table 0.1: Site Details

Location	Myleripalayam Village, Madukkarai Taluk, Coimbatore District, Tamil Nadu
Survey No.	70/1(P)
Coordinates	Latitude : 10°52'00.56" N to 10°52'04.76" N Longitude : 77°02'02.14" E to 77°02'06.02" E
Nearest Village	Maileripalaiyam -1.1km – (NW)
Nearest Town	Chettipalayam - 4.3km (N)
Nearest Highway	NH-83 (Coimbatore – kinathukadavu)– 2.4Km – W,



DRAFT EIA/EMP REPORT FOR ROUGHSTONE & GRAVEL QUARRY OF THIRU.K.RAMARAJ IN S.F.NOS. 70/1(P) OVER AN AREA OF 1.06.50HA IN MYLERIPALAYAM VILLAGE, MADUKKARAI TALUK, COIMBATORE DISTRICT, TAMIL NADU.

Nearest Railway Station	Kinathukadavu RS – 4.3km – (SW)
Nearest Airport	Coimbatore - 18km (N)
Accessibility	The lease area can be approached through village road on the southern side of the lease area which joins NH-83 Coimbatore – kinathukadavu highway at a distance of 2.4Km on the western side of the lease area.
Topography	The lease applied area is exhibits plain area covered by Rough stone & Gravel formation. The remaining land in the proposed area is partially covered with shrubs, herbs, grass, climbers, bushes, etc.

Table 0.2: Environment Setting of The Study Area

S.No	PARTICULARS	DETAILS
1	Nearest highway	NH-83 (Coimbatore – kinathukadavu)– 2.4Km – W,
2	Nearest Railway station	Kinathukadavu RS – 4.3km – (SW)
3	Nearest Airport	Coimbatore Airport - 18km – (N)
4	Nearest major water bodies	Kodavadi River – 7.3km – (S) Varattar River – 7.9km – (W)
5	Nearest town/City	➤ Chettipalayam – 4.3km (N)
6	Nearest villages	Myleripalayam – 1.1km- (NW) Kumaarapalayam – 1.8km – (SW)
7	Notified Archaeologically important places, Monuments	Nil within 10km radius
8	Environmental sensitive areas, Protected areas as per Wildlife Protection Act, 1972 (Tiger reserve, Elephant reserve, Biospheres, National parks, Wildlife sanctuaries, community reserves and conservation reserves)	Nil within 10km radius
9	Reserved / Protected Forests	Nil within 10km radius
10	Defence Installations	Nil within 10m radius
11	Seismic Zone	Zone – II (Least Active)
12	Other Industries in the study area	Other than rough stone quarry & crushers there are numerous ware houses, other industries like glass, textile mills, foundries, engineering units, Upcoming CODISSIA Industrial Park B (Kallapalayam), etc in the area.



DRAFT EIA/EMP REPORT FOR ROUGHSTONE & GRAVEL QUARRY OF THIRU.K.RAMARAJ IN S.F.NOS. 70/1(P) OVER AN AREA OF 1.06.50HA IN MYLERIPALAYAM VILLAGE, MADUKKARAI TALUK, COIMBATORE DISTRICT, TAMIL NADU.

Table 0.3: Technical Description

PARTICULARS	DETAILS																							
Geological reserve	194680 Cu.m. Roughstone & 14775 cu.m Gravel																							
Mineable reserve	73750 Cu.m. Roughstone &10614cu.m Gravel																							
Method of Mining	Open cast mechanized mining method with drilling, blasting, excavation, loading and transportation of Rough stone to needy buyers.																							
Previous Mining	• The proponent carried out mining operations during previous lease periods also. • During this period, Environmental Clearance was obtained from SEIAA, Tamil Nadu by the proponent for only Survey No.70/1(P) over an area of 1.06.50Ha vide Lr.No.DEIAA-CBE-V/F.No.358/1(a)/EC.No.53/2010 dated 10.12.2018 (Annexure-5) • This EC was issued for the production quantity of 90,353m3 of Roughstone upto a depth of 38m for a period of 5 years. • A letter is obtained from the Assistant Director, Geology & Mining vide Rc.No.778/Mines/2024 dated 09.01.2025 wherein the existing pit dimensions and the production quantities mined out has been furnished. (Annexure-6)The achieved quantity during the lease period was adhering to the production approved in the Environmental Clearance.																							
Production		<table><tr><th>Year</th><th>ROUGHSTONE (m3)</th><th>GRAVEL(m3)</th></tr><tr><td>I</td><td>14,700</td><td>10,614</td></tr><tr><td>II</td><td>14,830</td><td>--</td></tr><tr><td>III</td><td>14,900</td><td>--</td></tr><tr><td>IV</td><td>14,970</td><td>--</td></tr><tr><td>V</td><td>14,350</td><td>--</td></tr><tr><td>Total</td><td>73,750</td><td>10,614</td></tr></table>	Year	ROUGHSTONE (m3)	GRAVEL(m3)	I	14,700	10,614	II	14,830	--	III	14,900	--	IV	14,970	--	V	14,350	--	Total	73,750	10,614	
Year	ROUGHSTONE (m3)	GRAVEL(m3)																						
I	14,700	10,614																						
II	14,830	--																						
III	14,900	--																						
IV	14,970	--																						
V	14,350	--																						
Total	73,750	10,614																						
Waste Generation and Management	No waste generation is anticipated from this quarry operation, as the entire excavated material will be fully utilized. The overburden in the form of gravel will be loaded into tippers and supplied to customers upon payment of the prescribed fees to the Government. The rough stone will be excavated and transported to buyers for use in the production of crusher aggregates and M-sand.																							
Ultimate Depth	48m																							



DRAFT EIA/EMP REPORT FOR ROUGHSTONE & GRAVEL QUARRY OF THIRU.K.RAMARAJ IN S.F.NOS. 70/1(P) OVER AN AREA OF 1.06.50HA IN MYLERIPALAYAM VILLAGE, MADUKKARAI TALUK, COIMBATORE DISTRICT, TAMIL NADU.

PARTICULARS	DETAILS
Man power	20People directly and more than 50 people indirectly
Mode of transport	By Road
Waterrequirement	8KLD
Source of water	The required water will be procured from outside agencies initially. Later, water collected in the mine pit will be used to meet the needs.
Power requirement	All the equipment will be diesel operated. No electricity is needed for mining operation. The minimum power requirement for office, etc will be met from state grid.
Life of the mine	5 Years
Project cost	Rs. 1,03,30,000 (Including operational + Fixed Asset + EMP cost).

11.3 EXISTING ENVIRONMENTAL SCENARIO:

11.3.1 GENERAL:

The studies and data collection have been carried out systematically and meticulously as per relevant IS codes, CPCB and MoEF&CC guidelines and as per approved ToR during **Summer Season (march 2025 – May 2025)** by **Enviro Solutions & Labs, Coimbatore**. For the purpose of this study, the area has been divided into two zones, namely, core and buffer zones. Core zone is considered as the total lease area, while buffer zone encompasses an area of 10 km radius distance from the periphery of core zone.

11.3.2 SOCIO-ECONOMIC STATUS:

The proposed Roughstone and gravel quarry is located in Myleripalayam Village, Madukkarai Taluk, Coimbatore District, and Tamil Nadu. The details of the 10Km radius study area has been provided below:

Table 0.4: Social, Economic and Demographic Profile of the Study Area

Details	Population	Percentage
A. Gender-wise distribution		
Male Population	174613	50.09
Female Population	173985	49.91
Total	348598	100
B. Caste-wise population distribution		
Scheduled Caste	56402	16.18



DRAFT EIA/EMP REPORT FOR ROUGHSTONE & GRAVEL QUARRY OF THIRU.K.RAMARAJ IN S.F.NOS. 70/1(P) OVER AN AREA OF 1.06.50HA IN MYLERIPALAYAM VILLAGE, MADUKKARAI TALUK, COIMBATORE DISTRICT, TAMIL NADU.

Details	Population	Percentage
Scheduled Tribes	1942	0.56
Other	290254	83.26
Total	348598	100
C. Literate and Illiterate population		
Literate Males	139164	39.92
Literate Females	121238	34.78
Total Literate Population	260402	74.70
Others Males	35449	10.17
Others Females	52747	15.13
Others Population	88196	25.30
Total	348598	100
D. Occupational structure		
Main workers	142221	40.80
Marginal workers	16772	4.80
Total Workers	158993	45.60
Total Non-workers	189605	54.40
Total	348598	100

Further developments in this area with respect to these various facilities has occurred over the years. Numerous ware houses, other industries like glass, textile mills, foundaries, engineering units, Industrial Park B (Kallapalayam), etc serve as the main occupation for the young workforce. Industrialisation in harmony with locals are observed.

11.3.2.1 SAMPLE SURVEY:

Nearby villages were visited for conducting sample Village survey on all socio-economic aspects and requirements of the people. The existing socio-economic scenario is studied and CER activities are also suggested to the proponent. The study details are given in **Para 3.2.4, Chapter – III**.

11.3.3 EXISTING ENVIRONMENTAL QUALITY:

Table 0.5: Baseline Data

A) METEOROLOGICAL DATA		
Season: Winter Season (March 2025 to May 2025)		
PARAMETERS	MINIMUM	MAXIMUM
Temperature in °C	21.0	38.0
Humidity in %	18.0	98.0
Wind speed Km/Hr	<1.8	38.9



DRAFT EIA/EMP REPORT FOR ROUGHSTONE & GRAVEL QUARRY OF THIRU.K.RAMARAJ IN S.F.NOS. 70/1(P) OVER AN AREA OF 1.06.50HA IN MYLERIPALAYAM VILLAGE, MADUKKARAI TALUK, COIMBATORE DISTRICT, TAMIL NADU.

Predominant wind direction (From)		SW	
B) AMBIENT AIR QUALITY		Monitoring Location – 6 locations	
PARAMETER	RESULT (µg/m3)		*LIMIT (µg/m3)
Location	Core Zone	Buffer Zone	
Particulate Matter (Size <10 µm)	49.0 - 63.0	47.0 - 62.0	100
Particulate Matter (Size <2.5 µm)	18.0 - 25.0	16.0– 27.0	60
Sulphur Dioxide (as SO ₂)	5.0 - 8.0	5.0– 12.0	80
Nitrogen Dioxide (as NO ₂)	12.0 -19.0	10.0 – 23.0	80
Conclusion: The existing Ambient Air Quality levels for PM10, PM2.5, SO2 and NO2, are within the NAAQ standards prescribed CPCB limits of 100 µg/m3, 60 µg/m3, 80 µg/m3 & 80 µg/m3. The CO values in all the locations were found to be below detectable limit. Silica values in the study area are found to be below detectable limit. (Detection limit – 0.05 mg/m3)			
C) WATER QUALITY		Monitoring Location – 6 locations	
PARAMETER	Result		*LIMIT (µg/m3)
pH at 25 °C	7.33 – 8.02		6.5-8.5
Total Dissolved Solids, mg/L	415 – 789		2000
Chloride as Cl-, mg/L	38.7 – 168		1000
Total Hardness (as CaCO3), mg/L	128 – 269		600
Total Alkalinity (as CaCO3), mg/L	212– 265		600
Sulphates as SO42-, mg/L	12.8 – 55.3		400
Iron as Fe, mg/L	BDL		0.3
Nitrate as NO3, mg/L	4.1 – 6.63		45
Fluoride as F, mg/L	BDL – 0.2		1.5
Conclusion: The water quality of ground water is found to be within the prescribed Permissible limits of IS: 10500 Norms in the absence of an alternative source as per Drinking Water Specifications.			
D) NOISE LEVELS		Monitoring Location – 6 locations	
PARAMETER	RESULT dB(A)		*LIMIT (µg/m3)
	Day Equivalent	Night Equivalent	
Core Zone	53.8	43.5	90
Buffer Zone	49.6-54.6	40.7-43.8	Day Equivalent - 55dB(A), Night Equivalent - 45dB(A)
*Permissible noise for industrial workers as laid down by CPCB (at 8 hrs Exposure Time). While comparing with the MoEF&CC Norms, the monitored ambient noise levels are generally within the limit values.			
E) SOIL QUALITY		Monitoring Location – 6 locations	
PARAMETER	Range of values		
pH	6.54 to 6.86		
Electrical Conductivity (µmho/cm)	0.073 – 0.106		
Organic matter (%)	0.59 – 1.49%.		
Total Nitrogen (kg/Ha)	136 - 278		
Phosphorus (kg/Ha)	21.9 – 50.2		
Sodium (m.eq/100g)	1.26- 2.67		
Potassium ((kg/Ha))	235 - 403		
Soil is of Sandy type.			

F) LAND ENVIRONMENT:



Creative Engineers & Consultants

PRO CODE: CEC-EMP-MI-254

REV NO : 00/OCT/25

11-7

SUMMARY & CONCLUSION

DRAFT EIA/EMP REPORT FOR ROUGHSTONE & GRAVEL QUARRY OF THIRU.K.RAMARAJ IN S.F.NOS. 70/1(P) OVER AN AREA OF 1.06.50HA IN MYLERIPALAYAM VILLAGE, MADUKKARAI TALUK, COIMBATORE DISTRICT, TAMIL NADU.

For the present study on land use pattern in the study area, remote sensing satellite data have been used. The area estimated of land use categories around the 10km buffer zone is provided below:

Table 0.6: Land Use in 10Km Buffer Zone

S.No	Landuse Feature	Area (Sq.Km)	Percentage
1	Agriculture/ Plantation	108.81	34.16
2	Fallow Land	151.32	47.50
3	Land With Scrub	7.30	2.29
4	Land Without Scrub	10.05	3.16
5	Water bodies	0.99	0.31
6	Mining	8.03	2.52
7	Settlement	32.07	10.07
	Total	108.81	34.16

From the above table it is seen that 47.50 % of the buffer area is classified under fallow land, 34.16 % of Agriculture/ Plantation land, 2.29 % constitutes land with scrub, 3.16 % constitutes land without scrub and the balance falls under other land use categories

G) BIOLOGICAL ENVIRONMENT:

Flora: The proposed lease area is a non forest, private land. Part of the lease area is already mined and exposed with rock. The remaining area contains plantation carried out in the lease periphery and barren patch in the south side.

Dominated species in the buffer zone are *Acacia auriculiformis*, *Azadirachta indica*, , *Borassus flabellifer*, *Acacia nilotica*, *Leucaena leucocephala*, *Prosopis juliflora*, *Acacia leucophloea*, *Cocus nucifera*, *Albizia lebbeck*, etc. The detailed list of plants found in the Buffer zone is given in Table no – 3.26.

Fauna: There is no Wild Life Sanctuary or National Park within the study area of 10 km. Domesticated animals are commonly found. No wild mammalian species was directly sighted during the field survey. The list of fauna within the study area is given in Table No – 3.27.

H) HYDROLOGICAL STUDY:

The district is underlain by hard rock formation. Fissured and fractured crystalline rocks constitute the important aquifer systems in the district. Study area is dominated with hard Charnockite rock formation.



There are no streams, canals or water bodies within the lease area. The drainage pattern of the area is dendritic – sub dendritic. Drainage pattern is the pattern formed by the streams, rivers, and lakes in a particular drainage basin.

In the study area, the shallow aquifer is developed through dug wells and deeper aquifer through tube wells. Based on the well inventory of the nearby wells & borewells, it is observed that the average water level in the open well is varies from 12m to 15 m BGL whereas the water level in the bore well varies generally from 50m to 55m BGL.

Study of the area shows that the sub-surface formations reveal low to medium recharge potentials. Subsequently hard and massive formations of rock are found. Based on the available information and the geophysical investigations it is observed that the study area is of poor to moderate groundwater potential up to 50m to 55m. Besides, the mining area consists of hard compact rock, no major water seepage within the mine is expected. There is no water seepage noticed in to the already quarried deeper pits situated nearby the proposed quarry area. Hence, the quarrying rough stone up to the proposed depth may not have any adverse impact in the area over ground water conditions.

Direct rainfall falling into the mine pit during monsoon season and intermittent seepage from phreatic top layer if any will be collected in the bottom of the mine pit and gainfully used for Greenbelt development, Dust suppression etc

11.4 ANTICIPATED ENVIRONMENTAL IMPACTS AND MITIGATION MEASURES:

11.4.1 GENERAL:

In this project, mechanized open cast mining will be undertaken for the extraction of Rough Stone and Gravel. The potential impacts arising from mining and its associated activities have been assessed with respect to various environmental components such as air, water, noise, vibration, land, and transportation.

11.4.2 AIR ENVIRONMENT:

The principal sources of air pollution in the area due to mining and allied activities are dust generation in the mine due to various activities such as excavation of material, movement of HEMM, loading, unloading and transportation operations.. Besides, Gas emission also occur as a result of emission of SO₂, NO_x, CO etc., from diesel driven mining equipment, compressors,



DRAFT EIA/EMP REPORT FOR ROUGHSTONE & GRAVEL QUARRY OF THIRU.K.RAMARAJ IN S.F.NOS. 70/1(P) OVER AN AREA OF 1.06.50HA IN MYLERIPALAYAM VILLAGE, MADUKKARAI TALUK, COIMBATORE DISTRICT, TAMIL NADU.

generator sets, etc. In case of this mine, since the production from this lease is less, the number of equipment to be used, magnitude of operation & consequent impact on the environment will be less. Besides, the following measures will be adopted to control impact on the air quality due to mining operations in the lease area:

Table 0.7: Mitigation Measures – Air Environment

S.No	Activity	Mitigation Measures
1	Drilling	Usage of Drill bits in good condition
		Covering of drill holes with wet cloth
		Usage of sharp drill bits for drilling of holes.
		Provision of dust filters / mask to workers working at highly dust prone and affected areas.
2	Blasting	Well-designed blasting parameter, effective stemming to achieve optimum breakage occurs without generating fines.
		Use of appropriate explosives for blasting and avoiding overcharging of blast holes.
		Avoiding blasting during high wind periods where the fine dust is carried out away easily affecting the ambient air quality.
		Use of controlled blasting techniques with Nonel to keep the dust generation, noise as well as vibration level within the prescribed limits.
3	Excavation and Loading	Proper maintenance of HEMM
		Enclosures for operator cabin.
		Imparting sufficient training to operators on safety and environmental parameters.
		Proper maintenance of hauling equipments.
4	Transportation	Avoiding overloading of dumpers.
		Regular wetting of transport road using mobile water tanker.
		Proper maintenance of haul road and other roads
		Setting up of tyre wash facility in the transport road.
		Avoiding overloading of tippers
		Covering of loaded tippers with tarpaulins during transportation
5	Others	Vehicular emissions will be controlled through regular and proper preventive maintenance schedules and emissions tests are done with diesel smoke meter equipment to ensure emission values.
		Development of greenbelt / barriers around mine in the safety zone and carrying out plantation within the lease area.

Due to adoption of all these measures, no major impact on air quality is envisaged due to this proposed opencast mining operation.



DRAFT EIA/EMP REPORT FOR ROUGHSTONE & GRAVEL QUARRY OF THIRU.K.RAMARAJ IN S.F.NOS. 70/1(P) OVER AN AREA OF 1.06.50HA IN MYLERIPALAYAM VILLAGE, MADUKKARAI TALUK, COIMBATORE DISTRICT, TAMIL NADU.

The impact on air quality due to the proposed project is estimated using AERMOD View Gaussian Plume Air Dispersion Model developed by Lakes Environmental Software which is based on steady state Gaussian plume dispersion. Ground Level Concentration (GLC) have been computed using hourly meteorological data for particulate matter PM10 and PM2.5.

The resultant added concentrations with baseline figures even at worst scenario, show that the values of ambient air quality with respect to PM10 are in the range of 58.0 µg/m³ to 64.0 µg/m³ and with respect to PM2.5 are in the range of 24.0 µg/m³ to 28.0 µg/m³ which are within the statutory limits in each case.

For preservation of environment in this mine strict enforcement of management schemes will be undertaken for taking corrective actions, as needed. By adopting the effective implementation of all the mitigative measures, no adverse impact on Air quality due to the mining operation in this lease area is expected.

11.4.3 WATER ENVIRONMENT:

Water Requirement: The total water requirement for this project will be 8.0 KLD comprising 1.0 KLD for drinking water and domestic use, 5.0 KLD for dust suppression and 2.0 KLD for greenbelt. The water will be sourced initially from outside agencies. Later the rainwater collected in the mine pit sump will be used for this purpose.

The activity / source of pollution, its impact / consequence, proposed control measures are explained below:

Table 0.8: Mitigation Measures – Water Pollution

S.No	Source	Consequence	Mitigation Measures
A	Domestic use	Generation of waste water	The domestic sewage to be generated from the project will be collected in septic tank with soak pits.
B	Rainfall	Runoff from waste dump and stack	Towards surface runoff management, a garland drain of length 450m will be constructed around the quarry and will be connected to settling ponds with silt traps. The supernatant clear water from the settling pond will be flow to the downstream users.
		Rainwater Harvesting	The rain water falling in the quarry will be harvested in the sump at the lowest level of the quarry. This sump will act as a settling pond to prevent solids escaping along with discharge, before outlet. etc.
C	Drainage Course	Disturbance to drainage course	There are no streams or water bodies in and around the lease area. There is no proposal to discharge any effluent into this waterbody. No major impact is envisaged on the nearby water bodies due to project operations

Generation of mine pit water: Study of the area shows that the sub-surface formations are compact with less intergranular porosity and fractures leading to less permeability and



transmissivity values and as such the ground water level in this area is deep from surface. Subsequently hard and massive formations of rock are found. Based on the available information and the geophysical investigations it is observed that the study area is of poor to moderate groundwater potential up to 50m to 55m. Besides, the mining area consists of hard compact rock, no major water seepage within the mine is expected. The ultimate pit depth of mining is 48m. The ground water table in this area is below this level. Hence, ground water intersection is not envisaged and ground water will not be affected appreciably due to the quarrying operation. There is no water seepage noticed in the already quarried deeper pits situated nearby the proposed quarry area. Hence, the quarrying rough stone up to the proposed depth may not have any adverse impact in the area over ground water conditions.

As mentioned earlier, the rainfall will be collected in the mine floor sump and advantageously used. Excess water if any in the sump will be pumped to settling pond for downstream users.

11.4.4 NOISE ENVIRONMENT:

Anticipated noise levels resulting from operation of the various machineries like excavator, tippers, drill have been computed using point source model. Computation of cumulative noise levels at the nearby villages is made based on the assumption that there are no attenuation paths between the source and the boundary. From the studies, it is found that the predicted Noise Levels due to mining operations at the periphery of the mine lease itself will be less even without considering any attenuation factor. However, practically there will be attenuation due to vegetation etc., and as such there will not be any adverse noise propagation outside the lease boundary. Since the habitations are also away the effect of noise due to mining operations will not be felt at all in the surrounding village. Hence, by implementing the following mitigative measures for noise control, the impact on noise levels will continue to be insignificant:

- Planting rows of native trees along roads, around mine area and other noise generating centres to act as acoustic barriers.
- Sound proof operator's cabin for equipments like shovel, tippers, etc.
- Proper and regular maintenance of equipments may lead to less noise generation.
- Providing in-built mechanism for reducing sound emissions.
- Providing earplugs to workers exposed to higher noise level.



- Conducting regular health check-up of workers including Audiometry test for the workers engaged in noise prone area.
- Displaying the noise level status of operational machinery on the machines to know the extent of noise level and to control the time to which the worker is exposed to higher noise levels.
- Provision of green net in lease periphery

Further green belt and afforestation will be planned and executed to abate noise and dust propagation in the area.

11.4.5. VIBRATION:

Vibrations due to blasting may cause damage to nearby structures, if appropriate control measures are not adopted. Since the production from this lease is very low, the no. of holes and the quantum of explosives to be used for blasting will be negligible.

The following control measures will be planned to reduce ground vibratory conditions to sustainable statutory limits:

- 1) Carrying out controlled blasting using Nonel delay detonator.
- 2) Optimum design for burden and spacing.
- 3) Reducing explosive charge per delay to minimum.
- 4) The peak particle velocity (PPV) of ground vibration will be kept very low through optimally controlled blasting techniques, after necessary field trials.
- 5) To contain fly rocks, stemming column to be less than burden of the hole. Blasting area will also be muffled, if necessary, to stop fly rocks propagation.
- 6) Blasting will not be carried out when strong winds are. Blasting will be done during midday time.
- 7) Controlled blasting to avoid tension cracks which may endanger the stability of bench slopes in the mine.
- 8) Proper care and supervision during blasting by a competent and experienced person to be carried out.



- 9) Having different blasting time for the leases in the cluster.

By adoption of above measures, it will be ensured that the ground level vibration due to blasting are maintained within the limits prescribed by DGMS, Dhanbad . Elaborate details regarding the same are provided under section 4.4.2, Chapter-IV.

11.4.6 IMPACT ON LAND ENVIRONMENT:

The lease area of 1.06.50Ha in S.F.Nos.70/1(P) is a patta land, partly owned by the applicant and for the remaining, applicant got consent from the other pattadhar. The proponent has operated this lease in the previous lease periods also. Presently, 0.4075Ha of the lease area is quarried out. At the end of the period, In the post mining stage, the mine pit area of 0.75.10 Ha will be left as a water body. Plantation will be carried out over 0.29.30Ha and 0.021Ha will be left as road and infrasturcture. Overall about 500 trees will be planted in and around the lease area during the plan period. Entire mined out area will be properly fenced to prevent inadvertent entry of men and animals. In the post mining stage the rainwater harvested in the mined-out void shall be utilized.

11.4.7 BIOLOGICAL ENVIRONMENT:

Part of the lease area is already mined out during the previous lease periods and plantation carried out by the lessee is only present. Since the mining operation in this lease will be of small scale the impact on surrounding environ is expected to be insignificant. Additionally, necessary mitigative measures like dust suppression, proper maintenance of equipment's, greenbelt and plantation etc., will be carried out to prevent dust generation & any further impact on the vegetation. In the safety zone within the lease area and in the nearby areas including mineral transport road plantation of local trees will be carried out about 500 trees will be planted in and around the lease area.

.11.4.8 SOCIO ECONOMIC ENVIRONMENT:

The entire lease area is a private patta land. There are no habitations or hutments in the core zone area and as such no rehabilitation or resettlement is involved. The mining operations in the proposed quarry will employ about 20 people. Besides through allied opportunities in logistics, trading, repairing works etc. good employment potential will arise in this area, which



will provide raising income levels and standards of living in the area through various service related activities connected with the project operations.

Towards the socio-economic development of the surrounding area, the proponent has earmarked an amount of Rs.3 Lakhs under Corporate Environmental Responsibility. The activities identified under CER will be implemented in the nearby Government school. In consultation with the locals based on the need & priority it will be implemented.

11.4.9 OCCUPATIONAL HEALTH AND SAFETY ASPECTS:

In order to ensure minimisation of occupational health and safety problems in the project operation, the following preventive remedial measures will be effectively exercised in the project operations, so as to comply with applicable standards.

- Medical examination of workers at pre-entry level stage of workers, etc., by qualified doctors, with periodical examination of all workers/staff at least once a year, as per DGMS circulars.
- Regular awareness campaigns amongst staff and workers
- Staff will be provided with PPE to guard against excess noise levels, Dust generation and inhalation, etc., as per standards prescribed by DGMS.

11.4.10 IMPACT ON LOCAL LOGISTICAL SYSTEM DUE TO PROJECT:

From this proposed quarry the entire output will be transported to the consumers . There will be less than 1 trip per hour additional truck traffic. The transport route can easily absorb this negligible traffic due to this project. The following mitigative measures are suggested for mitigation of adverse impacts on the logistical aspect of the project:

- ❖ Water sprinkling on Rough stone in the transport vehicles before transporting, so that no dust nuisance during transport will arise.
- ❖ Proper maintenance of transport roads
- ❖ Proper maintenance of transport vehicles.
- ❖ Avoiding overloading of material
- ❖ Covering of loaded vehicles with tarpaulins sheet if warranted.



11.4.11 WASTE MANAGEMENT:

Since the entire mined out material will be used there will not be any solid waste generation from this project. There is no process effluent generation from this mine. Hence no liquid waste is generated.

The hazardous waste generated in this mine will be stored in a separate storage area with impervious containers for waste oil, oil contaminated clothes, used lead acid batteries, scraps, tyre storage etc. It will be disposed through authorized recyclers or re-processors periodically. The hazardous wastes will be transported in accordance with the provisions of rules. By effective implementation of above said mitigation measures no major impact due to Hazardous waste is expected.

Single use plastics/ use and throwaway plastics will be banned in the site as directed by the Tamil Nadu Government vide GO(Ms)No.84 regarding ban on use of plastic products. The employees will be encouraged to use compostable material or reusable material.

11.5 ENVIRONMENTAL MONITORING PROGRAMME:

The monitoring schedules are planned for systematic study of various pollution levels with respect to air and water qualities, noise levels, etc. to ensure that they conform to the standards laid down by Environmental Protection Act and various statutory Limits.

Monitoring location and the frequency of monitoring shall be suitably modified in consultation with the nodal agency as per the actual requirements and prevailing conditions of the mine and environmental factors, as dictated from time to time, depending on the prevailing pollution levels, if required.

Towards EMP measures, Rs.16.40Lakhs is allocated under capital cost. Besides, Rs.12.77 Lakhs per annum will be spent under recurring cost. All the recurring cost of maintenance of pollution control measures, environmental monitoring etc., will be met from revenue. Further details of the capital and recurring cost of environmental management has been provided in in Table No. 10.2, Chapter-X.



11.6 ADDITIONAL STUDIES:

The additional studies covered for this EIA / EMP report are:

1. Public consultation of the project as per MoEF&CC mandates.
2. Risk Assessment
3. R&R Plan
4. Mine closure plan

This draft EIA/EMP report will be made available for public consultation in accordance with the prescribed procedures. A 30-day advance notice regarding the date and time of the public hearing will be published in two local newspapers. The hearing will be conducted under the supervision of the District Collector and officials from the State Pollution Control Board. During the public consultation, the opinions, concerns, and objections of stakeholders will be documented. All queries raised by the public, along with responses provided by the project proponent and relevant authorities, will be duly recorded and incorporated into the final EIA/EMP report submitted for approval to the SEIAA, Tamil Nadu.

Elaborate description in respect of Risk Assessment and Mine closure plan are given in **Chapter -VII.**

Although the individual lease area of this project is less than 5 Ha, the other existing and proposed quarries within the 500m radius along with this subject project works out to >5 Ha. As such cluster situation applicable and this EMP is prepared. The baseline monitoring carried out for this project reflects the cumulative impact of the existing quarries.

From the study it is observed that due to adoption of various mitigative measures there will not be adverse impact on cumulative basis also.

11.7 CONCLUSION:

Mining and allied activities are already being carried out in the hard rock formations in and around the area.

Certified vehicles with low carbon emissions will only be used. These equipment's will be properly and regularly maintained. Besides, regular vehicular emission tests will be done for the transport vehicles to ensure minimal impact due to carbon emissions. To further mediate the



DRAFT EIA/EMP REPORT FOR ROUGHSTONE & GRAVEL QUARRY OF THIRU.K.RAMARAJ IN S.F.NOS. 70/1(P) OVER AN AREA OF 1.06.50HA IN MYLERIPALAYAM VILLAGE, MADUKKARAI TALUK, COIMBATORE DISTRICT, TAMIL NADU.

carbon emissions, a good greenbelt and plantation plan has been planned.

Geologically the area in and around the lease area contains charnokite type rock formation containing mostly fallow land. As such there no major vegetation or agricultural activities are observed. There are no Protected or Eco-Sensitive Zone or forest land nearby wherein it can have an impact.

It will be ensured that mining will be carried out adhering to all the statutory rules and regulations, appointing statutory personnel's like qualified mines manager, blaster, informing DGMS before commencement of mining operations and maintaining the environmental quality within the prescribed standards by effective implementation of various mitigative measures.

As such release of Greenhouse gases (GHG), rise in temperature, affecting livelihood of the local people, loss of Agriculture, Forestry and Traditional Practices is not envisaged. Such a limited scope will not induce any climatic change leading to droughts, floods etc.

Mine closure plan is prepared for the lease period and already included in the approved mine plan.

Due to absence of perennial water bodies nearby where in any marine ecosystem is observed, no effect on this front is also expected. Hydrological investigation carried out and as given in Para 3.6 of Chapter III & para 4.3 Chapter – IV shows that the all-time ground water table in this area is much below the mining level. Hence, ground water intersection in not envisaged for the entire life of the mine and ground water will not be affected due to the quarrying operation. As such there will not be any adverse impact on the ground water regime. Besides, this being a mining project, there will be not be any process effluent. As mentioned earlier, the rainfall will be collected in the mine floor sump and gainfully used as per CGWA requirement. Excess water if any in the sump will be pumped to settling pond and supernatant clear water let out for downstream users.

It will be ensured that mining will be carried out adhering to all the statutory rules and regulations, appointing statutory personnel's like qualified mines manager, blaster, informing DGMS before commencement of mining operations and maintaining the environmental quality within the prescribed standards by effective implementation of various mitigative measures for the entire lease period.



DRAFT EIA/EMP REPORT FOR ROUGHSTONE & GRAVEL QUARRY OF THIRU.K.RAMARAJ IN S.F.NOS. 70/1(P) OVER AN AREA OF 1.06.50HA IN MYLERIPALAYAM VILLAGE, MADUKKARAI TALUK, COIMBATORE DISTRICT, TAMIL NADU.

As the production from this lease is relatively low, the requirement for equipment and the scale of mining operations will be minimal and consequently, the anticipated environmental impacts are expected to be negligible. As such no adverse impact on environment is expected. Systematic mining and ensuring adoption of various mitigative measures given in the report will ensure that the future environmental quality in the area will be maintained within statutory limits. The environmental management strategy as explained above will prove that industrial growth, if properly planned with all environmental concerns and appropriate remedial measures can benefit this region in the fields of potential employment opportunities, improved per capita income for local people, improved social welfare facilities etc. in its own way and also revenue to Government through royalty, taxes etc. Besides, it will meet the raw material requirement of the construction industry also..

* * * * *



CHAPTER - XII

DISCLOSURE OF CONSULTANTS ENGAGED

CHAPTER 12 DISCLOSURE OF CONSULTANTS ENGAGED

Creative Engineers & Consultants, Chennai is an **NABL** accredited testing laboratory and **NABET** accredited EIA consultancy. Established over 25 years ago, this company has steadily made good strides in the environmental impact assessment fields, and is also one of the first companies to get accredited by NABET as an Accredited Consultant Organization as early as 2011. Creative Engineers & Consultants has to its credit, successful completion of numerous EIA/EMP reports, grant of environmental clearances and periodic environmental monitoring works. Presently, the company has been accredited by NABET as a 'Category-A' organization for the sectors of Mining of Minerals (opencast only), Thermal Power Plants, Mineral Beneficiation and Cement Plants with the accreditation valid upto 23.12.2026. The team of experienced professionals that are a part of this organization has been detailed below.

Figure 12.1: Disclosure of consultants engaged

EXPERT NAME	QUALIFICATION	POSITION	EXPERIENCE
Mr. P. Giri	AMIE (Mining)	EIA Coordinator & Functional area Expert (AP,NV,HW),	Over 35 years of experience in EIA/EMP report, mine plan preparation, including modeling
Mr. K. Shankar	M.Sc (Geology). PGMEMG	Functional area Expert (GEO, HG, SHW, RH) & IBM approved RQP.	Over 30 years of experience in EIA/EMP report, Mine plan, hydrological report preparation
Mr.S.S.Rajendran	M.Sc. (Pharmaceutical Chemistry)	Lab head	More than 15 years of experience in Environmental laboratory.
Mr. R. Babu raj	M.A (Sociology), B.Com(Y.L&Cost), ITI, Advance Diploma in Computer application	Functional Area Expert (Socio Economy)	Over 15 years of experience in dispersion modeling, computer applications. Specialized in CAD and computer software, applications. 5years experience in the field of socio economy and its allied report preparation.
Mr. B. Govindaraman	B.Sc.	Field technician	Over 20 years of field monitoring & data collection experience



**DRAFT EIA/EMP REPORT FOR ROUGHSTONE & GRAVEL QUARRY OF THIRU.K.RAMARAJ IN
S.F.NOS. 70/1(P) OVER AN AREA OF 1.06.50HA IN MYLERIPALAYAM VILLAGE, MADUKKARAI
TALUK, COIMBATORE DISTRICT, TAMIL NADU.**

EXPERT NAME	QUALIFICATION	POSITION	EXPERIENCE
Dr.B.Swamynathan	M.Sc (Ecology & Environmental Sciences), M.Phill (Botany), Ph.D (Ecology & Environmental Sciences)	EIA Coordinator& Functional Area Expert (EB,SC,LU&AP)	More than 12 years of experience in Environment and allied fields.
Ms. G. Sandhya	B. Tech Chemical Engineering M.Tech Environmental Engineering	EIA Coordinator & Functional Area Expert (AQ&WP)	Over 8 years experience in preparation of EIA/EMP reports

* * * * *



Creative Engineers & Consultants
DISCLOSURE OF CONSULTANT
ENGAGED

PRO CODE: CEC-EMP-MI-254
REV NO : 00/OCT/25
12-2

ANNEXURES

Annexure-1

உதவி இயக்குநர் அலுவலகம், 9 JAN 2025
புவியியல் மற்றும் சுரங்கத்துறை,
மாவட்ட ஆட்சியர் அலுவலக வளாகம்,
கோயம்புத்தூர் - 18.

ந.க.எண்.778/கனிமம்/2024

நாள்: 27.12.2024

குறிப்பாணை

பொருள்: கனிமங்களும் குவாரிகளும் - கோயம்புத்தூர் மாவட்டம் - மதுக்கரை வட்டம் - மயிலேரிபாளையம் கிராமம் - புல எண்.70/1 (பகுதி)-ல் 1.06.50 ஹெக்டேர் பரப்பளவு பட்டா பூமியில் சாதாரண கற்கள் மற்றும் கிராவல் மண் வெட்டி எடுக்க குவாரி குத்தகை உரிமம் கோரி திரு.K.ராமராஜ் என்பவர் விண்ணப்பம் செய்தது - வரைவு சுரங்கத்திட்டம் சமர்ப்பிக்க அறிவுறுத்துதல் - தொடர்பாக.

- பார்வை:
1. திரு.K.ராமராஜ், த/பெ.கந்தசாமி, 2/395-1, வெங்கடேஸ்வரா நகர், பிரிமியர் நகர் மேற்கு, ஒத்தக்கால் மண்டபம், கோயம்புத்தூர் என்பவரின் விண்ணப்பம் நாள் 31.07.2024
 2. இவ்வலுவலக கடிதம் இதே எண். நாள்: 28.08.2024
 3. வட்டாட்சியர், மதுக்கரை கடிதம் ந.க.எண்.2868/2024/அ6 நாள்: 26.09.2024
 4. வருவாய் கோட்டாட்சியர், கோயம்புத்தூர் தெற்கு அவர்களின் கடிதம் மூ.மு.எண்.5380/2024/அ2 நாள்: 09.10.2024.
 5. வட்டார வளர்ச்சி அலுவலர் (வ.ஊ), மதுக்கரை அவர்களின் கடிதம் ந.க.எண்.700/2024/அ2 நாள்: 15.11.2024.
 6. கோயம்புத்தூர் புவியியல் மற்றும் சுரங்கத்துறை உதவி புவியியலாளர் தணிக்கை குறிப்பு நாள்: 30.11.2024

பார்வை 1-ல் கோயம்புத்தூர் மாவட்டம், 2/395-1, வெங்கடேஸ்வரா நகர், பிரிமியர் நகர் மேற்கு, ஒத்தக்கால் மண்டபம் என்ற முகவரியில் வசிக்கும் திரு.கந்தசாமி என்பவரின் மகன் திரு.K.ராமராஜ் என்பவர் கோயம்புத்தூர் மாவட்டம், மதுக்கரை வட்டம், மயிலேரிபாளையம் கிராமம், புல எண்கள்.70/1 (பகுதி)-ல் 1.06.50 ஹெக்டேர் மற்றும் 71/1-ல் 0.53.50 ஹெக்டேர் ஆக மொத்தம் 1.60.00 ஹெக்டேர் பரப்பளவுள்ள பட்டா பூமியில் சாதாரண கற்கள் மற்றும் கிராவல் மண் வெட்டியெடுக்க குவாரி குத்தகை உரிமம் கோரி உரிய ஆவணங்களுடன் விண்ணப்பித்துள்ளார்.

பார்வை 3, 4, 5 மற்றும் 6-ல் கண்ட கடிதங்களில் மதுக்கரை வட்டாட்சியர், கோயம்புத்தூர் தெற்கு வருவாய் கோட்டாட்சியர், மதுக்கரை வட்டார வளர்ச்சி அலுவலர் (வ.ஊ), மற்றும் கோயம்புத்தூர் புவியியல் மற்றும் சுரங்கத்துறை உதவி புவியியலாளர் ஆகியோர் புலத்தணிக்கை மேற்கொண்டு கோயம்புத்தூர் மாவட்டம், மதுக்கரை வட்டம், மயிலேரிபாளையம் கிராமம், புல எண்.70/1 (பகுதி)-ல் 1.06.50 ஹெக்டேர் பரப்பளவு பட்டா பூமியில் திரு.K.ராமராஜ், த/பெ திரு.கந்தசாமி என்பவருக்கு சாதாரண கற்கள் மற்றும் கிராவல் குவாரி குத்தகை உரிமம் வழங்கலாம் என பரிந்துரை செய்துள்ளனர்.



எனவே, கோயம்புத்தூர் மாவட்டம், மதுக்கரை வட்டம், மயிலேற்பாளையம் கிராமம், புல எண்.70/1 (பகுதி)-ல் 1.06.50 ஹெக்டேர் பரப்பளவு பட்டா புவியியல் 1959-ம் வருடாந்திய தமிழ்நாடு சிறுகனிம சலுகை விதிகள், விதி எண்.19-ன் கீழ்க் கீழ்க் கீழ்க் காலங்களுக்கு சாதாரண கற்கள் மற்றும் கிராவல் வெட்டி எடுக்க அனுமதி வழங்க உகந்த புலமாக கருதி அறிவிப்பு செய்யப்படுகிறது.

மேலும், திரு.K.ராமராஜ் என்பவர் மூன்று மாத காலத்திற்குள் வரைவு சுரங்கத்திட்ட அறிக்கை (Draft Mining Plan) கீழ்க்கண்ட நிபந்தனைகளுக்குட்பட்டு தயார் செய்து கோயம்புத்தூர் மாவட்ட புவியியல் மற்றும் சுரங்கத்துறை உதவி இயக்குநரிடம் ஒப்புதல் பெற்றும், தமிழ்நாடு சிறுகனிம சலுகை விதிகள் 41 & 42-ன் படி ஏற்பளிக்கப்பட்ட சுரங்கத்திட்ட அறிக்கை மற்றும் மாநில சுற்றுச்சூழல் தாக்க மதிப்பீட்டு ஆணைய இசைவாணைச் சான்று பெற்று சமர்ப்பிக்குமாறும் அறிவுறுத்தப்படுகிறது.

நிபந்தனைகள்

1. அருகில் உள்ள பட்டா நிலத்திற்கு 7.5 மீட்டர் பாதுகாப்பு இடைவெளி விட்டு குவாரிப்பணி மேற்கொள்ள வேண்டும்.
2. அருகிலுள்ள பட்டா நிலங்கள் மற்றும் பொது மக்களுக்கும் எவ்வித இடையூறும் இன்றி குவாரி பணி மேற்கொள்ள வேண்டும்.

உதவி இயக்குநர்,
புவியியல் மற்றும் சுரங்கத்துறை
கோயம்புத்தூர்.

பெறுநர்:
திரு.K.ராமராஜ்,
த/பெ.கந்தசாமி,
2/395-1, வெங்கடேஸ்வரா நகர்,
பிரிமியர் நகர் மேற்கு,
ஒத்தக்கால் மண்டபம்,
கோயம்புத்தூர்

Annexure-2

From

Thiru.K.Vijayaragavan, M.Sc.,
Assistant Director,
Geology and Mining,
Coimbatore

To

Thiru.K.Ramaraj
S/o. Kandasamy
2/395-1, Venkateshawara Nagar,
Premier Nagar East,
Othakalmandapam,
Coimbatore - 641 032

Rc.No.778/Mines/2024 Dated: 09.01.2025.

Sir,

Sub: Mines and Quarries - Minor Minerals - Coimbatore District - Madukkarai Taluk - Myleripalayam Village - Survey No.70/1(P)- over an extent of 1.06.50 hectares of pattaland - Rough stone & Gravel quarry lease - Precise area communicated - Draft mining plan submitted by Thiru.K.Ramaraj- Approval of mining plan - Regarding.

Ref: 1. Application of Thiru.K.Ramaraj dated: 31.07.2024
2. Precise area communication in Rc.No.778/Mines/2024 dated: 27.12.2024.
3. Thiru.K.Ramaraj letter dt.08.01.2025

In the reference 1st cited, Thiru.K.Ramaraj has applied for the grant of rough stone & Gravel quarry lease over an extent of 1.06.50 hectares of patta land in Survey No.70/1(P) of Myleripalayam Village, Madukkarai Taluk, Coimbatore District under Rule 19(1) of Tamil Nadu Minor Mineral Concession Rules, 1959.

2) The precise area has been communicated to the applicant vide reference 2nd cited above, based on the recommendations of the Tahsildar, Madukarai, Revenue Divisional Officer, Coimbatore South, Block Development Officer, Madukarai and the Assistant Geologist of Geology and Mining, Coimbatore.

3) In exercise of powers delegated under Rule 42 of Tamil Nadu Minor Mineral Concession Rules, 1959, I hereby approve the mining plan submitted by Thiru.K.Ramaraj for grant of rough stone & gravel quarry of lease over an extent of 1.06.50 hectares of pattaland in Survey No.70/1(P) of Myleripalayam Village, Madukkarai Taluk, Coimbatore District for a period of Five years and the proposed mineable reserves after leaving safety distance is arrived as 73,750m³ of rough

stone and 10,614m³ of gravel upto a depth of 48m. This approval is subject to the following conditions:-

- (i). That the mining plan is approved without prejudice to any other Law applicable to the quarry lease from time to time whether such Laws are made by the Central Government, State Government or any other authority.
- (ii). This approval of the mining plan does not in any way imply the approval of the Government in terms of any other provisions of the Mines and Minerals (Development and Regulation) Act, 1957, or any other connected laws including Forest (Conservation) Act, 1980, Forest Conservation Rules, 1981, Environment Protection Act, 1980, Indian Explosives Act, 1884 (Central Act IV of 1884) and the rules made there under the Tamil Nadu Minor Mineral Concession Rules, 1959.
- (iii). That the mining plan is approved without prejudice to any other order or direction from any court of competent jurisdiction.
- (iv). No hindrance should be caused to the Public and nearby patta lands.
- (v). A safety distance of 7.5 meters should be provided for adjacent patta land from the lease applied area.


Assistant Director,
Geology and Mining,
Coimbatore

Encl: 2 copies of Approved Mining Plan.

Copy submitted to :

1. The Chairman, State Level Environment Impact Assessment Authority, Chennai
2. The Commissioner of Geology and Mining, Industrial Estate, Guindy, Chennai- 32

Annexure-3

From
Thiru.K.Vijayaragavan, M.Sc.,
Assistant Director,
Geology and Mining,
Coimbatore

To
Thiru.K.Ramaraj
S/o. Kandasamy
2/395-1, Venkateshawara Nagar,
Premier Nagar East,
Othakalmandapam,
Coimbatore - 641 032

Rc.No.778/Mines/2024 Dated: 09.01.2025.

Sir,

Sub: Mines and Quarries - Minor Minerals - Coimbatore District - Madukkarai Taluk - Myleripalayam Village - Survey No.70/1(P) - over an extent of 1.06.50 hectares of patta land - Rough stone & Gravel quarry lease - Precise area communicated - 500mts Radius letter requested- regarding.

Ref: 1. Application of Thiru.K.Ramaraj dated: 31.07.2024
2. Precise area communication in Rc.No.778/Mines/2024 dated: 27.12.2024.
3. Thiru.K.Ramaraj letter dt.08.01.2025

With reference to your letter in the reference 3rd cited, the details of existing and lease expired quarries located within 500m radius from the proposed Rough stone & gravel quarry over an extent of 1.06.50 hectares of patta land in Survey Nos.70/1(P) of Myleripalayam Village, Madukkarai Taluk, Coimbatore District are as follows:

Sl. No	Name of the quarry Owner	Name of the Village & Survey Number	Extent (in Hects)	Remarks
a. Existing Quarries				
1.	S.Shanmuga Sundaram	Myleripalayam 73/1, 73/2, 73/3& 73/4	2.95.50	23.02.2023 - 22.02.2028
2.	A.Ammasaiappan	Myleripalayam 72/1, 72/2 & 72/3	2.35.50	26.09.2023 - 25.09.2028
3.	S.Selvamani	Myleripalayam 67/2 & 69	3.47.50	26.09.2023 - 25.09.2028
4.	M/s.Vetri Velan Blue Metals	Myleripalayam 70/2 & 70/3	2.39.00	07.08.2024 - 06.08.2029
5.	M.Sarojini	Myleripalayam 67/1 & 68	3.48.00	16.12.2024 - 15.12.2029

b. Expired Quarries				
NIL				
c. Abandoned Quarries				
1.	K.M.Nanjappan	Myleripalayam 71/2	0.90.50	11.08.2009 - 10.08.2014
2.	M.Balasubramaniam	Myleripalayam 64/1, 64/2, 80/1 & 80/2	3.14.00	12.12.2008 - 11.12.2013
3.	Radhakrishnan	Myleripalayam 48/1B	0.98.5	06.07.2009 - 05.07.2014
4.	Saravanan	Myleripalayam 31/2	1.21.5	20.03.2010 - 19.03.2015
5.	K.Shanmuugam	Myleripalayam 94& 79/2A(P)	2.88.0	09.12.2010 - 08.12.2015
6.	R.Srinivasamoorthy	Myleripalayam 80/3A1, 3B1	1.31.5	14.06.2005 - 13.06.2010
7.	S.Jothimani	Myleripalayam 46/1(Pt), 47/2A	1.88.5	20.03.2004 - 19.03.2009
8.	P.Kannan	Myleripalayam 31/1, 47/1	1.99.5	12.12.2008 - 11.12.2013
d. Present proposed Quarries				
1.	K.Ramaraj	Myleripalayam 70/1 (P) & 71/1	1.06.50	Applied area Precise area communicated
2.	S.Kalaikumar	Myleripalayam 65/1A, 65/1C, 66/1C	2.16.70	Precise area communicated
3.	A.Saravanakumar	Myleripalayam 74/1, 74/2& 75/2	2.52.00	Land availability report awaited
4.	S.Vignesh Ramkumar	Myleripalayam 65/2B	1.31.18	Land availability report awaited


 Assistant Director,
 Geology and Mining,
 Coimbatore

15/9/125

பி.சி

சென்னை வட்டில் லாபம் கிடைத்த வட்டில்
 மகேந்திரபுரம் வட்டில் தீர்மானம் 22 மார்ச்சு
 70/1-ல் 49.3.25 (அ) 4 மார்ச்சு 1.31.5,
 71/1-ல் 49.1.32 (ஆ) 4 மார்ச்சு 0.53.4 அம்
 தீர்மானம் 49.4.57 (இ) 4 மார்ச்சு 1.85.0
 புதிய மானம் உடனடியாகத் தீர்மானம்
 மார்ச் 986-ல் 49.1.32 (அ) 4 மார்ச்சு 1.31.5
 மானம் (இ) 4 மார்ச்சு 0.53.4 மானம்
 மார்ச்சு 49.2.50 (அ) 4 மார்ச்சு
 1.01 புதிய மானம் மானம்
 மார்ச்சு மானம் மானம்
 மானம் 4 மார்ச்சு தீர்மானம்
 மானம் மானம்.

1. மார்ச் 49.1.32 (அ) 4 மார்ச்சு 1.31.5
2. மானம் மானம் மானம் 1894 மார்ச்
 49.1.32 (அ) 4 மார்ச்சு 1.31.5
3. மானம் தீர்மானம் மானம் மானம்
 மானம்
4. மானம் மானம் மானம் 1978 மார்ச்
 49.1.32 (அ) 4 மார்ச்சு 1.31.5
5. மானம் மானம் மானம்
6. மானம் மானம் மானம்
7. மானம் மானம் மானம்
 மானம் மானம்
8. மானம் மானம் மானம் மானம்
 மானம் மானம் மானம் மானம்
 (P.T.P)

മലയാളത്തിൽ, മലയാളം (എ) ഭാഷയിൽ
-മല (എ) മലയാളത്തിൽ മലയാളത്തിൽ
മല മലയാളം മലയാളം മലയാളത്തിൽ


Village Administrative Officer
12, Mythenpalayam
Madukkarai Taluk.

Annexure-5

From

To

Thiru.K.Vijayaragavan, M.Sc.,
Assistant Director,
Geology and Mining,
Coimbatore

Thiru.K.Ramaraj
S/o. Kandasamy
2/395-1, Venkateshawara Nagar,
Premier Nagar East,
Othakalmandapam,
Coimbatore - 641 032

Rc.No. 778/Mines/2024 dated: 09.01.2025

Sir,

Sub: Mines and Quarries - Minor Minerals - Coimbatore District - Madukkarai Taluk - Myleripalayam Village - Survey No.70/1(P) - over an extent of 1.06.50 hectares of patta land - Rough stone and gravel quarry lease - Precise area communicated - Mining Plan approved - further particulars called for - furnished - regarding - Regarding.

Ref: 1. Precise area communication in Rc.No.778/Mines/2024 dated: 27.12.2024.
2. Thiru.K.Ramaraj letter dt.08.01.2025


In the reference 2nd cited, Thiru.K.Ramaraj has requested to furnish certain particulars regarding the precise area granted over an extent of 1.06.50 hectares of pattaland in Survey No.70/1(P) of Myleripalayam Village, Madukkarai Taluk, Coimbatore District. In this connection the following details are furnished.

The area was previously held under quarry lease and the details are as follows

Sl. No.	Name of the Exlessee	SF.No/ Extent	District Collector's proceedings No. & Date	Lease Period
1	S.Kandasamy	71/1 0.53.5 Hec	153/94/x1 dt.12.04.1995	12.04.1995 to 11.04.2000
2.	S.Kandasamy	71/1 0.53.5 hec	-	19.06.2003 to 18.06.2008
3.	S.Kandasamy	70/1, 71/1 1.85.0 hec	773/2008/mm1 dt 07.10.2008	07.10.2008 to 06.10.2013
4.	K.Ramaraj	70/1(pt), 71/1 1.00.0 hec	358/mines/2018 dt.22.01.2019	22.01.2019 to 21.01.2024

As per draft mining plan, the existing quarry pit with a dimension of 79m (Max.length) X 54m (Max.width) X 38m (max.depth) is reported in the applied area.


Assistant Director,
Geology and Mining,
Coimbatore


18/9/12



தமிழ்நாடு தமிழ்நாடு TAMILNADU Rs. 100/-

EK 305093

K. Rajashekar

K. ராஜசேகரன்

முத்தியானந்தன் வீடுமையாளன்
உரிமட எண்: 828/அ-40221-70 கோயம்புத்தூர்
வினாத்தக்டை, தமிழ்நாடு
தேதி: 19.5.2025

K. ராமராஜ்

குத்தக்கால்மண்டபம்



குத்தகை ஆவணம்

2025 ஆம் வருடம் மே மாதம் 19 ஆம் தேதி.

கோயம்புத்தூர் மாவட்டம், மதுக்கரை வட்டம் - 641032,

குத்தக்கால்மண்டபம், பிரிமியர் நகர் மேற்கு, வெங்கடேஸ்வரா நகர்,

கதவு எண்.2/395-1 என்ற முகவரியில் வசித்து வரும்

(லேட்).திரு.கந்தசாமி அவர்களின் குமார் திரு.K.ராமராஜ் (1), (ஆதார்

அட்டை எண்.8060 3514 2007) (Cell No.9842202515),

1. K. Ramaraj

3. சிவசிக்ஷிணி

2. கி. ராமசுந்தரன்
பெண்

1 முதல் 2025	மே 19
மதுகரை	20
↑	தாக்காளர்களிடமிருந்து
வறுதல்	
	பதிவு ஆணை

5. கீழ்க்காணும் சொத்துக்களில் செய்யப்படும் தொழிலுக்கு சம்மந்தப்பட்ட அனைத்து மத்திய, மாநில அரசு வரிகளையும் 1 லக்கமிட்டவரே செலுத்திக் கொள்ள வேண்டியது.
6. 1 லக்கமிட்டவர் செய்யக்கூடிய தொழிலுக்கு தேவையான மின் தேவைகளை 1 லக்கமிட்டவர் தன்னுடைய சொந்த செலவில் பெற்றுக் கொள்ளவும், அதற்கு தேவையான ஆவணங்களில் கையொழுத்து செய்து கொள்ள வேண்டியது.
7. 1 லக்கமிட்டவர் தன்னுடைய விருப்பம் போல் தொழிலுக்கு தேவையான நடவடிக்கைகளும் எடுத்துக் கொள்ள உரிமை உண்டு.
8. கெடு முடிந்தவுடன் 1 லக்கமிட்டவர், 2, 3 லக்கமிட்டவர்களுக்கு கவாத்தீனம் செய்து கொடுத்துவிட வேண்டியது.
9. கீழ்க்காணும் சொத்துக்களில் மத்திய மாநில அரசு விதிமுறைகளின்படி சாதாரணகற்கள் மற்றும் கிராவல் குவாரிக்கு பயன்படுத்த மட்டும் 1 லக்கமிட்டவருக்கு உரிமை உண்டு. 1 லக்கமிட்டவர் தான் செய்யக்கூடிய தொழிலுக்கு தேவையான கட்டமைப்பு வசதிகளை தன் விருப்பம்போல் செய்து கொள்ளலாம்.
10. கீழ்க்காணும் சொத்துக்களின்மீத குத்தகை காலத்தின்போது 1 லக்கமிட்டவர் எந்தவிதமான வில்லங்கமோ, விற்பனையோ, அடமானமோ செய்யக்கூடாது.

1. K. Ramesh 3. S. S. S. S. S.

2. கல் அச்சுதான்
முதல்



1. திகதி	2025	ம. வ. நா. தி. வ.	5695
2. ஆணை	20	நாள் கடைபிடிக்கப்படுகிறது	
3. வது தரம்	4		
பதிவு செய்யப்பட்டது			

11. நாம் விரும்பினால் இந்த குத்தகை காலக்கெடுவினை நீடித்து
கொள்ளலாம். ஆய்வு நீடித்துக் கொண்டால் 1 லக்கமிட்டவர்
அதை புதிதாக மற்றொரு குத்தகை பதிவு செய்து கொள்ளவும்
வேண்டும்.

12. இந்த குத்தகைக்கு முன்பணம் ஏதும் இல்லை.

13. நம்மில் 2, 3 லக்கமிட்டவர்கள் கீழ்க்காணும் பூமியினை நானது
தேதியில் நம்மில் 1 லக்கமிட்டவரின் கவாதினத்தில் விட்டு
விட்டார்கள்.

மேற்படி இந்த குத்தகை ஆவணத்தினை நம்மில் 2 லக்கமிட்டவர்
நன்றாக படிக்க கேட்டு முழுமையான நிறைவுடன் இதில் இடது கை
பெருவிரல் ஏகை செய்துள்ளார்.

1. K. Ramaswami 35/10/2025

2. க. ராமசுவாமி
உடன்



பேர்	2025	ம் வருத்திய	15/4/25
ய ஆணை	20	நாள்களாக	கொண்டு
5	வரு துள்		
பதிவு அலுவலர்			

சொத்துவிபரம்

கோயம்புத்தூர் தெற்கு பதிவு மாவட்டம், கிணத்துக்கடவு துணைப் பதிவு மாவட்டம், மதுக்கரை வட்டம், மைலேறிபாளையம் கிராமம், பட்டா எண்.986-ல், க.ச.70/1 நெ.காலை பு.ஹெக்டேர்.1.31.5க்கு சரியான பு.ஏ.3.25 இந்த விஸ்தீரணமுள்ள பூமி பூராவும் இதன் எல்லை,

க.ச.69 நெ.காலைக்கும்	..	கிழக்கு
க.ச.70/2 நெ.காலைக்கும்	..	மேற்கு
க.ச.53 நெ.காலைக்கும்	..	தெற்கு
க.ச.71 நெ.காலைக்கும்	..	வடக்கு

இதன் மத்தியில் பு.ஹெக்டேர்.1.31.5க்கு சரியான பு.ஏ.3.25 இந்த விஸ்தீரணமுள்ள பூமி பூராவும்,

யின்னும் க.ச.71/1 நெ.காலை பு.ஹெக்டேர்.0.53.5க்கு சரியான பு.ஏ.1.32 இது பூராவும், இதன் எல்லை,

க.ச.69 நெ.காலைக்கும்	..	கிழக்கு
க.ச.71/2 நெ.காலைக்கும்	..	மேற்கு
க.ச.70 நெ.காலைக்கும்	..	தெற்கு
க.ச.73 நெ.காலைக்கும்	..	வடக்கு

இதன் மத்தியில் பு.ஹெக்டேர்.0.53.5க்கு சரியான பு.ஏ.1.32 இது பூராவும்,

1. *K. R. Ramesh* 35 பைசாஸ்

2. க.ச. 69/2

பு.ஏ. 1.32



2025	10 வது தரீய	5695
பு.ஏ. 1.32	பு.ஏ. 1.32	பு.ஏ. 1.32
பு.ஏ. 1.32	பு.ஏ. 1.32	பு.ஏ. 1.32
பு.ஏ. 1.32	பு.ஏ. 1.32	பு.ஏ. 1.32

ஆக ரூ. 1,85,000 க்கு சரியான ரூ. 4.57 இந்த விலைநீரணமுள்ள பூமிக்கும் மேற்படி பூமிக்கு அரசுமபாணையம் கிராமம், கிழமேல் இட்டேரியில் இருந்து ராயக்காள் பூமியாக ரூ. 72 நெ.காலையில் மாமூல் வண்டிப்பாதையில் வண்டி வாகனாதி வகையாக்கள் போக வர உண்டான தடபாத்தியமும் ஆகிய இந்தச் சொத்துக்களில் நம்மில் 2, 3 லக்கமிட்டவர்களுக்கு பாத்தியப்பட்ட பொதுவில் பிரிபாத 2/3 பங்கு சொத்துக்கள் சகிதம்.

மேலும் ரூ. 71 நெ.காலையில் தென்கோட்டில் கிழமேலாக 15 ஏக்கர் அகலத்தில் உள்ள வண்டித் தடத்தில் வெங்கிபாசலக்கவுண்டி, ராமசாமி கவுண்டி வகையா பேர்கள் போகவர வண்டித் தடபாத்தியம் உண்டு.

குத்தகை காலம் 25 வருடங்கள்

1 வருடத்திற்கு 1 ஹெக்டேருக்கு குத்தகை தொகை ரூபாய் 3,000/-

25 வருடத்திற்கு 1.85.0 ஹெக்டேருக்கு குத்தகை தொகை ரூபாய் 1,38,750/- (25x1.85.0x3000=1,38,750/-)

முன்பணம் இல்லை

1. K. A. M. M. M.

3. S. S. S. S. S.

2. க. க. க. க. க.

1	தேதி	2025	ம. வருடத்திலு	6695
2	ஆய்வு	20	தாரகமன்கிதொண்டி	
3	வருதல்			



ஆக மொத்த குத்தகை தொகை ரூபாய்.1,38,750/-

இதில் 2/3 பங்கு குத்தகை தொகை ரூபாய்.92,500/-

1. K. Ramaswami 3. S. Suresh

2. K. Ramaswami
இவர்



சாட்சிகள் -

1. R. S. Suresh

ராஜேஸ்வரி, க.பெ.ராமராஜ், 1/273,
அரசம்பாளையம், கிணத்துக்கடவு -642109 (ஆதார அட்டை எண்.6763
8152 7223)

2. R. S. Suresh

வேல்முருகன், த.பெ.ராமன், 3/91ஏ,
வெங்கடேஸ்வர நகர், பிரிமியர் நகர், ஒத்துக்கால்மண்டபம், கோவை -
641032 (ஆதார அட்டை எண்.5320 6082 8740)

Prepared by,



S.S.SURESH, B.A., B.L.,
Advocate Enroll No.1082/1990,
9/55, Gandhi Nagar, Muthuramalingadevar St,
Irugur, Coimbatore -641103,
Cell No.9360112229



1 புத்தகம்	2025	ம.வரு.ததி	6645
ம.அ.வணி	20	தள்ளுவனக்கொண்டி, து.	
சுரு.தள்ளி			
		பதிவு	2



தமிழ்நாடு அரசு

வருவாய் மற்றும் பேரிடர் மேலாண்மைத் துறை

நில உரிமை விபரங்கள் : இ. எண் 10(1) பீரீய்

மாவட்டம் : கோயம்புத்தூர்

வட்டம் : மதுக்கரை

வருவாய் இராமிடம் : அமலேறிபாளையம்

பட்டா எண் : 986

உரிமைபாளர்கள் பெயர்

- | | | |
|------------------|-------|--------------|
| 1. வேட சுந்தரமணி | மகன் | ராமராவ் |
| 2. வேட சுந்தரமணி | மனைவி | சுப்பரத்தாள் |
| 3. வேட சுந்தரமணி | மகன் | சுமரச்செல்வி |

புல எண்	உட்பீரீய்	புகட்சம்		தகவச்சம்		மற்றவை		குறிப்புகள்
		பரப்பு	தீர்வை	பரப்பு	தீர்வை	பரப்பு	தீர்வை	
		ஹெக்ட - ஏர்	ரூ - பை	ஹெக்ட - ஏர்	ரூ - பை	ஹெக்ட - ஏர்	ரூ - பை	
71	1	4 - 53.50	1.07	—	—	—	—	2020/0103/13/218949 Digitally signed-Senthil Kumar K Zonal Deputy Tahsildar 06/02/2025 03:11:45 PM
		0 - 53.50	1.07					

குறிப்பு :



1. மேற்கண்ட தகவல் / சான்றிதழ் தகவல் விவரங்கள் பின் படுமேலப்பதிவுத்து பெறப்பட்டுள்ளன. இவற்றை தாங்கள் <https://eservices.tn.gov.in> என்ற இணைய தளத்தில் S/12/14/044/00986/210403 என்ற குறிப்பு எண்ணை உள்ளிடுவதன் மூலம் உறுதி செய்துகொள்ளவும்.
2. இது தகவல்கள் 15-05-2025 ஆண்டு 11:32:57 AM நேரத்தில் அச்சடிக்கப்பட்டது.
3. தகவல்கள் கோரல்கள் 2D barcode படிப்புகள் மூலம் படித்து QR/QRIS வழி இணையதளத்தின் மூலம் பார்க்கவும்.

1. K. Ramanathan

2. சி.என். சுப்பரத்தாள்



3. S. Senthil Kumar



1 பிப்ரவரி 2025 ம் ஆண்டு 5695
ம.ஆணம் 20 தாங்கல்கள்கொண்டது
10 வது தாள்
பதிவு செய்தவர்



தமிழ்நாடு அரசு
GOVERNMENT OF TAMIL NADU
வருவாய்த் துறை
DEPARTMENT OF REVENUE ADMINISTRATION
அரசம்பலாயம் கிராம ஸ்பெ.சி.
ARASAMPALAYAM VILLAGE PANCHAYAT

இறப்பு சான்றிதழ் / DEATH CERTIFICATE

(இறப்பு மற்றும் இறப்பு பதிவு சட்டம், 1969 மற்றும் 1971 மற்றும் அரசாங்க இறப்பு இறப்பு பதிவு விதிகள் 2000 விதி 4(2)(b) 2(1) இல் குறிப்பிடப்பட்டுள்ளது.)

(GIVEN UNDER SECTION 12(1) OF THE REGISTRATION OF BIRTHS & DEATHS ACT, 1969 AND RULE 5(1) OF THE TAMIL NADU REGISTRATION OF BIRTH AND DEATH RULES 2000.)

இதன்மூலம், தகவல் இத்தகை, தமிழ்நாடு மாநிலம், கன்னியாகுமரி மாவட்டம், கன்னியாகுமரி வட்டம், அரசம்பலாயம் கிராம ஸ்பெ.சி. கிராம அற இறப்பு பதிவுகளைக் குறிப்பிட்டுள்ள இறப்பு பதிவு அறிக்கைகள் மூலம் சான்று அளிக்கப்படுகிறது.

THIS IS TO CERTIFY THAT THE FOLLOWING INFORMATION HAS BEEN TAKEN FROM THE ORIGINAL RECORD OF DEATH WHICH IS THE BASIS FOR ARASAMPALAYAM VILLAGE PANCHAYAT OF POLLACHI TALUK OF COIMBATORE DISTRICT OF TAMIL NADU STATE, INDIA.

NAME OF DECEASED / இறந்தவரின் பெயர்:
KANDASAMY / கந்தசாமி

SEX / பாலினம்: MALE / ஆண்

UID NUMBER OF DECEASED / இறந்தவரின் ஆயுத எண்

DATE OF DEATH / இறப்பு தேதி: 24/11/2018
2018 - NOVEMBER - TWO THOUSAND EIGHTEEN

PLACE OF DEATH / இறப்பு இடம்:
1. ARASAMPALAYAM - 642105

AGE OF DECEASED / இறந்தவரின் வயது: 78 YEARS

2. ARASAMPALAYAM - 642105

NAME OF FATHER / தந்தையின் பெயர்:
SOMASUNDRAM / சோமசுந்தரம்

MOTHER'S UID NUMBER / தாயின் ஆயுத எண்

FATHER NAME / தந்தையின் பெயர்:
SURESH COUNDER / சுரேஷ் சூண்டர்

FATHER'S UID NO. / தந்தையின் ஆயுத எண்

HUSBAND / WIFE NAME / கணவர் / மனைவியின் பெயர்

HUSBAND / WIFE UID NO. / கணவர் / மனைவியின் ஆயுத எண்

ADDRESS OF THE DECEASED AT THE TIME OF DEATH / இறந்தவரின் இறப்பு இடம் (முகவரி):

PERMANENT ADDRESS OF DECEASED / இறந்தவரின் இறப்பு இடம் (முகவரி):

1. ARASAMPALAYAM, KINATHIRKADAVU, COIMBATORE, TAMIL NADU - 642105

1. ARASAMPALAYAM, KINATHIRKADAVU, COIMBATORE, TAMIL NADU - 642105

2. அரசம்பலாயம், கன்னியாகுமரி, தமிழ்நாடு - 642105

2. அரசம்பலாயம், கன்னியாகுமரி, தமிழ்நாடு - 642105

REGISTRATION NUMBER / பதிவு எண்:
D-2018-33-1493-000022

DATE OF REGISTRATION / பதிவு செய்த தேதி: 24/11/2018

REMARKS (IF ANY) / குறிப்பு:

TYPE OF ISSUE / பதிவு செய்யும் முறை:



L. Jeyaraj
L. Jeyaraj
Sub Registrar
ARASAMPALAYAM VILLAGE PANCHAYAT
அரசம்பலாயம் கிராம ஸ்பெ.சி.



THIS IS A COMPUTER GENERATED CERTIFICATE.
THE SIGNATURE AND THE ORIGINAL RECORDS MUST BE KEPT FOR ALL OFFICIAL PURPOSES.
THE REGISTRATION NUMBER IS PRINTED ON EACH COPY.

இது ஒரு கணினி மூலம் உருவாக்கப்பட்ட சான்றிதழ் ஆகும். இது அனைத்து அலுவல்பூர்வ நோக்கங்களுக்கும் பயன்படுத்தப்படும். ஒவ்வொரு நகலிலும் பதிவு எண் அச்சிடப்பட்டுள்ளது.


1. *K. Ramasamy*

2. *Rev. S. Sankaranarayanan*
சேவரர்

3. *S. Sankaranarayanan*



1	பதிவு	2025	மார்ச் திணி	5765
2	பதிவு	20	தமிழ்நாடு	சென்னை
3	பதிவு	11	பதிவு	சென்னை



Downloaded from <http://ajphaphysocpharm.com/> on June 12, 2016

This is to certify that Kandasamy son of Subbiah Gounder who was residing at Door No. 6, Thimothathal Arasampalayam post Arasampalayam, Village/Town of Koththasagaram taluk of Coimbatore, Tamil Nadu State expired on 08-Nov-2018 leaving behind the following heirs as following legal heirs.

Sl. No.	Name of Person	Age / Sex	Relationship / Relationship for deceased	Marital Status	Address of Person
1	Sushila	46	Wife	Married	Same
2	Ramaji	46	Son	Married	Same
3	Krishna	26	Daughter	Married	Same

- [illegible]

Distric / District : Chhindwara
Taluk : Ratanakul

Signature valid

Digitally signed by T. RANGEEETHA
Date: 12/01/2019 10:47:25 IST

2010-11-11 - Hernandez

اسماء / Designation : معلمة رياضيات / Title

This certificate is digitally signed and does not require any seal or signature.



Call: 037-730141134660 and WhatsApp: 0377-730141134660 <https://www.facebook.com/0377-730141134660>
<https://www.instagram.com/0377-730141134660> & Email: 0377-730141134660

1999, 2000, 2001, 2002, 2003, 2004, 2005, 2006, 2007, 2008, 2009, 2010, 2011, 2012, 2013, 2014, 2015, 2016, 2017, 2018, 2019, 2020, 2021, 2022, 2023, 2024, 2025, 2026, 2027, 2028, 2029, 2030, 2031, 2032, 2033, 2034, 2035, 2036, 2037, 2038, 2039, 2040, 2041, 2042, 2043, 2044, 2045, 2046, 2047, 2048, 2049, 2050, 2051, 2052, 2053, 2054, 2055, 2056, 2057, 2058, 2059, 2060, 2061, 2062, 2063, 2064, 2065, 2066, 2067, 2068, 2069, 2070, 2071, 2072, 2073, 2074, 2075, 2076, 2077, 2078, 2079, 2080, 2081, 2082, 2083, 2084, 2085, 2086, 2087, 2088, 2089, 2090, 2091, 2092, 2093, 2094, 2095, 2096, 2097, 2098, 2099, 2100, 2101, 2102, 2103, 2104, 2105, 2106, 2107, 2108, 2109, 2110, 2111, 2112, 2113, 2114, 2115, 2116, 2117, 2118, 2119, 2120, 2121, 2122, 2123, 2124, 2125, 2126, 2127, 2128, 2129, 2130, 2131, 2132, 2133, 2134, 2135, 2136, 2137, 2138, 2139, 2140, 2141, 2142, 2143, 2144, 2145, 2146, 2147, 2148, 2149, 2150, 2151, 2152, 2153, 2154, 2155, 2156, 2157, 2158, 2159, 2160, 2161, 2162, 2163, 2164, 2165, 2166, 2167, 2168, 2169, 2170, 2171, 2172, 2173, 2174, 2175, 2176, 2177, 2178, 2179, 2180, 2181, 2182, 2183, 2184, 2185, 2186, 2187, 2188, 2189, 2190, 2191, 2192, 2193, 2194, 2195, 2196, 2197, 2198, 2199, 2200, 2201, 2202, 2203, 2204, 2205, 2206, 2207, 2208, 2209, 2210, 2211, 2212, 2213, 2214, 2215, 2216, 2217, 2218, 2219, 2220, 2221, 2222, 2223, 2224, 2225, 2226, 2227, 2228, 2229, 2230, 2231, 2232, 2233, 2234, 2235, 2236, 2237, 2238, 2239, 2240, 2241, 2242, 2243, 2244, 2245, 2246, 2247, 2248, 2249, 2250, 2251, 2252, 2253, 2254, 2255, 2256, 2257, 2258, 2259, 2260, 2261, 2262, 2263, 2264, 2265, 2266, 2267, 2268, 2269, 2270, 2271, 2272, 2273, 2274, 2275, 2276, 2277, 2278, 2279, 2280, 2281, 2282, 2283, 2284, 2285, 2286, 2287, 2288, 2289, 2290, 2291, 2292, 2293, 2294, 2295, 2296, 2297, 2298, 2299, 2300, 2301, 2302, 2303, 2304, 2305, 2306, 2307, 2308, 2309, 2310, 2311, 2312, 2313, 2314, 2315, 2316, 2317, 2318, 2319, 2320, 2321, 2322, 2323, 2324, 2325, 2326, 2327, 2328, 2329, 2330, 2331, 2332, 2333, 2334, 2335, 2336, 2337, 2338, 2339, 2340, 2341, 2342, 2343, 2344, 2345, 2346, 2347, 2348, 2349, 2350, 2351, 2352, 2353, 2354, 2355, 2356, 2357, 2358, 2359, 2360, 2361, 2362, 2363, 2364, 2365, 2366, 2367, 2368, 2369, 2370, 2371, 2372, 2373, 2374, 2375, 2376, 2377, 2378, 2379, 2380, 2381, 2382, 2383, 2384, 2385, 2386, 2387, 2388, 2389, 2390, 2391, 2392, 2393, 2394, 2395, 2396, 2397, 2398, 2399, 2400, 2401, 2402, 2403, 2404, 2405, 2406, 2407, 2408, 2409, 2410, 2411, 2412, 2413, 2414, 2415, 2416, 2417, 2418, 2419, 2420, 2421, 2422, 2423, 2424, 2425, 2426, 2427, 2428, 2429, 2430, 2431, 2432, 2433, 2434, 2435, 2436, 2437, 2438, 2439, 2440, 2441, 2442, 2443, 2444, 2445, 2446, 2447, 2448, 2449, 2450, 2451, 2452, 2453, 2454, 2455, 2456, 2457, 2458, 2459, 2460, 2461, 2462, 2463, 2464, 2465, 2466, 2467, 2468, 2469, 2470, 2471, 2472, 2473, 2474, 2475, 2476, 2477, 2478, 2479, 2480, 2481, 2482, 2483, 2484, 2485, 2486, 2487, 2488, 2489, 2490, 2491, 2492, 2493, 2494, 2495, 2496, 2497, 2498, 2499, 2500, 2501, 2502, 2503, 2504, 2505, 2506, 2507, 2508, 2509, 2510, 2511, 2512, 2513, 2514, 2515, 2516, 2517, 2518, 2519, 2520, 2521, 2522, 2523, 2524, 2525, 2526, 2527, 2528, 2529, 2530, 2531, 2532, 2533, 2534, 2535, 2536, 2537, 2538, 2539, 2540, 2541, 2542, 2543, 2544, 2545, 2546, 2547, 2548, 2549, 2550, 2551, 2552, 2553, 2554, 2555, 2556, 2557, 2558, 2559, 2560, 2561, 2562, 2563, 2564, 2565, 2566, 2567, 2568, 2569, 2570, 2571, 2572, 2573, 2574, 2575, 2576, 2577, 2578, 2579, 2580, 2581, 2582, 2583, 2584, 2585, 2586, 2587, 2588, 2589, 2590, 2591, 2592, 2593, 2594, 2595, 2596, 2597, 2598, 2599, 2600, 2601, 2602, 2603, 2604, 2605, 2606, 2607, 2608, 2609, 2610, 2611, 2612, 2613, 2614, 2615, 2616, 2617, 2618, 2619, 2620, 2621, 2622, 2623, 2624, 2625, 2626, 2627, 2628, 2629, 2630, 2631, 2632, 2633, 2634, 2635, 2636, 2637, 2638, 2639, 2640, 2641, 2642, 2643, 2644, 2645, 2646, 2647, 2648, 2649, 2650, 2651, 2652, 2653, 2654, 2655, 2656, 2657, 2658, 2659, 2660, 2661, 2662, 2663, 2664, 2665, 2666, 2667, 2668, 2669, 2670, 2671, 2672, 2673, 2674, 2675, 2676, 2677, 2678, 2679, 2680, 26

[illegible]

Continued on the certificate can be verified by

(U) Listing on the sample certificate number T-0978622 does not constitute an official government verification.

THE SEAL OF THE
ABANDONED REGISTRY

Sub Registrar




1. K. Ramakrishna

2. வினா. மாண்புமிகு பேரவைத் தலைவர்

356 அக்டோபர்

1. 10000 2020 10000 10000
2. 10000 10000 10000
3. 10000 10000 10000

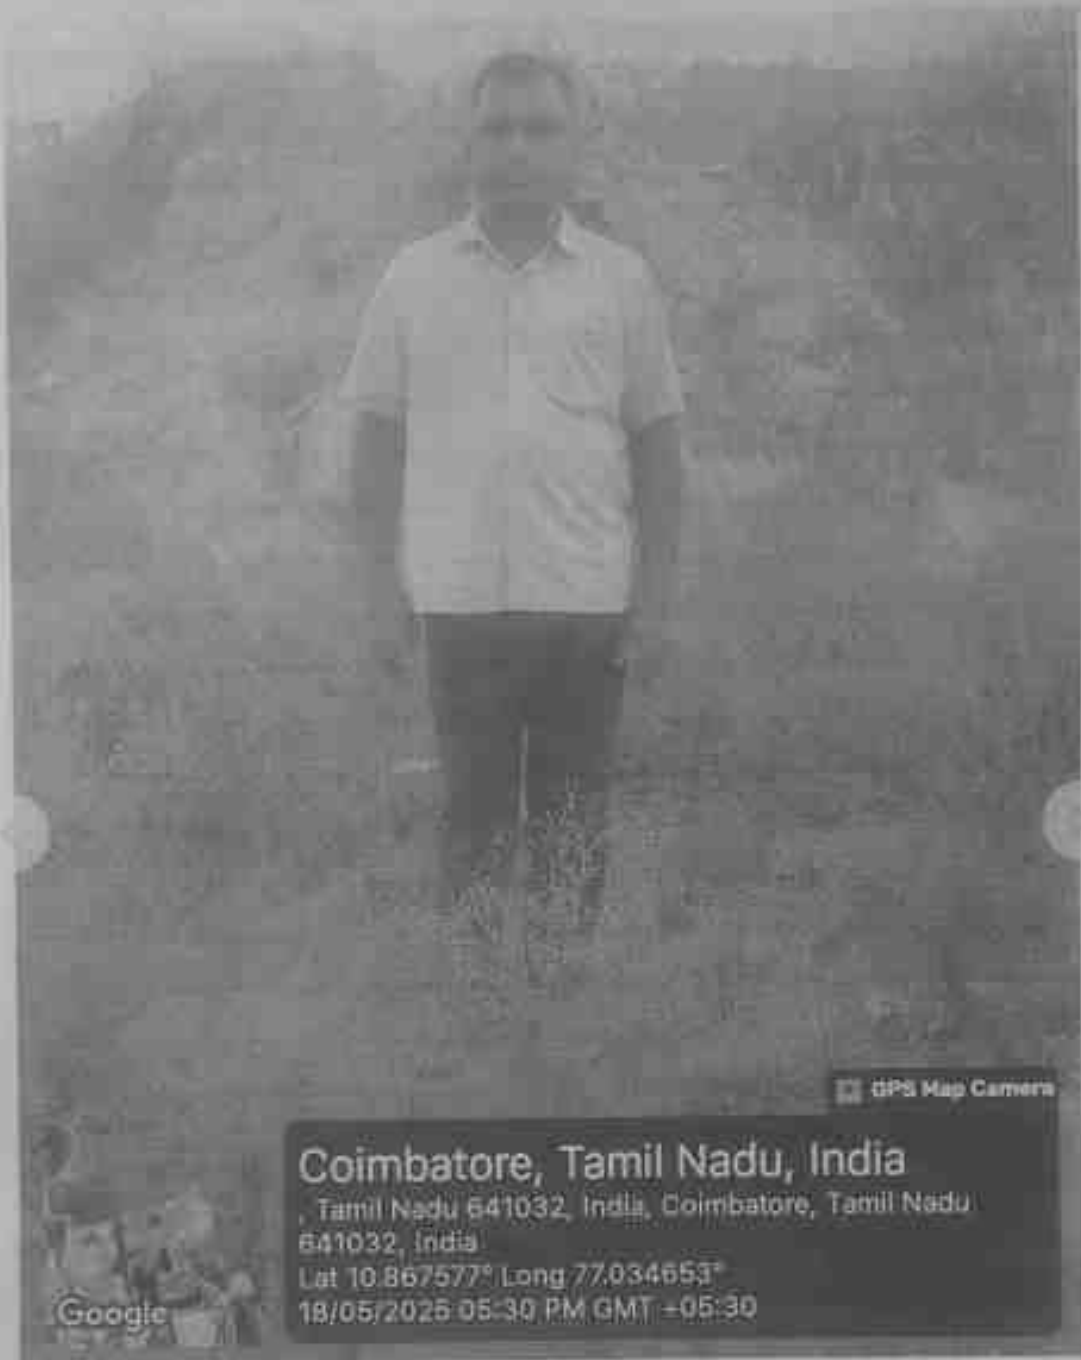

1. K. Ramakrishna

2. Rev. Fulvius
 2025

3. Rev. Fulvius

1	பெயர்	2025	பெயர்	5695
2	பெயர்	பெயர்	பெயர்	பெயர்
3	பெயர்	பெயர்	பெயர்	பெயர்



உறுதிமொழி

இந்த ஆவணத்தை எழுதிக் கொடுப்பதும், எழுதிப் பெறுபவர்களுக்கும் கீழ்க்கண்ட உறுதிமொழியை அளிக்கின்றோம்.

வழக்கிடை ஆவண சொத்து பதிவுச் சட்டம் 1908 பிரிவு 22(A) மற்றும் 22(B)-க்கு உட்பட்டதல்ல எனவும், ஆவணத்துடன் இணைக்கப்பட்ட அனைத்து ஆவணங்களும் இத்திய தண்டனைச் சட்டம் 1860 பிரிவு 470-ன்படி Forged Document அல்ல எனவும், ஆவணத்தை எழுதிப் பெறுபவர் அனைத்து ஆவணங்களையும் பரிசீலித்து வில்லங்கம் சரிபார்த்து எழுதிப் பெறுகிறார் எனவும், சொத்து மாற்றுச்சட்டம் 1882-ன்படி சொத்து பரிமாற்றம் தொடர்பான அனைத்து பிரிவுகளுக்கும் உட்பட்டு செயல்பட்டு உள்ளோம் எனவும் உறுதிமொழி அளிக்கின்றோம்.

சொத்தானது நீர்நிலை பகுதியில் அளவடிப் பெறவில்லை என்பதற்கான சான்று / உறுதிமொழி (Declaration) (தீதிபேரணை எண். 22163/2018-ல் வழங்கப்பட்ட தீர்ப்புறையை காண்க)

இந்த ஆவணத்தில் கண்ட சொத்தானது நீர்நிலைகள், நீர்வழிப் பாதைகள், நீர்ப்பிடிப்புபகுதிகளில் கட்டுடவில்லை என சான்று அளிக்கிறோம். மேலும் இதனில் தங்களுக்கு தவறான தகவல் அல்லது சான்று அளிக்கப்பட்டதாக பின்னாளில் கண்டுபிடிக்கப்பட்டால் அதனால் நாங்கள் சட்டபூர்வ நடவடிக்கைகளுக்கு உட்படுத்தப்படுவோம் என்பதையும் அறிவிோம்.

1. *K. Ramalingam*

2. *சும. சபாநாயகர்*
சபை

3. *சென்தியா*

1	பக்கம்	2025	ம.வழ.த.ப. 5625
2	ஆவணம்	20	தாசில்தாரைக்கு
3	வது தாள்		
			பதிவு செய்யப்பட்டது





6749954 அ.பாதி. 6749955 அ.பாதி.யா.காதி.



1. **Introduction**
 2. **Methods**
 3. **Results**
 4. **Discussion**
 5. **Conclusion**
 6. **References**
 7. **Appendix**
 8. **Index**
 9. **Glossary**
 10. **Notes**
 11. **Tables**
 12. **Figures**
 13. **Supplementary Materials**
 14. **References**
 15. **Appendix**
 16. **Index**
 17. **Glossary**
 18. **Notes**
 19. **Tables**
 20. **Figures**
 21. **Supplementary Materials**
 22. **References**
 23. **Appendix**
 24. **Index**
 25. **Glossary**
 26. **Notes**
 27. **Tables**
 28. **Figures**
 29. **Supplementary Materials**
 30. **References**
 31. **Appendix**
 32. **Index**
 33. **Glossary**
 34. **Notes**
 35. **Tables**
 36. **Figures**
 37. **Supplementary Materials**
 38. **References**
 39. **Appendix**
 40. **Index**
 41. **Glossary**
 42. **Notes**
 43. **Tables**
 44. **Figures**
 45. **Supplementary Materials**
 46. **References**
 47. **Appendix**
 48. **Index**
 49. **Glossary**
 50. **Notes**
 51. **Tables**
 52. **Figures**
 53. **Supplementary Materials**
 54. **References**
 55. **Appendix**
 56. **Index**
 57. **Glossary**
 58. **Notes**
 59. **Tables**
 60. **Figures**
 61. **Supplementary Materials**
 62. **References**
 63. **Appendix**
 64. **Index**
 65. **Glossary**
 66. **Notes**
 67. **Tables**
 68. **Figures**
 69. **Supplementary Materials**
 70. **References**
 71. **Appendix**
 72. **Index**
 73. **Glossary**
 74. **Notes**
 75. **Tables**
 76. **Figures**
 77. **Supplementary Materials**
 78. **References**
 79. **Appendix**
 80. **Index**
 81. **Glossary**
 82. **Notes**
 83. **Tables**
 84. **Figures**
 85. **Supplementary Materials**
 86. **References**
 87. **Appendix**
 88. **Index**
 89. **Glossary**
 90. **Notes**
 91. **Tables**
 92. **Figures**
 93. **Supplementary Materials**
 94. **References**
 95. **Appendix**
 96. **Index**
 97. **Glossary**
 98. **Notes**
 99. **Tables**
 100. **Figures**
 101. **Supplementary Materials**
 102. **References**
 103. **Appendix**
 104. **Index**
 105. **Glossary**
 106. **Notes**
 107. **Tables**
 108. **Figures**
 109. **Supplementary Materials**
 110. **References**
 111. **Appendix**
 112. **Index**
 113. **Glossary**
 114. **Notes**
 115. **Tables**
 116. **Figures**
 117. **Supplementary Materials**
 118. **References**
 119. **Appendix**
 120. **Index**
 121. **Glossary**
 122. **Notes**
 123. **Tables**
 124. **Figures**
 125. **Supplementary Materials**
 126. **References**
 127. **Appendix**
 128. **Index**
 129. **Glossary**
 130. **Notes**
 131. **Tables**
 132. **Figures**
 133. **Supplementary Materials**
 134. **References**
 135. **Appendix**
 136. **Index**
 137. **Glossary**
 138. **Notes**
 139. **Tables**
 140. **Figures**
 141. **Supplementary Materials**
 142. **References**
 143. **Appendix**
 144. **Index**
 145. **Glossary**
 146. **Notes**
 147. **Tables**
 148. **Figures**
 149. **Supplementary Materials**
 150. **References**
 151. **Appendix**
 152. **Index**
 153. **Glossary**
 154. **Notes**
 155. **Tables**
 156. **Figures**
 157. **Supplementary Materials**
 158. **References**
 159. **Appendix**
 160. **Index**
 161. **Glossary**
 162. **Notes**
 163. **Tables**
 164. **Figures**
 165. **Supplementary Materials**
 166. **References**
 167. **Appendix**
 168. **Index**
 169. **Glossary**
 170. **Notes**
 171. **Tables**
 172. **Figures**
 173. **Supplementary Materials**
 174. **References**
 175. **Appendix**
 176. **Index**
 177. **Glossary**
 178. **Notes**
 179. **Tables**
 180. **Figures**
 181. **Supplementary Materials**
 182. **References**
 183. **Appendix**
 184. **Index**
 185. **Glossary**
 186. **Notes**
 187. **Tables**
 188. **Figures**
 189. **Supplementary Materials**
 190. **References**
 191. **Appendix**
 192. **Index**
 193. **Glossary**
 194. **Notes**
 195. **Tables**
 196. **Figures**
 197. **Supplementary Materials**
 198. **References**
 199. **Appendix**
 200. **Index**
 201. **Glossary**
 202. **Notes**
 203. **Tables**
 204. **Figures**
 205. **Supplementary Materials**
 206. **References**
 207. **Appendix**
 208. **Index**
 209. **Glossary**
 210. **Notes**
 211. **Tables**
 212. **Figures**
 213. **Supplementary Materials**
 214. **References**
 215. **Appendix**
 216. **Index**
 217. **Glossary**
 218. **Notes**
 219. **Tables**
 220. **Figures**
 221. **Supplementary Materials**
 222. **References**
 223. **Appendix**
 224. **Index**
 225. **Glossary**
 226. **Notes**
 227. **Tables**
 228. **Figures**
 229. **Supplementary Materials**
 230. **References**
 231. **Appendix**
 232. **Index**
 233. **Glossary**
 234. **Notes**
 235. **Tables**
 236. **Figures**
 237. **Supplementary Materials**
 238. **References**
 239. **Appendix**
 240. **Index**
 241. **Glossary**
 242. **Notes**
 243. **Tables**
 244. **Figures**
 245. **Supplementary Materials**
 246. **References**
 247. **Appendix**
 248. **Index**
 249. **Glossary**
 250. **Notes**
 251. **Tables**
 252. **Figures**
 253. **Supplementary Materials**

6060 3514 2007

STUDY 2007, CHINA 2006-2007

1. K. Rammig

2. BSW - KLM 2015

3. ସଫଳତା କିମ୍ବା ସଫଳତା

1. பருகல் 2025 ம் வருடத்து 5695
2. ஆரம்பம் 20 திரைக்கலைக்கிரமம், 2
3. 16 வருடம்
4. 2





品名: 鋼板 / Equipment No.: 20425007302406



6763 8152 7223

ஆதாரம் - சரதாராண மணிதனின் அதிகாரம்



ஆதார - சாதாரண மனிதனின் அதிகாரம்

R. Wherrygan.

RBC ലിങ്ക്

1. K. Ramanujam

2. கி.த.வ. கல்யாணசுந்தரன்
செய்தது

3.5. பைபுஸ்

1. திகதி 2025 இல் பற்றியது 5695
இ. ந. ந. 20 பற்றியது 5695
17 பற்றியது
2 பற்றியது



பு/கிணத்துக்கடவு/புத்தகம்-1/5695/2025

180000 ஆண்டு இதழிய முத்திலிளர்ச் சட்டம் உவது பிரிவின சீழான லான்று

also with every thing else

1990-ல் வெளியிடப்பட்ட நகர பிரிவிப்பு நகர மேற்கு ஒத்தக்காலம்மைப்பம் கோடம்பத்தூர் தமிழ்நாடு இதழியா காலம் வசிகமும் திரு ராமராஜ எண்பவரிடமிருந்து 1 ஃபு. மதுபாய் மணையாற்று இயக்கத்தை மட்டும் இந்த ஆவணத்திற்காக இந்திய முத்திரைச் சட்டம் «வது பிரிவினை படி குண்டுவாயிருந்த முத்திரைச் சட்டம் வதுவிகம்பட்ட என நான் இதன் மூலம் காணவில்லேன்.

சார்பதிவுகளைக் கிணற்றுக்கடவு
தான் 1800000

சாதிக்காரன் மந்திரி இத்தர முத்திரை# #11111 மந்திரி
4340 120, 11111111

2023 ஆம் ஆண்டு மே மாதம் 18ம் தேதி ரிப் வசூல் மன்றங்களில் தினத்தந்தை வாராந்திரவாரி அலுவலகத்தில் நாகல் செய்து கட்டணம் ரூ.1,225 செலுத்தியவர்

இடது பெருவிரல்

K. R. R. R. R.

அடுத்து விவரங்கள் ஆய்வு செய்ததில்
உடனடியாக

எழுதிக் கொடுத்ததாக குடும்ப கொள்கை
இந்து பெருமிகல்



सर्वोत्तमः साक्षात्प्राप्तः
सिद्धिः

சுதேசப் பிவாங்குள்ள ஆவண வர்த்தகம்
உள்ளடிகு



எழுதிக் கொடுத்ததால் ஒவ்வொரு கவிஞரும்
தெரிந்து கொடுக்கிறார்

புதுச்சேரி

“சமீபத்தில் கையாடல் ஆதார அங்கீகாரம்” என்ற வற்றி இந்த உபரீர் அளபயரணம் விரும்பு ருக்க மூலம் ஆதார ஆணையத்தால் சரிபார்க்கப்பட்டது. உபரீர் உண்

UKC 8006384; <http://www.23andme.com/45668695/3934183252>

(Date Recd) _____
06-18-79

4. Kalkulation 2025 5695

மாண்புமிகு பேரவைத் தலைவர்: திரு. க. காமராசு

19 egg 2nd 2

எழுதி வாய்கியதாக ஒப்புக் கொண்டவர் இடது பெருவிரல்  	<i>K. Ramasamy</i> சம்மதத்துடன் கூடிய ஆதார அங்கீகாரம் என்ற வழி இந்த நபரின் அடையாளம் விரல் ரேகை மூலம் ஆதார ஆளையத்துடன் சரிபார்க்கப்பட்டது ஒப்பீட்டு எண் LIC-60111626c329a0374954738a3409a85298399 (Details from UIDAI) : Ramasamy S/O KANDASAMY, 04-04- 1958, xxxxxxxx2007.	
இன்னொரு திருபித்தவர்கள் வரைவு 1 இடது பெருவிரல்  	<i>R. Velupillai</i> திரு வேல்முருகன் தபெ ராமன் 3919, வெங்கடேஸ்வர நகர, பிரேமியர் நகர, ஒத்தக்காலமண்டபம், கோயம்புத்தூர், தமிழ்நாடு இந்தியா, 640032 சம்மதத்துடன் கூடிய ஆதார அங்கீகாரம் என்ற வழி இந்த நபரின் அடையாளம் விரல் ரேகை மூலம் ஆதார ஆளையத்துடன் சரிபார்க்கப்பட்டது ஒப்பீட்டு எண் LIC-77083132e15ef60c4874aee816bc314a2280723 (Details from UIDAI) : Velupillai Raman S/O: Raman, 23- 11-1976, xxxxxxxx23740.	
இன்னொரு திருபித்தவர்கள் வரைவு 2 இடது பெருவிரல்  	<i>Rajeshwari</i> திருமதி ராஜேஸ்வரி தபெ ராமராஜ் 1077, அரசமாளையம் கிணத்துக்கடவு, கோயம்புத்தூர், தமிழ்நாடு, இந்தியா, 640108 சம்மதத்துடன் கூடிய ஆதார அங்கீகாரம் என்ற வழி இந்த நபரின் அடையாளம் விரல் ரேகை மூலம் ஆதார ஆளையத்துடன் சரிபார்க்கப்பட்டது ஒப்பீட்டு எண் LIC-88458140548c07a283440508e72370a0a0c134 (Details from UIDAI) : Rajeshwari W/O Ramaraj, 25-06- 1978, xxxxxxxx7225.	

2025 ஆம் ஆண்டு மே மாதம் 20 நாள்	
1 புத்தகம் 2025 மலருத்திய 5645	
மேலும் 20 தாள்களைக் கொண்டது	
19 வது தாளில்	2 புதிதானது



[Signature]

கிணத்துக்கடவு
சுப்பிரதானியர்
காங்கத்தூக்கடவு
கிணத்துக்கடவு

R/கிணத்துக்கடவு/புத்தகம்-1/5695/2025 எண்ணகம் பதிவு செய்யப்பட்டது.

நாள் 19/05/2025

கிணத்துக்கடவு

கிணத்துக்கடவு
சார்பதிவு
கிணத்துக்கடவு



1 புத்தகம்	2025	எண்	ததிய	5695
ம் ஆவணம்	20	தாளகவனத்திற்குக் கொண்டு		
20	பதிவு தாள்	பதிவு அலுவலர்		

Shri. S. S. Sankaranarayanan, I.A.S.,
 Director,
 Tamil Nadu Sahitya Akademi

Secretary, Tamil Nadu Sahitya Akademi,
 Government of Tamil Nadu,
 Chennai-600 006.

MEMORANDUM

TO: THE SECRETARY, TAMIL NADU SAHITYA AKADEMI

FROM: THE SECRETARY,
 Tamil Nadu Sahitya Akademi,
 Government of Tamil Nadu,
 Chennai-600 006.

1. The Tamil Nadu Sahitya Akademi is a body of persons established by the Government of Tamil Nadu under the Tamil Nadu Sahitya Akademi Act, 1962.

2. The Tamil Nadu Sahitya Akademi is a body of persons established by the Government of Tamil Nadu under the Tamil Nadu Sahitya Akademi Act, 1962.

3. The Tamil Nadu Sahitya Akademi is a body of persons established by the Government of Tamil Nadu under the Tamil Nadu Sahitya Akademi Act, 1962.

4. The Tamil Nadu Sahitya Akademi is a body of persons established by the Government of Tamil Nadu under the Tamil Nadu Sahitya Akademi Act, 1962.

MEMORANDUM

The Tamil Nadu Sahitya Akademi is a body of persons established by the Government of Tamil Nadu under the Tamil Nadu Sahitya Akademi Act, 1962. The Tamil Nadu Sahitya Akademi is a body of persons established by the Government of Tamil Nadu under the Tamil Nadu Sahitya Akademi Act, 1962.

1. Name of the Person and address	Shri. S. S. Sankaranarayanan, I.A.S., Director, Tamil Nadu Sahitya Akademi, Government of Tamil Nadu, Chennai-600 006.
2. Name of the Person and address	Shri. S. S. Sankaranarayanan, I.A.S., Director, Tamil Nadu Sahitya Akademi, Government of Tamil Nadu, Chennai-600 006.

SECRETARY
 TAMIL NADU SAHITYA AKADEMI

A31

- [illegible]



- [illegible]

ASCE
AMERICAN SOCIETY OF
CIVIL ENGINEERS
1801 Alexander Bell Drive
Reston, VA 20191-4400
703/295-6200
www.asce.org

- [illegible]

—NICK

- [illegible]

[Signature]

0000-0000-0000-0000

- ² The *Journal Ministry of Home, Government of India*, New Delhi.

11. The National Bureau of Economic Research, *Business Conditions Digest* 11 (1987) 1000, 1002-1003.
12. The National Bureau of Economic Research, *Business Conditions Digest* 112 (1990) 1000, 1002-1003.
13. The National Bureau of Economic Research, *Business Conditions Digest* 112 (1990) 1000, 1002-1003.
14. The National Bureau of Economic Research, *Business Conditions Digest* 112 (1990) 1000, 1002-1003.
15. The National Bureau of Economic Research, *Business Conditions Digest* 112 (1990) 1000, 1002-1003.
16. The National Bureau of Economic Research, *Business Conditions Digest* 112 (1990) 1000, 1002-1003.
17. The National Bureau of Economic Research, *Business Conditions Digest* 112 (1990) 1000, 1002-1003.



भारतसरकार
GOVERNMENT OF INDIA

पर्यावरण, वन एवं जलवायु परिवर्तन मंत्रालय
MINISTRY OF ENVIRONMENT, FOREST & CLIMATE CHANGE

Regional Office/ क्षेत्रीय कार्यालय,
1st Floor, Additional Office Block for GPOA, Shastri Bhawan,
Haddows Road, Nungambakkam, Chennai - 600006



EP/12.1/2025-26/SEIAA/79/TN / 1302

22.08.2025

To

The Member Secretary,

State Level Environment Impact Assessment Authority (SEIAA),

3rd Floor, Panagal Maaligai, No.1, Jeeris Road,

Saldapet, Chennai - 600 015.

Email- cmantaseiaa@yahoo.com

Subject: DEIAA - CBE - Proposed Rough Stone Quarry located at S.F. No. 70/1(P) & 71/1, Myileripalayam Village, Madukkarai Taluk, Coimbatore District - Thiru. K. Ramaraj - issue of Environmental Clearance - reg.

EC Ref. No: Lr. No. DEIAA-CBE-V/F.No.358/1(a) / EC.No.53/2018 dated 10.12.2018.

(ii) CCR request letter dated: 22.07.2025

(iii) ATR seeking letter dated: 18.08.2025

(iv) ATR reply E-mail dated: 20.08.2025

Sir,

With reference to the subject cited above, please find enclosed herewith a Certified Compliance Report along with action taken report submitted by Thiru. K. Ramaraj on non-compliances observed in the Report issued by Regional Office, MoEF&CC, Chennai vide ref. no. 3 above.

This issues with the approval of the Competent Authority.

Encl: As above.

Yours faithfully,

C. Palpandi
22/8/25

Dr. C. Palpandi

Scientist 'D'

विज्ञानिक 'डी'

Dr.C.Palpandi

Scientist 'D'

Government of India

Min. of Environment Forest and Climate Change,

Regional Office,

1st Floor, Addl. Office Block for GPOA,

Shastri Bhawan, Haddows Road,

Nungambakkam, Chennai - 600 006.

Copy to:

1. **Dr. Shruti Rai Bhardwaj, Scientist 'F'** Monitoring Cell, IA Division, Indira Paryavaran Bhawan, MoEF&CC, Jorbagh Road, Aliganj, New Delhi - 110 003. Email- shruti.raib@nic.in
2. **The Member Secretary,** Tamil Nadu Pollution Control Board, 76, Mount Saal, Guindy, Chennai - 600 032. Email - memsec@tnpcb.gov.in
3. **Thiru. K. Ramaraj,** S/o. S. Kandasamy, No. 2/395-1, Venkateswara Nagar, Premier Nagar West, Othakal Mandapam, Coimbatore District.
4. **The District Collector,** Collectorate Building, Coimbatore - 641018. Email: collrcbe@nic.in

C. Palpandi
(Dr. C. Palpandi)
Scientist 'D'

Dr. C. J. Palmer
Scientist D
Government of India
Ministry of Environment, Forest and Climate Change
Regional Office
1st Floor, 44/45, Green Park Road, Connaught
Place, New Delhi - 110 048

Monitoring Report

Subject: DEIAA - CBE - Proposed Rough Stone Quarry located at S.F. No. 70/1(P) & 71/1, Myleripalayam Village, Madukkarai Taluk, Coimbatore District - Thiru.K.Ramraj - issue of Environmental Clearance - reg.

EC Ref. No: Lr. No. DEIAA-CBE-V/F.No.358/1(a) / EC.No.53/2018 dated 10.12.2018.

Project Proponent: Thiru. K. Ramaraj,
S/o. S.Kandasamy,
No. 2/395-1, Venkateswara Nagar,
Premier Nagar West,
Othakal Mandapam,
Coimbatore District

Present Status of the Project:



The District Level Environment Impact Assessment Authority (DEIAA) – Coimbatore District, Tamil Nadu, granted Environmental Clearance (EC) vide letter dated 10.12.2018 for the Rough Stone Quarry of Thiru. K. Ramraj in Myleripalayam Village, Mettupalayam Taluk, Coimbatore District, Tamil Nadu. The project involves Open-Cast, Mechanized mining operation with an approved mining depth of 38 meters below ground level. As per the letter issued by the Assistant Director, Geology & Mining, Coimbatore (Rc. No. 778/Mines/2024 dated 09.01.2025), quarrying has been carried out up to the depth of 38 meters.

The total Mine Lease (ML) area is 100.0 hectares, out of total Mine Lease area, broken-up area is 0.42.66 Hectare. The quantity of rough stone sanctioned for five years is 90,353 m³ and the quantity taken so far is 79, 583 m³ of rough Stone. The project cost is Rs. 48,08,000/-, with an Environmental Management Plan (EMP) cost is Rs.3,80,000/-

C. Ramraj

During the site visit, it was observed that the quarry is not in operation. The Project Proponent (PP) has obtained Consent to Operate (CTO) from the Tamil Nadu Pollution Control Board (TNPCB), Coimbatore and valid up to March 31, 2023.

The Nearest Railway Station is Kinathukadavu, located at a distance of 4.5 km on South-West side of the quarry. The Nearest National Highway (NH-83) Coimbatore – Nagapattinam Road, located at a distance of 2.5 km on the West side of the quarry. Major District Road (MDR-988) Kinathukadavu – Cochin Frontier Road, located at a distance of 820 m on the South-West side of the quarry. There is no Reserve Forest, Social Forest, or wildlife sanctuary exists within 1 km of the quarry.

The Environmental Clearance (EC) was issued by DEIAA – Coimbatore District, Tamil Nadu, vide Lr. No. DEIAA-CBE-V/F.No.358/1(a) / EC.No.53/2018 dated 10.12.2018, and was valid up to 09.12.2023, under Schedule 1(a) – Mining of Minerals, Category 'B2'. As the EC has since expired, the Project Proponent (PP) has applied for renewal of Environmental Clearance to SEIAA – Tamil Nadu.

During the 578th meeting of the State Expert Appraisal Committee (SEAC) held on 13.06.2025, the Authority directed the Project Proponent to submit a Certified Compliance Report (CCR) based on the existing Environmental Clearance.

In compliance with this direction, the Project Proponent submitted a request to the Regional Office of the Ministry of Environment, Forest & Climate Change (MoEF&CC), Chennai on 22.07.2025, seeking issuance of the Certified Compliance Report for EC renewal.

Accordingly, the site was inspected on 07.08.2025 in the presence of the Project Proponent. The status of compliance with the stipulated conditions of the aforementioned Environmental Clearance is detailed below in **Part – II**.

Date of Monitoring: **07.08.2025.**

C. Ravindran

PART - II

Environment Clearance Conditions:

Conditions to be Complied Before Commencing Mining Operations: -

S. No.	EC CONDITIONS	STATUS AS PER SIX MONTHLY COMPLIANCE REPORT SUBMITTED BY THE PP	Observations of ROs/SROs
1.	The project proponent shall advertise in at least two local newspapers widely circulated in the region, one of which shall be in the vernacular language informing the public that - The project has been accorded Environmental Clearance. - Copies of clearance letters are available with the Tamil Nadu Pollution Control Board. - Environmental Clearance may also be seen on the website of the District Level Environmental Impact Assessment Authority. - The advertisement should be made within 7 days from the date of	Advertisement has been given in two local newspapers regarding grant of Environmental Clearance. Refer newspaper advertisement copy as Annexure - I. We also agree to place it on our website.	Complied. The Advertisement were given in two local newspapers namely "Makkal Kural" and "Trinity Mirror" dated 06.01.2019 regarding Environmental clearance was obtained. Newspaper copy is enclosed in Annexure - I.

C. Murandi

S. No.	EC CONDITIONS	STATUS AS PER SIX MONTHLY COMPLIANCE REPORT SUBMITTED BY THE PP	Observations of ROs/SROs
	receipt of the clearance letter and a copy of the same shall be forwarded to the DEIAA.		
2.	The applicant has to obtain land use classification as industrial use before issue/renewal of mining lease.	We acknowledge the requirement and will initiate the process to obtain land use classification as industrial use before the issuance/renewal of the mining lease.	Complied. Before commencement of mining operations, the PP obtained land classification as "Kai Quarry," which is recorded in the A-register from the competent authority. A copy of the A-register is enclosed in Annexure -II.
3.	NOC from the Standing committee of the NBWL shall be obtained, if protected areas are located within 10 Km from the proposed project site.	There are no protected areas within 10 km radius of the project area. Hence NBWL clearance is not applicable for this project.	Complied. During the visit, it was observed that there is no Tiger reserve, Elephant reserve, Biospheres, National parks, Wildlife sanctuaries, community reserves and conservation reserves are available within 10 Km radius of the project site. Hence NBWL Clearance is not required.
4.	The project proponent shall comply the conditions laid down in	We comply with the conditions mentioned in Section V, Rule 36 of	Refer below.

C. Jain

S. No.	EC CONDITIONS	STATUS AS PER SIX MONTHLY COMPLIANCE REPORT SUBMITTED BY THE PP	Observations of ROs/SROs
	the section V, Rules 36 of Tamil Nadu Minor Minerals Concession Rules 1959.	the Tamil Nadu Minor Mineral Concession Rules, 1959.	During the site visit, no mining operations were observed. Hence, compliance with the stipulated conditions under Section V, Rule 36 of the Tamil Nadu Minor Mineral Concession Rules, 1959, including blasting, could not be verified specifically.
5.	A copy of the Environmental Clearance letter shall be sent by the proponent to the concerned Panchayat, Town Panchayat / Panchayat union, Municipal Corporation, Urban Local Body and the Local NGO, if any, from whom suggestions/ representations, if any, were received while processing the proposal. The clearance letter shall also be put on the website of the proponent and also kept at the site, for the general public to see.	EC letter was submitted to local Village Panchayat. EC copy is displayed at the project site for the general public to see. The Environmental Clearance letter will be placed on our website.	Not complied. Copies of the Environmental Clearance has not submitted to the Village Panchayat. The Environmental Clearance letter is available at the quarry site for public viewing. As this PP does not have a website, the letter has not yet been uploaded to their website. Justification given in the ATR is not satisfied/acceptable. Hence, the compliance status of this condition is "Not complied".

C. Narasimhan

S. No.	EC CONDITIONS	STATUS AS PER SIX MONTHLY COMPLIANCE REPORT SUBMITTED BY THE PP	Observations of ROs/SROs
6.	Quarry lease area should be demarcated on the ground with wire fencing to show the boundary of the lease area on all sides with red flags on every pillar shall be erected before commencement of quarrying.	A wire fence has been erected around the quarry lease area; with red flags on each pillar to mark the boundary of the lease area.	Complied. During the visit, it was observed that the quarry lease area was demarcated with boundary pillars on all sides, and wire fencing was erected on all sides of the lease boundary. Photographs of the boundary pillars and wire fencing are provided in Annexure – III.
7.	The proponent shall ensure that First Aid Box is available at site.	A first aid box is available in the quarry office.	Complied. First Aid Box is available at the quarry office.
8.	The excavation activity shall not alter the natural drainage pattern of the area.	The excavation activity will not alter the natural drainage pattern of the area.	Complied. During the site visit, it was observed that no streams in the mining lease are noticed and the same has been confirmed by the PP. Therefore, the excavation activity has not altered the natural drainage system of the area.
9.	The excavated pit shall be restored by the project proponent for useful purposes.	We assure that once the mining operation is completed, the excavated pit will be	Refer below. Not applicable at this stage.

C. Minerva

S. No.	EC CONDITIONS	STATUS AS PER SIX MONTHLY COMPLIANCE REPORT SUBMITTED BY THE PP	Observations of ROs/SROs
		restored for useful purposes.	
10.	The proponent shall quarry and remove only in the permitted areas as per the approved mining plan details.	Excavation of Rough Stone material is only where permitted area as per the approved Mining Plan.	Complied. As per the EC, the lease area is 1.00.0 Ha. Out of which the PP has mined out the area is 0.40.75 Hectare as per the Approved Mining Plan. In view of this, the PP has removed Rough Stone only in the permitted and approved areas.
11.	The quarrying operation shall be restricted between 7 AM and 5 PM.	The quarry is operated between 7 AM to 5 PM.	Refer below. During the site visit, no mining activity was carried out. Hence, this EC compliance could not be verified specifically.
12.	The proponent shall take necessary measures to ensure that there shall not be any adverse impacts due to quarrying operation on the nearby human habitations, by way of pollution to the environment.	Water is sprayed to control dust, materials are transported in covered lorry and environment is monitored every six months to avoid any adverse impact on nearby human habitats due to quarry operations.	Refer below. During the site visit, no mining activity was carried out. Hence, this EC compliance could not be verified specifically. The PP has submitted only one monitoring report for the environmental measures such as air, water, noise to prevent & control the pollution to the environment.

C. Ramani

S. No.	EC CONDITIONS	STATUS AS PER SIX MONTHLY COMPLIANCE REPORT SUBMITTED BY THE PP	Observations of ROs/SROs
			As the results of the report show that there is no impact on the environment, it can be observed that there is no impact on the nearby habitats.
13.	A minimum distance of 15mts. from any civil structure shall be kept from the periphery of any excavation area.	There are no civil structures within 15 meters of the perimeter of the excavation area.	Complied. During the site visit, it was observed that no civil structures are located within 15 meters of the periphery of the quarry excavation area.
14.	Depth of quarrying shall be 2m above the ground water table /approved depth of mining whichever is lesser to be considered as a safe guard against Environmental Contamination and over exploitation of resources.	Agreed. The depth of quarrying will be maintained at least 2m above the groundwater table or the approved depth of mining, whichever is lesser, as a safeguard against environmental contamination and resource overexploitation.	Complied. The approved depth of quarry is 38 meters below ground level, and excavation has been carried out up to a depth of 38 meters below ground level. As the groundwater level is at 45m - 50m BGL. Refer Pit letter in Annexure – IV. Therefore, the quarrying activity maintains a safe vertical buffer above the groundwater table, adhering to the condition of staying at

C. M. M. M.

S. No.	EC CONDITIONS	STATUS AS PER SIX MONTHLY COMPLIANCE REPORT SUBMITTED BY THE PP	Observations of ROs/SROs
			least 2 meters above the water table.
15.	The mined-out pits should be backfilled where warranted and area should be suitably landscaped to prevent environmental degradation. The mine closure plan as furnished in the proposal shall be strictly followed with back filling and tree plantation.	Agreed to carryout landscaping and tree plantation after completion of the mining operation.	Refer below. Not applicable at this stage.
16.	Wet drilling method is to be adopted to control dust emissions. Delay detonators and shock tube initiation system for blasting shall be used so as to reduce vibration and dust.	Wet drilling method is adopted to control dust emission. Delay detonators and shock tube initiation system are used for blasting operation, so the vibration and dust level is controlled.	Refer below. During the site visit, no mining activity was observed. Therefore, the implementation of the wet drilling method and delay detonator systems could not be verified.
17.	Drilling and blasting shall be done only either by licensed explosive agent or by the proponent after obtaining required approvals from Competent Authorities.	We are engaged authorized explosive agency to carry out the blasting. The explosives agencies have the valid blaster certificate after completion of blasting the explosives agencies will take it out back the remaining quantity of Explosives.	Refer below. During the site visit, no mining activity was carried out. Because of this, drilling and blasting activities were not observed. However, the PP informed that the Drilling and Blasting were done by engaging licensed explosive

C. Narayana

S. No.	EC CONDITIONS	STATUS AS PER SIX MONTHLY COMPLIANCE REPORT SUBMITTED BY THE PP	Observations of ROs/SROs
			agent. They carry out Drilling and Blasting in a safe and scientific manner as per DGMS guidelines. Agreement for blasting had been made <i>M/s.Senthil Explosives</i> . Refer Agreement copy and Blaster license as Annexure – V.
18.	The explosives shall be stored at site as per the conditions stipulated in the permits issued by the licensing Authority.	Explosives are not stored at the site; they are procured from the authorized explosive agent as required and unused quantity is returned as per regulations.	Refer below. The explosive material was not stored at the site and it was taken from licensed agent as and when it is required and used immediately.
19.	Blasting shall be carried out after announcing to the public adequate through public address system to avoid any accident.	The Blasting is carried out after announcing the public through posting red flags to avoid any accident.	Refer below. During the site visit, no mining activity was carried out. Because of this, drilling and blasting activities were not observed.
20.	A study has to be conducted to assess the optimum blast parameters and blast design to keep the vibration limits less than prescribed levels and only such design and parameters should be implemented while blasting is done.	The blasting pattern and safety measures has been studied in the Mining Plan. The quarry is situated more than 300 meter from the nearby villages, controlled blasting measures is being adopt for minimizing	Not complied. The PP has not conducted a study to assess the optimum blast parameters and blast design to ensure vibration levels are kept within the prescribed limits.

C. Narayana

S. No.	EC CONDITIONS	STATUS AS PER SIX MONTHLY COMPLIANCE REPORT SUBMITTED BY THE PP	Observations of ROs/SROs
	Periodical monitoring of the vibration at specified location to be conducted and records kept for inspection.	ground vibration and fly rock.	Justification given in the ATR is not satisfied/acceptable. Hence, the compliance status of this condition is "Not complied".
21.	The Proponent shall take appropriate measures to ensure that the GLC shall comply with the revised NAAQ norms notified by MoEF, Govt on 16.11.2009. (GLC = Ground Level Concentration), (NAAQ = Noise and Ambient Air Quality)	Ambient Air Quality was monitored through the third-party laboratory and the report shows that the values are within the revised NAAQ Norms. (See AAQ report at Annexure – 2).	Refer below. The Ground Level Concentration (GLC) has been controlled through regular water sprinkling to meet NAAQ norms. Monitoring of ambient air quality has been carried out only once by a NABL-accredited third-party laboratory. AAQ Monitoring reports is attached in Annexure - VI .
22.	The following measures are to be implemented to reduce Air Pollution during transportation of mineral i. Roads shall be graded to mitigate the dust emission. ii. Water shall be sprinkled at regular interval	i. Roads were graded to reduce the dust emissions. ii. Water is sprinkled on the main road and other service roads at regular intervals to suppress dust.	Refer below. During the site visit, no mining activity was carried out. Hence, this EC compliance could not be verified specifically.

C. pairanda

S. No.	EC CONDITIONS	STATUS AS PER SIX MONTHLY COMPLIANCE REPORT SUBMITTED BY THE PP	Observations of ROs/SROs
	on the main road and other service roads to suppress dust.		
23.	The following measures are to be implemented to reduce Noise Pollution. i. Proper and regular maintenance of vehicles and other equipment. ii. Limiting time exposure of workers to excessive noise. iii. The workers employed shall be provided with protection equipment and earmuffs etc. iv. Speed of trucks entering or leaving the mine is to be limited to moderate speed of 25 kmph to prevent undue noise from empty trucks.	i. Vehicles and other equipment are properly maintained. ii. Proper and regular maintenance of vehicles and other equipment's are carried out. iii. Workers' exposure to excessive noise is reduced by providing protective equipment and earmuffs. iv. The speed of trucks entering or exiting the mine is controlled by speed breakers to prevent unnecessary noise from empty trucks.	Refer below. During the site visit, no mining activity was carried out. Hence, this EC compliance could not be verified specifically.
24.	Measures should be taken to comply with the provisions laid under Noise Pollution (Regulation and	Noise generating machines are incorporated into the acoustics to reduce noise in the work area.	Refer below. During the site visit, no mining activity was carried out. Hence, this

O. J. J. J.

S. No.	EC CONDITIONS	STATUS AS PER SIX MONTHLY COMPLIANCE REPORT SUBMITTED BY THE PP	Observations of ROs/SROs
	Control) (Amendment) Rules, 2010, dt. 11.01.2010 issued by the MoE&F, GoI to control noise to the prescribed levels.	The noise levels are monitored by a third party laboratory and the values are within the range recommended by the MoEF. (See Noise monitoring report at Annexure – 3).	EC compliance could not be verified specifically. Monitoring of Ambient noise levels in and around the quarry area was carried out only once through third-party laboratory, and the results indicates that the noise levels are within the prescribed limits. Noise level monitoring report is enclosed in Annexure – VII .
25.	Suitable conservation measures to augment groundwater resources in the area shall be planned and implemented in consultation with Assistant Director, Ground Water Division, PWD, Coimbatore.	Complied.	Not complied. The PP has not consulted with "Assistant Director, Ground Water Division, PWD, Coimbatore" for the groundwater augmentation measures. Justification given in the ATR is not satisfied/acceptable. Hence, the compliance status of this condition is "Not complied".
26.	Permission from the competent authority should be obtained for	There was no bore well at the quarry site. Water is obtained from	Complied.

C. Jeyaraj

S. No.	EC CONDITIONS	STATUS AS PER SIX MONTHLY COMPLIANCE REPORT SUBMITTED BY THE PP	Observations of ROs/SROs
	drawl of ground water, if any, required for this project.	Water Supply vendors. So no permission from the competent authority is required for this project.	There is no ground water required for this project. Hence, permission from the Competent Authority was not obtained for ground water withdrawal.
27.	Topsoil, if any, shall be stacked properly with proper slope with adequate measures and should be used for plantation purpose.	Whatever topsoil removed is stacked and used for plantation purpose & bund formation in the quarry area.	Complied. The project proponent has stacked the topsoil within the lease area, which has been used for plantation purposes and bund formation in the quarry area.
28.	The following measures are to be adopted to control erosion of dumps:- a) Retention / toe walls shall be provided at the foot of the dumps. b) Worked out slopes are to be stabilized by planting appropriate shrub/ grass species on the slopes.	Toe wall is provide at the foot of the dumps. The plantation work is carried out at the worked out slopes.	Complied. There is no dump at the quarry site. Since 100% mineral is transported out.
29.	Waste oils, used oils generated from the EM machines, mining operations, if any, shall be disposed as	There is no waste oil is generated in the mining operations. We will follow hazardous waste rules, if any.	Refer below. During the site visit, no mining activity was carried out. Hence, this

C. J. J. J. J.

S. No.	EC CONDITIONS	STATUS AS PER SIX MONTHLY COMPLIANCE REPORT SUBMITTED BY THE PP	Observations of ROs/SROs
	per the Hazardous Wastes (Management, Handling, and trans boundary movement) Rules, 2008 and its amendments thereof to the recyclers authorized by TNPCB.		EC compliance could not be verified specifically.
30.	Concealing the factual data or failure to comply with any of the conditions mentioned above may result in withdrawal of this clearance and attract action under the provisions of Environment (Protection) Act, 1986.	Agreed.	Refer below. Informed to PP as stipulated and list of non-compliances are indicated.
31.	Rain water harvesting to collect and utilize the entire water falling in land area should be provided.	Rainwater is collected in the quarry pit during rainy season and stored in a settling tank to be used for green belt development and wet drilling method, dust suppression.	Complied. During monsoon season, the rain water was collected at the bottom of quarry pit. The part of water was allowed for percolation and rest of the water was utilized for greenbelt development and dust suppression. The PP has provided rain water harvesting system in the quarry office area.

C. Rainwater

S. No.	EC CONDITIONS	STATUS AS PER SIX MONTHLY COMPLIANCE REPORT SUBMITTED BY THE PP	Observations of ROs/SROs
			Refer the rainwater harvesting photos in Annexure – VIII.
32.	Rain water getting accumulated in the quarry floor shall not be discharged directly to the nearby stream or water body. If it is to be let into the nearby water body, it has to be discharged into a silt trap on the surface within the lease area and only the overflow after allowing settling of soil be let into the nearby waterways. The silt trap should be of sufficient dimensions to catch all the silt water being pumped out during one season. The silt trap should be cleaned of all the deposited silt at the end of the season and kept ready for taking care of the silt in the next season.	Rainwater is collected in the quarry pit during rainy season and stored in a settling tank. The water is not discharged directly to the nearby water body.	Refer below. No rain water is discharged directly to nearby stream or water body. The settling tank was not provided at the quarry site.
33.	The lease holder shall undertake adequate safeguard measures during extraction of material and ensure that due to this activity, the hydro-geological regime of the surrounding area	The groundwater quality was monitored at a nearby borewell and the report shows that the groundwater quality was not contaminated. (See water report at Annexure – 4).	Refer below. The Assistant Director, Ground Water division, PWD, Coimbatore had not monitored the groundwater table in the lease area.

C. Rajmoh

S. No.	EC CONDITIONS	STATUS AS PER SIX MONTHLY COMPLIANCE REPORT SUBMITTED BY THE PP	Observations of ROs/SROs
	shall not be affected. Regular monitoring of ground water level and quality shall be carried out around the mine lease area during the mining operation. If at any stage, if it is observed that the groundwater table is getting depleted due to the mining activity, necessary corrective measures shall be carried out. The Assistant Director Ground water Division, PWD Coimbatore shall monitor, the ground water related issues.	Agreed to monitor the groundwater level around the mine lease area.	Ground water quality at the buffer zone of the quarry was monitored through third party laboratory and as per the report there is no adverse impact was noticed. Water report is enclosed in Annexure - IX .
34.	No tree-felling shall be done in the leased area, except only with the permission from competent Authority.	No trees have been felled on the leased land. In case of any such cutting, the permission of the Competent Authority will be obtained.	Refer below. The lease area was opened in 2019. Hence, this condition could not be verified specifically during the site visit.
35.	To take up environmental monitoring of the proposed quarry site before, during and after the mining activities including vibration study data, water, air & flora/fauna environment, slurry	Environmental monitoring is carried out before, during the mining activities through a third-party laboratory. The monitored data shows that the values are within the permissible limits.	Not complied. The PP has not carried out environmental monitoring of the quarry site covering vibration study, water, air, and flora/fauna, instead of conducting it at the prescribed

C. Jairamdas.

S. No.	EC CONDITIONS	STATUS AS PER SIX MONTHLY COMPLIANCE REPORT SUBMITTED BY THE PP	Observations of ROs/SROs
	water generated/disposed and method of disposal, involving a reputed academic Institution.		intervals before, during, and after mining activities through a reputed academic institution. Justification given in the ATR is not satisfied/acceptable. Hence, the compliance status of this condition is "Not complied".
36.	Ground water quality monitoring should be conducted once in 3 Months.	Complied. Groundwater quality monitoring has been conducted through a third-party laboratory as per the stipulated requirements.	Not complied. Groundwater quality monitoring was not carried once in three months. Justification given in the ATR is not satisfied/acceptable. Hence, the compliance status of this condition is "Not complied".
37.	Transportation of the quarried materials shall not cause any hindrance to the Village people/Existing Village road,	Complied. Transportation of the quarried materials is carried out without causing any hindrance to the village residents or the existing village road.	Refer below. During the site visit, the quarry was not operational. Therefore, the transportation of quarried materials and its impact on the village roads could not be verified at that time.

C. Prasad

S. No.	EC CONDITIONS	STATUS AS PER SIX MONTHLY COMPLIANCE REPORT SUBMITTED BY THE PP	Observations of ROs/SROs
38.	Free Silica test should be conducted and reported to: TNPCB, Department of Geology and Mining and Regional Director, MoEF, GOI.	Free Silica test will be conducted to the quarry workers.	Not complied. Monitoring of Free Silica test was not conducted. In this regard, the PA has submitted ATR (Refer Annexure-B).
39.	Air sampling at intersection point should be conducted and reported to TNPCB, Department of Geology and Mining and Regional Director, MoEF&CC, GOI.	Air sampling was carried out in the intersection point through the third party laboratory and the report indicates that the Air quality concentration are within the permissible limits.	Not complied. Air sampling at intersection point was not monitored. In this regard, the PA has submitted ATR (Refer Annexure-B).
40.	Bunds to be provided at the boundary of the project site.	Provided bunds at the boundary of the project site.	Complied. The PP has been provided bunds around the boundary of the project site.
41.	The project proponent shall undertake plantation/afforestation work by planting the native species on all side of the lease area at the rate of 400/Ha. Suitable tall tree samplings should be planted on the bunds and other suitable areas in and around the work place and progress report shall	We agreed to carry out the afforestation and plantation work as per the stipulated requirements.	Complied. The PP has undertaken Plantation work by planting the native species on all side of the lease area. Plantation photos are provided in Annexure - X.

C. Narayana

S. No.	EC CONDITIONS	STATUS AS PER SIX MONTHLY COMPLIANCE REPORT SUBMITTED BY THE PP	Observations of ROs/SROs
	be submitted once in 3 months.		
42.	At least 10 Neem trees should be planted around the boundary of the quarry site.	Complied. More than 10 Neem trees have been planted around the boundary of the quarry site.	Complied. The PP has planted more than 10 Neem trees around the boundary of the quarry area.
43.	Floor of excavated pit to be leveled and sides to be sloped with gentle slope (Except for granite quarries) in the mine closure phase.	Agreed.	Refer below. Not applicable at this stage.
44.	The Project Proponent shall ensure a minimum of 2.5% of the annual turnover will be utilized for the CSR Activity	Complied. 2.5% of annual revenue is being spent on CSR activities.	Not complied. The PP had not provided evidence of allocating a minimum of 2.5% of the annual turnover for CSR activities as required by the condition. In this regard, the PA has submitted ATR (Refer Annexure-B).
45.	The CSR funds should be channelized for planning programme, nature conservation support, tribal development and activities that support forest and environment.	Agreed.	Not complied. The PP has not channelized CSR funds towards planning programmes, nature conservation support, tribal development, or other activities supporting forest and environmental

C. P. P. P.

S. No.	EC CONDITIONS	STATUS AS PER SIX MONTHLY COMPLIANCE REPORT SUBMITTED BY THE PP	Observations of ROs/SROs
			protection as stipulated. In this regard, the PA has submitted ATR (Refer Annexure-B).
46.	The Project Proponent shall provide solar lighting system to the nearby villages.	Provided solar lighting system to the nearby villages.	Complied. The PP has provided solar lighting system to the nearby villages. Refer solar light photos in Annexure – XI .
47.	The Project Proponent shall comply with the mining and other relevant rules and regulations where ever applicable.	Agreed.	Agreed to comply. Refer Annexure – XII for undertaking by the PP.
48.	Rainwater shall be pumped out Via Settling Tank only.	Complied. Rainwater is pumped out via a settling tank only.	Not complied. There is no settling tank provided. In this regard, the PA has submitted ATR (Refer Annexure-B).
49.	Earthen bunds and barbed wire fencing around the pits with green belt all along the boundary shall be developed and maintained.	Earthen bunds and barbed wire fencing around the pits with green belt all along the boundary were developed and maintained.	Complied. Earthen bunds and barbed wire fencing have been erected on all sides around the pits. Green belt has been developed and is

C. Narasimha

S. No.	EC CONDITIONS	STATUS AS PER SIX MONTHLY COMPLIANCE REPORT SUBMITTED BY THE PP	Observations of ROs/SROs
			maintained along the boundary.
50.	As per MoEF & CC, Gol. Office Memorandum dated 30.03.2015, prior clearance from Forestry & Wild Life angle including clearance from standing committee of the National Board for Wild life as applicable shall be obtained before starting the quarrying operation, if the project site is located within 10KM from National Park and Sanctuaries.	Agreed.	Complied. Clearance from forestry and wild life angle is not applicable to them due to following: • No forest land is involved in their lease area. • No wildlife sanctuary / critically polluted area / ecologically sensitive zone within 10km from the boundary of the mine lease area.
51.	The quarrying activity shall be stopped if the entire quantity indicated in the Mining plan is quarried even before the expiry of the quarry lease period and the same shall be monitored by the District Authorities.	Agreed.	Refer below. As per the approved mining plan as well as in EC, the approved quantity is 90,353 m³ of Rough stone up to a depth of 38 meters below ground level. As per the permit issued by Geology & Mining, PP has excavated only 79,583 m³ of rough stone during the lease period.
52.	Safety equipment's to be provided to all the employees.	All the employees were provided with safety equipment's such as	Refer below.

C. Praveen

S. No.	EC CONDITIONS	STATUS AS PER SIX MONTHLY COMPLIANCE REPORT SUBMITTED BY THE PP	Observations of ROs/SROs
		Safety Helmet, Masks, and Safety Shoes as per mines act and rules.	During the site visit, no mining activity was carried out; hence, the provision of safety equipment to all employees could not be verified.
53.	Safety distance of 50m has to be provided in case of railway, reservoir, canal/odai.	There is no railway, reservoir or stream within 50 m of the mining lease area.	Complied. During the visit, it was observed that there is no railway line, reservoir, canal/odai within 50 m distance from the boundary of the lease area.
54.	The Assistant / Deputy Director, Department of Geology and Mining shall ensure that the proponent has engaged the blaster with valid Blasting license / certificate obtained from the competent authority before execution of mining lease.	Complied.	Agreed to comply. Refer Annexure – XII for undertaking by the PP.
55.	The proponent shall furnish the Baseline data covering the Air, Water, Noise and land environment quality for the proposed quarry site before execution of mining lease.	Complied. Baseline data covering air, water, noise and land environmental quality were monitored before starting quarry operation.	Not complied. The PP has not done a baseline study covering air, water, noise and land environment before starting the mining operation.

C. Prasad

S. No.	EC CONDITIONS	STATUS AS PER SIX MONTHLY COMPLIANCE REPORT SUBMITTED BY THE PP	Observations of ROs/SROs
			In this regard, the PA has submitted ATR (Refer Annexure-B).
56.	The proponent shall erect the pillars in accordance with the Rules for depicting GPS details in the earmarked boundary of the quarry site to monitor electronically before execution of quarrying lease.	Boundary pillar with GPS coordinates were erected at the boundary of the quarry lease area.	Complied. During the visit, it was observed that pillars were erected according to the rules for depicting GPS details within the allotted boundary of the quarry site.
57.	The proponent has to provide insurance protection to the workers in the case of existing mining or provide the affidavit in case of fresh lease before commencing quarrying operation.	Complied. Insurance coverage was provided to the quarry workers.	Complied. The PP has provided insurance protection to the workers engaged in the mining activity. Refer insurance copy in Annexure – XIII.
58.	The proponent has to display the name board at the quarry site showing the details of proponent, lease period, extent, etc. with respect to the existing activity before execution of mining.	The name board is displayed at the quarry site showing the details like lease period, extent, lease address, etc.	Complied. The PP has displayed the name board at the entrance of the quarry site, which includes the details of the proponent, lease period, extent, and other relevant information.
59.	Heavy earth machinery equipment's if utilized, after getting approval from the competent authority.	Agreed to comply.	Not complied. The PP has not obtained approval from the competent authority for utilization

o. jayaram

S. No.	EC CONDITIONS	STATUS AS PER SIX MONTHLY COMPLIANCE REPORT SUBMITTED BY THE PP	Observations of ROs/SROs
			of heavy earth machinery and equipment. In this regard, the PA has submitted ATR (Refer Annexure-B).
60.	The proponent shall ensure that project activity including blasting, mining transportation etc. should in no way in adverse impact to the forests, such as reserve forest and social forests, tree plantation and bio diversity, surrounding water bodies etc.	Agreed.	Refer below. The PP has ensured that project activities, such as blasting and mining transportation, are conducted in a manner that does not cause any adverse impact on the nearby reserve forests, social forests, tree plantations, biodiversity, or surrounding water bodies.
61.	The environmental norms shall be adhered by the Project Proponent and shall furnish a report periodically to the authority concerned.	Agreed.	Not complied. The PP has not submitted six monthly compliance reports along with Environmental monitoring report to the Regional office of MoEF&CC, Chennai. Justification given in the ATR is not satisfied/acceptable.

C. munday

S. No.	EC CONDITIONS	STATUS AS PER SIX MONTHLY COMPLIANCE REPORT SUBMITTED BY THE PP	Observations of ROs/SROs
			Hence, the compliance status of this condition is "Not complied".
62.	Ground Water Level and quality shall be monitored by the Assistant Director, Public Works Department (WRD), Coimbatore.	Agreed. Groundwater level and quality will be monitored by the Assistant Director, Public Works Department (WRD), Coimbatore, as per the requirement.	Not complied. Ground Water Level and quality was not monitored by the Assistant Director, Public Works Department (WRO), Coimbatore. In this regard, the PA has submitted ATR (Refer Annexure-B).
63.	NOC for sanitary certificate obtained from the Deputy Director of Health Services, Coimbatore should be submitted by the proponent.	Agreed.	Not complied. The PP has not obtained NOC for sanitary certificate from the Deputy Director of Health Services, Coimbatore. In this regard, the PA has submitted ATR (Refer Annexure-B).
64.	Periodical medical examination of the quarry workers should be carried out by a registered medical practitioner and the report should be filed in the quarry office in a separate file and copy	Agreed. Periodical medical examinations of quarry workers will be conducted by a registered medical practitioner, and the reports will be maintained in a separate file at the quarry office, with a	Complied. Regular medical examinations of quarry workers were carried out and records are maintained. Refer medical report in Annexure – XIV.

G. Narayanan

S. No.	EC CONDITIONS	STATUS AS PER SIX MONTHLY COMPLIANCE REPORT SUBMITTED BY THE PP	Observations of ROs/SROs
	should be sent to the Health Department.	copy submitted to the Health Department.	
65.	Machinery equipments friction / wear and cost of things have to be monitored then and there along with maintenance.	Agreed. Machinery and equipment friction, wear, and associated costs will be regularly monitored along with scheduled maintenance.	Refer below. During the site visit, no mining activity was carried out; hence, machinery equipment friction, wear, and associated costs could not be verified specifically.
66.	Staff secure will be maintained by the proponent as per labour act and rules in force.	Complied.	Complied. Personnel Protective Equipment's has been provided. Provided safe drinking water and sanitation facilities for female and male separately. Regular medical checkup was carried out. Insurance protection was provided.
67.	Proper bench should be maintained by the proponent as per norms. Proper safety measures should be provided by the proponent while quarrying.	Agreed.	Not complied. The PP has not developed proper benches in the quarry area. Justification given in the ATR is not satisfied/acceptable.

C. Rammah

S. No.	EC CONDITIONS	STATUS AS PER SIX MONTHLY COMPLIANCE REPORT SUBMITTED BY THE PP	Observations of ROs/SROs
			Hence, the compliance status of this condition is "Not complied".

B. GENERAL CONDITIONS

S. No.	EC CONDITIONS	STATUS AS PER SIX MONTHLY COMPLIANCE REPORT SUBMITTED BY THE PP	Observations of ROs/SROs
1.	EC is given only on the factual records, documents and the commitment furnished in non-judicial stamp paper by the proponent.	Agreed.	Agreed to comply. It was submitted that this condition is noted and assured to abide by this condition.
2.	The Proponent shall obtain the Consent for Establishment from the TNPC Board before commencing the activity.	Consent to Establishment (CTE) has not obtained from Tamil Nadu Pollution Control Board (TNPCB). However, Consent To Operate (CTO) has been obtained directly from TNPCB, Coimbatore. (See CTO copy at Annexure – 5).	Not complied. The PP has not obtained the Consent for Establishment from TNPCB. However, the PP has obtained Consent to Operate (CTO) for Air vide proceedings NO.F.2044CBS/ RS/ DEE/ TNPCB/ CBS/ A/ 2019 and Water vide proceeding NO.F.2044CBS/ RS/ DEE/ TNPCB/ CBS/ A/ 2019 dated 12.01.2019 from the Tamil Nadu

C. Dhanraj

S. No.	EC CONDITIONS	STATUS AS PER SIX MONTHLY COMPLIANCE REPORT SUBMITTED BY THE PP	Observations of ROs/SROs
			Pollution Control Board, Coimbatore. Refer CTO in Annexure – XV. Justification given in the ATR is not satisfied/acceptable. Hence, the compliance status of this condition is "Not complied".
3.	No change in mining technology and scope of working should be made without prior approval of the DEIAA, Coimbatore District, Tamil Nadu.	So far there has been no change in mining technology and scope of work.	Complied. There is no change in mining technology and scope of working.
4.	No change in the calendar plan including excavation, quantum of mineral (minor mineral) should be made.	No change has been made in the calendar plan including excavation, mineral quantity (minor mineral).	Complied. There is no change in the calendar plan including excavation, quantum of mineral (minor mineral) made.
5.	Effective safeguard measures, such as regular water sprinkling shall be carried out in critical areas prone to air pollution and having high levels of particulate matter such as loading and unloading point and all transfer points.	Regular water sprinkling was carried out at the loading and unloading areas of the mine lease and at all transfer points. The ambient air quality in the quarry area was monitored and the parameters complied with the norms prescribed by the Central Pollution Control Board.	Complied. Water sprinkling on haul roads at regular intervals by water tankers to control dust generation. Ambient Air Quality (AAQ) was monitored on loading point, unloading point, and

O. Rajendran

S. No.	EC CONDITIONS	STATUS AS PER SIX MONTHLY COMPLIANCE REPORT SUBMITTED BY THE PP	Observations of ROs/SROs
	Extensive water sprinkling shall be carried out on haul roads. It should be ensured that the Ambient Air Quality parameters conform to the norms prescribed by the Central Pollution Control Board in this regard.		all transfer points by a third-party laboratory. Monitoring Reports indicates that AAQ levels are within the permissible limits.
6.	Effective safeguards shall be adopted against health risks on account of breeding of vectors in the water bodies created due to excavation of earth.	Agreed.	Complied. During the site visit, it was observed that no water is stagnant inside the mine pit. The traces of discharge and percolation pond observed. So, no water borne disease possible.
7.	A berm shall be left from the boundary of adjoining field having a width equal to at least half the depth of proposed excavation.	A berm has also been left along the haul roads, bordering the adjoining field.	Complied. A berm has left from the boundary of the adjoining field.
8.	Mineral handling area shall be provided with adequate number of high efficiency dust extraction system. Loading and unloading areas including all the transfer points should also have efficient dust control arrangements. These	Water is sprayed to control dust at transfer points including loading and unloading by tanker lorry.	Complied. No dust extraction system is provided in the mineral handling area. However, the PP is carrying out water sprinkling activities to control the dust levels in the project area.

C. Mandy

S. No.	EC CONDITIONS	STATUS AS PER SIX MONTHLY COMPLIANCE REPORT SUBMITTED BY THE PP	Observations of ROs/SROs
	should be properly maintained and operated.		
9.	Vehicular emissions shall be kept under control and be regularly monitored. The mineral transportation shall be carried out through the covered trucks only and the vehicles carrying the mineral shall not be overloaded.	Vehicle emissions are monitored at regular intervals by an authorized service center. Transport of material is carried out in covered trucks and is not overloaded.	Refer below. During the site visit, no mining activity was carried out. Hence, this specific EC condition could not be verified. However, the PP has been regularly monitoring vehicular emissions. Refer the PUC certificates enclosed in Annexure - XVI.
10.	Access and haul roads to the quarrying area should be restored in a mutually agreeable manner where these are considered unnecessary after extraction has been completed.	Agreed to comply.	Refer below. Access and haul roads to the quarry area will be restored in a mutually compatible manner after the extraction is completed.
11.	All Personnel shall be provided with protective respiratory devices including safety shoes, Masks, gloves etc. Supervisory people should be provided with adequate training and information on safety and health aspects. Occupational health	Safety shoes, masks and helmets are provided to all workers in the quarry.	Refer below. During the site visit, no mining activity was carried out. Hence, this EC compliance could not be verified specifically.

C. Ramesh

S. No.	EC CONDITIONS	STATUS AS PER SIX MONTHLY COMPLIANCE REPORT SUBMITTED BY THE PP	Observations of ROs/SROs
	surveillance program of the workers should be undertaken periodically to observe any contractions due to exposure to dust and take corrective measures, if needed.		
12	Periodical medical examination of the workers engaged in the project shall be carried out and records maintained. For the purpose, schedule of health examination of the workers should be drawn and followed accordingly. The workers shall be provided with personnel protective measures such as masks, gloves, boots etc.	Periodical medical examination is conducted and records are maintained for quarry workers.	Complied. Medical examinations of all workers have been conducted as per regulatory requirements. Records of these examinations have been maintained.
13	Workers / labourer shall be provided with facilities for drinking water and sanitation facility for Female and Male separately.	Drinking water and sanitary facilities are provided to the workers separately for men and women.	Refer below. During the site visit, no mining activity was carried out. Hence, this EC compliance could not be verified specifically.
14	The project proponent shall ensure that child labour is not employed in the	We ensure that no child labor is employed at this project site.	Refer below. During the site visit, no mining activity was carried out. Hence, this

C. Srinivas

S. No.	EC CONDITIONS	STATUS AS PER SIX MONTHLY COMPLIANCE REPORT SUBMITTED BY THE PP	Observations of ROs/SROs
	project as per the sworn affidavit furnished.		EC compliance could not be verified specifically.
15.	The funds earmarked for environmental protection measures should be kept in separate account and should not be diverted for other purpose. Year wise expenditure should be reported to ministry of Environment and Forest and its Regional Office located at Chennai.	A separate account has been opened to maintain the EMP expenditure. Year-wise expenditure is reported to the Ministry of Environment and Forests and its Regional Office located in Chennai.	Partly complied. As per EC, an amount of Rs.3.8 Lakhs has been earmarked for environmental management purposes, which has been utilized for monitoring environmental pollution, maintaining greenery around the quarry, and controlling pollution. Year wise expenditure was not reported to Ministry of Environment and Forest and its Regional Office located at Chennai. Justification given in the ATR is not satisfied/acceptable. Hence, the compliance status of this condition is "Not complied".
16.	The Environmental Clearance does not absolve the applicant / proponent of his	Agreed.	Agreed to comply. Refer Annexure – XII for undertaking by the PP.

0.10/12/2016

S. No.	EC CONDITIONS	STATUS AS PER SIX MONTHLY COMPLIANCE REPORT SUBMITTED BY THE PP	Observations of ROs/SROs
	obligation/requirement to obtain other statutory and administrative clearances from other statutory and administrative authorities.		
17.	This Environmental Clearance does not imply that the other statutory / administrative clearances shall be granted to the project by the concerned authorities. Such authorities would be considering the project on merits and be taking decisions independently of the Environmental Clearance	Agreed.	Agreed to comply. Refer Annexure – XII for undertaking by the PP.
18.	The DEIAA, Coimbatore District may alter / modify the above conditions or stipulate any further conditions in the interest of environment protection.	Agreed.	Agreed to comply. Refer Annexure – XII for undertaking by the PP.
19.	The DEIAA, Coimbatore District may cancel the Environmental Clearance granted to this project under the	Agreed.	Agreed to comply. Refer Annexure – XII for undertaking by the PP.

C. Jeyaraj

S. No.	EC CONDITIONS	STATUS AS PER SIX MONTHLY COMPLIANCE REPORT SUBMITTED BY THE PP	Observations of ROs/SROs
	provisions of EIA Notification, 2006, at any stage of the validity of this environmental clearance, if it is found or if it comes to the knowledge of this DEIAA, Coimbatore District that the project proponent has deliberately concealed and/or submitted false or misleading information or inadequate data for obtaining the Environmental Clearance.		
20.	Failure to comply with any of the conditions mentioned above may result in withdrawal of this clearance and attract action under the provisions of the Environment (Protection) Act, 1986.	Agreed.	Agreed to comply. Refer Annexure – XII for undertaking by the PP.
21.	The above conditions will be enforced inter-alia, under the provisions of the Water (Prevention & Control of Pollution) Act, 1974, the Air (Prevention & Control of Pollution)	Agreed.	Agreed to comply. Refer Annexure – XII for undertaking by the PP.

C. Nainmde

S. No.	EC CONDITIONS	STATUS AS PER SIX MONTHLY COMPLIANCE REPORT SUBMITTED BY THE PP	Observations of ROs/SROs
	Act, 1981, the Environment (Protection) Act, 1986, the Public Liability Insurance Act, 1991, along with their amendments, draft Minor Mineral Conservation & Development Rules, 2010 framed under MMDR Act 1957, National Commission for protection of Child Right Rules, 2006 and rules made there under and also any other orders passed by the Hon'ble Supreme Court of India/Hon'ble High Court of Madras and any other Courts of Law relating to the subject matter.		
22.	Any other conditions stipulated by other Statutory / Government authorities shall be complied.	Agreed.	Agreed to comply. Refer Annexure – XII for undertaking by the PP.
23.	Any appeal against this Environmental Clearance shall lie with the Hon'ble National Green Tribunal, if preferred, within a period of 30 days as prescribed under Section 16 of	There is no appeal lying with Hon'ble National Green Tribunal (NGT) against this Environmental Clearance.	Agreed to comply. Refer Annexure – XII for undertaking by the PP.

C-*Handwritten signature*

S. No.	EC CONDITIONS	STATUS AS PER SIX MONTHLY COMPLIANCE REPORT SUBMITTED BY THE PP	Observations of ROs/SROs
	the National Green Tribunal Act, 2010,		

Summary note:

(i) Implementation of Conditions

The PA has not complied following EC conditions:

1. Copies of the Environmental Clearance has not submitted to the Village Panchayat **(Specific condition No. 5).**
2. No such study has been conducted to assess the optimum blast parameters and blast design **(Specific condition No. 20).**
3. Consultation for Groundwater conservation measures were not done with the "Assistant Director, Ground Water Division, PWD, Coimbatore" **(Specific condition No. 25).**
4. Environmental monitoring of the proposed quarry site before and after the mining activities including vibration study data, water, air, flora/fauna by involving a reputed academic Institution **(Specific condition No. 35).**
5. Monitoring of ground water quality was not conducted once in 3 months **(Specific condition No. 36).**
6. Monitoring of Free Silica test was not conducted **(Specific condition No. 38).**
7. Air sampling at intersection point was not conducted **(Specific condition No. 39).**
8. CSR activity was not carried out **(Specific conditions No. 44 & 45).**
9. No Settling Tank in the quarry area **(Specific condition No. 48).**
10. Baseline study covering air, water, noise and land environment before starting the mining operation **(Specific condition No. 55).**
11. Approval from the Competent Authority for utilization of heavy earth equipment's has not obtained **(Specific condition No. 59).**
12. The PP has not submitted six monthly compliance reports along with Environmental monitoring report to the Regional office of MoEF&CC, Chennai **(Specific condition No. 61).**
13. Ground Water Level and quality was not monitored by the Assistant Director, Public Works Department (WRO), Coimbatore **(Specific condition No. 62).**
14. The PP has not obtained NOC for sanitary certificate from the Deputy Director of Health Services, Coimbatore **(Specific condition No. 63).**
15. The PP has not developed proper benches in the quarry area **Specific condition No. 67).**

C. Rajan

16. Consent to Establishment was not obtained (**General condition No. 2**).


17. Year wise expenditure was not reported to Ministry of Environment and Forest and its Regional Office located at Chennai (**General condition No. 15**).

- (ii) **Show cause Notice:** As submitted by the PP, there is no Show Cause Notice issued or pending against the project.
- (iii) **Court cases:** As informed, there is no court cases / closure notices issued by the Competent Authority.
- (iv) **Accidents:** As submitted by the PP, there is no major accidents or reportable incident happened at the plant.

Site Photographs: -



C. N. Narasimhan

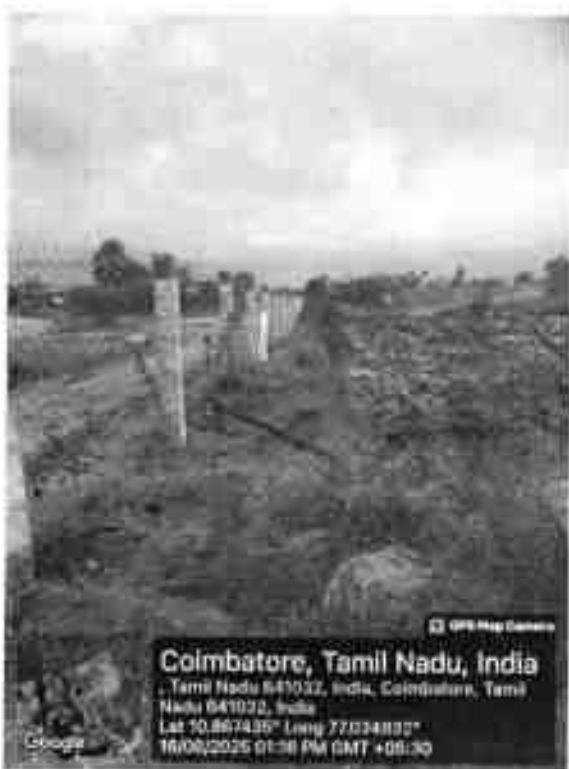

C. Dairamdy



E. Ramulu



C. Palpandi
 Signature of the inspecting officer

डॉ. पारपंडी
 वैज्ञानिक 'डी'
Dr.C.Palpandi
Scientist 'D'
 Government of India
 Min. of Environment Forest and Climate Change,
 Regional Office,
 1st Floor, Addl. Office Block for GPOA,
 Shastri Bhawan, Haddows Road,
 Nungambakkam, Chennai - 600 006.

Newspaper Advertisement Copy

அறிவிப்பு

கொழும்புத் தாது கட்டி, கழிக்கத் தகுதிகள் பெற்றிருக்கையில் கிராமம், பரமம், 57 NO. 70/1(P) & 71/1 - க்கு, 100.0 ஏக்கர், 8 மீட்டர் (நெல்சென்) அளவை கற்களி மற்றும் கிராமம் குளம் (Kodan. Stone and Gravel) குத்தகை உரிமை பெறுவதற்கு திரு.காமராஜ் எம்.பி.எம்.க்கு அமல்பட்ட அனுமதிப்புள்ள திட்டம் செயல்படுத்தும் ஆணையை கொடுத்ததும் (District Level Environment Impact Assessment Authority - Coimbatore) (DEIAA) CBE-V /F.No.353/114/EC.No.53/2018 திகதி 30.12.2018-ல் அனுமதிப்புள்ள திட்டத்தை எவ்வாறு கட்டுவதென்பது தொடர்பான அனுமதிப்புள்ள திட்டத்தை எவ்வாறு Environment Clearance விசாரித்து மாதிரி அங்கீகரிக்கப்பட்டு மாதிரி அனுமதிப்புள்ள திட்டம் செயல்படுத்தும் ஆணையை-32 மூலம் பெற்றிருக்கிறதென்பதை அறிவிக்கிறது. DEIAA TN Website at <http://deiaa.tn.gov.in> என்ற இணைய தள மூலம் அனுமதிப்புள்ள திட்டம் செயல்படுத்தும் ஆணையை எவ்வாறு பெறக்கூடியதென்பது.

திரு.காமராஜ், ஒத்திசைப்பாளர்

Makkal Kural dated 06.01.2019

NOTICE

THE DISTRICT LEVEL ENVIRONMENT IMPACT ASSESSMENT AUTHORITY, COIMBATORE (DEIAA), IN THEIR LETTER NO DEIAA - CBE-V /F.No.353/114/EC.No.53/2018 DATED 30.12.2018 HAS GRANTED ENVIRONMENT CLEARANCE TO THIRU. K.RAMARAJU TO GET QUARRY LEASE FOR QUARRYING KODAN STONE & GRAVEL IN S.F.NO. 70/1(P) & 71/1 OVER AN EXTENT OF 100.0 HA, BETTA LAND IN MYLATHIPALAM VILLAGE, MADHAKKARI TALUK, COIMBATORE DISTRICT. THE PUBLIC MAY BE SEEN THE CLEARANCE LETTER FROM THE STATE POLLUTION CONTROL BOARD OFFICE LOCATED AT TIRUNELVELI, CHENNAI-32 AND ALSO SEEN THE CLEARANCE ORDER IN THE DEIAA TN WEBSITE AT <http://deiaa.tn.gov.in>.

Thiru. K.RAMARAJU, Othakottam

Trinity Mirror dated 06.01.2019

K. Doornik

Mervyn Dymally

[illegible][illegible]

A means -11



Annexure – III:

Photograph of Boundary Pillars and Wire fencing



From

To

Thiru. K. Vijayaragavan, M.Sc.,
Assistant Director,
Geology and Mining,
Coimbatore

Thiru. K. Ramaraj
S/o. Kandasamy
2/395-1, Venkateshawara Nagar,
Premier Nagar-East,
Othakalmandapam,
Coimbatore - 641 032

Rc.No. 778/Mines/2024 dated: 09.01.2025

Sir,

Sub: Mines and Quarries - Minor Minerals - Coimbatore District - Madukkarai Taluk - Myleripalayam Village - Survey No.70/1(P) - over an extent of 1.06.50 hectares of patta land - Rough stone and gravel quarry lease - Precise area communicated - Mining Plan approved - further particulars called for - furnished - regarding - Regarding.

Ref: 1. Precise area communication in
Rc.No.778/Mines/2024 dated: 27.12.2024.
2. Thiru.K.Ramaraj letter dt.08.01.2025

In the reference 2nd cited, Thiru.K.Ramaraj has requested to furnish certain particulars regarding the precise area granted over an extent of 1.06.50 hectares of patta land in Survey No.70/1(P) of Myleripalayam Village, Madukkarai Taluk, Coimbatore District. In this connection the following details are furnished.

The area was previously held under quarry lease and the details are as follows

Sl. No.	Name of the Exlessee	SF.No/ Extent	District Collector's proceedings No. & Date	Lease Period
1	S.Kandasamy	71/1 0.53.5 Hec	153/94/x1 dt.12.04.1995	12.04.1995 to 11.04.2000
2.	S.Kandasamy	71/1 0.53.5 hec	-	19.06.2003 to 18.06.2008
3.	S.Kandasamy	70/1, 71/1 1.85.0 hec	773/2008/mm1 dt.07.10.2008	07.10.2008 to 06.10.2013
4.	K.Ramaraj	70/1(pt), 71/1 1.00.0 hec	358/mines/2018 dt.22.01.2019	22.01.2019 to 21.01.2024

As per draft mining plan, the existing quarry pit with a dimension of 79m (Max.length) X 54m (Max.width) X 38m (max.depth) is reported in the applied area.


Assistant Director,
Geology and Mining,
Coimbatore



Cert No. BR /SZ/0285




सत्यमेव जयते

भारत सरकार/Government of India
खान अधिनियम, 1952/Mines Act, 1952
खान परीक्षा बोर्ड/Board of Mining Examinations

विस्फोटकर्ता सक्षमता प्रमाण-पत्र
BLASTER'S CERTIFICATE OF COMPETENCY

(केवल ओपनकास्ट खानों तक सीमित)
(Restricted to mines having opencast workings only)
(धात्विकीय खान विनियम, 1961 के अन्तर्गत)
(Under the Metalliferous Mines Regulations, 1961)



श्री एन. मारिमुथु

सुपुत्र नल्लप्पन

जिनका जन्म तिथि 30.05.1966

है, को अपनी आयु, स्वस्थता, सदाचार,

साक्षरता और धात्विकीय खानों में काम करने के विहित अनुभव का सन्तोषजनक प्रमाण प्रस्तुत करने एवं दिनांक

24.01.2021 को जीवीटीसी, त्रिची

केंद्र पर आयोजित विहित परीक्षा में

उत्तीर्ण होने पर एतद्वारा केवल ओपनकास्ट खानों तक सीमित विस्फोटकर्ता सक्षमता प्रमाण-पत्र प्रदान किया जाता है।

Shri N. MARIMUTHU

SON OF NALLAPPAN

born on 30.05.1966

having given satisfactory evidence of his age,

medical fitness, good character, literacy and prescribed experience of working in metalliferous mines and having passed the prescribed examination held at

GVTC, TRICHY

centre on 24.01.2021 is hereby granted BLASTER'S CERTIFICATE OF COMPETENCY restricted to mines having opencast workings only.



बाएँ हाथ का अंगूठ का निशान

Left hand thumb impression

अवल सचिव

अध्यक्ष

खान परीक्षा बोर्ड

खान परीक्षा बोर्ड

Zonal Secretary

Zonal Secretary

Board of Mining

Board of Mining

Examinations

Examinations

अध्यक्ष

खान परीक्षा बोर्ड

Chairman

Board of Mining

Examinations

Signed and Sealed

Date 26.07.2021



To

SHRI N. MARIMUTHU

Shri SHRI NALLAPPAN

Home Address

Village CHELLAPILLAKUTTAL

PO NALLAGOUNDAMPATTI

Thana OMALUR

District SALEM

State TAMILNADU

PIN : 636304

प्रमाणित किया जाता है कि उनकी समस्त चिकित्सा अधिकारी द्वारा स्वास्थ्य परीक्षा कर
खान में कार्य करने के लिए स्वस्थ घोषित किया जाता है।

Certified that he has been examined by qualified medical
officer and declared fit for employment in mines.

1	_____ को	2	_____ को
On		On	
3	_____ को	4	_____ को
On		On	
5	_____ को	6	_____ को
On		On	
7	_____ को	8	_____ को
On		On	
9	_____ को	10	_____ को
On		On	

Prepared by श्रीधर कुमार

Checked by श्रीधर कुमार



57 4-11-16
 E.S. 1000000
 1000000
 1000000

25AB 150026

Rs.20

1000000
 1000000

2000

05.11.17

வேடி மருந்து வெடித்துக் கொடுக்கும்
 காண்ட்ராக்ட்

25.11.17 ஆகியும் 25.11.17 முதல் 25.11.17 வரை
 மேல்குத்தர் மருந்து 1000000 ரூபாய்கள் செலவில் செலவில்
 எக்ஸ்போசர் கால்கள் உபயோகம் எம்.பி. கம்பெனியை 1-வது நாளாகவும்,
 செலவு திருப்பி மருந்து 1000000 ரூபாய்கள் செலவில் செலவில்
 1000000 ரூபாய்கள் செலவில் செலவில் செலவில் செலவில்
 1000000 ரூபாய்கள் செலவில் செலவில் செலவில் செலவில்

1000000 ரூபாய்கள் செலவில் செலவில் செலவில் செலவில்

1000000 ரூபாய்கள் செலவில் செலவில் செலவில் செலவில்

குளரியில் உள் எடுக்க சிலை அமைத்த பதிக நேரம். செயல்திற அமைத்து
செய்துக் கொடுத்தும் காண்பாள். உள் இலாகா அமைக்க காண்பாள்.

நம்பி 2-வது நபருக்கு செய்து கொடுத்திருக்கிறார். உள் இலாகா அமைக்க காண்பாள்.
அப்போது 3-வது நபர் 1-வது நபர் உள் இலாகா அமைக்க காண்பாள்.
தகவல் PC-NO: 355/11/2024 குளரியில் காண்பாள்.

நம்பி 1-வது நபர் 1-வது நபர் உள் இலாகா அமைக்க காண்பாள். நேரம் சென்ற
செயலாளர்களைக் கொண்டு நேரம் செயல்படுத்தும் உள் இலாகா அமைத்து செய்து
கொடுத்தும் காண்பாள். செய்தும் 2-வது நபர் உள் இலாகா அமைக்க காண்பாள். தகவல்
கொண்டு எடுத்துக் கொண்டு காண்பாள்.

நம்பி 1-வது நபர் தகவல் கொண்டு 2-வது நபருக்கு செய்து கொடுத்தும்
செய்தும் காண்பாள். உள் இலாகா அமைக்க காண்பாள். உள் இலாகா அமைத்து 2-வது நபர்
செயல்படுத்தும் காண்பாள்.

1-வது நபர் செய்தும் காண்பாள்.

செய்தும் இலாகா அமைக்க காண்பாள். 1-வது நபர் உள் இலாகா அமைக்க காண்பாள். தகவல் செய்து
கொண்டும் காண்பாள். காண்பாள் செய்தும் காண்பாள். செய்தும் காண்பாள்.
செய்தும் காண்பாள். காண்பாள் செய்தும் காண்பாள். காண்பாள் செய்தும் காண்பாள்.
காண்பாள் 1-வது நபருக்கு செய்தும் காண்பாள். காண்பாள் செய்தும் காண்பாள்.
காண்பாள் காண்பாள்.

இந்த செய்தும் காண்பாள். 1-வது நபர் செய்தும் காண்பாள். 2-வது நபர் செய்தும் காண்பாள்.

காண்பாள் செய்தும் காண்பாள்.

1-வது நபர் செய்தும் காண்பாள்.
2-வது நபர் செய்தும் காண்பாள்.

காண்பாள்.

1-வது நபர் செய்தும் காண்பாள். 2-வது நபர் செய்தும் காண்பாள்.
2-வது நபர் செய்தும் காண்பாள். 3-வது நபர் செய்தும் காண்பாள்.

ENVIRO FARMERS LABS & TECHNOLOGIES



SERVICES:
 - Water and Waste Water Testing
 - Environmental Monitoring & Testing
 - Testing of Soil and Food Samples
 - Air, Industrial & Solid Waste Testing
 - Microbial Testing Services
 - Other Testing Services

CONTACT US:
 Address: No.245, Arampatti Road, Main Road,
 Chinnaiyandiapuram Post, Sakur Tharai,
 Chengam Block, Cuddalore District, India.
 Phone: +91 9442139426, +91 9730015485
 +91 9442139426, +91 9730015429
 E-Mail: envirofarmerslabs@gmail.com
 Website: www.envirofarmerslabs.com

ACCREDITATIONS



TEST REPORT FOR AMBIENT AIR QUALITY MONITORING				
Report Code:	EFLT/TRF/2023/0591	Report Date:	02.03.2023	
CUSTOMER DETAILS				
Name & Address of the Customer/Company:		Thirun. K. Ramaraj Rough Stone Quarry, (Mine Lease Area- 1.00.0 Hectare), S.F.No. 707(P) & 71(P), Mydarpalayam Village, Madukkam Taluk, Cumbhore District.		
DETAILS OF SAMPLE				
Customer Code	-	Laboratory Code	EFLT/TEA/2023/0591	
Sample Collected On	21.02.2023	Sample Collected By	Laboratory	
Sample Received On	22.02.2023	Analysis started Date	22.02.2023	
Received Condition	Good	Analysis Completed Date	02.03.2023	
Sample Description	Ambient Air Quality - North-East side of the quarry			
TEST REPORT PARTICULARS				
S. No.	Parameters	Test Method	Result	Standards
1.	Particulate matter (Size less than 10 µm/PM ₁₀)	IS 5182 Part 23	52.1 µg/m ³	100
2.	Particulate matter (Size less than 2.5 µm/PM _{2.5})	IS 5182 Part 24	22.8 µg/m ³	60
3.	Sulphur dioxide (SO ₂)	IS 5182 Part 2	9.5 µg/m ³	80
4.	Nitrogen dioxide (NO ₂)	IS 5182 Part 6	25.2 µg/m ³	80
5.	Ozone (O ₃)	CPCB Manual for Ambient Air Pollutants	BDL (DL:5.0) µg/m ³	180
6.	Ammonia (NH ₃)	CPCB Manual for Ambient Air Pollutants	6.8 µg/m ³	400
7.	Carbon Monoxide (CO)	IS 5182 Part 10	BDL (DL:1.0) mg/m ³	4.0
8.	Lead (Pb)	IS 5182 Part 22	BDL (DL:0.01) µg/m ³	1.0
9.	Benzene (C ₆ H ₆)	IS 5182 Part 11	BDL (DL:1.0) µg/m ³	5.0
10.	Benzo(a)Pyrene (BaP)	IS 5182 Part 12	BDL (DL:0.5) ng/m ³	1.0
11.	Arsenic (As)	CPCB Manual for Ambient Air Pollutants	BDL (DL:1.0) ng/m ³	6.0
12.	Nickel (Ni)	IS 5182 Part 26	BDL (DL:1.0) ng/m ³	20

*****End of Report*****



Authorized Signatory
 Dr. Rakeshkumar Marudhiah

ENVIRO FARMERS LABS & TECHNOLOGIES



ANALYSIS
 - Water and Waste Water analysis
 - Environmental Monitoring & Testing
 - Testing of Food and Food Products
 - Soil, Compost & Nutrient Fertilizer Testing
 - Microbial Testing Services
 - Other Testing Services

CONTACT US
 Address: No. 20, Main Road, Near Post Office,
 Kumbakonam, Pudukkottai Taluk,
 Kumbakonam - 61202, Tamil Nadu, India.
 Phone: 9940200490 / 9940200491
 9940200492 / 9940200493
 E-Mail: envirofarmerslabs@gmail.com
 Website: www.eFLT.com



TEST REPORT FOR AMBIENT AIR QUALITY MONITORING				
Report Code	EFLT/TR/2023/0591	Report Date	02.03.2023	
CUSTOMER DETAILS				
Name & Address of the Customer/Company		Thiru. K. Ramraj Rough Stone Quarry, (Mine Lease Area: 1.00.0 Hectare), S/O. S. - 2001019 (a 2) - 1, Mysakirupalayam Village, Pudukkottai Taluk, Kumbakonam District		
DETAILS OF SAMPLE				
Customer Code	-	Laboratory Code	EFLT/EA/2023/0591	
Sample Collected On	21.02.2023	Sample Collected By	Laboratory	
Sample Received On	22.02.2023	Analysis Started Date	22.02.2023	
Received Condition	Good	Analysis Completed Date	02.03.2023	
Sample Description	Ambient Air Quality - South West side of the quarry.			
TEST REPORT PARTICULARS				
S. No.	Parameters	Test Method	Result	Standards
1.	Particulate matter (Size less than 10 µm/PM ₁₀)	IS 3102 Part 23	53.2 µg/m ³	100
2.	Particulate matter (Size less than 2.5 µm/PM _{2.5})	IS 3102 Part 24	26.8 µg/m ³	60
3.	Sulphur dioxide (SO ₂)	IS 3102 Part 25	8.2 µg/m ³	80
4.	Nitrogen dioxide (NO ₂)	IS 3102 Part 26	26.5 µg/m ³	80
5.	Ozone (O ₃)	As per Standard test As per IS 3102 Part 27	BDL (DL: 25.0 µg/m ³)	180
6.	Ammonia (NH ₃)	CPCB Manual for Ambient Air Pollution	3.9 µg/m ³	400
7.	Carbon Monoxide (CO)	IS 3102 Part 10	BDL (DL: 1.0 µg/m ³)	4.0
8.	Lead (Pb)	IS 3102 Part 22	BDL (DL: 0.01 µg/m ³)	1.0
9.	Benzene (C ₆ H ₆)	IS 3102 Part 11	BDL (DL: 1.0 µg/m ³)	5.0
10.	Benzo(a)Pyrene (BaP)	IS 3102 Part 11	BDL (DL: 0.5 µg/m ³)	1.0
11.	Arsenic (As)	CPCB Manual for Ambient Air Pollution	BDL (DL: 1.0 µg/m ³)	6.0
12.	Nickel (Ni)	IS 3102 Part 26	BDL (DL: 1.0 µg/m ³)	20

*****End of Report*****



[Signature]
 Authorized Signatory
 Laboratory Manager

[illegible]

Report Code	ET/TA/TA/2023/0491	Report Date	02.03.2023	
CUSTOMER DETAILS				
Name & Address of the Customer/Company		Thiru. K. Ramaraj Rough Stone Quarry, (Mine Lease Area- 1000 Hectare), S.F.No. 2011P & T/1, Mylleripalayam Village, Madhavara Taluk, Coimbatore District.		
INITIALS OF SAMPLE				
Customer Code	-	Laboratory Code	ET/TA/2023/0591	
Sample Collected On	21.02.2023	Sample Collected By	Laboratory	
Sample Received On	22.02.2023	Analysis Started Date	22.02.2023	
Received Condition	Good	Analysis Completed Date	02.03.2023	
Sample Description	Ambient Air Quality - Mylleripalayam Village			
TEST REPORT PARTICULARS				
S. No.	Parameters	Test Method	Result	Standards
1.	Particulate matter (Size less than 10µm(PM ₁₀))	IS 5102 Part 23	52.5 µg/m ³	100
2.	Particulate matter (Size less than 2.5µm(PM _{2.5}))	IS 5102 Part 24	22.7 µg/m ³	60
3.	Sulphur dioxide (SO ₂)	IS 5102 Part 2	6.2 µg/m ³	80
4.	Nitrogen dioxide (NO ₂)	IS 5102 Part 8	22.8 µg/m ³	80
5.	Ozone (O ₃)	CPCB Method for Ambient Air Pollutants	BDL (DL≤0) µg/m ³	180
6.	Ammonia (NH ₃)	CPCB Method for Ambient Air Pollutants	8.1 µg/m ³	600
7.	Carbon Monoxide (CO)	IS 5102 Part 10	BDL (DL=1.0) ng/m ³	4.0
8.	Lead (Pb)	IS 5102 Part 22	BDL (DL=0.01) µg/m ³	1.0
9.	Benzene (C ₆ H ₆)	IS 5102 Part 11	BDL (DL=1.0) µg/m ³	5.0
10.	Benz(a)Pyrene (BaP)	IS 5102 Part 12	BDL (DL=0.5) ng/m ³	1.0
11.	Arsenic (As)	CPCB Method for Ambient Air Pollutants	BDL (DL=1.0) ng/m ³	6.0
12.	Nickel (Ni)	IS 5102 Part 26	BDL (DL=1.0) ng/m ³	20

End of Request



Authorized Signatory
Dr. Rajesh Kumar Mishra

ENVIRO FARMERS LABS & TECHNOLOGIES



SERVICES
 Water and Waste Water Testing
 Environmental Monitoring & M&PE
 Testing of Soil and Air & Noise Levels
 Soil Contamination Assessment
 Microbial Testing
 Urban Air Quality Monitoring

CONTACT US
 Address: No.245, Aravinda Road, Main Road,
 Chinnambur, near P.O., Noida, Tamil Nadu,
 600042, India. E-mail: info@eflt.com
 Phone: 94421 56123
 Website: www.eflt.com
 Email: info@eflt.com

ACCREDITATIONS



NABL



ISO 9001:2015



ISO 14001:2015

TEST REPORT FOR NOISE LEVEL MONITORING			
Report Code	EFLT/TRF/2023/0591	Report Date	02.03.2023
CUSTOMER DETAILS			
Name & Address of the Customer/Company		Thirup. K. Ramaraj Manager, Noise Quarry 1 Mile East of Aravinda Road, Noida, S.P. No. 70/1, P.O. & T.P.O., Myslipalayam Village, Madukkarai Taluk, Coimbatore District.	
DETAILS OF SAMPLE			
Customer Code	-	Laboratory Code	EFLT/FA/2023/0591
Sample Collected On	21.02.2023	Sample Collected By	Laboratory
Sample Received On	22.02.2023	Analysis Started Date	22.02.2023
Received Condition	Good	Analysis Completed Date	02.03.2023
Sample Description	Ambient Noise Level Monitoring		
TEST REPORT PARTICULARS			
S. No.	Location	Result	Standard
1.	North side of the quarry	53.2	75 dB (A) (Industrial)
2.	East side of the quarry	55.5	75 dB (A) (Industrial)
3.	South side of the quarry	54.2	75 dB (A) (Industrial)
4.	West side of the quarry	51.0	75 dB (A) (Industrial)
5.	Workers Shed	52.3	75 dB (A) (Industrial)
6.	Myslipalayam Village	54.8	55 dB (A) (Residential)



Authorized Signatory
 Dr. Ramesh Kumar

Photograph of Rainwater Harvesting



ENVIRO FARMERS LABS & TECHNOLOGIES



SERVICES:
 Water and Waste Water Testing
 Environmental Monitoring & Testing
 Testing of Food and Feed Products
 Soil, Fertilizer & Solid Waste Testing
 Microbial Testing Services
 Odour Testing Services

CONTACT US:
 Address: No.202, Srinagar Road Main Road,
 Chikmagalur, Dist. Chikmagalur, India
 Phone: +91 9449494246 +91 9238815445
 Email: info@envirofarmerslabs.com
 Website: www.envirofarmerslabs.com

ACCREDITATIONS:



TEST REPORT FOR WATER ANALYSIS			
Report Code	EFLT/TRF/2023/0591	Report Date	02.03.2023
CUSTOMER DETAILS			
Name & Address of the Customer/Company		Thiru. K. Ramraj Rough Stone Quarry, (Mine Lease Area- 1.00.0 Hectare), S.F.No. 26/1(P) & 71/1, Mylleripalayam Village, Madukalai Taluk, Coimbatore District.	
DETAILS OF SAMPLE			
Customer Code	-	Laboratory Code	EFLT/FA/2023/0591
Sample Collected On	21.02.2023	Sample Collected By	Laboratory
Sample Received On	22.02.2023	Analysis Started Date	22.02.2023
Received Condition	Packed in a Plastic Container	Analysis Completed Date	02.03.2023
Sample Description	Borewell Water		
TEST REPORT PARTICULARS			

S. No.	Parameters	Test Method	RESULTS	Standard (As per IS 10500:2012)
1.	pH	IS 3025 Part 11	7.34	6.5 - 8.5
2.	Color	IS 3025 Part 4	<5 Hazen	15
3.	Odor	IS 3025 Part 8	Agreeable	Agreeable
4.	Turbidity	IS 3025 Part 10	<1 NTU	5
5.	Electrical Conductivity	IS 3025 Part 14	216 µS/cm	-
6.	Total Dissolved Solids	IS 3025 Part 16	304	2000
7.	Total Solids	IS 3025 Part 17	305	-
8.	Total Suspended Solids	IS 3025 Part 18	<2	-
9.	Total Alkalinity	IS 3025 Part 23	172	600
10.	Total Hardness	IS 3025 Part 21	167	600
11.	Calcium	IS 3025 Part 40	29.5	200
12.	Magnesium	IS 3025 Part 46	22.7	100
13.	Chloride	IS 3025 Part 32	66.9	1000
14.	Iron	IS 3025 Part 42	BDL (DL: 0.1)	No Relaxation
15.	Acidity	IS 3025 Part 25	5.14	-
16.	Sulphate	IS 3025 Part 38	14.5	400
17.	Potassium	IS 3025 Part 43	19.2	-
18.	Sodium	IS 3025 Part 45	27	-
19.	Nitrate	IS 3025 Part 34	BDL (DL: 0.2)	No Relaxation
20.	Silica	IS 3025 Part 35	19.2	-
21.	Boron	IS 3025 Part 37	BDL (DL: 0.1)	1
22.	Manganese	IS 3025 Part 30	BDL (DL: 0.1)	0.3

*** End of Report ***





Authorized Signatory
 Dr. Bhikrishnan Marugesan

Photograph of Plantation in the Quarry



Photograph of Solar Light

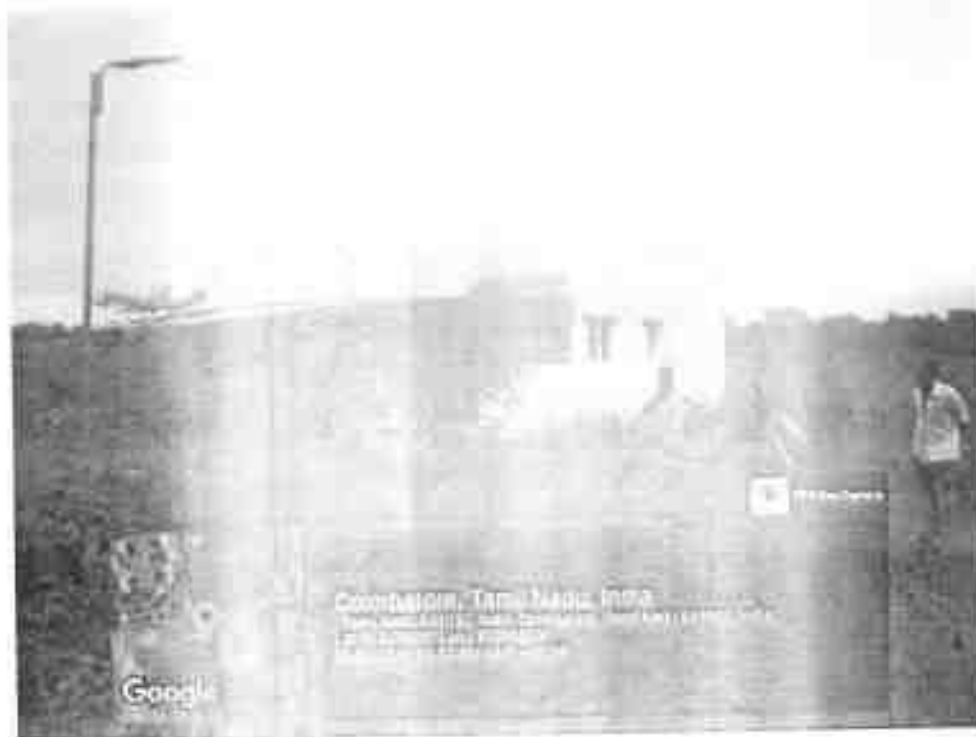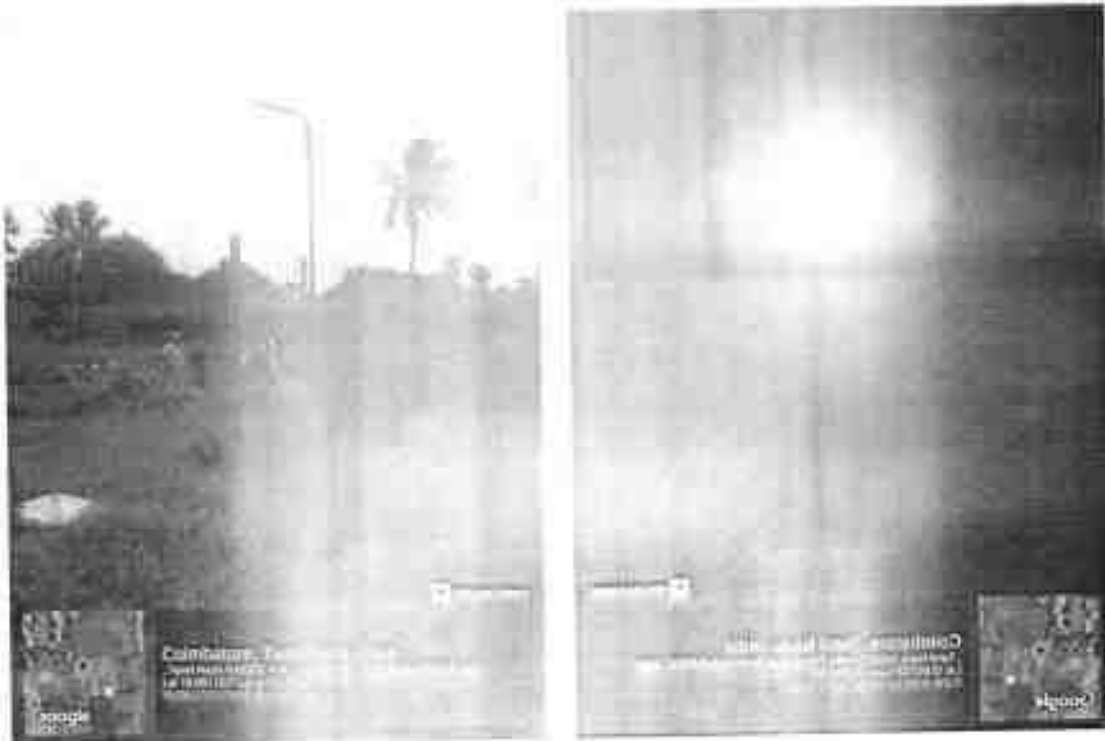

16.08.2025

From:

K. Ramaraj,
S/o. S.Kandasamy,
No. 2/395-1, Venkateswara Nagar,
Premier Nagar West,
Othakal Mandapam,
Coimbatore District.

To:

Deputy Director General,
Regional Office (South Eastern Zone)
Ministry of Environment, Forest and Climate Change (MoEF & CC)
1st Floor, Additional Office Block - Green,
Shastri Bhavan
Chennai - 600 006.

Sir,

Sub: Submission of Undertaking - K. Ramaraj - Rough Stone Quarry over an extent of 1.00.0 Hectare in S.P. No. 70/1(P) & 71/1, Mylarpalayam Village, Madukkam Taluk, Coimbatore District, Tamil Nadu - Certified Compliance Report Requested -reg

Ref:

1. DEIAA- Coimbatore, Environmental Clearance - Lr. No. DEIAA-CBE-VF.No.354/1(p) / EC-2018/018 dated 10.12.2018.
2. CCR Request Letter submitted to RD, MoEF&CC on 22.07.2025.
3. Site inspection by D.G. Farooqui, Scientist 'D' RD-SEZ, MoEF&CC on 07.08.2025.

We hereby submit this undertaking to comply with the Condition Nos. 47, & 54 in the Specific Conditions and Condition Nos. 16, 17, 18, 19, 20, 21, 22, & 23 in the General Conditions of the Environmental Clearance as per reference 1.

Additionally, we assure that all Non-Compliance conditions identified in the Certified Compliance Report (as per ref. 1) will be Complied in the future.

Thanking you for your attention.

Yours Sincerely,



(K. Ramaraj)

Project Proponent



CERTIFICATE OF INSURANCE (COI)

(Pradhan Mantri Suraksha Bima Yojana)

Member Details

Name of Member: DEVIKASHI SINGH
 Date of Birth: 20/04/1994
 Mobile Number: 994638250
 Address: S/O MAHESHWAR, PO: 125,
 KODCHANDAPUR DE, LAVALI,
 BELAVTU, TALUKA, DISTRICT,
 TAMILNADU 641012

Policy Number: 10000000000000000000
 Name of Beneficiary: MAHESHWAR
 Age of Beneficiary: 29 YEARS

Policy Details

Policy Period: 01/04/2025 to 31/03/2026
 Premium: ₹ 200.00
 Annual Premium: ₹ 200.00
 Monthly Premium: ₹ 16.67

Bank Details

Name of Beneficiary: MAHESHWAR
 Address: S/O MAHESHWAR, PO: 125,
 KODCHANDAPUR DE, LAVALI,
 BELAVTU, TALUKA, DISTRICT,
 TAMILNADU 641012

Coverage Details

Date of Commencement of Cover: 06/08/2025 16:58:59
 Sum Assured: ₹ 2,00,000**
 Premium Amount Paid: ₹ 435.0

Cover Period: 30 DAYS FROM THE DATE OF
 ENROLLMENT ON JUNE 06
 Cover End Date: 31/08/2025
 Annual Renewal Date: 01/09/2025

- *Rs 2 lakh is payable on member's death due to any cause.
- **In case of death (other than due to accident) during term period, no claim would be admissible.
- The terms and conditions of the scheme are available at <https://pmsuraksha.in>

Signature of authorized officer of bank / post office
 06/08/2025 16:58:59



CERTIFICATE OF INSURANCE (COI)

(ප්‍රාදේශීය මාරු සේවා අනුමැතිය ලබා ඇත)

Member Details

Name of Member: **සිල්වා**
 Date of Birth: **09/08/1985**
 Member Number: **87371318**
 Address: **3-134/34A, WILKINSON'S
 36, ANTONY STREET, SALT
 TANKARD, COLOMBO**
 Applicant Name: **සිල්වා**
 Member's Name: **සිල්වා**
 Age of Member: **40 YEARS**

Policy Details

Policy Number: **1000000000**
 Policy Type: **Term Insurance**
 Policy Amount: **Rs. 2,000,000**
 Policy Term: **10 YEARS**
 Policy Start Date: **05/08/2025**
 Policy End Date: **05/08/2035**

Bank Details

Name of Bank: **STATE BANK OF SRI LANKA**
 Branch Name: **COLOMBO**
 Branch Address: **100, COLLOMBO ROAD, COLOMBO**
 Branch Phone: **011 234 5678**
 Branch Email: **info@statebank.lk**

Coverage Details

Date of Commencement of Cover: **05/08/2025 10:13:59**
 Sum Assured: **Rs. 2,000,000**
 Premium Amount: **Rs. 436.00**

Loan Period: **10 DAYS FROM THE DATE OF
 EMPLOYMENT / RETIREMENT**
 Cover End Date: **11/08/2035**
 Annual Premium Date: **1ST JULY OF EACH YEAR**

Signature of authorized official of Bank / post office
05/08/2025 10:13:59

- The 2 lakh is payable on member's death due to any cause.
- In case of death (other than due to accident) during ten period, no claim would be admissible.
- The terms and conditions of the scheme are available at <http://www.soilife.lk>

Member Details

Name of Member

Date of Birth

Mobile Number

Address

Actual further

Name of Nominee

Age of Nominee

Coverage Details

Date of Commencement of Cover

Sum Assured

Premium Amount Paid

*Rs. 2 lakh is payable on member's death.

**In case of death (other than due to accident) during the period, no claim would be admissible.

The terms and conditions of this policy are given at <https://policy.sbi-life.co.in>

Policy No.

Policyholder's Name

Age

Policyholder's Address

First Date of Birth

Policyholder's

TCR

IF WORKING, PARACHUTE JUMP, ROAD COMBAT, YEAR 1992, 1993, 1994

30 DAYS FROM THE DATE OF ENROLLMENT / RESUME

21/05/2016

1st JUNE OF EVERY YEAR

Signature of Authorized officer of bank / post office
CHANDIGARH ID-143

Medical Examination Format

Form - 10

Issued by the Government of India

Subject: Medical Examination of Employees of the Government of India

For Patient Use

I, Mr. Dwarik, employee of the Government of India, hereby declare that I am suffering from Disability and I am unable to perform my duties. I am submitting this form for medical examination. The findings of the examination will be used for the purpose of determining the extent of my disability and the amount of compensation payable to me. I am aware that the findings of the examination may be used for other purposes.


I am submitting this form to the following authority:

- () All India Government Medical Officer
- () State Government Medical Officer
- () Local Government Medical Officer

I am suffering from Disability and I am unable to perform my duties. I am submitting this form for medical examination. The findings of the examination will be used for the purpose of determining the extent of my disability and the amount of compensation payable to me. I am aware that the findings of the examination may be used for other purposes.

For Patient Use
Only for the Candidate


Dr. Ramesh Raja Prabhoo
Regd. No. 72228
Certifying Surgeon
C/O. JD-1, DISH, COMBATORE
MINISTRY OF LABOUR, TN GOVT


Dr. Ramesh Raja Prabhoo
Regd. No. 72228
Certifying Surgeon
C/O. JD-1, DISH, COMBATORE
MINISTRY OF LABOUR, TN GOVT

Date: 10/8/75
* Delete whatever is not applicable.

** One copy of the certificate shall be handed over to the person concerned for his record and a copy shall be retained by the examining authority.

Medical Examination Format

(FORM 1-62)

Use only one side of the sheet.

Revised to include provisions under the 1947 Act and Regulations with effect from 1-1-1952.

Certifying Officer

I hereby certify that the person named above is suffering from a disability of such a nature and of such a degree as to entitle him to be considered as a person suffering from a disability under the provisions of the 1947 Act and Regulations. The nature of the disability is as follows: 4 years or less the nature of the disability is as follows: Salmon

He is suffering from a disability of such a nature and of such a degree as to entitle him to be considered as a person suffering from a disability under the provisions of the 1947 Act and Regulations.

- (1) any employment in which he is engaged
- (2) any employment in which he is engaged
- (3) any employment in which he is engaged

He should get the disability under control and should be again examined within a period of 6 months from the date of the examination with the result of the examination. He should be again examined within a period of 6 months from the date of the examination with the result of the examination. He should be again examined within a period of 6 months from the date of the examination with the result of the examination.

Having the report

of the Certifying Officer



Dr. Ramesh Raja Prabhoo

Regd. No. 7228
Certifying Surgeon

MINISTRY OF LABOUR, IN GOVT.

Place: Coimbatore

Date: 5/08/55

Name and designation in Block letters

Dr. Ramesh Raja Prabhoo

Regd. No. 7228

Certifying Surgeon

C/O. J.O.I. DISH, COIMBATORE

MINISTRY OF LABOUR, IN GOVT.

* Delete whatever is not applicable.

** One copy of the certificate shall be handed over to the person concerned for retention and another copy shall be retained by the examining authority.

Report of interest: www.fox.com or call 1-800-255-5888. Ask James P. at the News-Rite TV!

I, Mr. Harinatha, an agent of trade operation
Kamalya Sanyal, an owner of B.C. 1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 25, 26, 27, 28, 29, 30, 31, 32, 33, 34, 35, 36, 37, 38, 39, 40, 41, 42, 43, 44, 45, 46, 47, 48, 49, 50, 51, 52, 53, 54, 55, 56, 57, 58, 59, 60, 61, 62, 63, 64, 65, 66, 67, 68, 69, 70, 71, 72, 73, 74, 75, 76, 77, 78, 79, 80, 81, 82, 83, 84, 85, 86, 87, 88, 89, 90, 91, 92, 93, 94, 95, 96, 97, 98, 99, 100, 101, 102, 103, 104, 105, 106, 107, 108, 109, 110, 111, 112, 113, 114, 115, 116, 117, 118, 119, 120, 121, 122, 123, 124, 125, 126, 127, 128, 129, 130, 131, 132, 133, 134, 135, 136, 137, 138, 139, 140, 141, 142, 143, 144, 145, 146, 147, 148, 149, 150, 151, 152, 153, 154, 155, 156, 157, 158, 159, 160, 161, 162, 163, 164, 165, 166, 167, 168, 169, 170, 171, 172, 173, 174, 175, 176, 177, 178, 179, 180, 181, 182, 183, 184, 185, 186, 187, 188, 189, 190, 191, 192, 193, 194, 195, 196, 197, 198, 199, 200, 201, 202, 203, 204, 205, 206, 207, 208, 209, 210, 211, 212, 213, 214, 215, 216, 217, 218, 219, 220, 221, 222, 223, 224, 225, 226, 227, 228, 229, 230, 231, 232, 233, 234, 235, 236, 237, 238, 239, 240, 241, 242, 243, 244, 245, 246, 247, 248, 249, 250, 251, 252, 253, 254, 255, 256, 257, 258, 259, 260, 261, 262, 263, 264, 265, 266, 267, 268, 269, 270, 271, 272, 273, 274, 275, 276, 277, 278, 279, 280, 281, 282, 283, 284, 285, 286, 287, 288, 289, 290, 291, 292, 293, 294, 295, 296, 297, 298, 299, 300, 301, 302, 303, 304, 305, 306, 307, 308, 309, 310, 311, 312, 313, 314, 315, 316, 317, 318, 319, 320, 321, 322, 323, 324, 325, 326, 327, 328, 329, 330, 331, 332, 333, 334, 335, 336, 337, 338, 339, 340, 341, 342, 343, 344, 345, 346, 347, 348, 349, 350, 351, 352, 353, 354, 355, 356, 357, 358, 359, 360, 361, 362, 363, 364, 365, 366, 367, 368, 369, 370, 371, 372, 373, 374, 375, 376, 377, 378, 379, 380, 381, 382, 383, 384, 385, 386, 387, 388, 389, 390, 391, 392, 393, 394, 395, 396, 397, 398, 399, 400, 401, 402, 403, 404, 405, 406, 407, 408, 409, 410, 411, 412, 413, 414, 415, 416, 417, 418, 419, 420, 421, 422, 423, 424, 425, 426, 427, 428, 429, 430, 431, 432, 433, 434, 435, 436, 437, 438, 439, 440, 441, 442, 443, 444, 445, 446, 447, 448, 449, 450, 451, 452, 453, 454, 455, 456, 457, 458, 459, 460, 461, 462, 463, 464, 465, 466, 467, 468, 469, 470, 471, 472, 473, 474, 475, 476, 477, 478, 479, 480, 481, 482, 483, 484, 485, 486, 487, 488, 489, 490, 491, 492, 493, 494, 495, 496, 497, 498, 499, 500, 501, 502, 503, 504, 505, 506, 507, 508, 509, 510, 511, 512, 513, 514, 515, 516, 517, 518, 519, 520, 521, 522, 523, 524, 525, 526, 527, 528, 529, 530, 531, 532, 533, 534, 535, 536, 537, 538, 539, 540, 541, 542, 543, 544, 545, 546, 547, 548, 549, 550, 551, 552, 553, 554, 555, 556, 557, 558, 559, 560, 561, 562, 563, 564, 565, 566, 567, 568, 569, 570, 571, 572, 573, 574, 575, 576, 577, 578, 579, 580, 581, 582, 583, 584, 585, 586, 587, 588, 589, 590, 591, 592, 593, 594, 595, 596, 597, 598, 599, 600, 601, 602, 603, 604, 605, 606, 607, 608, 609, 610, 611, 612, 613, 614, 615, 616, 617, 618, 619, 620, 621, 622, 623, 624, 625, 626, 627, 628, 629, 630, 631, 632, 633, 634, 635, 636, 637, 638, 639, 640, 641, 642, 643, 644, 645, 646, 647, 648, 649, 650, 651, 652, 653, 654, 655, 656, 657, 658, 659, 660, 661, 662, 663, 664, 665, 666, 667, 668, 669, 670, 671, 672, 673, 674, 675, 676, 677, 678, 679, 680, 681, 682, 683, 684, 685, 686, 687, 688, 689, 690, 691, 692, 693, 694, 695, 696, 697, 698, 699, 700, 701, 702, 703, 704, 705, 706, 707, 708, 709, 710, 711, 712, 713, 714, 715, 716, 717, 718, 719, 720, 721, 722, 723, 724, 725, 726, 727, 728, 729, 730, 731, 732, 733, 734, 735, 736, 737, 738, 739, 740, 741, 742, 743, 744, 745, 746, 747, 748, 749, 750, 751, 752, 753, 754, 755, 756, 757, 758, 759, 760, 761, 762, 763, 764, 765, 766, 767, 768, 769, 770, 771, 772, 773, 774, 775, 776, 777, 778, 779, 780, 781, 782, 783, 784, 785, 786, 787, 788, 789, 790, 791, 792, 793, 794, 795, 796, 797, 798, 799, 800, 801, 802, 803, 804, 805, 806, 807, 808, 809, 810, 811, 812, 813, 814, 815, 816, 817, 818, 819, 820, 821, 822, 823, 824, 825, 826, 827, 828, 829, 830, 831, 832, 8

[illegible]

and employment across gender, as

2. If a sufficient number of _____ he should get the duplicate* certificate/contract and should be again examined within 2 period of _____ months. The 2nd will appear for re-examination with the result of first at _____ and the sponsor of _____ Special form _____ and may be recommended* permitted to carry on studies during this period.



D. F. Smith, R. J. P. Smith
No. 7228
C. J. Smith, Surgeon
On file with COMBINE
MINISTRY

[Handwritten signature]

Date: 5/10/2019
Dr. Ramakrishna Prabhoo
* I am a student of M.A. English

Dr. Ramesh Raju Prasad

Dr. Ramesh Raja Prabhu
Rajd. No. 7228
Cambridge, Surgeon
C/o 30-A, CHD, COMBATANT
MINISTRY OF LABOUR, TN GOVT

CONSENT ORDER NO. 1905220074978

DATED: 12/01/2019.

PROCEEDINGS NO.F.2044CBS/RS/DEE/TNPCB/CBS/A/2019 DATED: 12/01/2019

SUB: Tamil Nadu Pollution Control Board -CONSENT TO OPERATE -DIRECT -Ms. K RAMARAJ QUARRY, S.F.No. 70/1 Part & 71/1, MYLERIPALAYAM village Madukkarai Taluk and Coimbatore District - Consent for operation of the plant and discharge of emissions under Section 21 of the Air (Prevention and Control of Pollution) Act, 1981 as amended in 1987 (Central Act 14 of 1981) - Initied- Reg.

Ref: 1. Unit's CTO-direct application No - 20074978 dated 10/01/2019.
2. IR No. F.2044CBS/RS/AE/CBS/2019 dated 11/01/2019.
3. Minutes of the 177th DLCCC meeting held on 11.01.2019.

CONSENT TO OPERATE is hereby granted under Section 21 of the Air (Prevention and Control of Pollution) Act, 1981 as amended in 1987 (Central Act 14 of 1981) (hereinafter referred to as "The Act") and the rules and orders made there under as

The Proprietor:

Ms. K RAMARAJ QUARRY

S.F.No.70/1 Part & 71/1,

MYLERIPALAYAM Village,

Madukkarai Taluk,

Coimbatore District.

Authorizing the recipient to operate the industrial plant in the Air Pollution Control Area as notified by the Government and to make discharge of emission from the stacks/chimneys.

This is subject to the provisions of the Act, the rules and the orders made there under and the terms and conditions incorporated under the Special and General conditions stipulated in the Consent Order issued earlier and subject to the special conditions annexed.

This CONSENT is valid for the period ending March 31, 2023

P. MANIMARAN

District Environmental Engineer,
Tamil Nadu Pollution Control Board,
COIMBATORE SOUTH

To:

The Proprietor,

Ms. K RAMARAJ QUARRY,

SF.No.70/1 Part & 71/1, Myleripalayam Village, Madukkarai Taluk, Coimbatore District,

Pin: 641032.

Copy to:

1. The Commissioner, MADUKKARAI Panchayat Union, Madukkarai Taluk, Coimbatore District.

2. Copy submitted to the Member Secretary, Tamil Nadu Pollution Control Board, Chennai for favour of kind information.

3. Copy submitted to the JCIE-Monitoring, Tamil Nadu Pollution Control Board, Coimbatore for favour of kind information.

4. File

Form 59

[See rules 115 (2)]

Annexure - XVI

Pollution Under Control Certificate

Authorised By
State Transport Department

Date : 11/08/2025
Time : 12:38:08 PM
Validity upto : 10/02/2026



Certificate Sl. No.	TN62000180032758
Registration No.	TN37AU6399
Date of Registration	02/May/2007
Month & Year of Manufacturing	May-2007
Valid Mobile Number	*****4165
Emission Norms	BHARAT STAGE III
Fuel	DIESEL
PUC Code	TN6200018
GSTIN	
Fees	
MIL observation	No

Vehicle Photo with Registration plate
60 mm x 30 mm



Sr. No.	Pollutant (as applicable)	Units (as applicable)	Emission limits	Measured Value (upto 2 decimal places)
1	2	3	4	5
Idling Emissions	Carbon Monoxide (CO)	percentage (%)		
	Hydrocarbon, (THC/HC)	ppm		
High idling emissions	CO	percentage (%)		
	RPM	RPM	2500 ± 200	
	Lambda	-	1 ± 0.03	
Smoke Density	Light absorption coefficient	1/metre	2.45	1.28

This PUC certificate is system generated through the national register of motor vehicles and does not require any signature.

Note - 1. Vehicle owners to link their mobile numbers to registered vehicle by logging to <https://puc.parivahan.gov.in>

Authorised Signature with stamp of PUC Operator
60mm x 20 mm

ATR

Annexure - B

Regional Office Chennai <roefccc1@gmail.com>

Submission of Action Taken Report - K. Ramaraj, Rough Stone Quarry, Coimbatore

1 message

Brown Green Solution <browngreensolution@gmail.com>
To: roefccc1@gmail.com
Cc: Palpandi Chandurpandi <c.palpandi1981@gmail.com>

Wed, Aug 20, 2025 at 3:48 PM

Respected Sir/Madam,

With reference to your letter No. EP/12.1/2025-26/SEIAA/TN/1281 dated 18.08.2025, we are herewith submitting the **Action Taken Report (ATR)** with Annexures for our **K.Ramaraj - Rough Stone Quarry over an extent of 1.00.0 Hectare located at S.F.No. 70/1(P) & 71/1, Myileripalayam Village, Madukkarai Taluk, Coimbatore District.**

We kindly request your good office to consider our submission and issue the **Certified Compliance Report (CCR)** at the earliest.

Thanking you,

Yours faithfully,

K. Ramaraj
(Project Proponent)

 **K. Ramaraj_ATR_Des 1281.pdf**
245K

20.08.2025

From

K. Ramaraj

S/o. S. Kandasamy,

No. 2/395-1, Venkateswara Nagar,

Premier Nagar West,

Othakal Mandapam,

Coimbatore District.

To

Deputy Director General,

Regional Office (South Eastern Zone),

Ministry of Environment, Forest and Climate Change (MoEF & CC)

1st Floor, Additional Office Block for GPOA,

Shastri Bhawan, Haddows Road, Nungambakkam,

Chennai – 600 006.

Sir,

Sub: Submission of **Action Taken Report** – K. Ramaraj – Rough Stone Quarry over an extent of 1.00.0 Hectare located at S.F.No. 70/1(P) & 71/1, Myileripalayam Village, Medukkarai Taluk, Coimbatore District – Certified Compliance Report requested – reg.

Ref:

1. Environmental Clearance - Lr. No. DELAA-CBE-N/F.No.358/1(a) / EC.No.53/2018 dated 10.12.2018
2. CCR Request Letter submitted to RO, MoEF&CC, Chennai on 22.07.2025
3. Site inspection by Dr.C.Palpandi, Scientist 'D', RO-SEZ, MoEF&CC on 07.08.2025
4. Query Letter No. EP/12-1/2025-26 SEIAA/79/TN/1281 dated 18.08.2025

We acknowledge receipt of your letter dated 18.08.2025 regarding the observed non-compliance issues.

We are fully committed to addressing each point and ensuring full compliance with the stipulated conditions.

Below is the summary of corrective actions taken in response to the queries raised vide Ref.4, based on the Environmental Clearance conditions (Ref. 1):

S. No.	Query	Reply
1.	Copies of the Environmental Clearance has not submitted to the Village Panchayat (<i>Specific condition No. 5</i>)	We assure that once the Environmental Clearance is granted, a copy will be submitted immediately to the concerned Village Panchayat.
2.	No such study has been conducted to assess the optimum blast parameters and blast design (<i>Specific condition No. 20</i>)	We will carry out the required studies and implement the recommended blast design parameters. Periodic vibration monitoring will be conducted at designated locations, and the results will be included in the upcoming half-yearly compliance report.
3.	Consultation for Groundwater conservation measures were not done with the "Assistant Director, Ground Water Division, PWD, Coimbatore" (<i>Specific condition No. 25</i>).	We will initiate the necessary consultation with the Regional Director, CGWB to ensure that all required groundwater augmentation measures are implemented. An action plan will be developed based on their recommendations, and the details will be shared in the subsequent compliance submission.
4.	Environmental monitoring of the proposed quarry site before and after the mining activities including vibration study data, water, air, flora/fauna by involving a reputed academic Institution (<i>Specific condition No. 35</i>).	We ensure that environmental monitoring - including vibration study data, water quality, air quality, and flora/fauna assessments, will be conducted at the quarry site during and after mining operations through a reputed academic institution. The results will be documented and submitted in the upcoming half-yearly compliance report.
5.	Monitoring of ground water quality was not conducted once in 3 months (<i>Specific condition No. 36</i>).	We ensure that quarterly groundwater quality monitoring will be carried out.

S. No.	Query	Reply
		henceforth to comply with the stipulated condition without fail. The monitoring results will be documented and included in future half-yearly compliance reports.
6.	Monitoring of Free Silica test was not conducted (<i>Specific condition No. 38</i>).	We ensure that free silica testing will be conducted in the coming days through a NABL-accredited laboratory. The test results will be included in our upcoming half-yearly compliance report and submitted to the Regional Office, MoEF&CC, Chennai.
7.	Air sampling at intersection point was not conducted (<i>Specific condition No. 39</i>).	We ensure that air sampling at the intersection point of the quarry site will be done through accredited laboratory in future.
8.	CSR activity was not carried out (<i>Specific condition No. 44 & 45</i>).	We acknowledge that the CSR activity, as per the stipulated condition, was not conducted. We assure to implement CSR plan during the next operational period.
9.	No Settling Tank in the quarry area (<i>Specific condition No. 48</i>).	Settling tank has not been constructed in the quarry area. We assure that the same will be implemented during the forthcoming quarry operations, and details will be submitted in the Half-Yearly Compliance Report (HYCR).
10.	Baseline study covering air, water, noise and land environment before starting the mining operation (<i>Specific condition No. 55</i>).	We commit to promptly conducting the baseline study covering air, water, noise, and ground conditions before commencing mining activities.


S. No.	Query	Reply
11.	Approval from the Competent Authority for utilization of heavy earth equipment's has not obtained (<i>Specific condition No. 59</i>).	We ensure that all necessary permissions for operating heavy earth-moving equipment will be obtained from the concerned authorities in a timely manner.
12.	The PP has not submitted six-monthly compliance reports along with Environmental monitoring report to the Regional office of MoEF&CC, Chennai (<i>Specific Condition No. 61</i>).	We ensure that all future environmental monitoring will be conducted in accordance with the stipulated conditions, and compliance will be duly maintained. The six-monthly compliance reports will be submitted to the Regional Office, MoEF&CC, Chennai within the prescribed timelines without fail.
13.	Ground water level and quality was not monitored by the Assistant Director, Public Works Department (WRO), Coimbatore (<i>Specific condition No.62</i>).	We acknowledge that groundwater level and quality were not monitored by the Assistant Director, Public Works Department (WRO), Coimbatore. We will initiate coordination with the concerned authority and include the monitoring data in future compliance reports.
14.	The PP has not obtained NOC for Sanitary certificate from the Deputy Director of Health Services, Coimbatore (<i>Specific condition no. 63</i>).	We will initiate the process to obtain the sanitary certificate from the Deputy Director of Health Services, Coimbatore, and ensure its submission in the next compliance report.
15.	The PP has not developed proper benches in the quarry area (<i>Specific conditions No/ 67</i>).	We ensure that systematic benching will be provided in the mining lease area as per the approved mining plan guidelines.
16.	Consent to Establishment was not obtained (<i>General condition No. 2</i>).	We assure that Consent to Establish (CTE) will be obtained from the Tamil Nadu Pollution Control Board (TNPCB) before commencement of quarrying operations.

S. No.	Query	Reply
17	Year wise expenditure was not reported to Ministry of Environment and Forest and its Regional Office located at Chennai (General condition No. 15).	Year-wise expenditure was not reported to the Ministry of Environment & Forests and its Regional Office, Chennai, during the last EC period. The same will be properly maintained and reported in the forthcoming Half-Yearly Compliance Reports (HYCR).

We also assure that all conditions of the Environmental Clearance (EC) issued by SEIAA-TN will be complied in the future.

Thanking You,

Yours Sincerely,



(K. Ramaraj)

Project Proponent

THIS RECEIPT IS VALID ONLY WHEN SIGNED BY THE REGISTRAR OR THE
REGISTERED AGENT AND DOCUMENT MAY BE HELD IN THE OFFICE THROUGH THE AGENT

NOTE - Government papers 11 to 15 with 2 copies

Dr. [Signature]
For [Signature]
[Signature]

Document No.	1	Copy	of	2010	of	2010
Volume	53	Number	10	Year	2010	
						✓
						NOT RECORDED
						RECORDED

A117



भारत गणराज्य
भारत गणराज्य



अधिसूचना
(अधिसूचना ११/१०/१५)

1. अधिसूचना ११/१०/१५ (अधिसूचना ११/१०/१५)
2. अधिसूचना ११/१०/१५ (अधिसूचना ११/१०/१५)
3. अधिसूचना ११/१०/१५ (अधिसूचना ११/१०/१५)
4. अधिसूचना ११/१०/१५ (अधिसूचना ११/१०/१५)

अधिसूचना ११/१०/१५ (अधिसूचना ११/१०/१५)
अधिसूचना ११/१०/१५ (अधिसूचना ११/१०/१५)

अधिसूचना ११/१०/१५ (अधिसूचना ११/१०/१५)
अधिसूचना ११/१०/१५ (अधिसूचना ११/१०/१५)




अधिसूचना ११/१०/१५ (अधिसूचना ११/१०/१५)
अधिसूचना ११/१०/१५ (अधिसूचना ११/१०/१५)



अधिसूचना ११/१०/१५ (अधिसूचना ११/१०/१५)
अधिसूचना ११/१०/१५ (अधिसूचना ११/१०/१५)

A118



THE GOVERNMENT OF INDIA, MINISTRY OF FINANCE, DEPARTMENT OF REVENUE, OFFICE OF THE COMMISSIONER OF CUSTOMS AND EXCISE, NEW DELHI.

It is hereby notified that the Government of India, Ministry of Finance, Department of Revenue, Office of the Commissioner of Customs and Excise, New Delhi, has decided to grant a concession in the rate of duty on the import of certain goods from the United Kingdom, Ireland, France, Germany, Italy, Japan, the Netherlands, Belgium, Luxembourg, Greece, Spain, Portugal, Sweden, Norway, Denmark, Finland, Austria, Switzerland, and the United States of America, for the purpose of the export of certain goods to the United Kingdom, Ireland, France, Germany, Italy, Japan, the Netherlands, Belgium, Luxembourg, Greece, Spain, Portugal, Sweden, Norway, Denmark, Finland, Austria, Switzerland, and the United States of America.

[Redacted]
[Signature]
[Stamp]
[Signature]
[Stamp]

A119

...the
of the
... ..
... ..

... ..
... ..
... ..
... ..

... ..
... ..
... ..
... ..

... ..
... ..
... ..
... ..

... ..
... ..
... ..
... ..

... ..
... ..
... ..
... ..

... ..
... ..
... ..
... ..

... ..
... ..
... ..
... ..

... ..
... ..
... ..
... ..

... ..
... ..
... ..
... ..

... ..
... ..
... ..
... ..

... ..
... ..
... ..
... ..

... ..
... ..
... ..
... ..

A120

[illegible]

© 1997 by The McGraw-Hill Companies, Inc. All rights reserved. This publication is protected by copyright. No part of this publication may be reproduced, stored in a retrieval system, or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording, or by any information storage and retrieval system, without permission in writing from The McGraw-Hill Companies, Inc.

©2011 The Board of Trustees, United Methodist Church. All rights reserved. Printed by the Board of Trustees, United Methodist Church, 1200 North 17th Street, Suite 100, Kansas City, MO 64106. Printed in the USA. 10/11

© 1999 The Authors. Journal compilation © 1999 Blackwell Science Ltd

DOI is a better estimate of T₀ values than is provided for all using the equation of a 2nd order polynomial.

© 2002 Blackwell Science Ltd, *Journal of Internal Medicine* 252: 103–110

©2013 by owner. All rights reserved. No part of this publication may be reproduced, stored in a retrieval system, or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording, or by any information storage or retrieval system, without the prior written permission of the copyright owner.

[illegible]

[21] For convenience, this last drawing is only as sketched for meeting the

© 2001 The Royal Society. All rights reserved. No part of this publication may be reproduced, stored in a retrieval system, or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording, or by any information storage or retrieval system, without prior permission in writing from the Royal Society.

and the business and industry groups into the problems of control, financing and

1. *Journal of Polymer Science: Part A: Polymer Chemistry*, 1999, 37, 1001-1010.
2. *Journal of Polymer Science: Part A: Polymer Chemistry*, 1999, 37, 1011-1020.
3. *Journal of Polymer Science: Part A: Polymer Chemistry*, 1999, 37, 1021-1030.
4. *Journal of Polymer Science: Part A: Polymer Chemistry*, 1999, 37, 1031-1040.

[20] 1995 report on the status of the water projects the state is also likely to receive based on the voluntary agreement of the non-tribal water providers. 1995



1. **RESEARCHER'S NAME**
 2. **INSTITUTION**
 3. **ADDRESS**

A124

A124

1975 The Committee on the Status of the American Indian, National Indian Council, Bureau of Indian Affairs, U.S. Department of the Interior, Washington, D.C. 20540

For and on behalf of the Committee on the Status of the American Indian, National Indian Council, Bureau of Indian Affairs, U.S. Department of the Interior, Washington, D.C. 20540

Special Committee

1. The Committee on the Status of the American Indian, National Indian Council, Bureau of Indian Affairs, U.S. Department of the Interior, Washington, D.C. 20540
2. A Special Committee of the Committee on the Status of the American Indian, National Indian Council, Bureau of Indian Affairs, U.S. Department of the Interior, Washington, D.C. 20540
3. The Committee on the Status of the American Indian, National Indian Council, Bureau of Indian Affairs, U.S. Department of the Interior, Washington, D.C. 20540
4. The Committee on the Status of the American Indian, National Indian Council, Bureau of Indian Affairs, U.S. Department of the Interior, Washington, D.C. 20540
5. The Committee on the Status of the American Indian, National Indian Council, Bureau of Indian Affairs, U.S. Department of the Interior, Washington, D.C. 20540
6. The Committee on the Status of the American Indian, National Indian Council, Bureau of Indian Affairs, U.S. Department of the Interior, Washington, D.C. 20540
7. The Committee on the Status of the American Indian, National Indian Council, Bureau of Indian Affairs, U.S. Department of the Interior, Washington, D.C. 20540
8. The Committee on the Status of the American Indian, National Indian Council, Bureau of Indian Affairs, U.S. Department of the Interior, Washington, D.C. 20540
9. The Committee on the Status of the American Indian, National Indian Council, Bureau of Indian Affairs, U.S. Department of the Interior, Washington, D.C. 20540
10. The Committee on the Status of the American Indian, National Indian Council, Bureau of Indian Affairs, U.S. Department of the Interior, Washington, D.C. 20540



[Signature]

[Signature]

RECEIVED BUREAU OF INDIAN AFFAIRS

[Signature]

RECEIVED BUREAU OF INDIAN AFFAIRS

RECEIVED BUREAU OF INDIAN AFFAIRS
U.S. DEPARTMENT OF THE INTERIOR
WASHINGTON, D.C. 20540
JAN 15 1975
[Stamp]



A125



CONFIDENTIAL - SECURITY INFORMATION - THIS DOCUMENT IS NOT TO BE RELEASED OUTSIDE THE U.S. GOVERNMENT

U.S. GOVERNMENT

1. This document is a copy of a document received from the Department of Defense, which contains information that is classified as CONFIDENTIAL - SECURITY INFORMATION. It is being provided to you for your information only. It is not to be released outside the U.S. Government.

U.S. GOVERNMENT
CONFIDENTIAL

Signature of the Director, Central Intelligence Agency
U.S. GOVERNMENT
CONFIDENTIAL

Approved for release by the Central Intelligence Agency on 10/10/2000. This document is not to be released outside the U.S. Government.

U.S. GOVERNMENT



[Handwritten signature]

Signature of the Director, Central Intelligence Agency

U.S. GOVERNMENT
CONFIDENTIAL



Signature of the Director, Central Intelligence Agency

U.S. GOVERNMENT
CONFIDENTIAL



[Handwritten signature]

Signature of the Director, Central Intelligence Agency



A127



Handwritten signature or initials.

Handwritten text and stamps on the right side of the document.



Handwritten text below the redacted area, including the word "REQUISITION" and "MILITARY".

Rectangular stamp or box containing text, possibly a date or reference number.



A128



S. J. [illegible]
RECEIVED [illegible]

P. [illegible]
REGISTERED [illegible]

Receipt No. <u>12345</u>	Date <u>10/10/1918</u>
To <u>General T. C. [illegible]</u>	
For <u>[illegible]</u>	
[illegible]	



A129

Form with fields and a small portrait photo.

Form with fields and a QR code.

01/01/2016



Signature

RECEIVED ORDER

H. R. [Signature]

RECEIVED ORDER

Document No. 1000 of 1000, 10/01/2016
[Signature]
[Stamp]



A130



© 2000 Blackwell Science Ltd

Instrument No. 15, 21 or 22, which
 contains the same, is hereby
 acknowledged to be the true and
 correct copy of the original.

Copyright © 2001 by John Wiley & Sons, Inc.

© 2004 Blackwell Publishing Ltd *Journal of Internal Medicine* 255: 103–110

1970, 1971, 1972, 1973, 1974, 1975, 1976, 1977, 1978, 1979, 1980, 1981, 1982, 1983, 1984, 1985, 1986, 1987, 1988, 1989, 1990, 1991, 1992, 1993, 1994, 1995, 1996, 1997, 1998, 1999, 2000, 2001, 2002, 2003, 2004, 2005, 2006, 2007, 2008, 2009, 2010, 2011, 2012, 2013, 2014, 2015, 2016, 2017, 2018, 2019, 2020, 2021, 2022, 2023, 2024, 2025, 2026, 2027, 2028, 2029, 2030, 2031, 2032, 2033, 2034, 2035, 2036, 2037, 2038, 2039, 2040, 2041, 2042, 2043, 2044, 2045, 2046, 2047, 2048, 2049, 2050, 2051, 2052, 2053, 2054, 2055, 2056, 2057, 2058, 2059, 2060, 2061, 2062, 2063, 2064, 2065, 2066, 2067, 2068, 2069, 2070, 2071, 2072, 2073, 2074, 2075, 2076, 2077, 2078, 2079, 2080, 2081, 2082, 2083, 2084, 2085, 2086, 2087, 2088, 2089, 2090, 2091, 2092, 2093, 2094, 2095, 2096, 2097, 2098, 2099, 2100, 2101, 2102, 2103, 2104, 2105, 2106, 2107, 2108, 2109, 2110, 2111, 2112, 2113, 2114, 2115, 2116, 2117, 2118, 2119, 2120, 2121, 2122, 2123, 2124, 2125, 2126, 2127, 2128, 2129, 2130, 2131, 2132, 2133, 2134, 2135, 2136, 2137, 2138, 2139, 2140, 2141, 2142, 2143, 2144, 2145, 2146, 2147, 2148, 2149, 2150, 2151, 2152, 2153, 2154, 2155, 2156, 2157, 2158, 2159, 2160, 2161, 2162, 2163, 2164, 2165, 2166, 2167, 2168, 2169, 2170, 2171, 2172, 2173, 2174, 2175, 2176, 2177, 2178, 2179, 2180, 2181, 2182, 2183, 2184, 2185, 2186, 2187, 2188, 2189, 2190, 2191, 2192, 2193, 2194, 2195, 2196, 2197, 2198, 2199, 2200, 2201, 2202, 2203, 2204, 2205, 2206, 2207, 2208, 2209, 2210, 2211, 2212, 2213, 2214, 2215, 2216, 2217, 2218, 2219, 2220, 2221, 2222, 2223, 2224, 2225, 2226, 2227, 2228, 2229, 2230, 2231, 2232, 2233, 2234, 2235, 2236, 2237, 2238, 2239, 2240, 2241, 2242, 2243, 2244, 2245, 2246, 2247, 2248, 2249, 2250, 2251, 2252, 2253, 2254, 2255, 2256, 2257, 2258, 2259, 2260, 2261, 2262, 2263, 2264, 2265, 2266, 2267, 2268, 2269, 2270, 2271, 2272, 2273, 2274, 2275, 2276, 2277, 2278, 2279, 2280, 2281, 2282, 2283, 2284, 2285, 2286, 2287, 2288, 2289, 2290, 2291, 2292, 2293, 2294, 2295, 2296, 2297, 2298, 2299, 2300, 2301, 2302, 2303, 2304, 2305, 2306, 2307, 2308, 2309, 2310, 2311, 2312, 2313, 2314, 2315, 2316, 2317, 2318, 2319, 2320, 2321, 2322, 2323, 2324, 2325, 2326, 2327, 2328, 2329, 2330, 2331, 2332, 2333, 2334, 2335, 2336, 2337, 2338, 2339, 2340, 2341, 2342, 2343, 2344, 2345, 2346, 2347, 2348, 2349, 2350, 2351, 2352, 2353, 2354, 2355, 2356, 2357, 2358, 2359, 2360, 2361, 2362, 2363, 2364, 2365, 2366, 2367, 2368, 2369, 2370, 2371, 2372, 2373, 2374, 2375, 2376, 2377, 2378, 2379, 2380, 2381, 2382, 2383, 2384, 2385, 2386, 2387, 2388, 2389, 2390, 2391, 2392, 2393, 2394, 2395, 2396, 2397, 2398, 2399, 2400, 2401, 2402, 2403, 2404, 2405, 2406, 2407, 2408, 2409, 2410, 2411, 2412, 2413, 2414, 2415, 2416, 2417, 2418, 2419, 2420, 2421, 2422, 2423, 2424, 2425, 2426, 2427, 2428, 2429, 2430, 2431, 2432, 2433, 2434, 2435, 2436, 2437, 2438, 2439, 2440, 2441, 2442, 2443, 2444, 2445, 2446, 2447, 2448, 2449, 2450, 2451, 2452, 2453, 2454, 2455, 2456, 2457, 2458, 2459, 2460, 2461, 2462, 2463, 2464, 2465, 2466, 2467, 2468, 2469, 2470, 2471, 2472, 2473, 2474, 2475, 2476, 2477, 2478, 2479, 2480, 2481, 2482, 2483, 2484, 2485, 2486, 2487, 2488, 2489, 2490, 2491, 2492, 2493, 2494, 2495, 2496, 2497, 2498, 2499, 2500, 2501, 2502, 2503, 2504, 2505, 2506, 2507, 2508, 2509, 2510, 2511, 2512, 2513, 2514, 2515, 2516, 2517, 2518, 2519, 2520, 2521, 2522, 2523, 2524, 2525, 2526, 2527, 2528, 2529, 2530, 2531, 2532, 2533, 2534, 2535, 2536, 2537, 2538, 2539, 2540, 2541, 2542, 2543, 2544, 2545, 2546, 2547, 2548, 2549, 2550, 2551, 2552, 2553, 2554, 2555, 2556, 2557, 2558, 2559, 2560, 2561, 2562, 2563, 2564, 2565, 2566, 2567, 2568, 2569, 2570, 2571, 2572, 2573, 2574, 2575, 2576, 2577, 2578, 2579, 2580, 2581, 2582, 2583, 2584, 2585, 2586, 2587, 2588, 2589, 2590, 2591, 2592, 2593, 2594, 2595, 2596, 2597, 2598, 2599, 2600, 2601, 2602, 2603, 2604, 2605, 2606, 2607, 2608, 2609, 2610, 2611, 2612, 2613, 2614, 2615, 2616, 2617, 2618, 2619, 2620, 2621, 2622, 2623, 2624, 2625, 2626, 2627, 2628, 2629, 2630, 2631, 2632, 2633, 2634, 2635, 2636, 2637, 2638, 2639, 2640, 2641, 2642, 2643, 2644, 2645, 2646, 2647, 2648, 2649, 2650, 2651, 26

© 2012 by the American Psychological Association or one of its allied publishers. This article is intended solely for the personal use of the individual user and is not to be disseminated broadly.

Year	Age Group	Gender	Number of Cases	Rate per 100,000	Rate per 1,000
1990	15-24	Male	10	1.0	1.0
1990	15-24	Female	10	1.0	1.0
1990	25-34	Male	10	1.0	1.0
1990	25-34	Female	10	1.0	1.0
1990	35-44	Male	10	1.0	1.0
1990	35-44	Female	10	1.0	1.0
1990	45-54	Male	10	1.0	1.0
1990	45-54	Female	10	1.0	1.0
1990	55-64	Male	10	1.0	1.0
1990	55-64	Female	10	1.0	1.0
1990	65-74	Male	10	1.0	1.0
1990	65-74	Female	10	1.0	1.0
1990	75+	Male	10	1.0	1.0
1990	75+	Female	10	1.0	1.0
1990	All	Male	10	1.0	1.0
1990	All	Female	10	1.0	1.0
1990	All	Total	20	2.0	2.0

1. The first step is to identify the problem or question that needs to be answered. This involves understanding the context and the specific requirements of the task.

Source: *Journal of the American Statistical Association*, 1997, 92, 10, 1000-1001. Copyright 1997 by the American Statistical Association.

© 2000 Blackwell Science Ltd
Journal of Internal Medicine 247: 395–401

Chemical analysis

Deputy, express mail *Reynolds* 1100

© 2000 Blackwell Science Ltd

and temperature will be 100 mm.

bio-ethical dilemmas and dilemmas, involving genetic testing, stem-cell research, and abortion, is largely unaddressed in the policy and public debate.

Journal of Management Education 32(10)

See the "Comments" and "References" sections for more information.

1

© 2004 Blackwell Publishing Ltd *Journal of Internal Medicine* 255: 105–112

doi:10.1017/S0022292412001616

© 2004 Blackwell Publishing Ltd, *Journal of Internal Medicine* 255: 105–112

Downloaded At: 11:53 11 September 2009



© 2004 Blackwell Publishing Ltd
Journal of Internal Medicine 255: 105–112

129



11-11-11

U.S. Department of Justice
Federal Bureau of Investigation

1. Registration
 2. Registration - Registration - Registration



A133



GOVERNMENT OF INDIA
MINISTRY OF HEALTH AND FAMILY WELFARE
GOVERNMENT OF INDIA
GOVERNMENT OF INDIA
GOVERNMENT OF INDIA

GOVERNMENT OF INDIA, NEW DELHI, 15.05.2014

GOVERNMENT OF INDIA, NEW DELHI, 15.05.2014

GOVERNMENT OF INDIA, NEW DELHI, 15.05.2014

GOVERNMENT OF INDIA, NEW DELHI, 15.05.2014

GOVERNMENT OF INDIA, NEW DELHI, 15.05.2014

GOVERNMENT OF INDIA, NEW DELHI, 15.05.2014

GOVERNMENT OF INDIA, NEW DELHI, 15.05.2014

GOVERNMENT OF INDIA, NEW DELHI, 15.05.2014

GOVERNMENT OF INDIA, NEW DELHI, 15.05.2014

GOVERNMENT OF INDIA, NEW DELHI, 15.05.2014

GOVERNMENT OF INDIA, NEW DELHI, 15.05.2014

GOVERNMENT OF INDIA, NEW DELHI, 15.05.2014

GOVERNMENT OF INDIA, NEW DELHI, 15.05.2014

GOVERNMENT OF INDIA, NEW DELHI, 15.05.2014

GOVERNMENT OF INDIA, NEW DELHI, 15.05.2014

GOVERNMENT OF INDIA, NEW DELHI, 15.05.2014

GOVERNMENT OF INDIA, NEW DELHI, 15.05.2014

GOVERNMENT OF INDIA, NEW DELHI, 15.05.2014

GOVERNMENT OF INDIA, NEW DELHI, 15.05.2014

GOVERNMENT OF INDIA, NEW DELHI, 15.05.2014

GOVERNMENT OF INDIA, NEW DELHI, 15.05.2014

GOVERNMENT OF INDIA, NEW DELHI, 15.05.2014

GOVERNMENT OF INDIA, NEW DELHI, 15.05.2014

GOVERNMENT OF INDIA, NEW DELHI, 15.05.2014

GOVERNMENT OF INDIA, NEW DELHI, 15.05.2014

GOVERNMENT OF INDIA, NEW DELHI, 15.05.2014

GOVERNMENT OF INDIA, NEW DELHI, 15.05.2014

GOVERNMENT OF INDIA, NEW DELHI, 15.05.2014

GOVERNMENT OF INDIA, NEW DELHI, 15.05.2014

GOVERNMENT OF INDIA, NEW DELHI, 15.05.2014

GOVERNMENT OF INDIA, NEW DELHI, 15.05.2014

GOVERNMENT OF INDIA, NEW DELHI, 15.05.2014

GOVERNMENT OF INDIA, NEW DELHI, 15.05.2014


GOVERNMENT OF INDIA, NEW DELHI, 15.05.2014

GOVERNMENT OF INDIA, NEW DELHI, 15.05.2014

A134

Name of Applicant		Date of Birth	
Address		Occupation	

No.	Area	Remarks
1	100	100
2	100	100
3	100	100
4	100	100
5	100	100
6	100	100
7	100	100
8	100	100
9	100	100
10	100	100



REGISTERED HOLDER

H. R. ...

REGISTERED HOLDER

H. R. ...

1000 ...

1000 ...

1000 ...

1000 ...

1000 ...

1000 ...

1000 ...



A135

Journal of Management Inquiry 20(4)
December 2011 403-418

1992 1993 1994 1995 1996 1997 1998 1999 2000 2001 2002 2003 2004 2005 2006 2007 2008 2009 2010 2011 2012 2013 2014 2015 2016 2017 2018 2019 2020 2021 2022 2023 2024 2025 2026 2027 2028 2029 2030 2031 2032 2033 2034 2035 2036 2037 2038 2039 2040 2041 2042 2043 2044 2045 2046 2047 2048 2049 2050 2051 2052 2053 2054 2055 2056 2057 2058 2059 2060 2061 2062 2063 2064 2065 2066 2067 2068 2069 2070 2071 2072 2073 2074 2075 2076 2077 2078 2079 2080 2081 2082 2083 2084 2085 2086 2087 2088 2089 2090 2091 2092 2093 2094 2095 2096 2097 2098 2099 2100 2101 2102 2103 2104 2105 2106 2107 2108 2109 2110 2111 2112 2113 2114 2115 2116 2117 2118 2119 2120 2121 2122 2123 2124 2125 2126 2127 2128 2129 2130 2131 2132 2133 2134 2135 2136 2137 2138 2139 2140 2141 2142 2143 2144 2145 2146 2147 2148 2149 2150 2151 2152 2153 2154 2155 2156 2157 2158 2159 2160 2161 2162 2163 2164 2165 2166 2167 2168 2169 2170 2171 2172 2173 2174 2175 2176 2177 2178 2179 2180 2181 2182 2183 2184 2185 2186 2187 2188 2189 2190 2191 2192 2193 2194 2195 2196 2197 2198 2199 2200 2201 2202 2203 2204 2205 2206 2207 2208 2209 2210 2211 2212 2213 2214 2215 2216 2217 2218 2219 2220 2221 2222 2223 2224 2225 2226 2227 2228 2229 2230 2231 2232 2233 2234 2235 2236 2237 2238 2239 2240 2241 2242 2243 2244 2245 2246 2247 2248 2249 2250 2251 2252 2253 2254 2255 2256 2257 2258 2259 2260 2261 2262 2263 2264 2265 2266 2267 2268 2269 2270 2271 2272 2273 2274 2275 2276 2277 2278 2279 2280 2281 2282 2283 2284 2285 2286 2287 2288 2289 2290 2291 2292 2293 2294 2295 2296 2297 2298 2299 2300 2301 2302 2303 2304 2305 2306 2307 2308 2309 2310 2311 2312 2313 2314 2315 2316 2317 2318 2319 2320 2321 2322 2323 2324 2325 2326 2327 2328 2329 2330 2331 2332 2333 2334 2335 2336 2337 2338 2339 2340 2341 2342 2343 2344 2345 2346 2347 2348 2349 2350 2351 2352 2353 2354 2355 2356 2357 2358 2359 2360 2361 2362 2363 2364 2365 2366 2367 2368 2369 2370 2371 2372 2373 2374 2375 2376 2377 2378 2379 2380 2381 2382 2383 2384 2385 2386 2387 2388 2389 2390 2391 2392 2393 2394 2395 2396 2397 2398 2399 2400 2401 2402 2403 2404 2405 2406 2407 2408 2409 2410 2411 2412 2413 2414 2415 2416 2417 2418 2419 2420 2421 2422 2423 2424 2425 2426 2427 2428 2429 2430 2431 2432 2433 2434 2435 2436 2437 2438 2439 2440 2441 2442 2443 2444 2445 2446 2447 2448 2449 2450 2451 2452 2453 2454 2455 2456 2457 2458 2459 2460 2461 2462 2463 2464 2465 2466 2467 2468 2469 2470 2471 2472 2473 2474 2475 2476 2477 2478 2479 2480 2481 2482 2483 2484 2485 2486 2487 2488 2489 2490 2491 2492 2493 2494 2495 2496 2497 2498 2499 2500 2501 2502 2503 2504 2505 2506 2507 2508 2509 2510 2511 2512 2513 2514 2515 2516 2517 2518 2519 2520 2521 2522 2523 2524 2525 2526 2527 2528 2529 2530 2531 2532 2533 2534 2535 2536 2537 2538 2539 2540 2541 2542 2543 2544 2545 2546 2547 2548 2549 2550 2551 2552 2553 2554 2555 2556 2557 2558 2559 2560 2561 2562 2563 2564 2565 2566 2567 2568 2569 2570 2571 2572 2573 2574 2575 2576 2577 2578 2579 2580 2581 2582 2583 2584 2585 2586 2587 2588 2589 2590 2591 2592 2593 2594 2595 2596 2597 2598 2599 2600 2601 2602 2603 2604 2605 2606 2607 2608 2609 2610 2611 2612 2613 2614 2615 2616 2617 2618 2619 2620 2621 2622 2623 2624 2625 2626 2627 2628 2629 2630 2631 2632 2633 2634 2635 2636 2637 2638 2639 2640 2641 2642 2643 2644 2645 2646 2647 2648 2649 2650 2651 2652 2653 2654 2655 2656 2657 2658 2659 2660 2661 2662 2663 2664 2665 2666 2667 2668 2669 2670 2671 2672 2673 2674 2675 2676 2677 2678 2679 2680 2681 2682 2683 2684 2685 2686 2687 2688 2689 2690 2691 2692 2693 2694 2695 2696 2697 2698 2699 2700 2701 2702 2703 2704 2705 2706 2707 2708 2709 2710 2711 2712 2713 2714 2715 2716 2717 2718 2719 2720 2721 2722 2723 2724 2725 2726 2727 2728 2729 2730 2731 2732 2733 2734 2735 2736 2737 2738 2739 2740 2741 2742 2743 2744 2745 2746 2747 2748 2749 2750 2751 2752 2753 2754 2755 2756 2757 2758 2759 2760 2761 2762 2763 2764 2765 2766 2767 2768 2769 2770 2771 2772 2773 2774 2775 2776 2777 2778 2779 2780 2781 2782 2783 2784 2785 2786 2787 2788 2789 2790 2791 2792 2793 2794 2795 2796 2797 2798 2799 2800 2801 2802 2803 2804 2805 2806 2807 2808 2809 2810 2

1994

[illegible]

BRITISH COLUMBIA
AGRICULTURE



Handwritten signature: *[Signature]*
 (2) *[illegible]*
 (3) *[illegible]*

2 January 1952
 Mr. [illegible]
 [illegible]
 [illegible]
 [illegible]

Received by _____
Date _____



Information about the project is available at: www.137.org

This website and project are organized by David Johnson, publisher of
the book, and the project is organized by the project's members, who are
all very experienced and knowledgeable.

Information about the project is available at: www.137.org

A137

POPULATION BREAKUP & LITERACY LEVEL IN THE BUFFER ZONE

Sl.No	No. of Villages	Name of village	Rural / urban	HOUSE HOLDS	POPULATION			POPULATION BELOW 6 AGE GROUP			SCHEDULE CASTE			SCHEDULE TRIBE			LITRERATES			ILLITRERATES		
					TOTAL	MALE	F.MALE	TOTAL	MALE	F.MALE	TOTAL	MALE	F.MALE	TOTAL	MALE	F. MALE	TOTAL	MALE	F.MALE	TOTAL	MALE	F.MALE
0-2 km,Coimbatore South Sub-District, Coimbatore District																						
1	1	Myleripalayam	Rural	1393	4990	2451	2539	447	227	220	1381	679	702	0	0	0	3169	1746	1423	1821	705	1116
Pollachi Sub-District, Coimbatore District																						
2	1	Arasampalayam	Rural	1090	3818	1894	1924	298	160	138	947	471	476	0	0	0	2473	1384	1089	1345	510	835
		total (A)		2483	8808	4345	4463	745	387	358	2328	1150	1178	0	0	0	5642	3130	2512	3166	1215	1951
2-5 km,Pollachi Sub-District, Coimbatore District																						
3	1	Panappatti	Rural	763	2635	1383	1252	199	113	86	450	219	231	0	0	0	1740	1026	714	895	357	538
4	2	Vadasithur	Rural	1532	5080	2483	2597	342	173	169	940	459	481	2	1	1	3452	1878	1574	1628	605	1023
5	3	Kondampatty	Rural	738	2467	1218	1249	165	77	88	455	221	234	2	1	1	1625	889	736	842	329	513
6	4	Solavampalayam	Rural	1837	6387	3195	3192	619	316	303	1364	691	673	3	2	1	4074	2234	1840	2313	961	1352
Sulur Sub-District, Coimbatore District																						
7	1	Peedampalli	Rural	1134	3896	1955	1941	339	185	154	683	356	327	24	13	11	2982	1601	1381	914	354	560
Coimbatore South Sub-District, Coimbatore District																						
8	1	Othakalmandapam (TP)	Urban	3394	12207	6028	6179	1087	551	536	1479	707	772	69	40	29	9133	4831	4302	3074	1197	1877
		total (B)		9398	32672	16262	16410	2751	1415	1336	5371	2653	2718	100	57	43	23006	12459	10547	9666	3803	5863
5-10 km,Coimbatore South Sub-District, Coimbatore District																						
9	1	Narasipuram	Rural	831	3078	1574	1504	245	125	120	466	234	232	145	70	75	2034	1145	889	1044	429	615
10	2	Madavarayapuram	Rural	1797	6365	3226	3139	619	342	277	510	274	236	53	32	21	4587	2468	2119	1778	758	1020
11	3	Ikkaraibooluvampatti	Rural	1834	6361	3183	3178	536	270	266	1367	679	688	495	240	255	4043	2273	1770	2318	910	1408
12	4	Madampatti	Rural	1999	6771	3359	3412	595	312	283	1384	700	684	9	4	5	4748	2584	2164	2023	775	1248
13	5	Theethipalayam	Rural	2386	8629	4296	4333	847	425	422	1395	686	709	25	16	9	6329	3424	2905	2300	872	1428
14	6	Palathurai	Rural	767	2727	1346	1381	213	103	110	1214	602	612	0	0	0	1906	1033	873	821	313	508
15	7	Thambagoundenpalayam	Rural	133	482	234	248	30	17	13	87	42	45	0	0	0	374	193	181	108	41	67
16	8	Karunchamigoundenpalayam	Rural	95	343	171	172	33	17	16	0	0	0	0	0	0	213	111	102	130	60	70
17	9	Seerappalayam	Rural	1646	5881	3053	2828	505	282	223	1041	513	528	0	0	0	4457	2470	1987	1424	583	841
18	10	Nachippalayam	Rural	878	3008	1517	1491	228	120	108	1033	509	524	0	0	0	2019	1105	914	989	412	577
19	11	Arisippalayam	Rural	700	2400	1212	1188	225	127	98	823	414	409	0	0	0	1670	883	787	730	329	401
20	12	Valukkupparai	Rural	1412	4891	2376	2515	383	182	201	1368	667	701	55	33	22	3043	1670	1373	1848	706	1142
Pollachi Sub-District, Coimbatore District																						
21	1	Mettubavi	Rural	719	2485	1281	1204	173	93	80	301	153	148	8	3	5	1671	971	700	814	310	504
22	2	Vadaputhur	Rural	1467	5176	2561	2615	503	259	244	706	348	358	15	5	10	3663	1985	1678	1513	576	937
23	3	Kuthiraiampalayam	Rural	444	1448	685	763	107	52	55	442	216	226	9	5	4	887	483	404	561	202	359
24	4	Pottaiyandiporambu	Rural	445	1530	764	766	127	59	68	357	180	177	71	30	41	901	502	399	629	262	367
25	5	Sangarayapuram	Rural	255	816	416	400	58	27	31	147	67	80	55	27	28	604	338	266	212	78	134
26	6	Kodangipalayam	Rural	463	1481	730	751	91	52	39	331	165	166	0	0	0	887	479	408	594	251	343
27	7	Kothavadi	Rural	500	1565	767	798	84	43	41	662	317	345	0	0	0	1005	556	449	560	211	349
28	8	Kurunallipalayam	Rural	528	1753	887	866	110	60	50	457	236	221	0	0	0	1014	599	415	739	288	451

Sl.No	No. of Villages	Name of village	Rural / urban	HOUSE HOLDS	POPULATION			POPULATION BELOW 6 AGE GROUP			SCHEDULE CASTE			SCHEDULE TRIBE			LITRERATES			ILLITRERATES		
					TOTAL	MALE	F.MALE	TOTAL	MALE	F.MALE	TOTAL	MALE	F.MALE	TOTAL	MALE	F. MALE	TOTAL	MALE	F.MALE	TOTAL	MALE	F.MALE
29	9	Periakalandai	Rural	571	1915	951	964	162	86	76	588	284	304	0	0	0	1224	687	537	691	264	427
30	10	Andipalayam	Rural	1006	3315	1624	1691	205	101	104	654	327	327	8	4	4	2278	1245	1033	1037	379	658
31	11	Chettiakkapalayam	Rural	984	3370	1710	1660	204	102	102	719	335	384	0	0	0	2219	1291	928	1151	419	732
32	12	Nallattipalayam	Rural	1550	5431	2699	2732	536	272	264	969	495	474	521	250	271	3541	1911	1630	1890	788	1102
Sulur Sub-District, Coimbatore District																						
33	1	Kallapalayam	Rural	860	3066	1581	1485	253	130	123	686	346	340	4	3	1	2350	1293	1057	716	288	428
34	2	Pappampatti	Rural	1172	4143	2052	2091	415	196	219	961	455	506	0	0	0	2865	1524	1341	1278	528	750
35	3	Edayapalayam	Rural	667	2251	1130	1121	193	98	95	269	128	141	4	3	1	1659	930	729	592	200	392
36	4	Vadavalli	Rural	955	3171	1567	1604	244	128	116	822	413	409	0	0	0	2010	1093	917	1161	474	687
37	5	Bogampatti	Rural	686	2415	1254	1161	155	85	70	170	87	83	0	0	0	1515	905	610	900	349	551
Coimbatore South Sub-District, Coimbatore District																						
38	1	Vellalur (TP)	Urban	6837	24872	12794	12078	2232	1129	1103	4389	2206	2183	16	8	8	19571	10684	8887	5301	2110	3191
39	2	Kurichi (M)	Urban	32830	123667	61815	61852	12987	6596	6391	13001	6502	6499	312	153	159	99529	51805	47724	24138	10010	14128
40	3	Chettipalayam (TP)	Urban	2841	10366	5268	5098	880	480	400	2920	1460	1460	0	0	0	7304	3991	3313	3062	1277	1785
41	4	Madukkarai (TP)	Urban	8153	30357	15084	15273	3049	1544	1505	4640	2325	2315	29	12	17	23046	12155	10891	7311	2929	4382
42	5	Malumichampatti (CT)	Urban	3594	12936	6568	6368	1294	687	607	2561	1294	1267	4	2	2	10023	5315	4708	2913	1253	1660
Pollachi Sub-District, Coimbatore District																						
43	1	Kinathukadavu (TP)	Urban	2469	8653	4271	4382	737	381	356	1263	620	643	4	2	2	6565	3474	3091	2088	797	1291
		total (C)		84474	307118	154006	153112	29258	14982	14276	48703	24279	24424	1842	902	940	231754	123575	108179	75364	30431	44933
		Grand Total (A+B+C)		96355	348598	174613	173985	32754	16784	15970	56402	28082	28320	1942	959	983	260402	139164	121238	88196	35449	52747

**Source: District Primary Census Abstract, Coimbatore District of Tamilnadu State-2011*

OCCUPATIONAL STRUCTURE IN THE BUFFER ZONE

Sl.No	No. of Villages	Name of village	Rural / urban	MAIN WORKERS		CULTIVATORS		AGRI LABOURS		HOUSE HOLD		OTHERS		MARGINAL WORKERS		NON WORKERS	
				MALE	F.MALE	MALE	F.MALE	MALE	F.MALE	MALE	F.MALE	MALE	F.MALE	MALE	F.MALE	MALE	F.MALE
0-2 km,Coimbatore South Sub-District, Coimbatore District																	
1	1	Myleripalayam	Rural	1539	1042	303	265	264	320	36	50	936	407	127	204	785	1293
Pollachi Sub-District, Coimbatore District																	
2	1	Arasampalayam	Rural	1166	697	241	119	345	401	12	11	568	166	103	75	625	1152
		total (A)		2705	1739	544	384	609	721	48	61	1504	573	230	279	1410	2445
2-5 km,Pollachi Sub-District, Coimbatore District																	
3	1	Panappatti	Rural	969	597	391	240	300	304	5	6	273	47	5	8	409	647
4	2	Vadasithur	Rural	1631	788	354	194	377	340	19	9	881	245	40	53	812	1756
5	3	Kondampatty	Rural	635	351	86	54	219	195	8	1	322	101	183	141	400	757
6	4	Solavampalayam	Rural	2014	1023	145	95	432	494	15	29	1422	405	120	210	1061	1959
Sulur Sub-District, Coimbatore District																	
7	1	Peedampalli	Rural	1023	442	139	39	83	100	86	44	715	259	218	186	714	1313
Coimbatore South Sub-District, Coimbatore District																	
8	1	Othakalmandapam (TP)	Urban	3274	1297	76	29	80	85	50	28	3068	1155	510	318	2244	4564
		total (B)		9546	4498	1191	651	1491	1518	183	117	6681	2212	1076	916	5640	10996
5-10 km,Coimbatore South Sub-District, Coimbatore District																	
9	1	Narasipuram	Rural	912	475	76	27	215	132	13	9	608	307	205	282	457	747
10	2	Madavarayapuram	Rural	1452	740	213	113	422	302	32	22	785	303	551	354	1223	2045
11	3	Ikkaraibooluvampatti	Rural	1773	991	162	107	747	649	42	26	822	209	308	313	1102	1874
12	4	Madampatti	Rural	2041	1228	297	140	720	751	26	30	998	307	118	207	1200	1977
13	5	Theethipalayam	Rural	2362	922	222	31	362	410	34	23	1744	458	328	289	1606	3122
14	6	Palathurai	Rural	557	211	67	26	37	48	6	5	447	132	337	298	452	872
15	7	Thambagoundenpalayam	Rural	134	59	24	13	10	10	1	0	99	36	8	23	92	166
16	8	Karunchamigoundenpalayam	Rural	109	43	28	29	1	1	0	0	80	13	4	26	58	103
17	9	Seerappalayam	Rural	1760	691	112	37	247	203	35	31	1366	420	85	87	1208	2050
18	10	Nachippalayam	Rural	934	664	257	201	248	231	8	11	421	221	113	92	470	735
19	11	Arisippalayam	Rural	702	272	103	14	149	132	11	4	439	122	69	83	441	833
20	12	Valukkupparai	Rural	1429	1211	466	432	509	626	19	18	435	135	216	199	731	1105
Pollachi Sub-District, Coimbatore District																	
21	1	Mettubavi	Rural	879	446	335	142	252	205	3	5	289	94	12	35	390	723
22	2	Vadaputhur	Rural	1623	856	273	218	205	261	21	14	1124	363	54	137	884	1622
23	3	Kuthiraiampalayam	Rural	441	365	86	86	201	236	6	6	148	37	32	58	212	340
24	4	Pottaiyandiporambu	Rural	321	177	96	54	60	46	1	0	164	77	197	194	246	395
25	5	Sangarayapuram	Rural	274	172	97	81	69	51	3	1	105	39	27	45	115	183
26	6	Kodangipalayam	Rural	471	178	174	43	135	91	9	8	153	36	56	273	203	300
27	7	Kothavadi	Rural	549	380	153	94	211	209	9	12	176	65	1	5	217	413
28	8	Kurunallipalayam	Rural	612	449	169	166	205	222	0	0	238	61	2	7	273	410

Sl.No	No. of Villages	Name of village	Rural / urban	MAIN WORKERS		CULTIVATORS		AGRI LABOURS		HOUSE HOLD		OTHERS		MARGINAL WORKERS		NON WORKERS	
				MALE	F.MALE	MALE	F.MALE	MALE	F.MALE	MALE	F.MALE	MALE	F.MALE	MALE	F.MALE	MALE	F.MALE
29	9	Periakalandai	Rural	657	425	147	74	275	276	8	4	227	71	2	3	292	536
30	10	Andipalayam	Rural	1087	662	156	47	458	441	30	12	443	162	39	52	498	977
31	11	Chettiakkapalayam	Rural	1222	677	307	146	389	385	51	42	475	104	10	20	478	963
32	12	Nallattipalayam	Rural	1553	1016	113	73	308	343	89	59	1043	541	211	171	935	1545
Sulur Sub-District, Coimbatore District																	
33	1	Kallapalayam	Rural	961	561	214	148	227	227	31	13	489	173	18	7	602	917
34	2	Pappampatti	Rural	1262	499	95	48	225	158	48	27	894	266	79	137	711	1455
35	3	Edayapalayam	Rural	676	301	153	47	54	124	28	15	441	115	72	101	382	719
36	4	Vadavalli	Rural	1095	763	180	109	634	479	75	80	206	95	16	20	456	821
37	5	Bogampatti	Rural	731	254	352	118	174	104	11	3	194	29	82	98	441	809
Coimbatore South Sub-District, Coimbatore District																	
38	1	Vellalur (TP)	Urban	7404	2647	230	64	274	265	208	244	6692	2074	767	539	4623	8892
39	2	Kurichi (M)	Urban	34683	10136	211	53	158	105	614	446	33700	9532	2222	1999	24910	49717
40	3	Chettipalayam (TP)	Urban	3078	1000	393	46	157	109	49	35	2479	810	221	151	1969	3947
41	4	Madukkarai (TP)	Urban	8642	2757	105	30	162	142	79	77	8296	2508	532	543	5910	11973
42	5	Malumichampatti (CT)	Urban	3922	1300	123	65	57	47	61	40	3681	1148	133	162	2513	4906
Pollachi Sub-District, Coimbatore District																	
43	1	Kinathukadavu (TP)	Urban	2686	1211	89	35	314	248	78	79	2205	849	52	82	1533	3089
		total (C)		88994	34739	6278	3157	8871	8269	1739	1401	72106	21912	7179	7092	57833	111281
		Grand Total (A+B+C)		101245	40976	8013	4192	10971	10508	1970	1579	80291	24697	8485	8287	64883	124722

**Source: District Primary Census Abstract, Coimbatore District of Tamilnadu State-2011*

Annexure- 11

EDUCATIONAL FACILITIES IN THE STUDY AREA

Sl.No	No. of Villages	Name of village	Educational Facilities (A(1)/ NA(2))	Govt Pre - Primary School (Nursery/LKG/UKG) (Numbers)	Govt Primary School (Numbers)	Govt Middle School (Numbers)	Govt Secondary School (Numbers)	Govt Senior Secondary School (Numbers)	Govt Arts and Science Degree College (Numbers)	Govt Engineering College (Numbers)	Govt Medicine College (Numbers)	Govt Management Institute (Numbers)	Govt Polytechnic (Numbers)	Govt Vocational Training School/ITI (Numbers)	Government Non Formal Training Centre (Numbers)	Government School For Disabled (Numbers)
0-2 km,Coimbatore South Sub-District, Coimbatore District																
1	1	Myleripalayam	1	3	3	1	0	0	0	0	0	0	0	0	0	0
Pollachi Sub-District, Coimbatore District																
2	1	Arasampalayam	1	3	2	1	1	0	0	0	0	0	0	0	0	0
		total (A)		6	5	2	1	0	0	0	0	0	0	0	0	0
2-5 km,Pollachi Sub-District, Coimbatore District																
3	1	Panappatti	1	2	1	1	1	0	0	0	0	0	0	0	0	0
4	2	Vadasithur	1	4	3	1	1	1	0	0	0	0	0	0	0	0
5	3	Kondampatty	1	2	1	1	0	0	0	0	0	0	0	0	0	0
6	4	Solavampalayam	1	4	3	1	0	0	0	0	0	0	0	0	0	0
Sulur Sub-District, Coimbatore District																
7	1	Peedampalli	1	2	2	1	1	1	0	0	0	0	0	0	0	0
		total (B)		14	10	5	3	2	0	0	0	0	0	0	0	0
5-10 km,Coimbatore South Sub-District, Coimbatore District																
8	1	Narasipuram	1	1	1	1	1	0	0	0	0	0	0	0	0	0
9	2	Madavarayapuram	1	4	1	0	0	0	0	0	0	0	0	0	0	0
10	3	Ikkaraibooluvampatti	1	1	4	2	1	0	0	0	0	0	0	0	0	0
11	4	Madampatti	1	4	3	5	0	0	0	0	0	0	0	0	0	0
12	5	Theethipalayam	1	2	4	2	1	0	0	0	0	0	0	0	0	0
13	6	Palathurai	1	1	1	1	0	0	0	0	0	0	0	0	0	0
14	7	Thambagoundenpalayam	1	1	1	0	0	0	0	0	0	0	0	0	0	0
15	8	Karunchamigoundenpalayam	1	1	0	0	0	0	0	0	0	0	0	0	0	0
16	9	Seerappalayam	1	3	3	1	0	0	0	0	0	0	0	0	0	0
17	10	Nachippalayam	1	3	4	0	0	0	0	0	0	0	0	0	0	0
18	11	Arisippalayam	1	3	2	1	1	1	0	0	0	0	0	0	0	0
19	12	Valukkupparai	1	3	3	1	1	0	0	0	0	0	0	0	0	0
Pollachi Sub-District, Coimbatore District																
20	1	Mettubavi	1	1	3	1	0	0	0	0	0	0	0	0	0	0
21	2	Vadaputhur	1	2	2	0	0	0	0	0	0	0	0	0	0	0
22	3	Kuthiraiampalayam	1	1	1	0	0	0	0	0	0	0	0	0	0	0
23	4	Pottaiyandiporambu	1	1	1	0	0	0	0	0	0	0	0	0	0	0
24	5	Sangarayapuram	1	1	1	0	0	0	0	0	0	0	0	0	0	0
25	6	Kodangipalayam	1	1	2	0	0	0	0	0	0	0	0	0	0	0
26	7	Kothavadi	1	1	2	1	0	0	0	0	0	0	0	0	0	0
27	8	Kurunallipalayam	1	1	1	0	0	0	0	0	0	0	0	0	0	0
28	9	Periakalandai	1	2	2	0	0	0	0	0	0	0	0	0	0	0
29	10	Andipalayam	1	3	3	2	1	1	0	0	0	0	0	0	0	0
30	11	Chettiakkapalayam	1	2	1	0	0	0	0	0	0	0	0	0	0	0
31	12	Nallattipalayam	1	4	3	1	0	0	0	0	0	0	0	0	0	0
Sulur Sub-District, Coimbatore District																
32	1	Kallapalayam	1	2	1	1	1	0	0	0	0	0	0	0	0	0
33	2	Pappampatti	1	2	1	1	0	0	0	0	0	0	0	0	0	0
34	3	Edayapalayam	1	1	1	1	1	1	0	0	0	0	0	0	0	0

Sl.No	No. of Villages	Name of village	Educational Facilities (A(1)/ NA(2))	Govt Pre - Primary School (Nursery/LKG/UKG) (Numbers)	Govt Primary School (Numbers)	Govt Middle School (Numbers)	Govt Secondary School (Numbers)	Govt Senior Secondary School (Numbers)	Govt Arts and Science Degree College (Numbers)	Govt Engineering College (Numbers)	Govt Medicine College (Numbers)	Govt Management Institute (Numbers)	Govt Polytechnic (Numbers)	Govt Vocational Training School/ITI (Numbers)	Government Non Formal Training Centre (Numbers)	Government School For Disabled (Numbers)
35	4	Vadavalli	1	2	2	1	1	0	0	0	0	0	0	0	0	0
36	5	Bogampatti	1	1	2	2	0	0	0	0	0	0	0	0	0	0
		total (C)		55	56	25	9	3	0	0	0	0	0	0	0	0
		Grand Total (A+B+C)		75	71	32	13	5	0	0	0	0	0	0	0	0

**Source: District Primary Census Abstract, Coimbatore District of Tamilnadu State-2011*

MEDICAL FACILITIES WITHIN THE STUDY AREA

Sl.No	No. of Villages	Name of village	Medical Facilities (A(1)/NA(2))	Community Health Centre (Numbers)	Primary Health Centre (Numbers)	Primary Health Sub Centre (Numbers)	Maternity And Child Welfare Centre (Numbers)	TB Clinic (Numbers)	Hospital Allopathic (Numbers)	Hospital Alternative Medicine (Numbers)	Dispensary (Numbers)	Veterinary Hospital (Numbers)	Mobile Health Clinic (Numbers)	Family Welfare Centre (Numbers)
0-2 km,Coimbatore South Sub-District, Coimbatore District														
1	1	Myleripalayam	1	0	1	1	1	1	0	0	1	0	0	1
Pollachi Sub-District, Coimbatore District														
2	1	Arasampalayam	1	0	0	1	0	0	0	0	0	0	0	0
		total (A)		0	1	2	1	1	0	0	1	0	0	1
2-5 km,Pollachi Sub-District, Coimbatore District														
3	1	Panappatti	1	0	0	1	0	0	0	0	0	1	0	0
4	2	Vadasithur	1	0	0	1	0	0	0	0	0	1	0	0
5	3	Kondampatty	1	0	0	1	0	0	0	0	0	0	0	0
6	4	Solavampalayam	1	0	0	3	0	0	0	0	0	0	0	0
Sulur Sub-District, Coimbatore District														
7	1	Peedampalli	1	0	0	1	0	0	0	0	0	0	0	0
		total (B)		0	0	7	0	0	0	0	0	2	0	0
5-10 km,Coimbatore South Sub-District, Coimbatore District														
8	1	Narasipuram	1	0	1	1	1	1	0	0	1	1	0	1
9	2	Madavarayapuram	1	0	0	1	0	0	0	0	0	0	0	0
10	3	Ikkaraibooluvampatti	1	0	0	1	0	0	0	0	0	0	0	0
11	4	Madampatti	1	0	0	1	0	0	0	0	0	1	0	0
12	5	Theethipalayam	1	0	0	1	1	0	0	0	0	0	0	0
13	6	Palathurai	1	0	0	1	0	0	0	0	0	0	0	0
14	7	Thambagoundenpalayam	2	0	0	0	0	0	0	0	0	0	0	0
15	8	Karunchamigoundenpalayam	2	0	0	0	0	0	0	0	0	0	0	0
16	9	Seerappalayam	1	0	0	3	0	0	0	0	0	0	0	0
17	10	Nachippalayam	1	0	0	1	0	0	0	0	0	0	0	0
18	11	Arisippalayam	1	0	1	1	1	1	0	0	1	0	0	1
19	12	Valukkupparai	1	0	0	1	0	0	0	0	0	1	0	0
Pollachi Sub-District, Coimbatore District														
20	1	Mettubavi	2	0	0	0	0	0	0	0	0	0	0	0
21	2	Vadaputhur	1	0	0	1	0	0	0	0	0	0	0	0
22	3	Kuthiraiampalayam	2	0	0	0	0	0	0	0	0	0	0	0
23	4	Pottaiyandiporambu	1	0	0	1	0	0	0	0	0	0	0	0
24	5	Sangarayapuram	2	0	0	0	0	0	0	0	0	0	0	0
25	6	Kodangipalayam	2	0	0	0	0	0	0	0	0	0	0	0
26	7	Kothavadi	2	0	0	0	0	0	0	0	0	0	0	0
27	8	Kurunallipalayam	2	0	0	0	0	0	0	0	0	0	0	0
28	9	Periakalandai	2	0	0	0	0	0	0	0	0	0	0	0
29	10	Andipalayam	1	0	0	1	1	0	0	0	0	0	0	0

Sl.No	No. of Villages	Name of village	Medical Facilities (A(1)/NA(2))	Community Health Centre (Numbers)	Primary Health Centre (Numbers)	Primary Health Sub Centre (Numbers)	Maternity And Child Welfare Centre (Numbers)	TB Clinic (Numbers)	Hospital Allopathic (Numbers)	Hospital Alternative Medicine (Numbers)	Dispensary (Numbers)	Veterinary Hospital (Numbers)	Mobile Health Clinic (Numbers)	Family Welfare Centre (Numbers)
30	11	Chettiakkapalayam	1	0	0	1	0	0	0	0	0	0	0	0
31	12	Nallattipalayam	1	1	1	1	1	1	0	0	1	0	0	1
Sulur Sub-District, Coimbatore District														
32	1	Kallapalayam	1	0	0	1	0	0	0	0	0	0	0	0
33	2	Pappampatti	1	0	0	1	0	0	0	0	0	1	0	0
34	3	Edayapalayam	2	0	0	0	0	0	0	0	0	0	0	0
35	4	Vadavalli	1	0	0	1	0	0	0	0	0	0	0	0
36	5	Bogampatti	2	0	0	0	0	0	0	0	0	0	0	0
		total (C)		1	3	20	5	3	0	0	3	4	0	3
		Grand Total (A+B+C)		1	4	29	6	4	0	0	4	6	0	4

**Source: District Primary Census Abstract, Coimbatore District of Tamilnadu State-2011*

Note : A: Available, NA- Not Available

INFRASTRUCTURAL FACILITIES IN THE STUDY AREA

Sl.No	No. of Villages	Name of village	Tap Water-Treated (Status A(1)/NA(2))	Covered Well (Status A(1)/NA(2))	Hand Pump (Status A(1)/NA(2))	Tube Wells/Borehole (Status A(1)/NA(2))	Spring (Status A(1)/NA(2))	River/Canal (Status A(1)/NA(2))	Tank/Pond/Lake (Status A(1)/NA(2))	Post Office (Status A(1)/NA(2))	Sub Post Office (Status A(1)/NA(2))	Post And Telegraph Office (Status A(1)/NA(2))	Telephone (landlines) (Status A(1)/NA(2))	Mobile Phone Coverage (Status A(1)/NA(2))	Public Bus Service (Status A(1)/NA(2))	Railway Station (Status A(1)/NA(2))
0-2 km,Coimbatore South Sub-District, Coimbatore District																
1	1	Myleripalayam	1	1	1	1	2	2	2	2	1	2	1	1	1	2
Pollachi Sub-District, Coimbatore District																
2	1	Arasampalayam	1	1	1	1	2	2	2	2	1	2	1	1	1	2
2-5 km,Pollachi Sub-District, Coimbatore District																
3	1	Panappatti	1	1	1	1	1	2	2	2	2	2	1	1	1	2
4	2	Vadasithur	1	1	1	1	2	2	2	2	1	2	1	1	1	2
5	3	Kondampatty	1	1	2	1	2	1	2	2	1	2	1	1	1	2
6	4	Solavampalayam	1	1	1	1	2	2	2	2	1	2	1	1	1	1
Sulur Sub-District, Coimbatore District																
7	1	Peedampalli	1	1	2	2	2	2	2	2	1	2	1	1	1	2
5-10 km,Coimbatore South Sub-District, Coimbatore District																
8	1	Narasipuram	1	1	2	2	2	1	2	2	1	2	1	1	1	2
9	2	Madavarayapuram	1	1	1	1	2	1	1	2	1	2	1	1	1	2
10	3	Ikkaraibooluvampatti	1	1	1	1	2	1	1	2	1	2	1	1	1	2
11	4	Madampatti	1	1	1	1	2	2	1	2	1	2	1	1	1	2
12	5	Theethipalayam	1	1	2	1	2	2	2	2	1	2	1	1	1	2
13	6	Palathurai	1	1	1	1	2	2	2	2	1	2	1	1	1	2
14	7	Thambagoundenpalayam	1	2	2	2	2	2	2	2	2	2	1	1	1	2
15	8	Karunchamigoundenpalayam	1	2	1	1	2	2	2	2	2	2	1	1	1	2
16	9	Seerappalayam	1	1	1	1	1	1	2	2	1	2	1	1	1	2
17	10	Nachippalayam	1	1	1	1	2	2	2	2	2	2	1	1	1	2
18	11	Arisippalayam	1	2	2	1	2	1	2	2	1	2	1	1	1	2
19	12	Valukkupparai	1	1	1	1	1	2	1	2	1	2	1	1	1	2

Sl.No	No. of Villages	Name of village	Tap Water-Treated (Status A(1)/NA(2))	Covered Well (Status A(1)/NA(2))	Hand Pump (Status A(1)/NA(2))	Tube Wells/Borehole (Status A(1)/NA(2))	Spring (Status A(1)/NA(2))	River/Canal (Status A(1)/NA(2))	Tank/Pond/Lake (Status A(1)/NA(2))	Post Office (Status A(1)/NA(2))	Sub Post Office (Status A(1)/NA(2))	Post And Telegraph Office (Status A(1)/NA(2))	Telephone (landlines) (Status A(1)/NA(2))	Mobile Phone Coverage (Status A(1)/NA(2))	Public Bus Service (Status A(1)/NA(2))	Railway Station (Status A(1)/NA(2))
Pollachi Sub-District, Coimbatore District																
20	1	Mettubavi	1	1	2	1	1	2	2	2	2	2	1	1	1	2
21	2	Vadaputhur	1	1	1	1	2	2	2	2	2	2	1	1	1	2
22	3	Kuthiraiampalayam	1	1	1	1	2	2	2	2	2	2	1	1	1	2
23	4	Pottaiyandiporambu	1	1	2	1	2	2	2	2	2	2	1	1	1	2
24	5	Sangarayapuram	1	1	1	1	2	2	2	2	2	2	1	1	2	2
25	6	Kodangipalayam	1	1	1	1	2	2	2	2	2	2	1	1	1	2
26	7	Kothavadi	1	1	2	1	2	1	2	2	1	2	1	1	1	2
27	8	Kurunallipalayam	1	1	2	1	2	2	1	2	1	2	1	1	1	2
28	9	Periakalandai	1	1	2	1	2	2	2	2	2	2	1	1	1	2
29	10	Andipalayam	1	1	1	1	2	2	2	2	1	2	1	1	1	2
30	11	Chettiakkapalayam	1	1	1	1	2	2	2	2	1	2	1	1	1	2
31	12	Nallattipalayam	1	1	1	1	1	2	2	2	1	2	1	1	1	2
Sulur Sub-District, Coimbatore District																
32	1	Kallapalayam	1	1	1	1	2	2	1	2	1	2	1	1	1	2
33	2	Pappampatti	1	2	2	1	1	2	2	2	1	2	1	1	1	2
34	3	Edayapalayam	1	1	1	1	2	2	2	2	2	2	1	1	1	2
35	4	Vadavalli	1	1	2	1	1	2	2	2	1	2	1	1	1	2
36	5	Bogampatti	1	1	1	1	2	2	2	2	1	2	1	1	2	2

**Source: District Primary Census Abstract, Coimbatore District of Tamilnadu State-2011*

Note : A: Available, NA- Not Available

Status: A(1)/NA(2)



Enviro Solutions & Labs

A5, Cheran Nagar, Off, Mettupalayam Road,
Kavundampalayam, GN Mills (Post), Coimbatore - 641 029, Tamilnadu.

info@envislab.com www.envislab.com 0422 4200600



Annexure-14

Issued To

Mr. K. Ramraj (Rough Stone Quarry)
2/395-1, Venkateshwara Nagar, Premier Nagar
West, Othala Mandapam, Coimbatore - 641 032.

TEST REPORT

Report No
Report Date
Sample Code

ESL/2506/AAQ/3012
05.06.2025
ESL250656


Page 01 of 01

SAMPLE DETAILS

Nature of Sample	Air Quality	Sample Description	Ambient Air
Sample Collected By	Enviro Solutions & Labs	Sample Condition	Good
Sampling Date	ESL/QSP/07	Sample Location	Project Site
Sample Collected At	K. Ramraj (Rough Stone Quarry), S.F.No.70/1(P), Myleripalayam Village, Madukarai Thaluka.		

Monitoring Date	Particulate Matter size less than 10- µm (PM ₁₀)	Particulate Matter size less than 2.5- µm (PM _{2.5})	Sulphur Dioxide (SO ₂)	Nitrogen Dioxide (NO ₂)	Carbon Monoxide (CO)
	µg/m ³	µg/m ³	µg/m ³	µg/m ³	mg/m ³
03.03.2025	52	25	7	16	0.21
07.03.2025	56	23	5	12	0.24
10.03.2025	55	21	8	14	0.19
14.03.2025	51	23	7	19	0.21
17.03.2025	56	24	6	15	0.23
21.03.2025	54	23	7	18	0.21
25.03.2025	57	21	8	16	0.20
30.03.2025	49	23	6	17	0.19
02.04.2025	57	21	5	18	0.22
07.04.2025	61	25	7	16	0.21
11.04.2025	55	23	6	17	0.22
16.04.2025	57	24	7	16	0.22
21.04.2025	58	21	6	16	0.21
23.04.2025	63	22	8	15	0.23
28.04.2025	57	18	7	13	0.21
30.04.2025	55	21	8	14	0.24
02.05.2025	56	19	6	12	0.22
07.05.2025	55	21	7	13	0.23
12.05.2025	57	18	6	19	0.21
16.05.2025	56	20	6	15	0.22
19.05.2025	58	20	5	16	0.22
21.05.2025	52	19	5	14	0.18
23.05.2025	55	21	5	15	0.19
26.05.2025	58	20	6	16	0.22
28.05.2025	52	22	7	14	0.23
30.05.2025	53	19	6	15	0.21
Min	49	18	5	12	0.18
Max	63	25	8	19	0.24
Mean	56	21	6	15	0.21
98%ile	62	25	8	19	0.24
CPCB Limits	100	60	80	80	2

Note: BQL - below Quantification Limit, LOQ - Limit of Quantification



Authorized Signatory

[Signature]

I. Ravi. Jeyaraj

Technical Manager

- The test results relate only to the items tested during the specified time
- The test report shall not be reproduced in full or part without the written approval of ENVISLAB
- The test items will not be retained more than 30 days from the date of issue of the test report unless specifically requested

A148



Enviro Solutions & Labs

A5, Cheran Nagar, Off. Mettupalayam Road,

Kavundampalayam, GN Mills (Post), Coimbatore - 641 029, Tamilnadu.

info@envislab.com www.envislab.com 0422 4200600



Issued To

Mr. K. Ramraj (Rough Stone Quarry)
2/395-1, Venkateshwara Nagar, Premier Nagar
West Othakalmandapam, Coimbatore - 641 032.

TEST REPORT

Report No
Report Date
Sample Code

ESL/2506/AAQ/3013
05.06.2025
ESL250657

Page 01 of 01

SAMPLE DETAILS

Nature of Sample	Air Quality	Sample Description	Ambient Air
Sample Collected By	Enviro Solutions & Labs	Sample Condition	Good
Sampling Date	ESL/QSP/07	Sample Location	Myleripalayam Village
Sample Collected At	K. Ramraj (Rough Stone Quarry), S.F.No.70/1(P), Myleripalayam Village, Madukani Taluka.		

Monitoring Date	Particulate Matter size less than 10- µm (PM ₁₀)	Particulate Matter size less than 2.5- µm (PM _{2.5})	Sulphur Dioxide (SO ₂)	Nitrogen Dioxide (NO ₂)	Carbon Monoxide (CO)
	µg/m ³	µg/m ³	µg/m ³	µg/m ³	mg/m ³
03.03.2025	55	22	6	12	0.16
07.03.2025	53	19	5	10	0.21
10.03.2025	60	24	7	13	0.18
14.03.2025	54	18	8	11	0.18
17.03.2025	57	22	6	12	0.23
21.03.2025	61	23	7	11	0.18
25.03.2025	58	23	5	14	0.18
30.03.2025	55	21	7	15	0.22
02.04.2025	49	20	6	14	0.17
07.04.2025	59	21	5	13	0.16
11.04.2025	62	23	6	11	0.22
16.04.2025	60	22	5	14	0.15
21.04.2025	57	23	6	13	0.21
23.04.2025	59	22	7	15	0.17
28.04.2025	56	21	5	13	0.22
30.04.2025	55	23	6	12	0.21
02.05.2025	50	22	5	12	0.22
07.05.2025	49	18	6	13	0.18
12.05.2025	51	20	6	11	0.16
16.05.2025	53	19	6	13	0.17
19.05.2025	56	20	5	13	0.21
21.05.2025	55	23	5	14	0.18
23.05.2025	59	23	5	12	0.22
26.05.2025	57	24	6	12	0.17
28.05.2025	58	22	6	11	0.18
30.05.2025	54	20	6	13	0.21
Min	49	18	5	10	0.15
Max	62	24	8	15	0.23
Mean	56	21	6	13	0.19
98%ile	62	24	8	15	0.23
CPCB Limits	100	60	80	80	2

Note: BQL - Below Quantification Limit, LOQ - Limit of Quantification



Authorized Laboratory

I. Ram Ganesan
Technical Manager

- The test results relate only to the items tested and are valid for a limited time.
- The test report shall not be reproduced in full or part without the written approval of ENVISLAB.
- The test items will not be retained more than 15 days from the date of issue of the test report unless specifically requested.

A149



Enviro Solutions & Labs

A5, Cheran Nagar, Off. Mettupalayam Road,
Kavundampalayam, GN Mills (Post), Coimbatore - 641 029, Tamilnadu.

☎ : info@envislab.com 🌐 : www.envislab.com ☎ : 0422 4200600



TEST REPORT

Page 01 of 01

Issued To

Mr. K. Ramraj (Rough Stone Quarry)
2/395-1, Venkateshwara Nagar, Premier Nagar
West, Othakalmandapam, Coimbatore - 641 032.

Report No
Report Date
Sample Code

: ESL/2506/AAQ/3014
: 05.06.2025
: ESL250658

SAMPLE DETAILS

Nature of Sample	Air Quality	Sample Description	Ambient Air
Sample Collected By	Enviro Solutions & Labs	Sample Condition	Good
Sampling Date	ESL/QSP/07	Sample Location	Kumaarapalayam Village
Sample Collected At	K. Ramraj (Rough Stone Quarry), S.P. No. 70/1(P), Myleripalayam Village, Madukarai Taluqa,		

Monitoring Date	Particulate Matter size less than 10- µm (PM ₁₀)	Particulate Matter size less than 2.5- µm (PM _{2.5})	Sulphur Dioxide (SO ₂)	Nitrogen Dioxide (NO ₂)	Carbon Monoxide (CO)
	µg/m ³	µg/m ³	µg/m ³	µg/m ³	mg/m ³
03.03.2025	57	20	7	17	0.22
07.03.2025	50	19	6	14	0.21
10.03.2025	51	18	6	15	0.18
14.03.2025	57	20	7	11	0.15
17.03.2025	51	19	7	13	0.22
21.03.2025	50	21	8	18	0.15
25.03.2025	49	19	6	15	0.14
30.03.2025	58	22	7	17	0.19
02.04.2025	55	18	6	15	0.17
07.04.2025	49	19	6	16	0.22
11.04.2025	51	17	7	17	0.18
16.04.2025	47	19	8	16	0.18
21.04.2025	49	21	7	18	0.23
23.04.2025	52	18	6	15	0.17
28.04.2025	50	19	7	14	0.23
30.04.2025	49	22	8	15	0.24
02.05.2025	48	19	7	16	0.23
07.05.2025	55	23	6	14	0.21
12.05.2025	52	20	7	17	0.16
16.05.2025	48	18	8	15	0.17
19.05.2025	49	19	6	16	0.22
21.05.2025	52	21	6	17	0.18
23.05.2025	49	19	7	15	0.17
26.05.2025	51	22	6	16	0.22
28.05.2025	53	19	5	14	0.15
30.05.2025	55	20	6	17	18
Min	47	17	5	11	0.14
Max	58	23	8	18	18
Mean	51	20	7	16	0.88
98%ile	58	23	8	18	9.12
CPCB Limits	100	60	80	80	2

Note: BQL- Below Quantification Limit, LOQ - Limit of Quantification



Authorized Signatory

K. Ram Rajan

K. Ram Rajan
Technical Manager

- The test results relate only to the items tested during the specified time
- The test report shall not be reproduced in full or part without the written approval of ENVISLAB
- The test items will not be retained more than 15 days from the date of issue of the test report unless specifically requested

A150



Enviro Solutions & Labs

A5, Cheran Nagar, Off. Mettupalayam Road,
Kavundampalayam, GN Mills (Post), Coimbatore - 641 029, Tamilnadu.

☎: info@envislab.com 🌐: www.envislab.com 📞: 0422 4200600



TEST REPORT

Page 01 of 01

Issued To

Mr. K. Ramraj (Rough Stone Quarry)
2/395-1, Venkateshwara Nagar, Premier Nagar
West, Othakulmandapam, Coimbatore - 641 032

Report No
Report Date
Sample Code

: ESL/2506/AAQ/3015
: 05.06.2025
: ESL250659

SAMPLE DETAILS

Nature of Sample	Air Quality	Sample Description	Ambient Air
Sample Collected By	Enviro Solutions & Labs	Sample Condition	Good
Sampling Date	ESL/QSP/07	Sample Location	Tegani Village
Sample Collected At	K. Ramraj (Rough Stone Quarry), S.F.No.70/1(P), Myleripalayam Village, Madukarai Taluqa.		

Monitoring Date	Particulate Matter size less than 10- µm (PM ₁₀)	Particulate Matter size less than 2.5- µm (PM _{2.5})	Sulphur Dioxide (SO ₂)	Nitrogen Dioxide (NO ₂)	Carbon Monoxide (CO)
	µg/m ³	µg/m ³	µg/m ³	µg/m ³	mg/m ³
03.03.2025	55	21	5	15	0.14
07.03.2025	51	18	6	18	0.18
10.03.2025	50	21	5	16	0.12
14.03.2025	54	24	5	13	0.15
17.03.2025	51	25	5	15	0.13
21.03.2025	53	26	5	13	0.14
25.03.2025	50	25	7	19	0.21
30.03.2025	52	22	5	14	0.12
02.04.2025	49	18	5	14	0.16
07.04.2025	51	25	6	19	0.12
11.04.2025	48	23	5	19	0.16
16.04.2025	50	19	6	14	0.21
21.04.2025	52	25	5	13	0.12
23.04.2025	48	19	6	16	0.13
28.04.2025	52	25	5	18	0.18
30.04.2025	53	22	6	19	0.12
02.05.2025	55	20	5	16	0.23
07.05.2025	57	27	5	15	0.25
12.05.2025	50	22	7	15	0.12
16.05.2025	49	26	5	13	0.14
19.05.2025	51	24	6	16	0.18
21.05.2025	53	25	5	18	0.21
23.05.2025	49	19	6	14	0.14
26.05.2025	50	26	5	17	0.15
28.05.2025	48	22	6	16	0.12
30.05.2025	49	20	6	13	0.21
Min	48	18	5	13	0.12
Max	57	27	7	19	0.25
Mean	51	23	6	16	0.16
98%ile	56	27	7	19	0.24
CPCB Limits	100		80	80	2

Note: BQL-Below Quantification Limit, LOQ - Limit of Quantification



Authorized Laboratory

[Signature]
I, Ram Ganesan

- The test results relate only to the items tested during the specified time
- The test report shall not be reproduced in full or part without the written approval of ENVISLAB Technical Manager
- The test items will not be retained more than 15 days from the date of issue of the test report unless specifically requested

A151



Enviro Solutions & Labs

AS, Cheran Nagar, Off. Mettupalayam Road,
Kavundampalayam, GN Mills (Post), Coimbatore - 641 029, Tamilnadu.
info@envislabs.com : www.envislabs.com : 0422 4200600



TEST REPORT

Page 01 of 01

Issued To

Mr. K. Ramraj (Rough Stone Quarry)
2/395-1, Venkateshwara Nagar, Premier Nagar,
West, Othakalmandapam, Coimbatore - 641 032.

Report No
Report Date
Sample Code


ESL/2506/AAQ/3016
05.06.2025
ESL250660

SAMPLE DETAILS

Nature of Sample	Air Quality	Sample Description	Ambient Air
Sample Collected By	Enviro Solutions & Labs	Sample Condition	Good
Sampling Date	ESL/QSP/07	Sample Location	Karachery Village
Sample Collected At	K.Ramraj (Rough Stone Quarry), S.F.No.70/1(P), Myleripalayam Village, Madukarai Taluka.		

Monitoring Date	Particulate Matter size less than 10- µm (PM ₁₀)	Particulate Matter size less than 2.5- µm (PM _{2.5})	Sulphur Dioxide (SO ₂)	Nitrogen Dioxide (NO ₂)	Carbon Monoxide (CO)
	µg/m ³	µg/m ³	µg/m ³	µg/m ³	mg/m ³
03.03.2025	51	22	10	17	0.24
07.03.2025	48	19	9	18	0.24
10.03.2025	56	21	8	16	0.26
14.03.2025	53	19	10	15	0.25
17.03.2025	51	21	9	17	0.24
21.03.2025	55	23	11	20	0.23
25.03.2025	50	20	8	19	0.23
30.03.2025	55	22	10	18	0.25
02.04.2025	53	21	8	15	0.25
07.04.2025	51	21	10	16	0.24
11.04.2025	52	19	11	19	0.22
16.04.2025	49	18	12	17	0.24
21.04.2025	50	19	8	18	0.24
23.04.2025	52	20	9	14	0.25
28.04.2025	54	19	11	18	0.24
30.04.2025	51	22	9	17	0.21
02.05.2025	52	18	8	23	0.23
07.05.2025	53	19	7	18	0.24
12.05.2025	48	18	11	18	0.22
16.05.2025	51	21	8	19	0.25
19.05.2025	48	19	9	20	0.23
21.05.2025	50	22	9	18	0.24
23.05.2025	54	21	10	19	0.21
26.05.2025	57	24	8	20	0.26
28.05.2025	51	21	8	17	0.21
30.05.2025	54	24	9	18	0.19
Min	48	18	7	14	0.19
Max	57	24	12	23	0.26
Mean	52	21	9	18	0.24
98%ile	57	24	12	21	0.26
CPCB Limits	100	50	80	80	2

Note: BQL - Below Quantification Limit, LOQ - Limit of Quantification



Authorised Signatory

[Signature]

I. Ram Ganesan
Technical Manager

- The test results relate only to the items tested during the specified time.
- The test report shall not be reproduced in full or part without the written approval of ENVISLAB.
- The test items will not be retained more than 15 days from the date of issue of the test report unless specifically requested.

A152



Enviro Solutions & Labs

AS, Cheran Nagar, Off. Mettupalayam Road,
Kavundampalayam, GN Mills (Post), Coimbatore - 641 029, Tamilnadu.

info@envislab.com www.envislab.com 0422 4200600



Issued To

Mr. K. Ramraj (Rough Stone Quarry)
2/395-1, Venkateshwara Nagar, Premier Nagar
West, Othakalmandapam, Coimbatore - 641 032

TEST REPORT

Report No
Report Date
Sample Code

ESL/2506/AAQ/3017
05.06.2025
ESL2506661

Page 01 of 01

SAMPLE DETAILS

Nature of Sample	Air Quality	Sample Description	Ambient Air
Sample Collected By	Enviro Solutions & Labs	Sample Condition	Good
Sampling Date	ESL/QSP/07	Sample Location	Near Shammugam Quarry
Sample Collected At	K. Ramraj (Rough Stone Quarry), S.F.No.70/1(P), Myleripalayam Village, Madukarai Taluka.		

Monitoring Date	Particulate Matter size less than 10- µm (PM ₁₀)	Particulate Matter size less than 2.5- µm (PM _{2.5})	Sulphur Dioxide (SO ₂)	Nitrogen Dioxide (NO ₂)	Carbon Monoxide (CO)
	µg/m ³	µg/m ³	µg/m ³	µg/m ³	mg/m ³
03.03.2025	53	21	9	15	0.21
07.03.2025	49	19	9	13	0.19
10.03.2025	55	23	7	16	0.26
14.03.2025	51	19	10	15	0.25
17.03.2025	53	21	8	17	0.24
21.03.2025	54	23	10	20	0.23
25.03.2025	49	18	8	16	0.18
30.03.2025	53	22	10	18	0.25
02.04.2025	51	21	8	15	0.25
07.04.2025	53	21	10	18	0.24
11.04.2025	52	19	11	19	0.22
16.04.2025	47	16	8	15	0.17
21.04.2025	51	19	8	18	0.24
23.04.2025	49	18	7	14	0.18
28.04.2025	52	19	11	20	0.24
30.04.2025	50	20	9	17	0.21
02.05.2025	52	18	11	23	0.23
07.05.2025	51	19	7	21	0.24
12.05.2025	47	18	8	15	0.19
16.05.2025	51	21	10	19	0.25
19.05.2025	46	17	7	16	0.23
21.05.2025	49	19	8	18	0.17
23.05.2025	51	21	10	19	0.19
26.05.2025	54	24	11	20	0.26
28.05.2025	51	21	10	19	0.21
30.05.2025	50	22	9	22	0.22
Min	46	16	7	13	0.17
Max	55	24	11	23	0.26
Mean	51	20	9	18	0.22
98%ile	55	24	11	23	0.26
CPCB Limits	100	60	80	80	2

Note: BQL - Below Quantification Limit, LOQ - Limit of Quantification

End of Report

Authorised Signatory

J.S. Ram
I. Ram Ganesan

Technical Manager

- The test results relate only to the items tested during the specified time
- The test report shall not be reproduced in full or part without the written approval of ENVISLAB
- The test items will not be retained more than 15 days from the date of issue of the test report unless specifically requested



Enviro Solutions & Labs

AS, Cheran Nagar, Off. Mettupalayam Road,
Kavundampalayam, GN Mills (Post), Coimbatore - 641 029, Tamilnadu.

info@envislab.com : www.envislab.com : 0422 4200600



Annexure-15

Issued To

Mr. K. Ramraj (Rough Stone Quarry)
2/395-1, Venkateshwara Nagar, Premier Nagar,
West, Othakalmandapam, Coimbatore - 641 032.

TEST REPORT

Report No : ESL/2506/N/3018
Report Date : 05.06.2025
Sample Code : ESL250662


Page 01 of 01

SAMPLE DETAILS

Nature of Sample	Air Quality	Sample Description	Ambient Noise
Sample Collected By	Enviro Solutions & Labs	Sample Condition	Good
Sampling Date	ESL/QSP/07	Sample Location	As Mentioned Below
Sample Collected At	K. Ramraj (Rough Stone Quarry), S.P.No.70/1(P), Myleripalayam Village, Madukarai Taluka.		

TIME	PROJECT SITE	Myleripalayam	Kumaarapalayam	Tegani	Karachery	Core Zone
06:00 AM	47.2	40.5	45.6	48.7	46.5	48.9
07:00 AM	52.7	42.8	44.7	46.3	51.6	49.7
08:00 AM	53.4	53.6	47.6	49.5	49.7	55.3
09:00 AM	50.3	56.1	51.4	51.2	53.4	57.1
10:00 AM	52.1	60.4	52.8	52.8	53.6	56.4
11:00 AM	54.6	59.7	53.5	52.4	51.5	58.3
12:00 PM	52.5	55.2	53.4	49.3	53.8	52.6
01:00 PM	55.1	56.5	50.8	50.7	50.6	55.9
02:00 PM	52.6	54.8	50.3	53.6	49.5	52.7
03:00 PM	50.3	53.4	52.4	51.4	47.3	54.6
04:00 PM	53.4	55.7	48.2	53.7	46.5	50.8
05:00 PM	54.6	49.6	42.3	52.4	48.7	50.4
06:00 PM	52.3	47.5	41.5	48.7	45.6	49.2
07:00 PM	48.6	43.3	42.7	45.9	43.4	49.8
08:00 PM	48.3	43.6	40.6	48.6	46.3	49.5
09:00 PM	51.7	45.1	44.7	46.2	44.7	50.7
10:00 PM	45.9	48.2	45.3	48.5	42.4	46.5
11:00 PM	43.6	46.3	41.7	43.9	40.1	44.7
12:00 AM	46.5	43.8	40.4	41.7	43.2	40.5
01:00 AM	43.7	45.7	38.6	39.5	45.7	43.6
02:00 AM	41.3	39.9	41.5	43.4	40.3	40.7
03:00 AM	40.5	36.8	39.6	39.5	37.2	44.3
04:00 AM	38.6	35.6	33.5	37.4	35.4	43.7
05:00 AM	35.4	34.8	31.7	32.6	38.7	40.2
Leq - day	52.4	54.6	49.6	50.7	50.0	53.8
Leq - night	43.2	43.8	40.7	42.9	41.2	43.5
Leq - dn	50.9	53.0	48.1	49.3	48.6	52.5

AMBIENT NOISE STANDARDS	Lday dB(A)	Lnight dB(A)
Industrial Area	75	70
Commercial Area	65	55
Residential Area	55	45
Silence Zone	50	40



Authorised Signatory

[Signature]
I. Ram Ganesan

Technical Manager

- The test results relate only to the items tested during the specified time.
- The test report shall not be reproduced in full or in part without the written approval of ENVISLAB.
- The test items will not be retained more than 15 days from the date of issue of the test report unless specifically requested.



Enviro Solutions & Labs

A5, Cheran Nagar, Off. Mettupalayam Road,
Kavundampalayam, GN Mills (Post), Coimbatore - 641 029, Tamilnadu.
info@envislab.com : www.envislab.com : 0422 4200600

Annexure-16



Issued To :

TEST REPORT

Page: 01 of 01

Mr. K. Ramraj (Rough Stone Quarry)
2/395-1, Venkateshwara Nagar, Premier Nagar
West, Othakalmandapam, Coimbatore - 641 032.

Report No : ESL/2506/W/3019
Report Date : 05.06.2025
Sample Code : ESL250663

SAMPLE DETAILS

Nature of Sample	Water	Sample Description	Ground Water - Well
Sample Collected By	Enviro Solutions & Labs	Sample Condition	Good
Sampling Procedure	ESL/QSP/07	Sample Location	Near Project Site
Sample Collected On	28.05.2025	Sample Received On	28.05.2025
Analysis Started On	28.05.2025	Analysis Completed On	05.06.2025
Sample Collected At	K.Ramraj (Rough Stone Quarry), S.F.No.70/1(P), Myleripalayam Village, Madukarai Taluka.		

S.No.	PARAMETER	UNIT	TEST PROCEDURE	RESULTS	*Limits
1	Odour	-	IS 3025 Part 5-2018	Agreeable	Agreeable
2	Turbidity	NTU	IS 3025 Part 10-2023	BQL (LOQ:0.1)	1
3	pH at 25 °C	-	IS 3025 Part 11-2022	7.96	6.5-8.5
4	Electrical Conductivity @25°C	µS/cm	IS 3025 Part 14- 1984(RA: 2023)	1092	Not Specified
5	Total dissolved solids	mg/l	IS 3025 Part 16-2023	589	2000
6	Total Suspended solids	mg/l	IS 3025 Part 17-2022	BQL (LOQ:2.0)	Not Specified
7	Total Alkalinity as CaCO ₃	mg/l	IS 3025 Part 23- 2023	218	600
8	Total Hardness as CaCO ₃	mg/l	IS 3025 Part 21-2009(RA:2023)	260	600
9	Calcium as Ca	mg/l	IS 3025 Part 40-2024	114	200
10	Magnesium as Mg	mg/l	IS 3025 Part 46-2023	38.9	100
11	Magnesium as CaCO ₃	mg/l	IS 3025 Part 46-2023	160	Not Specified
12	Free Residual Chlorine	mg/l	IS 3025 Part 26-2021	BQL (LOQ:0.2)	1.0
13	Chloride as Cl ⁻	mg/l	IS 3025 Part 32-1988 (RA: 2019)	138	1000
14	Sulphate as SO ₄	mg/l	IS 3025 Part 24/Sec 1: 2022	45.2	400
15	Nitrate as NO ₃	mg/l	IS 3025 Part 34-2023	5.49	45
16	Iron as Fe	mg/l	IS 3025 Part 53-2024	BQL(LOQ:0.05)	1.0
17	Manganese as Mn	mg/l	IS 3025 Part 59-2023	BQL(LOQ:0.02)	0.3
18	Fluoride as F	mg/l	IS 3025 Part 60-2008(RA:2017)	0.2	1.5
19	Ammonia as N	mg/l	IS 3025 Part 34-2023	BQL(LOQ:0.05)	0.5
20	Calcium as CaCO ₃	mg/l	IS 3025 Part 40-1991 (RA:2019)	268	-

*Limits-PERMISSIBLE LIMIT AS PER IS 10500: 2012

Note: BQL- Below Quantification Limit, LOQ - Limit of Quantification.

End of Report



Authorised Signatory
I. Ram Ganeshan
Technical Manager

- The test results relate only to the items tested during the specified time.
- The test report shall not be reproduced in full or part without the written approval of ENVISLAB.
- The test items will not be retained more than 15 days from the date of issue of the test report unless specifically requested.

A155



Enviro Solutions & Labs

A5, Cheran Nagar, Off. Mettupalayam Road,
Kavundampalayam, GN Mills (Post), Coimbatore - 641 029, Tamilnadu
info@envislab.com : www.envislab.com : 0422 4200600



Issued To :

TEST REPORT

Page: 01 of 01

Mr. K. Ramraj (Rough Stone Quarry)

2/395-1, Venkateshwara Nagar, Premier Nagar
West, Othakalmandapam, Coimbatore - 641 032.

Report No

: ESL/2506/W/3020

Report Date

: 05.06.2025

Sample Code

: ESL250664

SAMPLE DETAILS

Nature of Sample	Water	Sample Description	Ground Water - Borewell
Sample Collected By	Enviro Solutions & Labs	Sample Condition	Good
Sampling Procedure	ESL/QSP/07	Sample Location	Myleripalayam Village
Sample Collected On	28.05.2025	Sample Received On	28.05.2025
Analysis Started On	28.05.2025	Analysis Completed On	05.06.2025
Sample Collected At	K.Ramraj (Rough Stone Quarry), S.F.No.70/1(P), Myleripalayam Village, Madukani Thaluka.		

S.No.	PARAMETER	UNIT	TEST PROCEDURE	RESULTS	*Limits
1	Odour	-	IS 3025 Part 5-2018	Agreeable	Agreeable
2	Turbidity	NTU	IS 3025 Part 10-2023	BQL (LOQ:0.1)	1
3	pH at 25 °C	-	IS 3025 Part 11-2022	7.33	6.5-8.5
4	Electrical Conductivity @25°C	µS/cm	IS 3025 Part 14- 1984(RA: 2019)	1082	Not Specified
5	Total dissolved solids	mg/l	IS 3025 Part 16-2023	541	2000
6	Total Suspended solids	mg/l	IS 3025 Part 17-2022	BQL (LOQ:2.0)	Not Specified
7	Total Alkalinity as CaCO ₃	mg/l	IS 3025 Part 23- 2023	245	600
8	Total Hardness as CaCO ₃	mg/l	IS 3025 Part 21-2009(RA:2019)	212	600
9	Calcium as Ca	mg/l	IS 3025 Part 40-1991 (RA:2019)	81.8	200
10	Magnesium as Mg	mg/l	IS 3025 Part 46-2023	43.2	100
11	Magnesium as CaCO ₃	mg/l	IS 3025 Part 46-2023	180	Not Specified
12	Free Residual Chlorine	mg/l	IS 3025 Part 26-2021	BQL (LOQ:0.2)	1.0
13	Chloride as Cl	mg/l	IS 3025 Part 32-1988 (RA: 2019)	98.6	1000
14	Sulphate as SO ₄	mg/l	IS 3025 Part 24/Sec 1: 2022	32.9	400
15	Nitrate as NO ₃	mg/l	IS 3025 Part 34-2023	5.12	45
16	Iron as Fe	mg/l	IS 3025 Part 53-2024	BQL(LOQ:0.05)	1.0
17	Manganese as Mn	mg/l	IS 3025 Part 59-2023	BQL(LOQ:0.02)	0.3
18	Fluoride as F	mg/l	IS 3025 Part 60-2008(RA:2017)	BQL(LOQ:0.1)	1.5
19	Ammonia as N	mg/l	IS 3025 Part 34-2023	BQL(LOQ:0.05)	0.5
20	Calcium as CaCO ₃	mg/l	IS 3025 Part 40-1991 (RA:2019)	204	-

*Limits-PERMISSIBLE LIMIT AS PER IS 10500: 2012

Note: BQL-Below Quantification Limit, LOQ- Limit of Quantification.

End of Report



Authorized Signatory

[Signature]
I. Ram Ganesan
Technical Manager

- The test results relate only to the items tested during the specified time
- The test report shall not be reproduced in full or part without the written approval of ENVISLAB
- The test items will not be retained more than 15 days from the date of issue of the test report unless specifically requested



Enviro Solutions & Labs

9 A5, Cheran Nagar, Off. Mettupalayam Road,

Kavundampalayam, GN Mills (Post), Coimbatore - 641 029, Tamilnadu.

✉ : info@envislab.com 🌐 : www.envislab.com ☎ : 0422 4200600



Issued To :

TEST REPORT

Page: 01 of 01

Mr. K. Ramraj (Rough Stone Quarry)

2/395-1, Venkateshwara Nagar, Premier Nagar

West, Othakalmandapam, Coimbatore - 641 032.

Report No

: ESL/2506/W/3021

Report Date

: 05.06.2025

Sample Code

: ESL250665

SAMPLE DETAILS

Nature of Sample	Water	Sample Description	Ground Water - Borewell
Sample Collected By	Enviro Solutions & Labs	Sample Condition	Good
Sampling Procedure	ESL/QSP/07	Sample Location	Kumaarapalayam Village
Sample Collected On	28.05.2025	Sample Received On	28.05.2025
Analysis Started On	28.05.2025	Analysis Completed On	05.06.2025
Sample Collected At	K.Ramraj (Rough Stone Quarry), S.F.No.70/1(P), Myleripalayam Village, Madukarai Taluka.		

S.No.	PARAMETER	UNIT	TEST PROCEDURE	RESULTS	*Limits
1	Odour	-	IS 3025 Part 5-2018	Agreeable	Agreeable
2	Turbidity	NTU	IS 3025 Part 10-2023	0.47	1
3	pH at 25 °C	-	IS 3025 Part 11-2022	7.41	6.5-8.5
4	Electrical Conductivity @25°C	µS/cm	IS 3025 Part 14- 1984(RA: 2019)	1580	Not Specified
5	Total dissolved solids	mg/l	IS 3025 Part 16-2023	789	2000
6	Total Suspended solids	mg/l	IS : 3025 Part 17-2022	BQL (LOQ:2.0)	Not Specified
7	Total Alkalinity as CaCO ₃	mg/l	IS 3025 Part 23- 2023	251	600
8	Total Hardness as CaCO ₃	mg/l	IS 3025 Part 21-2009(RA:2019)	269	600
9	Calcium as Ca	mg/l	IS 3025 Part 40-1991 (RA:2019)	150	200
10	Magnesium as Mg	mg/l	IS 3025 Part 46-2023	38.6	100
11	Magnesium as CaCO ₃	mg/l	IS 3025 Part 46-2023	160	Not Specified
12	Free Residual Chlorine	mg/l	IS 3025 Part 26-2021	BQL (LOQ:0.2)	1.0
13	Chloride as Cl ⁻	mg/l	IS 3025 Part 32-1988 (RA: 2019)	168	1000
14	Sulphate as SO ₄	mg/l	IS 3025 Part 24/Sec 1: 2022	55.3	400
15	Nitrate as NO ₃	mg/l	IS 3025 Part 34-2023	6.63	45
16	Iron as Fe	mg/l	IS 3025 Part 53-2024	BQL(LOQ:0.05)	1.0
17	Manganese as Mn	mg/l	IS 3025 Part 59-2023	BQL(LOQ:0.02)	0.3
18	Fluoride as F	mg/l	IS 3025 Part 60-2008(RA:2017)	BQL(LOQ:0.1)	1.5
19	Ammonia as N	mg/l	IS 3025 Part 34-2023	BQL(LOQ:0.05)	0.5
20	Calcium as CaCO ₃	mg/l	IS 3025 Part 40-1991 (RA:2019)	372	-

*Limits-PERMISSIBLE LIMIT AS PER IS 10500: 2012

Note: BQL-Below Quantification Limit, LOQ - Limit of Quantification.

End of Report



Authorised Signatory

I. Ram Ganesan
I. Ram Ganesan
Technical Manager

- The test results relate only to the items tested during the specified time.
- The test report shall not be reproduced in full or part without the written approval of ENVISLAB.
- The test items will not be retained more than 15 days from the date of issue of the test report unless specifically requested.



Enviro Solutions & Labs

AS, Cheran Nagar, Off, Mettupalayam Road,

Kavundampalayam, GN Mills (Post), Coimbatore - 641 029, Tamilnadu.

info@envislab.com www.envislab.com 0422 4200600



Issued To :

TEST REPORT

Page: 01 of 01

Mr. K. Ramraj (Rough Stone Quarry)

2/395-1, Venkateshwara Nagar, Premier Nagar
West, Othakalmandapam, Coimbatore - 641 032.

Report No

: ESL/2506/W/3022

Report Date

: 05.06.2025

Sample Code

: ESL250666

SAMPLE DETAILS

Nature of Sample	Water	Sample Description	Ground Water - Borewell
Sample Collected By	Enviro Solutions & Labs	Sample Condition	Good
Sampling Procedure	ESL/QSP/07	Sample Location	Tegani Village
Sample Collected On	28.05.2025	Sample Received On	28.05.2025
Analysis Started On	28.05.2025	Analysis Completed On	05.06.2025
Sample Collected At	K. Ramraj (Rough Stone Quarry), S.F.No.70/1(P), Myleripalayam Village, Madukarai Taluqa.		

S.No.	PARAMETER	UNIT	TEST PROCEDURE	RESULTS	*Limits
1	Odour	-	IS 3025 Part 5-2018	Agreeable	Agreeable
2	Turbidity	NTU	IS 3025 Part 10-2023	BQL (LOQ:0.1)	1
3	pH at 25 °C	-	IS 3025 Part 11-2022	8.02	6.5-8.5
4	Electrical Conductivity @25°C	µS/cm	IS 3025 Part 14-1984(RA: 2019)	912	Not Specified
5	Total dissolved solids	mg/l	IS 3025 Part 16-2023	456	2000
6	Total Suspended solids	mg/l	IS 3025 Part 17-2022	BQL (LOQ:2.0)	Not Specified
7	Total Alkalinity as CaCO ₃	mg/l	IS 3025 Part 23-2023	265	600
8	Total Hardness as CaCO ₃	mg/l	IS 3025 Part 21-2009(RA:2019)	162	600
9	Calcium as Ca	mg/l	IS 3025 Part 40-1991 (RA:2019)	60.0	200
10	Magnesium as Mg	mg/l	IS 3025 Part 46-2023	16.7	100
11	Magnesium as CaCO ₃	mg/l	IS 3025 Part 46-2023	70.0	Not Specified
12	Free Residual Chlorine	mg/l	IS 3025 Part 26-2021	BQL (LOQ:0.2)	1.0
13	Chloride as Cl ⁻	mg/l	IS 3025 Part 32-1988 (RA: 2019)	38.7	1000
14	Sulphate as SO ₄	mg/l	IS 3025 Part 24/Sec 1: 2022	12.8	400
15	Nitrate as NO ₃	mg/l	IS 3025 Part 34-2023	4.12	45
16	Iron as Fe	mg/l	IS 3025 Part 53-2024	BQL(LOQ:0.05)	1.0
17	Manganese as Mn	mg/l	IS 3025 Part 59-2023	BQL(LOQ:0.02)	0.3
18	Fluoride as F	mg/l	IS 3025 Part 60-2008(RA:2017)	0.2	1.5
19	Ammonia as N	mg/l	IS 3025 Part 34-2023	BQL(LOQ:0.05)	0.5
20	Calcium as CaCO ₃	mg/l	IS 3025 Part 40-1991 (RA:2019)	151	-

*Limits-PERMISSIBLE LIMIT AS PER IS 10500: 2012

Note: BQL-Below Quantification Limit, LOQ - Limit of Quantification.

End of Report



Authorized Signatory

I. Ram Ganeshan
Technical Manager

- The test results relate only to the items tested during the specified time.
- This test report shall not be reproduced in full or part without the written approval of ENVISLAB
- The test items will not be retained more than 15 days from the date of issue of the test report unless specifically requested



Enviro Solutions & Labs

AS, Cheran Nagar, Off. Mettupalayam Road,

Kavundampalayam, GN Mills (Post), Coimbatore - 641 029, Tamilnadu.

Info: info@envislab.com : www.envislab.com : 0422-4200600



Issued To :

TEST REPORT

Page: 01 of 01

Mr. K. Ramraj (Rough Stone Quarry)

2/395-1, Venkateshwara Nagar, Premier Nagar,

West, Othakalmandapam, Coimbatore - 641 032.

Report No

: ESL/2506/W/3023

Report Date

: 05.06.2025

Sample Code

: ESL250667

SAMPLE DETAILS

Nature of Sample	Water	Sample Description	Ground Water - Borewell
Sample Collected By	Enviro Solutions & Labs	Sample Condition	Good
Sampling Procedure	ESL/QSP/07	Sample Location	Karachery Village
Sample Collected On	28.05.2025	Sample Received On	28.05.2025
Analysis Started On	28.05.2025	Analysis Completed On	05.06.2025
Sample Collected At	K. Ramraj (Rough Stone Quarry), S.F.No.70/1(P), Myleripalayam Village, Madukarai Thaluka.		

S.No.	PARAMETER	UNIT	TEST PROCEDURE	RESULTS	*Limits
1	Odour	-	IS 3025 Part 5-2018	Agreeable	Agreeable
2	Turbidity	NTU	IS 3025 Part 10-2023	BQL (LOQ:0.1)	1
3	pH at 25 °C	-	IS 3025 Part 11-2022	7.91	6.5-8.5
4	Electrical Conductivity @25°C	µS/cm	IS:3025 Part 14- 1984(RA: 2019)	974	Not Specified
5	Total dissolved solids	mg/l	IS 3025 Part 16-2023	487	2000
6	Total Suspended solids	mg/l	IS : 3025 Part 17-2022	BQL (LOQ:2.0)	Not Specified
7	Total Alkalinity as CaCO ₃	mg/l	IS 3025 Part 23- 2023	218	600
8	Total Hardness as CaCO ₃	mg/l	IS 3025 Part 21-2009(RA:2019)	175	600
9	Calcium as Ca	mg/l	IS 3025 Part 40-1991 (RA:2019)	101	200
10	Magnesium as Mg	mg/l	IS 3025 Part 46-2023	21.5	100
11	Magnesium as CaCO ₃	mg/l	IS 3025 Part 46-2023	90.0	Not Specified
12	Free Residual Chlorine	mg/l	IS 3025 Part 26-2021	BQL (LOQ:0.2)	1.0
13	Chloride as Cl ⁻	mg/l	IS 3025 Part 32-1988(RA: 2019)	96.4	1000
14	Sulphate as SO ₄	mg/l	IS 3025 Part 24/Sec 1: 2022	32.3	400
15	Nitrate as NO ₃	mg/l	IS 3025 Part 34-2023	4.58	45
16	Iron as Fe	mg/l	IS 3025 Part 53-2024	BQL(LOQ:0.05)	1.0
17	Manganese as Mn	mg/l	IS-3025 Part 59-2023	BQL(LOQ:0.02)	0.3
18	Fluoride as F	mg/l	IS 3025 Part 60-2008(RA:2017)	BQL(LOQ:0.1)	1.5
19	Ammonia as N	mg/l	IS 3025 Part 34-2023	BQL(LOQ:0.05)	0.5
20	Calcium as CaCO ₃	mg/l	IS 3025 Part 40-1991 (RA:2019)	251	-

*Limits-PERMISSIBLE LIMIT AS PER IS 10500: 2012

Note: BQL-Below Quantification Limit, LOQ - Limit of Quantification

End of Report



Authorized Signatory

L. Ram Ganesan
L. Ram Ganesan
Technical Manager

- The test results relate only to the items tested during the specified time.
- The test report shall not be reproduced in full or part without the written approval of ENVISLAB
- The test items will not be retained more than 15 days from the date of issue of the test report unless specifically requested



Enviro Solutions & Labs

📍 A5, Cheran Nagar, Off. Mettupalayam Road,
Kavundampalayam, GN Mills (Post), Coimbatore - 641 029, Tamilnadu.
📧 : info@envislab.com 🌐 : www.envislab.com ☎ : 0422 4200600



Issued To :

TEST REPORT

Page: 01 of 01

Mr. K. Ramraj (Rough Stone Quarry)
2/395-1, Venkateshiwara Nagar, Premier Nagar
West, Othakalmandapam, Coimbatore - 641 032.

Report No : ESL/2506/W/3024
Report Date : 05.06.2025
Sample Code : ESL250668

SAMPLE DETAILS

Nature of Sample	Water	Sample Description	Ground Water - Borewell
Sample Collected By	Enviro Solutions & Labs	Sample Condition	Good
Sampling Procedure	ESL/QSP/07	Sample Location	Near Shanmugam Quarry
Sample Collected On	28.05.2025	Sample Received On	28.05.2025
Analysis Started On	28.05.2025	Analysis Completed On	05.06.2025
Sample Collected At	K.Ramraj (Rough Stone Quarry), S.E.No.70/1(P), Myleripalayam Village, Madukarai Taluka.		

S.No.	PARAMETER	UNIT	TEST PROCEDURE	RESULTS	*Limits
1	Odour	-	IS 3025 Part 5-2018	Agreeable	Agreeable
2	Turbidity	NTU	IS 3025 Part 10-2023	BQL (LOQ:0.1)	1
3	pH at 25 °C	-	IS 3025 Part 11-2022	7.85	6.5-8.5
4	Electrical Conductivity @25°C	µS/cm	IS:3025 Part 14- 1984(RA: 2019)	830	Not Specified
5	Total dissolved solids	mg/l	IS 3025 Part 16-2023	415	2000
6	Total Suspended solids	mg/l	IS : 3025 Part 17-2022	BQL (LOQ:2.0)	Not Specified
7	Total Alkalinity as CaCO ₃	mg/l	IS 3025 Part 23- 2023	212	600
8	Total Hardness as CaCO ₃	mg/l	IS 3025 Part 21-2009(RA:2019)	128	600
9	Calcium as Ca	mg/l	IS 3025 Part 40-1991 (RA:2019)	86.4	200
10	Magnesium as Mg	mg/l	IS 3025 Part 46-2023	19.7	100
11	Magnesium as CaCO ₃	mg/l	IS 3025 Part 46-2023	80.0	Not Specified
12	Free Residual Chlorine	mg/l	IS 3025 Part 26-2021	BQL (LOQ:0.2)	1.0
13	Chloride as Cl	mg/l	IS 3025 Part 32-1988 (RA: 2019)	81.5	1000
14	Sulphate as SO ₄	mg/l	IS 3025 Part 24/Sec 1: 2022	27.3	400
15	Nitrate as NO ₃	mg/l	IS 3025 Part 34-2023	4.10	45
16	Iron as Fe	mg/l	IS 3025 Part 53-2024	BQL(LOQ:0.05)	1.0
17	Manganese as Mn	mg/l	IS 3025 Part 59-2023	BQL(LOQ:0.02)	0.3
18	Fluoride as F	mg/l	IS 3025 Part 60-2008(RA:2017)	BQL(LOQ:0.1)	1.5
19	Ammonia as N	mg/l	IS 3025 Part 34-2023	BQL(LOQ:0.05)	0.5
20	Calcium as CaCO ₃	mg/l	IS 3025 Part 40-1991 (RA:2019)	232	-

*Limits-PERMISSIBLE LIMIT AS PER IS 10500: 2012

Note: BQL- Below Quantification Limit, LOQ - Limit of Quantification.

****End of Report****



Authorised Signatory

I. Ram Ganesan
I. Ram Ganesan
Technical Manager

- The test results relate only to the items tested during the specified time.
- The test report shall not be reproduced in full or part without the written approval of ENVISLAB.
- The test items will not be retained more than 15 days from the date of issue of the test report unless specifically requested.



Enviro Solutions & Labs

AS, Cheran Nagar, Off. Mettupalayam Road,
Kavundampalayam, GN Mills (Post), Coimbatore - 641 029, Tamilnadu.

info@envislab.com : www.envislab.com : 0422 4200600



Annexure-17

Issued To

Mr. K. Ramraj (Rough Stone Quarry)
2/395-1, Venkateshwara Nagar, Premier Nagar
West, Othakalmandapam, Coimbatore - 641 032.

TEST REPORT

Page 1 of 1

Report No. : ESL/2506/S/3025
Report Date : 05.06.2025
Sample Code : ESL250669

SAMPLE DETAILS

Nature of Sample	Soil Analysis	Sample Description	Soil
Sample Collected By	Enviro Solutions & Labs	Sample Condition	Good
Sampling Procedure	ESL/QSP/07	Sample Location	Project Site
Sample Collected On	28.05.2025	Sample Received On	28.05.2025
Analysis Started On	28.05.2025	Analysis Completed On	05.06.2025
Sample Collected At	K.Ramraj (Rough Stone Quarry), S.F.No.70/1(P), Myleripalayam Village, Madukarai Taluka,		

S.NO	PARAMETER	UNIT	TEST METHOD	RESULTS
1	pH (1:5 Suspension)	%	IS 2720 Part-26 : 1987 (RA- 2021)	6.72
2	Bulk Density	%	FAO Chapter 3, ESL/SOP/18:2023	1.10
3	Electrical conductivity, (1:5 Suspension)	mS/cm	IS -14767:2000 (RA 2021)	0.102
4	Total Nitrogen as N	Kg/ha	IS -14684:1999, RA:2019	169
5	Available Phosphorous,	Kg/ha	FAO Chapter 3, ESL/SOP/14:2023	21.9
6	Available Potassium	Kg/ha	FAO Chapter 3, ESL/SOP/17:2023	275
7	Exchangeable Calcium as Ca,	m.eq/100g	FAO Chapter 3, ESL/SOP/15:2023	18.9
8	Exchangeable Magnesium as Mg,	m.eq/100g	FAO Chapter 3, ESL/SOP/16:2023	4.96
9	Exchangeable Sodium as Na,	m.eq/100g	FAO Chapter 3, ESL/SOP/17:2023	2.37
10	Organic matter	%	IS 2720 Part- 22 : 1972 [RA- 2020]	1.42
11	Texture Classification		Bouyoucos G.J. Hydrometer method improved for making particle size analysis of soil. Argon, J. 54-464-465: 1962: 1962	Sandy
a)	Sand	%		85.8
b)	Clay	%		9.2
c)	Silt	%		5.0
12	Porosity	%	ICARDA page 53: 2013	0.62
13	Water Holding Capacity	Inches/foot	ICARDA page 28: 2013	5.6
14	Sodium Absorption Ratio (SAR)	meq/Kg	ESL/SOP/54:2024	1.10

End of Report



Authorized Signatory

I. Ram Ganesan
Technical Manager

- The test results relate only to the items tested during the specified time.
- The test report shall not be reproduced in full or part without the written approval of ENVISLAB
- The test items will not be retained more than 15 days from the date of issue of the test report unless specifically requested



Enviro Solutions & Labs

📍 A5, Cheran Nagar, Off. Mettupalayam Road,
Kavundampalayam, GN Mills (Post), Coimbatore - 641 029, Tamilnadu.
✉ : info@envislab.com 🌐 : www.envislab.com ☎ : 0422 4200600



Issued To

Mr. K. Ramraj (Rough Stone Quarry)
2/395-1, Venkateshwara Nagar, Premier Nagar
West, Othakalmandapam, Coimbatore - 641 032.

TEST REPORT

Page 1 of 1

Report No. : ESL/2506/S/3026
Report Date : 05.06.2025
Sample Code : ESL250670

SAMPLE DETAILS

Nature of Sample	Soil Analysis	Sample Description	Soil
Sample Collected By	Enviro Solutions & Labs	Sample Condition	Good
Sampling Procedure	ESL/QSP/07	Sample Location	Myleripalayam Village
Sample Collected On	28.05.2025	Sample Received On	28.05.2025
Analysis Started On	28.05.2025	Analysis Completed On	05.06.2025
Sample Collected At	K.Ramraj (Rough Stone Quarry), S.F.No.70/1(P), Myleripalayam Village, Madukarai Taluka.		

S.NO	PARAMETER	UNIT	TEST METHOD	RESULTS
1	pH (1:5 Suspension)	%	IS 2720 Part-26 : 1987 (RA-2021)	6.54
2	Bulk Density	%	FAO Chapter 3, ESL/SOP/18:2023	1.13
3	Electrical conductivity, (1:5 Suspension)	mS/cm	IS -14767:2000 (RA 2021)	0.089
4	Total Nitrogen as N	Kg/ha	IS -14684:1999, RA:2019	136
5	Available Phosphorous,	Kg/ha	FAO Chapter 3, ESL/SOP/14:2023	28.2
6	Available Potassium	Kg/ha	FAO Chapter 3, ESL/SOP/17:2023	235
7	Exchangeable Calcium as Ca,	m.eq/100g	FAO Chapter 3, ESL/SOP/15:2023	10.4
8	Exchangeable Magnesium as Mg,	m.eq/100g	FAO Chapter 3, ESL/SOP/16:2023	3.02
9	Exchangeable Sodium as Na,	m.eq/100g	FAO Chapter 3, ESL/SOP/17:2023	1.58
10	Organic matter	%	IS 2720 Part- 22 : 1972 [RA- 2020]	0.87
11	Texture Classification		Bouyoucos G.J. Hydrometer method improved for making particle size analysis of soil. Argon. J. 54-464-465; 1962: 1962	Sandy
a)	Sand	%		86.9
b)	Clay	%		10.5
c)	Silt	%		2.6
12	Porosity	%	ICARDA page 53: 2013	0.61
13	Water Holding Capacity	Inches/foot	ICARDA page 28: 2013	5.9
14	Sodium Absorption Ratio (SAR)	meq/Kg	ESL/SOP/54:2024	1.11

End of Report



Authorized Signatory

I. Ram Ganesan
Technical Manager

- The test results relate only to the items tested during the specified time.
- The test report shall not be reproduced in full or part without the written approval of ENVISLAB.
- The test items will not be retained more than 15 days from the date of issue of the test report unless specifically requested.



Enviro Solutions & Labs

A5, Cheran Nagar, Off. Mettupalayam Road,
Kavundampalayam, GN Mills (Post), Coimbatore - 641 029, Tamilnadu.

info@envislab.com : www.envislab.com : 0422 4200600



Issued To

Mr. K. Ramraj (Rough Stone Quarry)
2/395-1, Venkateshwara Nagar, Premier Nagar
West, Othakalmandapam, Coimbatore - 641 032.

TEST REPORT

Page 1 of 1

Report No. : ESL/2506/S/3027
Report Date : 05.06.2025
Sample Code : ESL250671

SAMPLE DETAILS

Nature of Sample	Soil Analysis	Sample Description	Soil
Sample Collected By	Enviro Solutions & Labs	Sample Condition	Good
Sampling Procedure	ESL/QSP/07	Sample Location	Kumaarapalayam Village
Sample Collected On	28.05.2025	Sample Received On	28.05.2025
Analysis Started On	28.05.2025	Analysis Completed On	05.06.2025
Sample Collected At	K.Ramraj (Rough Stone Quarry), S.F.No.70/1(P), Myleripalayam Village, Madukarai Taluka.		

S.NO	PARAMETER	UNIT	TEST METHOD	RESULTS
1	pH (1:5 Suspension)	%	IS 2720 Part-26 : 1987 (RA-2021)	6.75
2	Bulk Density	%	FAO Chapter 3, ESL/SOP/18:2023	1.24
3	Electrical conductivity, (1:5 Suspension)	mS/cm	IS -14767:2000 (RA 2021)	0.106
4	Total Nitrogen as N	Kg/ha	IS -14684:1999, RA:2019	238
5	Available Phosphorous,	Kg/ha	FAO Chapter 3, ESL/SOP/14:2023	38.9
6	Available Potassium	Kg/ha	FAO Chapter 3, ESL/SOP/17:2023	367
7	Exchangeable Calcium as Ca,	m.eq/100g	FAO Chapter 3, ESL/SOP/15:2023	19.8
8	Exchangeable Magnesium as Mg,	m.eq/100g	FAO Chapter 3, ESL/SOP/16:2023	5.84
9	Exchangeable Sodium as Na,	m.eq/100g	FAO Chapter 3, ESL/SOP/17:2023	2.67
10	Organic matter	%	IS 2720 Part- 22 : 1972 [RA- 2020)	1.49
11	Texture Classification		Bouyoucos G.J. Hydrometer method improved for making particle size analysis of soil, Argon J. 54-464-465: 1962- 1962	Sandy
a)	Sand	%		87.8
b)	Clay	%		8.9
c)	Silt	%		3.3
12	Porosity	%	ICARDA page 53: 2013	0.65
13	Water Holding Capacity	Inches/foot	ICARDA page 28: 2013	5.9
14	Sodium Absorption Ratio (SAR)	meq/Kg	ESL/SOP/54:2024	1.13

End of Report



Authorized Signatory

I. Ram Ganesan

I. Ram Ganesan
Technical Manager

- The test results relate only to the items tested during the specified time.
- The test report shall not be reproduced in full or part without the written approval of ENVISLAB
- The test items will not be retained more than 15 days from the date of issue of the test report unless specifically requested



Enviro Solutions & Labs

A5, Cheran Nagar, Off. Mettupalayam Road,
Kavundampalayam, GN Mills (Post), Coimbatore - 641 029, Tamilnadu.
info@envislab.com : www.envislab.com : 0422 4200600



Issued To

Mr. K. Ramraj (Rough Stone Quarry)
2/395-1, Venkateshwara Nagar, Premier Nagar
West, Othakalmandapam, Coimbatore - 641 032.

TEST REPORT

Page 1 of 1

Report No. : ESL/2506/S/3028
Report Date : 05.06.2025
Sample Code : ESL250672

SAMPLE DETAILS

Nature of Sample	Soil Analysis	Sample Description	Soil
Sample Collected By	Enviro Solutions & Labs	Sample Condition	Good
Sampling Procedure	ESL/QSP/07	Sample Location	Tegani Village
Sample Collected On	28.05.2025	Sample Received On	28.05.2025
Analysis Started On	28.05.2025	Analysis Completed On	05.06.2025
Sample Collected At	K.Ramraj (Rough Stone Quarry), S.F.No.70/1(P), Myleripalayam Village, Madukarai Taluka,		

S.NO	PARAMETER	UNIT	TEST METHOD	RESULTS
1	pH (1:5 Suspension)	%	IS 2720 Part-26 : 1987 (RA- 2021)	6.86
2	Bulk Density	%	FAO Chapter 3, ESL/SOP/18:2023	1.19
3	Electrical conductivity, (1:5 Suspension)	mS/cm	IS -14767:2000 (RA 2021)	0.073
4	Total Nitrogen as N	Kg/ha	IS -14684:1999, RA:2019	278
5	Available Phosphorous,	Kg/ha	FAO Chapter 3, ESL/SOP/14:2023	50.2
6	Available Potassium	Kg/ha	FAO Chapter 3, ESL/SOP/17:2023	403
7	Exchangeable Calcium as Ca,	m.eq/100g	FAO Chapter 3, ESL/SOP/15:2023	5.9
8	Exchangeable Magnesium as Mg,	m.eq/100g	FAO Chapter 3, ESL/SOP/16:2023	2.35
9	Exchangeable Sodium as Na,	m.eq/100g	FAO Chapter 3, ESL/SOP/17:2023	1.26
10	Organic matter	%	IS 2720 Part- 22 : 1972 (RA- 2020)	0.59
11	Texture Classification		Bouyoucos G.J. Hydrometer method improved for making particle size analysis of soil. Argon, J. 54-464-465: 1962: 1962	Sandy
a)	Sand	%		87.4
b)	Clay	%		8.1
c)	Silt	%		4.5
12	Porosity	%	ICARDA page 53: 2013.	0.68
13	Water Holding Capacity	Inches/foot	ICARDA page 28: 2013	5.6
14	Sodium Absorption Ratio (SAR)	meq/Kg	ESL/SOP/54:2024	1.08

End of Report



Authorized Signatory
I. Ram Ganesan
I. Ram Ganesan
Technical Manager

- The test results relate only to the items tested during the specified time
- The test report shall not be reproduced in full or part without the written approval of ENVISLAB
- The test items will not be retained more than 15 days from the date of issue of the test report unless specifically requested



Enviro Solutions & Labs

A5, Cheran Nagar, Off. Mettupalayam Road,
Kavundampalayam, GN Mills (Post), Coimbatore - 641 029, Tamilnadu,
info@envislab.com www.envislab.com 0422 4200600



Issued To

Mr. K. Ramraj (Rough Stone Quarry)
2/395-1, Venkateshwara Nagar, Premier Nagar
West, Othakalmandapam, Coimbatore - 641 032.

TEST REPORT

Page 1 of 1

Report No. : ESL/2506/S/3029
Report Date : 05.06.2025
Sample Code : ESL250673

SAMPLE DETAILS

Nature of Sample	Soil Analysis	Sample Description	Soil
Sample Collected By	Enviro Solutions & Labs	Sample Condition	Good
Sampling Procedure	ESL/QSP/07	Sample Location	Karachery Village
Sample Collected On	28.05.2025	Sample Received On	28.05.2025
Analysis Started On	28.05.2025	Analysis Completed On	05.06.2025
Sample Collected At	K. Ramraj (Rough Stone Quarry), S.F.No. 70/1(P), Myleripalayam Village, Madukarai Taluka.		

S.NO	PARAMETER	UNIT	TEST METHOD	RESULTS
1	pH (1:5 Suspension)	%	IS 2720 Part-26 : 1987 (RA- 2021)	6.85
2	Bulk Density	%	FAO Chapter 3, ESL/SOP/18:2023	1.21
3	Electrical conductivity, (1:5 Suspension)	mS/cm	IS -14767:2000 (RA 2021)	0.102
4	Total Nitrogen as N	Kg/ha	IS -14684:1999, RA:2019	207
5	Available Phosphorous,	Kg/ha	FAO Chapter 3, ESL/SOP/14:2023	34.6
6	Available Potassium	Kg/ha	FAO Chapter 3, ESL/SOP/17:2023	338
7	Exchangeable Calcium as Ca,	m.eq/100g	FAO Chapter 3, ESL/SOP/15:2023	13.2
8	Exchangeable Magnesium as Mg,	m.eq/100g	FAO Chapter 3, ESL/SOP/16:2023	4.16
9	Exchangeable Sodium as Na,	m.eq/100g	FAO Chapter 3, ESL/SOP/17:2023	1.96
10	Organic matter	%	IS 2720 Part- 22 : 1972 (RA- 2020)	1.25
11	Texture Classification		Bouyoucos G.J. Hydrometer method improved for making particle size analysis of soil. Argon, J. 54-464-465: 1962: 1962	Sandy
a)	Sand	%		86.1
b)	Clay	%		9.2
c)	Silt	%		4.7
12	Porosity	%	ICARDA page 53: 2013	0.67
13	Water Holding Capacity	Inches/foot	ICARDA page 28: 2013	5.3
14	Sodium Absorption Ratio (SAR)	meq/Kg	ESL/SOP/54:2024	1.12

End of Report



Authorized Signatory

[Signature]
I. Ram Ganesan
Technical Manager

- The test results relate only to the items tested during the specified time
- The test report shall not be reproduced in full or part without the written approval of ENVISLAB
- The test items will not be retained more than 15 days from the date of issue of the test report unless specifically requested



Enviro Solutions & Labs

📍 A5, Cheran Nagar, Off. Mettupalayam Road,

Kavundampalayam, GN Mills (Post), Coimbatore - 641 029, Tamilnadu.

📧 : info@envislab.com 🌐 : www.envislab.com ☎ : 0422 4200600



Issued To

Mr. K. Ramraj (Rough Stone Quarry)

2/395-1, Venkateshwara Nagar, Premier Nagar

West, Othakalmandapam, Coimbatore - 641 032.

TEST REPORT

Page 1 of 1

Report No.

: ESL/2506/S/3030

Report Date

: 05.06.2025

Sample Code

: ESL250674

SAMPLE DETAILS

Nature of Sample	Soil Analysis	Sample Description	Soil
Sample Collected By	Enviro Solutions & Labs	Sample Condition	Good
Sampling Procedure	ESL/QSP/07	Sample Location	Near Shanmugam Quarry
Sample Collected On	28.05.2025	Sample Received On	28.05.2025
Analysis Started On	28.05.2025	Analysis Completed On	05.06.2025
Sample Collected At	K. Ramraj (Rough Stone Quarry), S.F.No.70/1(P), Myleripalayam Village, Madukarai Taluqa.		

S.NO	PARAMETER	UNIT	TEST METHOD	RESULTS
1	pH (1:5 Suspension)	%	IS 2720 Part-26 : 1987 (RA- 2021)	6.75
2	Bulk Density	%	FAO Chapter 3, ESL/SOP/18:2023	1.19
3	Electrical conductivity, (1:5 Suspension)	mS/cm	IS -14767:2000 (RA 2021)	0.096
4	Total Nitrogen as N	Kg/ha	IS -14684:1999, RA:2019	202
5	Available Phosphorous,	Kg/ha	FAO Chapter 3, ESL/SOP/14:2023	33.5
6	Available Potassium	Kg/ha	FAO Chapter 3, ESL/SOP/17:2023	331
7	Exchangeable Calcium as Ca,	m.eq/100g	FAO Chapter 3, ESL/SOP/15:2023	13.1
8	Exchangeable Magnesium as Mg,	m.eq/100g	FAO Chapter 3, ESL/SOP/16:2023	4.14
9	Exchangeable Sodium as Na,	m.eq/100g	FAO Chapter 3, ESL/SOP/17:2023	1.91
10	Organic matter	%	IS 2720 Part- 22 : 1972 (RA- 2020)	1.21
11	Texture Classification		Bouyoucos G.J. Hydrometer method improved for making particle size analysis of soil. Argon. J. 54-464-465: 1962: 1962	Sandy
a)	Sand	%		87.9
b)	Clay	%		8.7
c)	Silt	%		3.4
12	Porosity	%	ICARDA page 53: 2013	0.66
13	Water Holding Capacity	Inches/foot	ICARDA page 28: 2013	5.2
14	Sodium Absorption Ratio (SAR)	meq/Kg	ESL/SOP/54:2024	1.12

End of Report



Authorised Signatory

I. Ram Ganesan
I. Ram Ganesan
Technical Manager

- The test results relate only to the items tested during the specified time.
- The test report shall not be reproduced in full or part without the written approval of ENVISLAB
- The test items will not be retained more than 15 days from the date of issue of the test report unless specifically requested

LAND USE PATTERN OF THE STUDY AREA WITHIN 10 KM RADIUS AROUND THE PROPOSED PROJECT AREA

Sl.No	No. of Villages	Name of village	Total Geographical Area (in Hectares)	Forest Area (in Hectares)	Area under Non-Agricultural Uses (in Hectares)	Barren & Un-cultivable Land Area (in Hectares)	Permanent Pastures and Other Grazing Land Area (in Hectares)	Land Under Miscellaneous Tree Crops etc. Area (in Hectares)	Culturable Waste Land Area (in Hectares)	Fallows Land other than Current Fallows Area (in Hectares)	Current Fallows Area (in Hectares)	Total Unirrigated Land Area (in Hectares)	Area Irrigated by Source (in Hectares)
0-2 km,Coimbatore South Sub-District, Coimbatore District													
1	1	Myleripalayam	1112.88	0	318.06	0	0	0	0	0	344.87	194.75	255.2
Pollachi Sub-District, Coimbatore District													
2	1	Arasampalayam	1270.73	0	95.83	9.24	0	0	44.93	0	586.75	267.37	266.61
		total (A)	2383.61	0	413.89	9.24	0	0	44.93	0	931.62	462.12	521.81
2-5 km,Pollachi Sub-District, Coimbatore District													
3	1	Panappatti	1616.95	0	112.91	15.74	0	950.43	0	0	0	293.33	244.54
4	2	Vadasithur	1748.48	0	142.86	3.25	0	0	0	0	818.23	167.74	616.4
5	3	Kondampatty	1205.85	0	69.57	7.54	0	0	58.39	0	647	125.08	298.27
6	4	Solavampalayam	869.81	0	92.17	0	0	0.85	0	0	423.68	124.39	228.72
Sulur Sub-District, Coimbatore District													
7	1	Peedampalli	1359.65	0	425.06	0	0	0.74	41.9	343.91	292.54	110.26	145.24
		total (B)	6800.74	0	842.57	26.53	0	952.02	100.29	343.91	2181.45	820.8	1533.17
5-10 km,Coimbatore South Sub-District, Coimbatore District													
8	1	Narasipuram	1332.73	0	22.63	0	0	0	394.25	208.26	0	0.7	706.89
9	2	Madavarayapuram	1308.36	0.92	116.1	0	0	0	0	0	693.43	0	497.91
10	3	Ikkaraibooluvampatti	1915.78	0	298.53	0	0	15.16	12.32	218.45	264.6	8.8	1097.92
11	4	Madampatti	1554.34	0	262.08	0	0	8.8	71.27	250.6	218.38	203.64	539.57
12	5	Theethipalayam	1338.96	0	256.04	0	0	3.34	3.28	593.88	129.03	23.81	329.58
13	6	Palathurai	344.34	0	90.32	0	0	0	0	29.39	61.56	39.85	123.22
14	7	Thambagoundenpalayam	261.1	0	46.11	0	0	0	0	20.63	45.34	56.17	92.85
15	8	Karunchamigoundenpalayam	413.3	0	91.74	0	0	0	0	32.23	68.72	0	220.61
16	9	Seerappalayam	1187.56	0	172.66	0	0	0	0	163.29	568.17	69.02	214.42
17	10	Nachippalayam	516.52	0	63.63	0	0	0	0	40.53	83.86	0	328.5
18	11	Arisippalayam	1085.6	0	79.09	20.68	0	0	188.48	0	393.9	388.95	14.5
19	12	Valukkupparai	1698.3	0	200.36	4.34	0	0	0	0	61.31	697.67	734.62
Pollachi Sub-District, Coimbatore District													
20	1	Mettubavi	2120.03	0	149.58	0	0	0.05	0	0	858.36	671.56	440.48
21	2	Vadaputhur	1059.16	0	253.53	12.4	0	0.22	4.94	0	325.56	196.01	266.5
22	3	Kuthiraiampalayam	263.74	0	41.98	0	0	0	0	0	68.78	55.88	97.1
23	4	Pottaiyandiporambu	502.99	0	33.32	1.99	0	0	0	0	198.32	99.34	170.02
24	5	Sangarayapuram	692.04	0	63.08	7.46	0	0	0	0	224.37	197.37	199.76
25	6	Kodangipalayam	753.51	0	65.13	6.57	0	0	0	0	368.79	130.79	182.23
26	7	Kothavadi	291.55	0	32.63	1.32	0	0	0	0	112.81	34.32	110.47
27	8	Kurunallipalayam	827.67	0	149.4	0.84	0	0.53	0	0	193.38	115.41	368.11
28	9	Periakalandai	1153.92	0	86.4	14.34	0	0.39	1.19	0	412.48	168.29	470.83
29	10	Andipalayam	1329.9	0	133.35	0	0	0	16.82	0	345.81	88.24	745.68

30	11	Chettiakkapalayam	976.68	0	133.65	3.15	0	0	0	0	112.75	149.89	577.24
31	12	Nallattipalayam	978.92	0	248.21	3.69	0.67	1.36	2.42	0	206.73	128.61	387.23
Sulur Sub-District, Coimbatore District													
32	1	Kallapalayam	1141.05	0	48.67	0	0	0	0	74.47	716.44	0	301.47
33	2	Pappampatti	1024.82	0	162.72	0	0	0	0	8.19	660.33	0	193.58
34	3	Edayapalayam	1191.04	0	188.02	28.43	0	0	111.17	171.5	11.02	487.51	193.39
35	4	Vadavalli	1745.38	0	195.98	0	0	0.17	193.19	432.36	345.9	337.24	240.54
36	5	Bogampatti	1876.93	0	261.7	3.84	0	0	231.48	561.49	269.69	355.2	193.53
		total (C)	30886.22	0.92	3946.64	109.05	0.67	30.02	1230.81	2805.27	8019.82	4704.27	10038.75
		Grand Total (A+B+C)	40070.57	0.92	5203.1	144.82	0.67	982.04	1376.03	3149.18	11132.89	5987.19	12093.73

**Source: District Primary Census Abstract, Coimbatore District of Tamilnadu State-2011*

MINING PLAN

FOR GRANT OF ROUGH STONE & GRAVEL QUARRYING LEASE
[PREPARED UNDER RULE 19 (1), 20, 41 & 42 OF TAMILNADU MINOR MINERAL
CONCESSION RULES, 1959 AND AMENDED TAMILNADU MINOR MINERAL
CONSERVATION AND DEVELOPMENT RULES, 2010]

LOCATION

EXTENT : 1.06.50 HECTARES
SURVEY NO. : 70/1(P)
VILLAGE : MYLERIPALAYAM
TALUK : MADUKKARAI
DISTRICT : COIMBATORE
STATE : TAMILNADU

APPLICANT ADDRESS

Mr. K. RAMARAJ,
S/o KANDASAMY
2/395-1, VENKATESHWARA NAGAR,
PREMIER NAGAR WEST, OTHAKALMANDAPAM,
COIMBATORE DISTRICT, TAMILNADU- 641 032
MOBILE – +91 98422 02515.

PREPARED BY

A. ALLIMUTHU., (RQP)
REG.NO . RQP/DMG/HYD/85/2022,
D.NO.1/231,PATTAKARNAVALAVU,
CHINNAMUTHIYAMPATTI, PUDUPPALAYAM (PO),
EDAPADDI (TK), SALEM DISTRICT,
TAMIL NADU – 636 306.
MOBILE : +91 97886 36242,
E-mail : allimuthu1973@gmail.com

K. Ramaraj



Mr. K. RAMARAJ,
S/o Kandasamy,
2/395-1, Venkateshwara Nagar,
Premier Nagar West, Othakalmandapam,
Coimbatore District, Tamilnadu- 641 032
Mobile – +91 98422 02515.

CONSENT LETTER FROM THE MINE OWNER

The Mining Plan in respect of **Rough Stone & Gravel Quarry** over an extent of **1.06.50** Hectares in **S.F.No. 70/1(P)** at **Myleripalayam Village, Madukkarai Taluk, Coimbatore District, Tamilnadu State** has been prepared by **Mr. A. ALLIMUTHU** , Recognized Qualified Person, Reg.No. **RQP / DMG / HYD / 85 / 2022**

I request the Assistant Director, Dept. of Mining and Geology, **Coimbatore District** to make further correspondence regarding modifications of the Mining Plan with the said Recognized Person on this following Address,

A. ALLIMUTHU.,
D.No-1/231, Pattakarnavalavu,
Chinnamuthiyampatti, Pudupalayam (PO),
Edapaddi Taluk, Salem District,
Tamilnadu – 636 306.

Mobile: +91 97886 36242
E-mail: allimuthu1973@gmail.com

I hereby under take that all modifications so made in the Mining Plan by the Recognized Qualified Person may be deemed to have been made with my knowledge and consent and shall be acceptable to me and binding on me in all respects.

Place :

Date :

K. RAMARAJ,

Mr. K. RAMARAJ,
S/o Kandasamy,
2/395-1, Venkateshwara Nagar,
Premier Nagar West, Othakalmandapam,
Coimbatore District, Tamilnadu- 641 032
Mobile – +91 98422 02515.




DECLARATION OF MINE OWNER

The Mining Plan in respect of Rough Stone & Gravel quarry over an extent of 1.06.50 Hectares in S.F.No. 70/1(P) at Myleripalayam Village, Madukkarai Taluk, Coimbatore District, Tamilnadu State has been prepared with my consultation and I have understood the contents and agree to implement the same in accordance with the Mining Laws.

Place :

Date :

K. RAMARAJ,

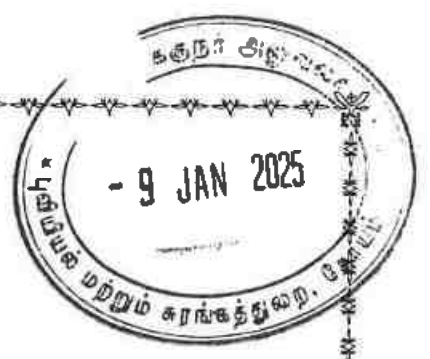

A. ALLIMUTHU.,
D.No-1/231, Pattakarnavalavu,
Chinnamuthiyampatti, Pudupalayam (PO),
Edapaddi Taluk, Salem District,
Tamilnadu – 636 306.

Mobile: +91 97886 36242

E-mail: allimuthu1973@gmail.com

CERTIFICATE

This is to certify that the provisions of Minor Minerals Conservation & Development Rules, 2010 (MMCDR, 2010) have been observed in the Mining Plan for grant of **Rough Stone & Gravel** quarrying lease over an extent of **1.06.50 Hectares** in S.F.No. **70/1(P)** at **Myleripalayam Village, Madukkarai Taluk, Coimbatore District, Tamilnadu State** for quarry lease.

Wherever specific permissions/exemptions/relaxations or approvals are required, the applicant will approach the concerned authorities of State and Central Governments for granting such permissions etc.

Certified

Place :

Date :

A. Allimuthu

Recognized Qualified Person

A. ALLIMUTHU

A.ALLIMUTHU, M.Sc.,M.Phil.,

Recognized Qualified Person

RQP/DMG/HYD/86/2022

H. Ramas



A. ALLIMUTHU.,
D.No-1/231, Pattakarnavalavu,
Chinnamuthiyampatti, Pudupalayam (PO),
Edapaddi Taluk, Salem District,
Tamilnadu – 636 306.

Mobile: +91 97886 36242

E-mail: allimuthu1973@gmail.com

CERTIFICATE

Certified that in preparation of Mining Plan for Rough Stone & Gravel quarry over an extent of 1.06.50 Hectares in in S.F.No. 70/1(P) at Myleripalayam Village, Madukkarai Taluk, Coimbatore District, Tamilnadu State prepared for Mr. K. Ramaraj, 2/395-1, Venkateshwara Nagar, Premier Nagar West, Othakalmandapam, Coimbatore District, Tamilnadu State, covers all the provisions of Mines Act, Rules and Regulations, etc. made there under and whenever specific permissions are required the applicant will approach the Director General of Mines Safety, Chennai. The standards prescribed by DGMS in respect of Miners Health will be strictly implemented.

Certified

Place :

Date :

A. Allimuthu
Recognized Qualified Person

A. ALLIMUTHU

A. ALLIMUTHU, M.Sc., M.Phil.,
Recognized Qualified Person
RQP / DMG / HYD / 85 / 2022

K. Ramaraj



CONTENTS

S.No	Description	Page No
1	Introduction	1
2	Executive Summary	3
3	General Information	4
4	Location	4
5	Geology and Mineral Reserves	6
6	Mining	10
7	Blasting	14
8	Mine Drainage	20
9	Other Permanent Structures	21
10	Employment Potentials & Welfare Measures	22
11	Environment Management Plan	24
12	Mine Closure Plan	29
13	Any Other Details Intend to furnish by the Applicant	31

LIST OF ANNEXURE

S.No	Description	Annexure No
1	Precise Area Communication Letter issued from the Assistant Director, Department of Geology & Mining, Coimbatore District.	I
2	FMB Sketch along with Measurements	II
3	Land Documents (Patta, A.Register, Adangal, etc.,)	III
4	Copy of Identity Proof	IV
5	Copy of RQP Certificate	V

K. Arumugam



LIST OF PLATES

S.No	Description	Plate No	Scale
1	Location Map	I	1:50000
2	Satellite Image 500m Radius	II	1: 5000
3	Lease Plan	III	1:1000
4	Geological & Surface Plan	IV	1:1000
5	Geological Cross Section	V	Horizontal -1:1000 Vertical – 1:1000
6	Year Wise Production & Development Plan	VI	1:1000
7	Production Cross Section	VII	Horizontal -1:1000 Vertical – 1:1000
8	Conceptual Plan	VIII	1:1000
9	Conceptual Cross Section	IX	Horizontal -1:1000 Vertical – 1:1000
10	Environment Plan	X	1:5000

MINING PLAN

FOR ROUGH STONE & GRAVEL QUARRYING LEASE

(PREPARED UNDER RULE 19(1), 20, 41 & 42 OF TAMILNADU MINOR MINERAL CONCESSION RULES, 1959 AND AMENDED TAMILNADU MINOR MINERAL CONSERVATION AND DEVELOPMENT RULES, 2010)

1.0 INTRODUCTION:

The Applicant, **Mr. K. RAMARAJ**, residing at 2/395-1, Venkateshwara Nagar, Premier Nagar West, Othakalmandapam, Coimbatore District has applied for grant of permission for quarrying Rough Stone & Gravel over an extent of 1.06.50 Hectares, located in Survey.No – 70/1(P) at Myleripalayam Village of Madukkarai Taluk, Coimbatore District, Tamilnadu State. The excavated Rough Stone is used for building and road construction and also used for crushing units and Gravel is used for filling and leveling of low lying areas of road projects and other infrastructure development work in and around the district.

1. The application was meritoriously processed and precise area communication letter issued by the Assistant Director, Department of Geology & Mining, Coimbatore District has passed an order vide R.C.No.778/ Kanimam / 2024. dated 27.12.2024.
2. The applicant has to submit Mining Plan and to get approval from the Assistant Director, Department of Geology & Mining, Coimbatore District and to obtain Environmental Clearance from the State Level Environment Impact Assessment Authority SEIAA, Tamil Nadu State, notified by MoEF and Climate Change and the procedure prescribed under the EIA Notification,2006 and by incorporating all the details proposed in the letter No. SEIAA-TN/Minor Minerals/2012 dated 17.04.2013 of State Level Environmental Impact Assessment Authority.
3. Geological Resources are estimated to contain **14,775m³** of Gravel up to a depth of **3m** & **1,94,680m³** of Rough Stone up to a depth of **45m**. The Mineable Reserves is estimated at **10,614m³** of Gravel up to a depth of **3m** and **73,750m³** of Rough Stone up to a depth of **45m** after leaving necessary safety distance from the lease boundary. Total depth of mining area up to **48m** (3m Gravel + 45m Rough stone).



4. Environmental parameters,

i. Forest Conservation Act, 1980: (Reserve Forest)

Walayar R.F – 17.5km - West

ii. Interstate Boundary:

Velanthavalam, Kerala – Tamil Nadu Border – 20km - SW

iii. Wildlife (Protection) Act, 1972:

The area does not attract the Wild Life Sanctuary around 10km Radius from the boundary of lease applied area.

iv. The Coastal Regulation Zone (CRZ) Notification 1991:

The quarry is located at a distance of 126km from the Arabian Sea in the western side. Hence, the project doesn't attract the C.R.Z. Notification, 1991.

5. Environmental measures to be adopted shall be,

i) Dust control at source while drilling and blasting,

ii) Dust suppression at loading point and transport haul roads.

iii) Noise control in blasting, control of fly rock missiles and vibration by doing peak particle velocity are within standard as prescribed by the DGMS and MoEF.

iv) Avoid uneven rat hole mining and follow scientific and systematic mining by safe bench system of open cast mining.

v) Unnecessary Land degradation will be avoided or damaged land should be reclaimed or rehabilitated.

vi) Mining near major fracture zones if any will be avoided to control ground water fluctuation in the adjacent agricultural lands.

vii) Emission test of vehicles will be in tack to maintain minimum emission level of flue gases.

viii) Noise level will not exceed 80dB and the vehicles will use only permitted Air Horn while on road near residential areas.

ix) Safety Zones as prescribed by the Department of Geology and Mining from adjacent infrastructures will be strictly adhering to.

x) And any other conditions as stipulated by the concerned authorities will be followed to protect the environment.

K. Ramaraj



2.0 EXECUTIVE SUMMARY:

a.	Name of the village	MYLERIPALAYAM
b.	Geological Resources of Rough Stone	1,94,680m ³
c.	Geological Resources of Gravel	14,775m ³
d.	Mineable Reserves of Rough Stone	73,750m ³
e.	Mineable Reserves of Gravel	10,614 m ³
f.	Extent of the lease area	1.06.50 Ha
g.	Proposed Life of Mine	Five Years
h.	Proposed depth of mining	48m
i.	Method of mining/ level of mechanization	Open cast, semi mechanized mining with a bench height of 5m and bench width of 5m is proposed.
m.	Cost of Project	
	a. Fixed Cost	58,00,000/-
	b. Operational Cost	40,00,000/-
	c. EMP Cost	5,30,000/-

K. Ramasamy



3.0 GENERAL INFORMATION:

3.1	a.	Name of the Applicant	:	K. RAMARAJ
	b.	Address of the Applicant with phone no and e-mail id if any	:	2/395-1, Venkateshwara Nagar, Premier Nagar West, Othakalmandapam, Coimbatore District, Tamilnadu- 641 032 Mobile – +91 98422 02515
	c.	Status of Land	:	Patta Land
3.2	a.	Mineral which the Applicant intends to mine	:	Rough Stone & Gravel
	b.	Precise area communication Letter details	:	R.C.No.778/ Kanimam/ 2024. dated 27.12.2024
	c.	Period of permission / lease granted	:	Five Years
	d.	Name and Address of the RQP preparing Mining Plan	:	A. ALLIMUTHU D.No-1/231, Pattakarnavalavu, Chinnamuthiyampatti, Pudupalayam (PO), Edapaddi Taluk, Salem District, Tamilnadu – 636 306. Mobile: +91 97886 36242 E-mail: allimuthu1973@gmail.com
	e.	RQP Reg no.	:	[RQP/DMG/HYD/85/2022] Valid upto 25-04-2032

4.0 LOCATION:

a) Details of the area:

STATE & DISTRICT	TALUK	VILLAGE	SF.NO.	EXTENT(HA)
Tamilnadu, Coimbatore	Madukkarai	Myleripalayam	70/1(P)	1.06.50

Route:

COIMBATORE $\xrightarrow{20\text{km}}$ MYLERIPALAYAM $\xrightarrow{2\text{km}}$ SITE

K. Ramaraj



Classification of the Area: **Patta land** (Patta No – 986)

- a) Ownership occupancy of applied area (Surface rights): Own Property.
b) Existence of Public Road / Railway Line if any nearby and approximate distance:

Nearest Public Road is **Village Road** at a distance of **300m**.

Nearest Railway Station is **Kinathukadavu** at a distance of **4.5km**.

Infrastructures nearby are given as under,

Sl. No	Particulars	Location	Approximate distance in km
1	POST OFFICE	MYLERIPALAYAM	2
2	TOWN	KINATHUKADAVU	4.5
3	POLICE STATION	KINATHUKADAVU	5
4	FIRE STATION	KINATHUKADAVU	3.5
5	GOVT. HOSPITAL/PHC	MYLERIPALAYAM	2
6	GOVT. SCHOOL	MYLERIPALAYAM	2
7	DSP OFFICE	PODANUR	12
8	RAILWAY STATION	KINATHUKADAVU	4.5
9	NEAREST AIRPORT	COIMBATORE	25
10	SEA PORT	COCHIN	185

Topo sheet No. with latitude and longitude: Toposheet No: **58F/1** & The 8 Pillars Reading as follows,

BOUNDARY CO-ORDINATES		
P.No.	LATITUDE	LONGITUDE
1	10° 52' 04.76"N	77° 02' 04.08"E
2	10° 52' 03.75"N	77° 02' 04.30"E
3	10° 52' 03.88"N	77° 02' 05.26"E
4	10° 52' 00.65"N	77° 02' 06.02"E
5	10° 52' 00.62"N	77° 02' 04.72"E
6	10° 52' 00.56"N	77° 02' 02.77"E
7	10° 52' 03.94"N	77° 02' 02.23"E
8	10° 52' 04.29"N	77° 02' 02.14"E
DATUM WGS-84		

K. Ramani



PART – A

5.0 GEOLOGY AND MINERAL RESERVES:

5.1	Topography	1. The lease applied area is exhibits Plain Area covered by Rough stone & Gravel formation. The remaining land in the proposed area is partially covered with shrubs, herbs, grass, climbers, bushes, etc 2. Massive rock & gravel is observed in the area. No major river or Pond is found nearby applied area. 3. The maximum and minimum temperatures for the District during summer and winter vary between 35 °C to 18 °C 4. The average annual rainfall in the plains is around 700mm with the northeast and the southwest monsoons contributing to 47% and 28% respectively to the total rainfall.														
5.2	Regional Geology	Coimbatore district is covered by rocks belonging to Archean age comprising the Khondalite group, Charnockite Group, migmatite group, Sathayamangalam group, Bhavani Group and Alkali complex of Proterozoic age and Recent to Late Pleistocene rocks of Cainozoic age. <table><tr><th>Lithology</th><th>Age</th></tr><tr><td>Black soil & laterite</td><td>Recent</td></tr><tr><td>Alkali Complex</td><td>Proterozoic</td></tr><tr><td>Bhavani & Satyamangalam Group</td><td>Archaean formation</td></tr><tr><td>Migmatite & Peninsular gneiss</td><td>Archaean formation</td></tr><tr><td>Charnockite</td><td>Archaean formation</td></tr><tr><td>Khondalite</td><td>Archaean formation</td></tr></table>	Lithology	Age	Black soil & laterite	Recent	Alkali Complex	Proterozoic	Bhavani & Satyamangalam Group	Archaean formation	Migmatite & Peninsular gneiss	Archaean formation	Charnockite	Archaean formation	Khondalite	Archaean formation
Lithology	Age															
Black soil & laterite	Recent															
Alkali Complex	Proterozoic															
Bhavani & Satyamangalam Group	Archaean formation															
Migmatite & Peninsular gneiss	Archaean formation															
Charnockite	Archaean formation															
Khondalite	Archaean formation															
5.3	Geology of the Precise Area	The area is mainly composed of crystalline metamorphic complex. The rock type majorly noticed in the area for lease is Charnockite. Which is mainly composed Hypersthene, biotite mica, Quartz, and Feldspar with some ferromagnesian minerals. The grain size is medium to course. The strike of the Charnockite formation is N35°E-S35°W with dipping towards 60°S.														

PHOTOGRAPH SHOWS GENERAL VIEW OF THE LEASE AREA

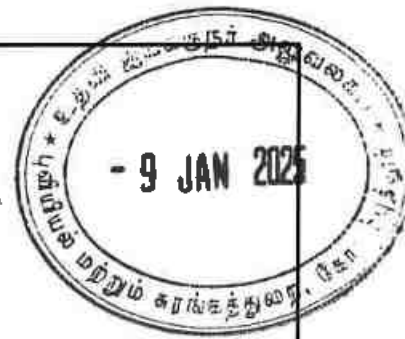


FIG: 1




FIG: 2



CLOSE VIEW OF THE ROCK

The Charnockite is part of peninsular gneisses, a high grade metamorphic rock. It is typically brown to black colour and grain size is coarse grained. It is suitable for construction purposes because of its high strength, colour, high density, low porosity etc.





5.4 DETAILS OF EXPLORATION

Already Mined out:

The Proposed lease area was disturbed by earlier quarrying activity. There is a mined-out pit adjacent to this area on south side where the rough stone and gravel is well exposed. The applied area has geological continuity of the adjacent quarry area. The existing pit dimension is as under,

EXISTING PIT DIMENSION			
PIT	Max L(m)	Max W(m)	Max D(m)
I	79	54	38

5.5 METHOD OF ESTIMATION OF RESERVES

* As far as Rough stone & Gravel is concerned, the only practical method is the systematic geological mapping and delineation of Rough stone & Gravel within the field and careful evaluation of body lustre, physical properties, engineering properties, commercial aspects etc.,

* Totally two sections have been drawn, one section drawn length wise as (A-B) and another three Sections drawn width wise as (X1-Y1), (X2-Y2) & (X3-Y3) to cover maximum area considered for lease.

* The Topographical, Geological plan and sections demarcated the commercial, marketable Rough stone & Gravel deposit has been prepared in Scale 1:1000 and Sections have been drawn with a scale of Hor 1:1000 and Ver 1:1000 respectively.

* Please refer Plate No. VI & VII Rough stone & Gravel are terms of Cubic Meters (Volume) only.

a) GEOLOGICAL RESOURCES

The Geological resources are estimated as 14,775m³ of Gravel to a depth of 3m and 1,94,680m³ of Rough stone up to a depth of 45m. Details of estimation of Geological resources are given below,

Geological Resources						
Section	MSL	Length (m)	Width (m)	Depth(m)	Volume (m ³)	Gravel (m ³)
AB-X1Y1	362-360	12	50	2	1200	-
	360-350	52	95	10	49400	-
AB-X2Y2	398-395	29	92	3	-	8004
	395-360	33	92	35	106260	-
AB-X3Y3	398-395	37	61	3	-	6771
	395-350	31	61	20	37820	-
(Up to Depth of 48m) Total					194680	14775

K. Rama Raju



b) MINEABLE RESERVES

The mineable reserves are estimated as **10,614m³** of Gravel to a depth of **3m** and **10,614m³** of Rough stone up to a depth of **45m** **10,614m³** of Gravel to a depth of **3m** after leaving the safety distance of **7.5m** for adjacent Patta lands from the boundary of lease applied area as indicated in precise area communication letter and relevant mining laws in force. Details of estimation of mineable reserves are given below,

Mineable Reserves						
Section	MSL	Length (m)	Width (m)	Depth(m)	Volume (m ³)	Gravel (m ³)
AB-X1Y1	362-360	12	30	2	720	-
	360-355	45	46	5	10350	-
	355-350	35	36	5	6300	-
AB-X2Y2	398-395	29	76	3	-	6612
	395-390	30	70	5	10500	-
	390-385	31	62	5	9610	-
	385-380	32	52	5	8320	-
	380-375	33	42	5	6930	-
	375-370	34	32	5	5440	-
	370-365	30	22	5	3300	-
	365-360	25	12	5	1500	-
AB-X3Y3	398-395	29	46	3	-	4002
	395-390	25	40	5	5000	-
	390-385	21	32	5	3360	-
	385-380	16	22	5	1760	-
	380-375	11	12	5	660	-
TOTAL					73750	10614



6.0 MINING

6.1 Mining Methods:

Opencast method of semi mechanized mining with 5m vertical bench height and width 5m of the bench is not less than bench height.

However, as far as the quarrying of Rough stone & Gravel is concerned, observance of the provisions of Regulation 106(2)(b) as below is seldom possible due to various inherent petro genetic factors coupled with mining difficulties. Hence it is proposed to obtain relaxation to the provisions of the below regulation from the Director of mines safety for which necessary provision is available with the regulation 106 (2) (b) of MMR-1961, under Mine Act-1952.

6.2 Mode of working:

Mode of working is semi-mechanized quarrying operation using shot hole drilling with the help of compressor and jack hammer for smooth blasting. The raw materials are removed using Hydraulic excavator and loaded directly to the tippers. The mineral is transported to the crushing plants, where it is crushed to required sizes. The height and width of bench is designed as 5m.

6.3 Details of Overburden / Mineral Production proposed for the five years

The development involves only removal of 3m gravel to be generated out of production. The five years production is 73,750m³. Production plan is shown in plate VI to VII.

Year	Gravel (m ³)	Rough Stone (m ³) (Production/Year)
I	10614	14700
II	---	14830
III	---	14900
IV	---	14970
V	---	14350
Total	10614	73750



Gravel quantity = $10,614\text{m}^3 / 6 = 1769 \text{ Loads}$
 = $10,614\text{m}^3 / 260 \text{ days (1 Years)}$
 = 41m^3 or 7 Lorry Loads per day

The applicant ensures the total approved quantity of proposed reserves in benches will not exceed the quarrying operation. Besides the Rough stone & Gravel locked up in bench loss will be exploited after obtaining necessary permission from Director General of Mines Safety, Chennai region by submit the relevant documents, appropriate safety plans and its necessary mitigation safety measures etc.,

6.4. Details of mining machinery deployed and their specification:

The machineries are proposed to be purchased or hired for use in mines for systematic operation and development.

a) Drilling:

Drilling of shot-holes will be carried out using compressor and Jack Hammer combination. Depth of holes shall be 2-3m and the spacing shall be 0.95m and burden shall be 0.50m. To estimate a correct blasting geometry and to effect a perfect pre-determined fragmentation and fly rock control, certain amount of trial blast is a prerequisite. Details of drilling equipment are tabulated below,


Type	No	Dia of hole	Make	Motive
Jack Hammer	2	33 mm	Atlas copco	Air
Compressor	1	-	Chicago Newmatic	Diesel

b) Loading Equipment:

Loading shall be done by Excavator into tippers from the working place. Gravel and rough stone shall be dumped in the site. The applicant is proposed to engage one Hydraulic excavator and one hydraulic rock breaker with 1.3m^3 capacity and 4 tippers of 10/20 tonnes capacity for transportation of rock and internal transport of rock.

Type	No.	Capacity	Make	Motive
Hydraulic Excavator	1	1.20 M^3	L&T Komatsu	Diesel
Hydraulic Rock breaker	1	-	JCB	Diesel

K. Arumugam

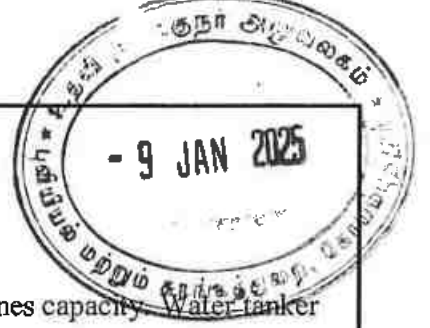

c) Transportation

Transport of Gravel and Rough stone shall be done by Tippers of 10-20 tonnes capacity. Water-tanker will be used for the transportation and supply of water to site as well as sprinkling of water along the haul roads.

Type	No.	Capacity	Make	Motive
Tipper	4	10-20 MT	Tata / Ashok Leyland / Bharath Benz	Diesel
Water Tanker	1	10 KL	Ashok Leyland / TATA	Diesel

6.5 DISPOSAL OF OVERBURDEN/WASTE

The excavated Gravel is $10,614\text{m}^3$ up to a depth of 3m and it is used for filling and leveling of low lying areas of road projects and other infrastructure development work in and around the district. There is no overburden (weathered rock). Here, the recovery is taken as 100% of total production.

6.6 Brief Note on Conceptual Mining Plan:

Conceptual plan is prepared with an objective of long term systematic development of mines. This involves bench layouts, selection of ultimate pit limit and pit slope.

Ultimate Pit Dimension: The ultimate pit size is designed based on certain practical factors such as the economical depth of mining, safety zones, permissible area etc., The Ultimate pit Dimensions of the mine is given as under.

ULTIMATE PIT DIMENSION			
PIT	Max. L(m)	Max. W(m)	Max Depth(m)
I	109	77	48

During extraction, each bench will be maintained at 5m height and 5m width. The quantum of excavation is estimated as $73,750\text{m}^3$ to a depth of 45m. The quantity of Gravel is estimated as $10,614\text{m}^3$ to a depth of 3m. Entire quantity of excavated Gravel will be used for filling and leveling of low lying areas of road projects and other infrastructure development work.




7.0 BLASTING:

The massive formation shall be broken into pieces of transportable size by drilling and blasting using jack hammers and shot hole blasting. Since the bench height needs to be maintained at 5.0 m, two sub benches will be created of 2.5 m height each and the benches will be joined / merged together to form 5.00 m height. Blast hole will be, preferably by jack hammer where the diameter is normally 33 mm and the depth of the hole is approximately 2.4 m. Blasting pattern is generally square or rectangle or zig zag with burden of 0.5m and spacing of 0.75 meters. Usually single / double row of holes is blasted along free face to achieve optimum powder factor and best fragmentation. Blasting pattern is generally square or rectangle or staggered, The Burden and Spacing will be decided as per the requirements of the size of the boulders, generally the burden ranging from 2.00 to 2.50 meters and spacing of 2.50 to 3.00 meters.

Diameter of the hole	33 mm
Spacing	0.75m
Burden	0.5m
Depth	2.4m
Charge / Hole	0.125kg/ stick, 3 stick/ Hole = 0.375Kg
Pattern of hole	Zig-Zag
Inclination of hole	70° from the horizontal.
Quantity of rock broken	$0.5 \times 0.75 \times 2.4 \times 2.5 = 2.25$ MT
Blasting efficiency @ 90%	$2.25 \times 90\% = 2$ MT / hole

Subsequent to the drilling and blasting, the material so fragmented / loosened from the rock mass will be crushed or broken with the help of the rock breakers. Then material will be loaded into tippers with the help of the excavator. Thereafter the material is loaded into trucks / tippers of 10-20 tonnes capacity with the help of the excavator. The loaded material is then transported to the site or crusher units.

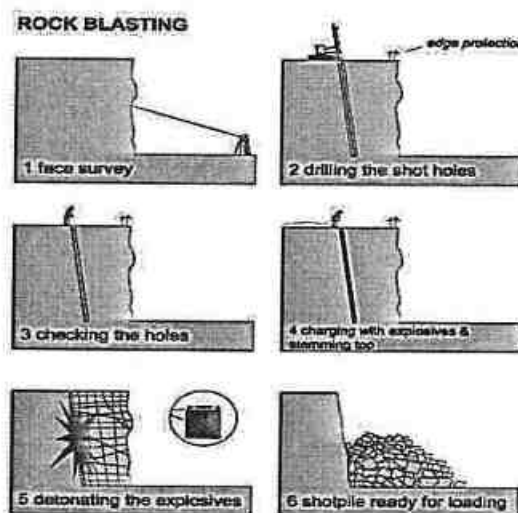



Types of Explosives

Following explosives are recommended for efficient blasting with safe practices. Nitrate slurry explosives are used for blasting. Powder factor is approximately 4 tonnes per kg of explosive.

Sl. No.	Description	Class	Division	Type
1	Nitrate Mixture	2	0	Nitrate Mixtures
2	Safety fuse	6	3	Blue sump fuse coils
3	NONEL	6	3	Non-Electric Detonator

MEASURES PROPOSED TO MINIMIZE GROUND VIBRATION DUE TO BLASTING

The following steps shall be adopted to control ground vibration due to blasting.

1. The minimum recommended delay time of 8ms will be maintained to minimize ground vibration to avoid constructive interference of blast vibration waves and hence its impact or amplitude.
2. Maximum numbers of holes blasted at a time is generally limited to 20 to 30 with milli second delay detonators (MSDD) to mitigate adverse impacts like throw, ground vibration etc.
3. Maximum number of holes is generally limited to 30 with non-electric detonators (NONEL) to mitigate adverse impacts such as air blast, fly rock and ground vibration. The Ignition will be the Non-Conventional and Eco- Friendly method by NONEL (Non-Electric Detonators).
4. Charge per hole depends on the powder factor designed for each hole, based on the quantum of blasting, strength of rocks, fracture pattern etc.
5. The hole will be blasted in two phases, each one after the other, by inserting one NONEL at bottom and another one at the middle of the hole. The hole will be blasted one after the other with a delay of 17 ms. The bottom portion will be blasted first and the middle one next with a blast gap of 17 ms. The blast delay will be 43ms from row to row. A schematic diagram of drilling and blasting pattern show here



Blast Hole Pattern

O-17Ms-O-17Ms-O-17Ms-O-17Ms-O-17Ms-O-17Ms-O-17Ms-O-17Ms-O - second row

620	586	552	518	484	467	433	399	365	42Ms
603	569	535	501	467	450	416	382	348	

O-17Ms-O-17Ms-O-17Ms-O-17Ms-O-17Ms-O-17Ms-O-17Ms-O x - first row

34	68	102	136	170	204	238	272	306
17	51	85	119	153	187	220	255	289

Free Face

6. Blast holes will always be initiated by short delay detonators, rather than adopting instantaneous detonation. Short delay in blasting of successive blast holes will effectively reduce the vibration problem.
7. Number of holes per shot and blast will be kept to minimum to guide the throw in the desired direction while keeping vibration and noise to minimum.
8. Mostly, holes will be fired towards the free face.
9. Proper spacing & burden will be maintained.
10. Optimum utilization of the explosives will be ensured.
11. Direction of the hole will be maintained towards free face.

NONEL (Non-Electric Detonators)

Total non-electric initiation systems were introduced to offer all the advantages of electric initiation but adding safety benefits including insensitivity to electricity, radio frequency energy, and electromagnetic radiation. Non-electric detonators also improved operational flexibility because of their easier to design larger initiation sequences, theoretically with an unlimited number of delays. This initiation system is composed of shock tubes connected to down-the-hole detonators and surface connectors. Though their coating of reactive powders and thanks to a starter, shock tubes transmit shock waves to the non-electric detonators.




NONEL IS STRUCTURED AS FOLLOWS

- 3mm diameter tube is prepared in different length (4 Mts to 25 Mts)
- The tube filled with PETN (Penta erythritol tetra nitrate).
- Bottom end of the Tube is crimped with Detonator which is having Delay Element, ASA and PETN at the bottom.
- Top end of the tube is connected with connector having 17 MS (Milli Second).


NONEL LOADING INTO THE BLAST HOLE

- The Nonel Detonator is pricked into the Nitrate Mixtures and dropped into the Blast Hole.
- Then the Nitrate mixtures are dropped inside the Hole.
- One third of the Hole is filled with stemming material (MUD).
- As like 20 Holes are loaded with Explosives & Nonel.
- The holes are connected through the MS Connector which is crimped at top of the Nonel Tube.
- Only one Detonator is connected with first Nonel Tube.
- Finally the detonator is ignited and the blast is completed.
- Each and every hole is blasted with a 17 Milli Second delay.
- The delays are given for 20 Holes.

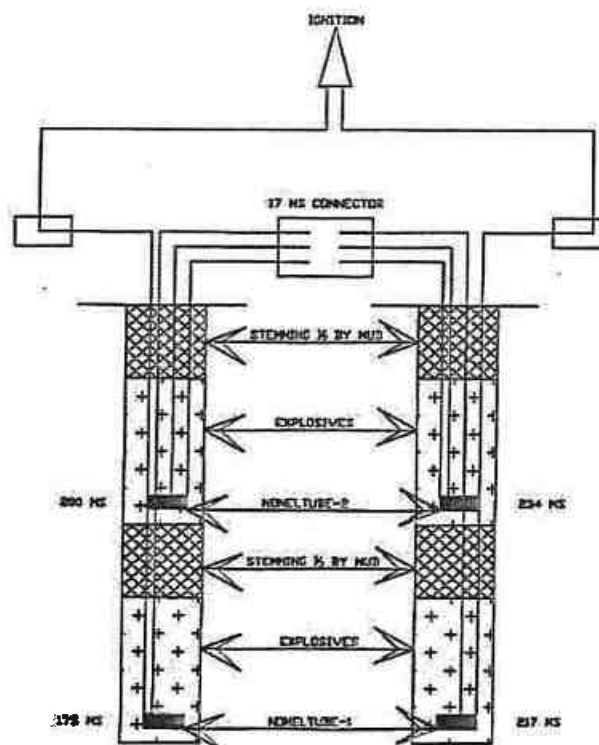

ADVANTAGES OF NONEL

1. Eco-Friendly initiation method.
2. Is used mainly during the rainy season because it is Non-Electric Detonator.
3. It is bottom ignition.
4. The Noise is less.
5. Fly Rock & Vibration is less.
6. Fragmentation is good.

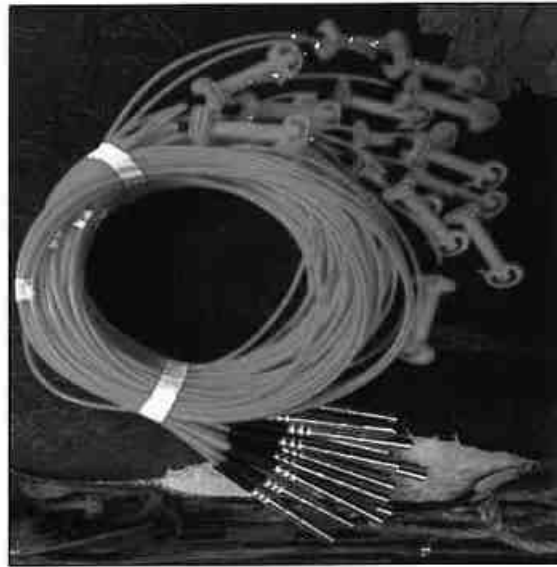

NONEL

STORAGE OF EXPLOSIVES AND SAFETY MEASURES TO BE TAKEN WHILE BLASTING

1. The applicant proposes to store the explosives as per the Indian Explosives Act, 1884.
2. The applicant will engage an authorized blastman to carry out blasting.
3. Controlled blasting is proposed by adopting all the safety measures as per "MMR 1961" and with the permission of DGMS. Blasting will be performed as per requirement on the face.
4. First Aid Box is a statutory requirement and will be made available.
5. Necessary precautionary announcement will be carried out and sirens will be blown before the blasting operation. The blasting time is proposed between 12pm to 12.30pm.
6. Instructions in common language will be given to all employees and Regular safety inspection will be done by a competent person and Proper training on safety will be given to all employees. Proper warning signs will be displayed at respective areas.
9. Proper, safe and careful handling and use of explosives by competent Blasters having Blaster's Certificate of Competency issued by DGMS.

10. Proper security system to prevent theft/ pilferage, unauthorized entry into Magazine area and checking authorized persons to prevent carrying of match box, lights, mobile phones, cigarette or Beedi, etc.

FLY ROCK HAZARD CONTROL & NOISE CONTROL

- Inter row delay will be selected in such a manner, so that each row pushes its burden in a forward direction rather than in an upward direction.
- Stemming length will be kept not less than the burden.
- It will be ensured that the burden will not be excessive.
- Detonating fuse will not be used & Blasts will be planned properly to eliminate noise.

Before beginning of drilling & blasting operations, the applicant will identify the hazards from the knowledgeable person who had worked in masonry stone mining and being trained to recognize the hazards as well as to inform the authority for quickly corrective action to eliminate such hazards. The applicant will use engineering and administrative control measures, personal protective equipment (PPE) including respiratory protection and training to protect workers involved in drilling & blasting activities. Engineering control measures such as substitution, isolation, containment and ventilation which are the primary means of preventing or reducing exposures to airborne hazards during drilling & blasting operations have to be implemented by the applicant.

PERSONAL PROTECTIVE EQUIPMENTS (PPE)

1. Ear Plug
2. Spectacles
3. Nose Mask
4. Helmet
5. Leather gloves
6. Safety shoes or boots
7. Provide training to quarry employees on quarry operation, health, safety hazards, how to use controls, personal hygiene practices, safe work practices and the use of respirators.

PREVENTIVE MEASURES

1. Respirators will not be used as the only means of preventing or minimizing exposures to airborne contaminants. Dust source controls such as containment systems, local exhaust systems, and good work practices will be implemented as the primary means of protecting

K. Ramaiah



workers. When dust source controls cannot keep exposures below the recommended exposure limits, controls should be supplemented with the use of respiratory protection.

2. Environmental monitoring by trained personnel will be conducted in all blasting applications. This is necessary to ensure that workers will not be over exposed than the prescribed exposure limit as fixed by the authorities.
3. Anytime environmental conditions, airborne contaminants and their concentrations will be maintained within the permissible limit.

8.0 MINE DRAINAGE:

8.1 Depth of water table:

There is no major river, stream or canal flowing within the applied lease area and its surrounding. Bore well exists near to the proposed area. The mining activity will reach only up to a depth of 48m (Max) or 350m above MSL. The water table is located below 45-50m (305-300m above MSL) from the lowest point of mining and hence it may not touch the Ground water table. In case of necessity, the accumulated rainy water (free from suspended solid material) from pit bottom may be allowed to flow out after settling through a check dam & allowed to spill over adjoining areas, facilitating uptake by native plants. Normally, the mine will be closed during rains. The same will also be used for watering saplings/trees in the plantation site. The excess water will be allowed to be stored in the public tank for irrigation.

8.2 Arrangements and Place where the mine water is finally proposed to be discharged

The ground water may not rise immediately in this type of mining. However, the rain water percolation and collection of water from the seepage shall be less than 100 lpm and it shall be pumped about periodically by a stand by diesel powered Centrifugal pump. The quality of water is potable.

K. Ramakrishna



9.0 OTHER PERMANENT STRUCTURES:

9.1	Habitations/ Village (300m)	:	There are no inhabited sites within the radius of 300m from the boundary of lease area under Rule 36(1-A) (a) TNMMCR 1959. The Nearest Village habitation is Myleripalayam are about 1km on NW side of the lease applied area.
9.2	Power lines (HT/LT)	:	There is no HT power lines located within the safety distance as prescribed under Tamilnadu Minor Minerals Concession Rules, 2015.
9.3	Water bodies (River, Pond, Lake, Odai, Canal etc.)	:	Noyyal River is situated at a distance of 12km towards the North side of the lease area.
9.4	Archeological / Historical Monuments	:	There are no Archeological / Historical Monuments within a radius of 500m.
9.5	Road (NH, SH, Village Road etc)	:	Nearest Public Road is Village Road at a distance of 300m from lease boundary. MDR-988 Kinathukadavu – Cochin Frontier road at distance of 820m towards SW side of the lease area. NH-83 Coimbatore – Nagapattinam Highway at distance of 2.5km towards West side of the lease area.
9.6	Places of Worship	:	There is no Places of Worship within a radius of 500m
9.7	Reserved Forest / Forest / Social Forest / Wild Life Sanctuary etc.,	:	Walayar Reserve Forest is located 17.5km towards the west side of the quarry lease area.
9.8	Any Interstate Border, Protected areas under the Wild Life (Protection) Act, 1972, Critically Polluted Areas as Identified by Central Pollution Control Board and Notified Eco sensitive areas	:	The inter State border is at a distance of 20km .
9.9	Any Other Structures	:	There are few quarries area adjacent to the lease area.

- 9 JAN 2025

10. 2	a.	Welfare Measures Drinking Water	Drinking water shall be provided to the nearby public. Quantity for Drinking and utilities is 1 KLD. Dust suppression and Green belt of water is 8 KLD. Minimum quantity of 9 KLD is required. Drinking water will be purchased and water for dust suppression and green belt development will be sourced from open well in site as well as purchased from outside.
	b.	Sanitary facilities	Latrines & urinals shall be maintained at convenient places for use of labours separately for males and females. Washing facilities shall also be arranged.
	c.	First Aid Facility	Being a small mine, First Aid station will be provided. First aid training will be given to selected employees and such Qualified First Aid personnel will be nominated to attend emergency first aid treatment.
	d.	Labour Health	As per Rule 45(A) Mines Rule, 1955, Periodic medical examination has to be arranged for occupational health once in a year in addition to attending medical treatment of occupational injuries.

10.3 Precautionary safety measures to the Laborers

- All the quarry workers will be provided with Safety device include such as safety helmet, mine goggles, ear muffs, ear Plugs, dust mask, sand respirator (avoid silica dusts forms- Silicosis), reflector jackets, safety thick shoes, etc., as Personnel Productive Equipment (PPE) as per the circulars and amendments made for Mine Labours under the guidance of DGMS.



Helmet



Mine
Goggles



Ear Muffs



Ear
Plugs



Dust
Mask



Sand
Respirator



Reflector
Jackets



Shoes



- Periodically medical checkup will be conducted for all workers for any mine health problems.
- Proper training and induction will be given by qualified and experienced safety officer to all employees about the safe and systematic quarrying operation.
- The drillers and workers are sent for vocational training periodically to carry out the quarrying operations scientifically to safeguard the men machinery and mineral and to create awareness of conventional opencast quarrying operation.

PART – B

11.0 ENVIRONMENT MANAGEMENT PLAN

11.1) Existing Land use Pattern:

The applied area is dry barren land and devoid of agriculture and habitations and the area is not used for the specific vegetation. The surrounding area is practiced by the seasonal cultivation.

S. No.	Land Use	Present Area (Hect)	Area in use during the quarrying period (Hectares)
1.	Area under quarrying	0.40.75	0.75.10
2.	Infrastructure	---	0.01.00
3.	Roads	0.00.10	0.01.10
4.	Green Belt	0.29.30	0.29.30
5.	Dump	---	---
6.	Unutilized	0.36.35	---
	Total	1.06.50 Ha	1.06.50 Ha

11.2) Water Regime:

i) Water:

Water drawn from the nearest bore well is potable and is used for a long period. No adverse health hazardous was reported due to quality of water like fluorosis. TDS, COD, BOD, Salinity, hardness, etc. Mineral water shall be supplied in cans for drinking purposes or RO systems shall be provided.

ii) Air quality:

The air quality will be affected by the Suspended Particulate Matter (SPM) generated by the blasting, jack hammer drilling, loading and unloading during the quarrying operation.

The following mitigation measures will be carried out, Mist water spraying will be carried out by means of water sprinklers to suppress dust emission in the Haul roads. The native species of Neem etc., will be planted along the lease boundary and Safety buffer zone.

K. Ramalingam



The quarried out materials will be fully covered by the Tarpaulin during transportation to avoid the spillage of materials. The Air quality will be monitored periodically as per the norms and standards measures carried out to prevent dust and air propagation in to the air.

Operators, those exposed directly to such conditions will be provide such as (PPE) Personnel Protective Equipment's like Dust mask, Ear plug, Helmet, Gloze etc., as per the Mines Act -1952.

.iii) Water quality:

A water sample from the open well adjacent to the mine will be checked in consultation with NABL approved agency to assess hardness, salinity, color, specific gravity, P^H, turbidity, COD, BOD, fluorine etc.

iv) Noise levels:

Nowhere the noise level should exceed the permissible limit of 80db during the quarry working hours.

The drivers will be strictly instructed to move the vehicle during the transportation not exceeding 40.0 Km per Hour, Sentries with Red Flag & whistle will be posted in village junction and regulate traffic.

v) Vibration levels:

No activity to test vibration of longitudinal waves and its peak particle velocity.

11.3) Flora and Fauna

Neem tree, Aavaram chedi(Tanner's Cassia), Thorny bushes, Shrubs are noticed within lease area. Neem, Panai(Palm Tree), Coconut trees and Mullumaram(Prosopis Juliflora) are noticed the surrounded area. No plants of botanical interest and animals of zoological interest are noticed in this area.

11.4) Human Settlement

The nearest habitations with the population, approx. distance within 5.0Km radius from the proposed quarry site are as given under,

S. No	Name of the Village	Approximate distance (km)	Direction from lease area	Approximate population
1.	Myleripalayam	1	NW	4990
2.	Arasampalayam	2.3	SE	3818
3.	Karachery	2.8	East	1200
4.	Chettipalayam	4.6	North	10,366



11.5) ENVIRONMENTAL IMPACT ASSESSMENT (EIA)

Facts to be considered for EIA are,

- i) Dust generation,
- ii) Temporary storage and utilization of gravel
- iii) Land degradation
- iv) Adverse effect on water regime
- v) Socio-economic benefits arising out of Mining

i) Dust:

Dust expected to be generated from drilling, hauling roads, place of excavation etc. will be suppressed by periodical wetting of land by spraying.

ii) Temporary storage and Utilization of Gravel:

Gravel shall be dumped within lease area and will be used for filling and leveling of low lying areas of road projects and other infrastructure development work within the district.

iii) Land degradation:

Land degradation by means of cutting the trees and removal of fertile soil does not arise. Proposed usage of land for five years shall be less than 1.06.50 Ha. Afforestation will be started during the first year of mining operation itself.

iv) Measures to minimizing adverse effect on water regime:


No chemicals or hazardous substances are likely to be quarried during the mining of rough stone and hence, the quality of ground water will not be affected. The water to be pumped will be pure and potable and therefore it will not affect any water regime of the area.

v) Socio-Economic benefits arising out of Mining:

- Employment opportunities of the nearby Villagers.
- Cultural development of the nearby Villagers.

11.6) Proposal for Waste Management:

There is no waste anticipated during in this Rough stone & Gravel quarry operation. The quarried out materials 100% will be utilized.

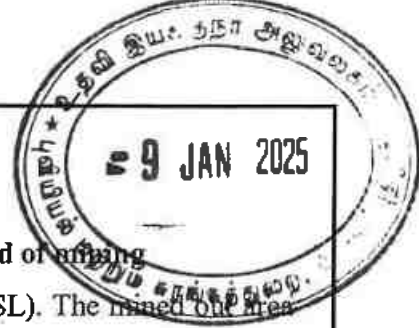

11.7) Reclamation of Land affected during mining activities and at the end of mining

The present mining is proposed to an average depth of 48m (350m above MSL). The mined out area will be fenced on top of open cast working with barbed wires. No immediate proposals for closure of pit as the Rough Stone & Gravel persist still at deeper level.

11.8) Programme for Afforestation

Native Trees will be planted along the lease boundary with an interval of 5m. The rate of survival expected to be 80% in this area. Appropriate native species of Neem, Pungan, Teak and Casuarinas Saplings will be planted approach roads, service roads, nearby villages, village roads, government school etc.,

Year	No. of Saplings proposed to be planted	Survival %	No. of Saplings expected to be grown	Name of the species
I	50	80%	40	Teak, Pungai & Neem
II	50	80%	40	
III	50	80%	40	
IV	50	80%	40	
V	50	80%	40	

11.9) Proposed financial estimate / budget for (EMP) Environment Management

S.No	Monitory and Analysis Description	Rate per location	No. of location	Total Charges for monitoring		
				6 months	Per Year	5 Years
1	Ambient Air quality monitoring	5000	4	20000	40000	2,00,000
2	Water sampling and analysis	10000	1	10000	20000	1,00,000
3	Noise level monitoring	500	4	2000	4000	20,000
4	Ground vibration monitoring	2500	2	5000	10000	50,000
Total EMP Cost				37000	74000	3,70,000

H. Ramaraj



a) Fixed Asset Cost

i)	Land Cost	:	Rs 50,00,000
ii)	Refilling / Fencing	:	Rs 2,50,000
iii)	Laborers Shed	:	Rs 2,00,000
iv)	Canteen facility	:	Rs 1,00,000
v)	Other items	:	Rs 2,50,000
	Total		Rs 58,00,000/-

b) Operational Cost:

i)	Machinery cost	:	Rs 40,00,000
	Excavator with Breaker, Tipper ,Compressor, Jack Hammer, Pump etc (Owned +Hired)		
	Total	:	Rs. 40,00,000/-

c) EMP Cost:

i)	Drinking water facility for the laborers	:	Rs 1,80,000
ii)	Sanitary arrangement	:	Rs 1,00,000
iii)	Safety kits & protective equipments	:	Rs 1,00,000
iv)	Dust control	:	Rs 50,000
v)	Afforestation etc.	:	Rs 1,00,000
	Total		Rs 5,30,000/-
	Total Project Cost		: Rs 1,03,30,000/-

11.10. Corporate Environment Responsibility (CER):

The Applicant shall be distributed Note books, Stationary items to nearby Govt Primary School and to conduct the Medical camp, Environment awareness program, etc., to nearby villages after consultation with local panchayat authorities.

The Applicant shall ensure that a minimum of 2.0% from the Total project cost (Rs.2,06,600/-) for the entire lease period will be utilized for the CER Activities.

District Mineral Fund @10% of the Royalty shall be given to the Dept. of Geology and Mining.

K. Arumugam



12.0 MINE CLOSURE PLAN

12.1. Closure activity:

This mining plan is prepared for 5 years and the quantity of mineral excavated during this period is only 73,750m³. The Closure activity will start during the first year itself. The Afforestation along the Buffer area will be done initially and the mined out area will be afforested once the bench is formed. At the closure of the mining activity the entire area will be restored completely by Tree plantation. The proposed area is a plain surface area having a highest and lowest elevation of 396m & 360m respectively. Mining will be done from top by developing benches 5 X 5 m. There will not be any land degradation because the mining activity will be limited depth only. After extraction of the material up to ultimate pit limit of 48m(350m above MSL), the mined out pit will be used for water storage.

12.2. Re-vegetation:

It is proposed to develop green belt in areas covering the proposed land, which includes regions along the mine lease boundary and the reclaimed area. Grass and bushes will be planted in areas prone to erosion. Other areas will be fertilized and planted with local species. The characteristics of this vegetation will resemble that of the natural environment except for the early growth, which may be a protective cover crop. Before re-vegetation, the land will be properly prepared by spreading the soil which is rich in organic contents. Vegetation will be self-sufficient after planting and require no fertilization or maintenance.

12.3. Steps proposed for phased restoration, reclamation of already mined out areas

In case of steep slopes, fencing shall be made to control accident due to inadvertent entry of animals and local persons. Plantation shall be made over small dumps to prevent soil erosion/wash outs and help ecological balance.

12.4. Mitigation measures to be undertaken for safety and restoration / reclamation of the already mined out area

The area applied for quarry lease was disturbed by earlier quarrying activities. The land ecology shall be preserved during Mine closure by proper terracing and stabilization with plantations.

12.5. Measures to be under taken on mine closure as per Act & Rules

Fencing shall be made around open cast working as per DGMS circulars.

R. Ramakrishna



12.6. Safety and Security:

Safety measures will be implemented to the prevent access to surface opening excavations. Working area will be fenced with Barbed wires.

12.7. Disaster Management and Risk Assessment:

In order to handle emergency situations, an organizational chart entrusting responsibility to various project personnel will be prepared with their specific roles during the emergency. Assembly points will be setup farthest from the quarry location where workers would assemble in case of emergency. Fire protection system will be setup at mine site which consist of Portable Handheld appliances suitable for extinguishing small fires. Other emergency services like First Aid center, Vehicle to rush to nearby hospital etc., will be provided.

12.8. Care and Maintenance during temporary discontinuance:

During the temporary discontinuance the working place will be fenced completely & a board of Discontinuance will be hanged on the main entrance of the working place. One watchman will be kept on the leaset area to watch the area and look after the survival of the plants.

12.9. Economic Repercussions of closure of mine & man power retrenchments:

Five years mining will generate employment potential and general financial status and socio economic conditions of approx. 20 laborers will be improved.

12.10. Abandonment Cost:

Abandonment is not proposed during five years of mining. But implementation of waste management, retaining wall and afforestation is proposed as continues process. Cost of these is around Rs. 50,000/- per year.

H. Arumugam



13.0 ANY OTHER DETAILS INTEND TO FURNISH BY THE APPLICANT:

Overview:

- Care and precautionary measures will be taken for the safety of workers as per Rules and Acts.
- There is no deep hole drilling and heavy blasting of this lease area.
- The Applicant will endeavor every attempt to quarry the Rough stone & Gravel economically without any wastage and to improve the environment and ecology.

Mining Plan with Mine Closure Plan is prepared under the provisions of Tamilnadu Minor Minerals Concession Rules, 1959 for quarrying Rough Stone & Gravel with due consideration of environmental parameters so as to obtain Environmental Clearance (EC). Systematic mining and blasting techniques will ensure safety and create eco-friendly environment.

K. Ramaraj

K. RAMARAJ
(Applicant)

A. Allimuthu

A. ALLIMUTHU
(RQP/DMG/HYD/85/2022)

A. ALLIMUTHU, M.Sc., M.Phil.,
Recognized Qualified Person
RQP/DMG/HYD/85/2022

This Mining Plan is Approved
subject to the conditions / stipulation
& indicated in the Mining Plan Approval
Letter No: *YR/Mines/2022/94-28*
office of the *Assistant Director* *Coimbatore*

This Mining Plan is Approved based on the
incorporation of the particulars specified
in the letter of the commissioner of Geology
and Mining, Chennai ref No: 3863/LC/2012
Dated 19.11.2012 and subjected to further
fulfillment of the condition laid down under
Tamilnadu Minor Mineral Concession Rules 19th

[Signature]
ASSISTANT DIRECTOR
DEPARTMENT OF GEOLOGY & MINING
COIMBATORE DISTRICT

dyt/9/1/25

K. Ramaraj

உதவி இயக்குநர் அலுவலகம், 9 JAN 2025
புவியியல் மற்றும் சுரங்கத்துறை,
மாவட்ட ஆட்சியர் அலுவலக வளாகம்,
கோயம்புத்தூர் - 18.

ந.க.எண்.778/கனிமம்/2024

நாள்: 27.12.2024

குறிப்பாணை

பொருள்: கனிமங்களும் குவாரிகளும் - கோயம்புத்தூர் மாவட்டம் - மதுக்கரை வட்டம் - மயிலேரிபாளையம் கிராமம் - புல எண்.70/1 (பகுதி)-ல் 1.06.50 ஹெக்டேர் பரப்பளவு பட்டா பூமியில் சாதாரண கற்கள் மற்றும் கிராவல் மண் வெட்டி எடுக்க குவாரி குத்தகை உரிமம் கோரி திரு.K.ராமராஜ் என்பவர் விண்ணப்பம் செய்தது - வரைவு சுரங்கத்திட்டம் சமர்ப்பிக்க அறிவுறுத்துதல் - தொடர்பாக.

- பார்வை:**
1. திரு.K.ராமராஜ், த/பெ.கந்தசாமி, 2/395-1, வெங்கடேஸ்வரா நகர், பிரிமியர் நகர் மேற்கு, ஒத்தக்கால் மண்டபம், கோயம்புத்தூர் என்பவரின் விண்ணப்பம் நாள் 31.07.2024
 2. இவ்வலுவலக கடிதம் இதே எண். நாள்: 28.08.2024
 3. வட்டாட்சியர், மதுக்கரை கடிதம் ந.க.எண்.2868/2024/அ6 நாள்: 26.09.2024
 4. வருவாய் கோட்டாட்சியர், கோயம்புத்தூர் தெற்கு அவர்களின் கடிதம் மூ.மு.எண்.5380/2024/அ2 நாள்: 09.10.2024.
 5. வட்டார வளர்ச்சி அலுவலர் (வ.ஊ), மதுக்கரை அவர்களின் கடிதம் ந.க.எண்.700/2024/அ2 நாள்: 15.11.2024.
 6. கோயம்புத்தூர் புவியியல் மற்றும் சுரங்கத்துறை உதவி புவியியலாளர் தணிக்கை குறிப்பு நாள்: 30.11.2024

பார்வை 1-ல் கோயம்புத்தூர் மாவட்டம், 2/395-1, வெங்கடேஸ்வரா நகர், பிரிமியர் நகர் மேற்கு, ஒத்தக்கால் மண்டபம் என்ற முகவரியில் வசிக்கும் திரு.கந்தசாமி என்பவரின் மகன் திரு.K.ராமராஜ் என்பவர் கோயம்புத்தூர் மாவட்டம், மதுக்கரை வட்டம், மயிலேரிபாளையம் கிராமம், புல எண்கள்.70/1 (பகுதி)-ல் 1.06.50 ஹெக்டேர் மற்றும் 71/1-ல் 0.53.50 ஹெக்டேர் ஆக மொத்தம் 1.60.00 ஹெக்டேர் பரப்பளவுள்ள பட்டா பூமியில் சாதாரண கற்கள் மற்றும் கிராவல் மண் வெட்டியெடுக்க குவாரி குத்தகை உரிமம் கோரி உரிய ஆவணங்களுடன் விண்ணப்பித்துள்ளார்.

பார்வை 3, 4, 5 மற்றும் 6-ல் கண்ட கடிதங்களில் மதுக்கரை வட்டாட்சியர், கோயம்புத்தூர் தெற்கு வருவாய் கோட்டாட்சியர், மதுக்கரை வட்டார வளர்ச்சி அலுவலர் (வ.ஊ), மற்றும் கோயம்புத்தூர் புவியியல் மற்றும் சுரங்கத்துறை உதவி புவியியலாளர் ஆகியோர் புலத்தணிக்கை மேற்கொண்டு கோயம்புத்தூர் மாவட்டம், மதுக்கரை வட்டம், மயிலேரிபாளையம் கிராமம், புல எண்.70/1 (பகுதி)-ல் 1.06.50 ஹெக்டேர் பரப்பளவு பட்டா பூமியில் திரு.K.ராமராஜ், த/பெ திரு.கந்தசாமி என்பவருக்கு சாதாரண கற்கள் மற்றும் கிராவல் குவாரி குத்தகை உரிமம் வழங்கலாம் என பரிந்துரை செய்துள்ளனர்.



எனவே, கோயம்புத்தூர் மாவட்டம், மதுக்கரை வட்டம், மயிலேற்பாளையம் கிராமம், புல எண்.70/1 (பகுதி)-ல் 1.06.50 ஹெக்டேர் பரப்பளவு பட்டா புவியியல் 1959-ம் வருடாந்திய தமிழ்நாடு சிறுகனிம சலுகை விதிகள், விதி எண்.19-ன் கீழ்க் கீழ்க் கீழ்க் காலங்களுக்கு சாதாரண கற்கள் மற்றும் கிராவல் வெட்டி எடுக்க அனுமதி வழங்க உகந்த புலமாக கருதி அறிவிப்பு செய்யப்படுகிறது.

மேலும், திரு.K.ராமராஜ் என்பவர் மூன்று மாத காலத்திற்குள் வரைவு சுரங்கத்திட்ட அறிக்கை (Draft Mining Plan) கீழ்க்கண்ட நிபந்தனைகளுக்குட்பட்டு தயார் செய்து கோயம்புத்தூர் மாவட்ட புவியியல் மற்றும் சுரங்கத்துறை உதவி இயக்குநரிடம் ஒப்புதல் பெற்றும், தமிழ்நாடு சிறுகனிம சலுகை விதிகள் 41 & 42-ன் படி ஏற்பளிக்கப்பட்ட சுரங்கத்திட்ட அறிக்கை மற்றும் மாநில சுற்றுச்சூழல் தாக்க மதிப்பீட்டு ஆணைய இசைவாணைச் சான்று பெற்று சமர்ப்பிக்குமாறும் அறிவுறுத்தப்படுகிறது.

நிபந்தனைகள்

1. அருகில் உள்ள பட்டா நிலத்திற்கு 7.5 மீட்டர் பாதுகாப்பு இடைவெளி விட்டு குவாரிப்பணி மேற்கொள்ள வேண்டும்.
2. அருகிலுள்ள பட்டா நிலங்கள் மற்றும் பொது மக்களுக்கும் எவ்வித இடையூறும் இன்றி குவாரி பணி மேற்கொள்ள வேண்டும்.


உதவி இயக்குநர்,
புவியியல் மற்றும் சுரங்கத்துறை
கோயம்புத்தூர்.

பெறுநர்:

திரு.K.ராமராஜ்,
த/பெ.கந்தசாமி,
2/395-1, வெங்கடேஸ்வரா நகர்,
பிரிமியர் நகர் மேற்கு,
ஒத்தக்கால் மண்டபம்,
கோயம்புத்தூர்

A. ALLIMUTHU, M.Sc., M.Phil,
Recognized Qualified Person
ROP/DMG/HYD/85/2022

ILLA 2 : MYLERIPALAYAM &
 ARASAMPALAYAM
 TALUK : MADUKKARAI
 DISTRICT : COIMBATORE

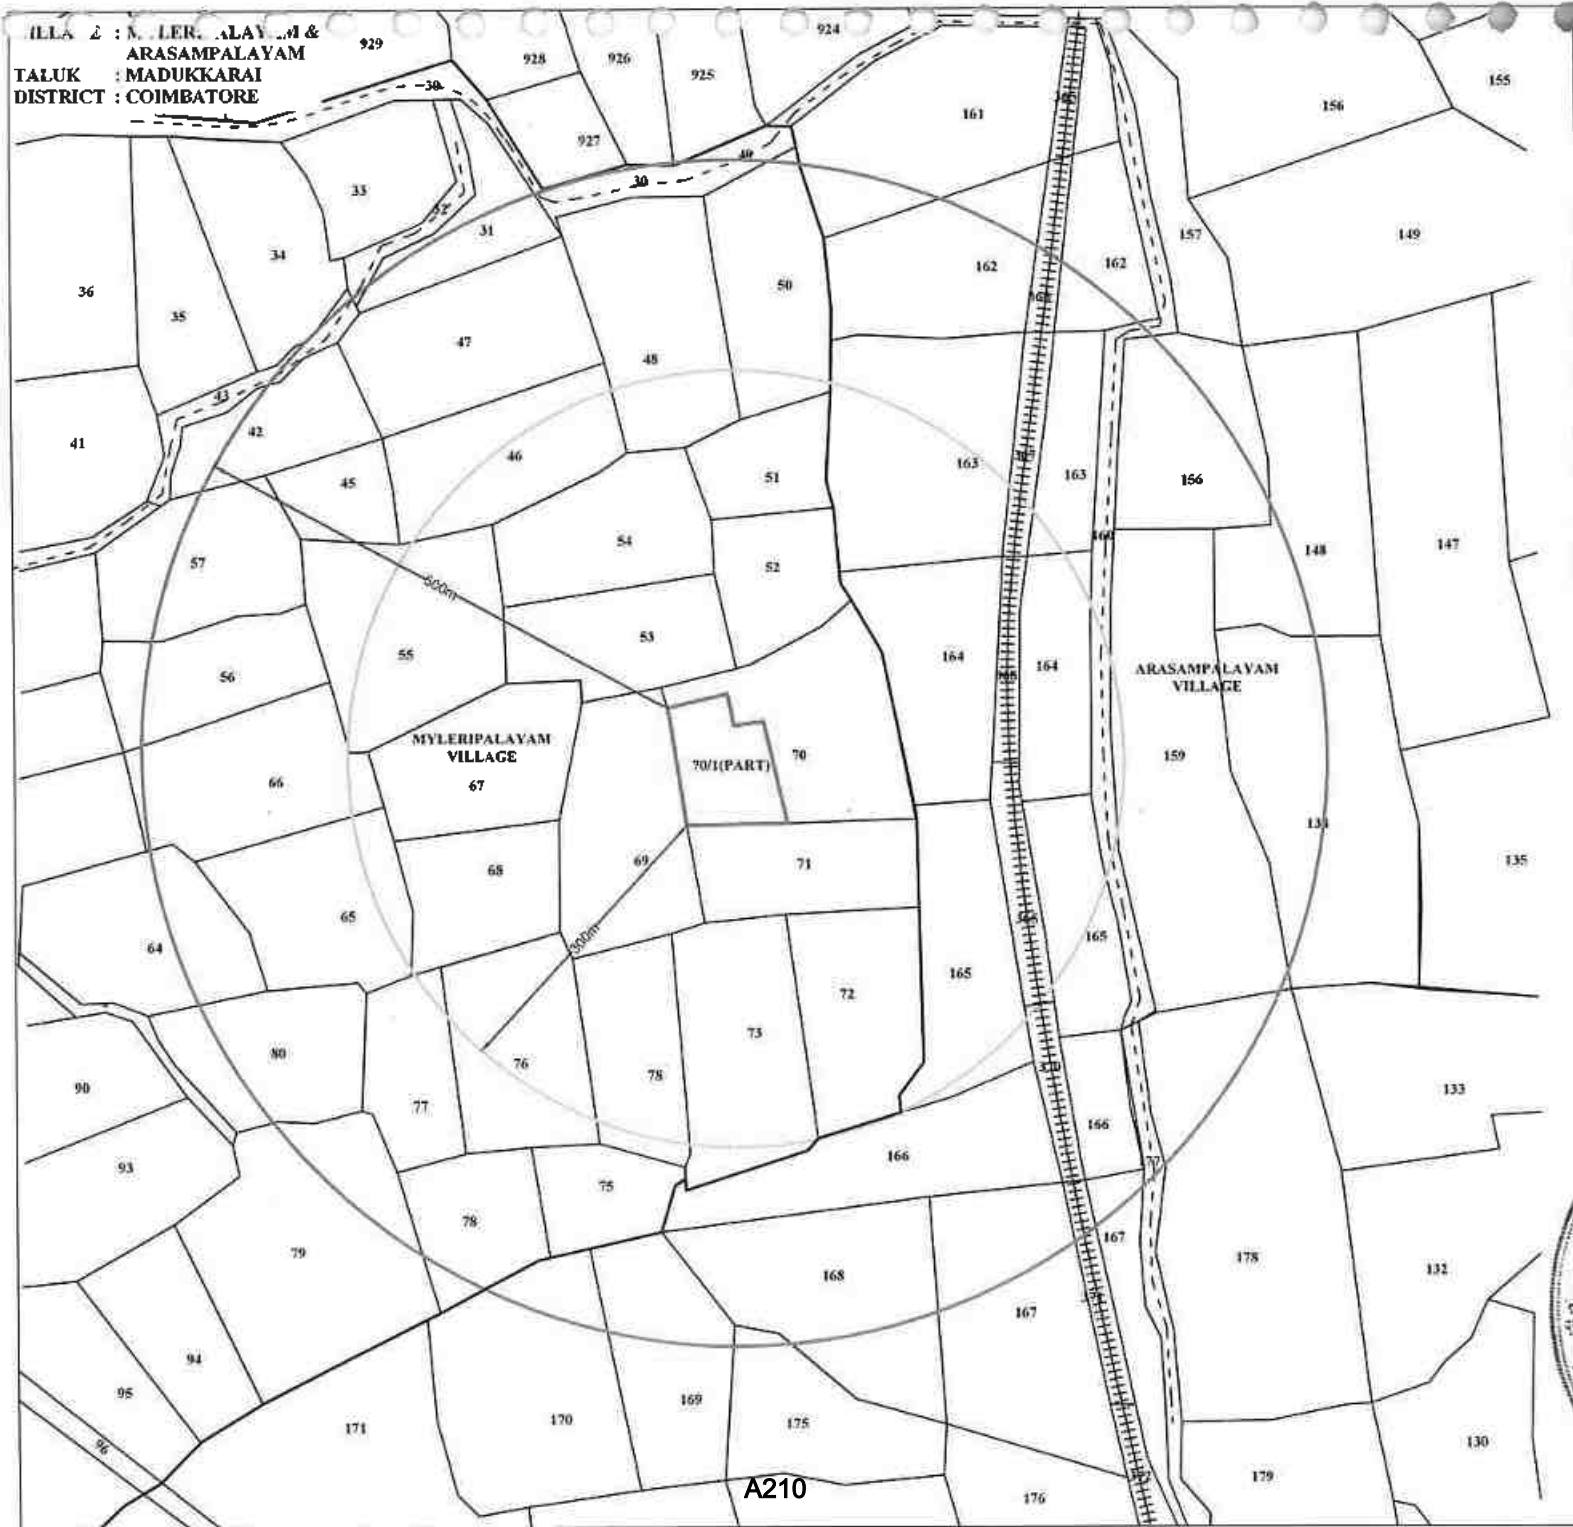

H. Ramakrishna

A. Arinmud
 A. ALLIMUTHU, M.Sc., M.Phil.
 Recognized Qualified Person
 ROP/DMG/MPD/06/2022





தமிழ்நாடு அரசு

வருவாய்த் துறை

நில உரிமை விபரங்கள் : இ. எண் 10(1) பிரிவு

மாவட்டம் : கோயம்புத்தூர்

வட்டம் : மதுக்கரை

வருவாய் கிராமம் : மைலேறிபாளையம்

பட்டா எண் : 986

உரிமையாளர்கள் பெயர்

- | | | | |
|------------------|-------|--------------|--|
| 1. லேட் கந்தசாமி | மகன் | ராமராஜ் | |
| 2. லேட் கந்தசாமி | மனைவி | சுப்பாத்தாள் | |
| 3. லேட் கந்தசாமி | மகள் | கலைச்செல்வி | |

புல எண்	உட்பிரிவு	புன்செய்		நன்செய்		மற்றவை		குறிப்புரைகள்
		பரப்பு	தீர்வை	பரப்பு	தீர்வை	பரப்பு	தீர்வை	
		ஹெக் - ஏர்	ரூ - பை	ஹெக் - ஏர்	ரூ - பை	ஹெக் - ஏர்	ரூ - பை	
70	1	1 - 31.50	2.63	--	--	--	--	2020/0103/12/218949- ----- 06-02-2020
71	1	0 - 53.50	1.07	--	--	--	--	2020/0103/12/218949- ----- 06-02-2020
		1 - 85.00	3.70					

குறிப்பு :



- மேற்கண்ட தகவல் / சான்றிதழ் நகல் விவரங்கள் மின் பதிவேட்டிலிருந்து
- பெறப்பட்டவை. இவற்றை தாங்கள் <https://eservices.tn.gov.in> என்ற இணைய தளத்தில் 12/14/044/00986/210403 என்ற குறிப்பு எண்ணை உள்ளீடு செய்து உறுதி செய்துகொள்ளவும்.
 - இத் தகவல்கள் 09-07-2024 அன்று 04:01:13 PM நேரத்தில் அச்சடிக்கப்பட்டது.
 - கைப்பேசி கேமராவின் 2D barcode படிப்பான் மூலம் படித்து 3G/GPRS வழி இணையதளத்தில் சரிபார்க்கவும்

புது - ஆம் பச்சளில் குதாயுதுதாய்
யாவட்டம் மதுகிதாய்
வட்டம் மி, தாயுதுதாயுது
கிதாயுது தாயுது

[illegible]

விருமன் மணக்கு

புது - ஆம் பரஸிஸில் சிங்காயுதுதான்
 மாவட்டம் மதுச்சேரி
 வட்டம் இ. தாதுபாளையம்

[illegible]

A212

A212 *R. Poma*



இந்திய அரசாங்கம்
Government of India

இந்திய தனித்துவ அடையாள ஆணையம்
Unique Identification Authority of India


பதிவு அடையாளம் / Enrolment No. 0000/00572/27733

To
Ramaraj
ராமராஜ்
S/O KANDASAMY,
2/395-1,
VENKATESWARA NAGAR,
PREMIER NAGAR WEST,
VTC: Othakalmandapam, PO: Othakalmandapam,
District: Coimbatore,
State: Tamil Nadu, PIN Code: 641032,
Mobile: 9842202515

10200267



KG102002673F1



உங்கள் ஆதார் எண் / Your Aadhaar No.

8060 3514 2007

எனது ஆதார், எனது அடையாளம்



இந்திய அரசாங்கம்
Government of India



Issue Date: 02/12/2015



ராமராஜ்
Ramaraj
பிறந்த நாள் / DOB: 04/04/1968
ஆண்பால் / Male

8060 3514 2007

எனது ஆதார், எனது அடையாளம்



Government of India



- ஆதார் அடையாளத்திற்கான ஆதார குடியரிமைக்கு அல்ல.
- பாதுகாப்பான QR குறியீடு/ ஆய்வுகூறு XML / ஆணைகளை அங்கீகாரத்தைப் பயன்படுத்தி அடையாளத்தை சரிபார்க்கவும்.

INFORMATION

- Aadhaar is a proof of identity, not of citizenship.
- Verify identity using Secure QR Code / Offline XML / Online Authentication.

- ஆதார் நாடு முழுவதிலும் செல்லுபடியாகும்.
- பல்வேறு அரசு மற்றும் அரசு சாரா சேவைகளை எளிதில் பெற ஆதார் உதவுகிறது.
- உங்கள் மொபைல் எண் மற்றும் மின்னஞ்சல் ஐடியை ஆதாரில் புதுப்பிக்கவும்.
- mAadhaar செயலியைப் பயன்படுத்தி உங்கள் ஸ்மார்ட் போனில் ஆதாரை எடுத்துச் செல்லுங்கள்.
- Aadhaar is valid throughout the country.
- Aadhaar helps you avail various Government and non-Government services easily.
- Keep your mobile number & email ID updated in Aadhaar.
- Carry Aadhaar in your smart phone – use mAadhaar App.




இந்திய தனித்துவ அடையாள ஆணையம்
Unique Identification Authority of India



Print Date: 02/06/2022

முகவரி: த.பெ கந்தசாமி, 2/395-1, வெங்கடேஸ்வர நகர்
மிந்மியர் நகர் மேற்கு, ஒத்தக்ளம்மண்டபம், கோவை, தம்
நாடு, 641032

Address: S/O KANDASAMY, 2/395-1,
VENKATESWARA NAGAR, PREMIER
NAGAR WEST, Othakalmandapam,
Coimbatore, Tamil Nadu, 641032



8060 3514 2007



1947



help@uidai.gov.in



www.uidai.gov.in

आयकर विभाग
INCOME TAX DEPARTMENT



भारत सरकार
GOVT. OF INDIA

K RAMARAJ
KANDASAMY

04/04/1968
Permanent Account Number

ALYPR6193A

K. Ramaraj
Signature



K. Ramaraj



[Under Rule 14(2) of Granite Conservation and Development Rules 1999 & Rule 7(B) of Telangana State Minor Mineral Concession Rules, 1966]

A. Allimuthu
A. ALLIMUTHU, M.Sc., M.Phil.,
Recognized Qualified Person
RQP/DMG/HYD/85/2022

A215

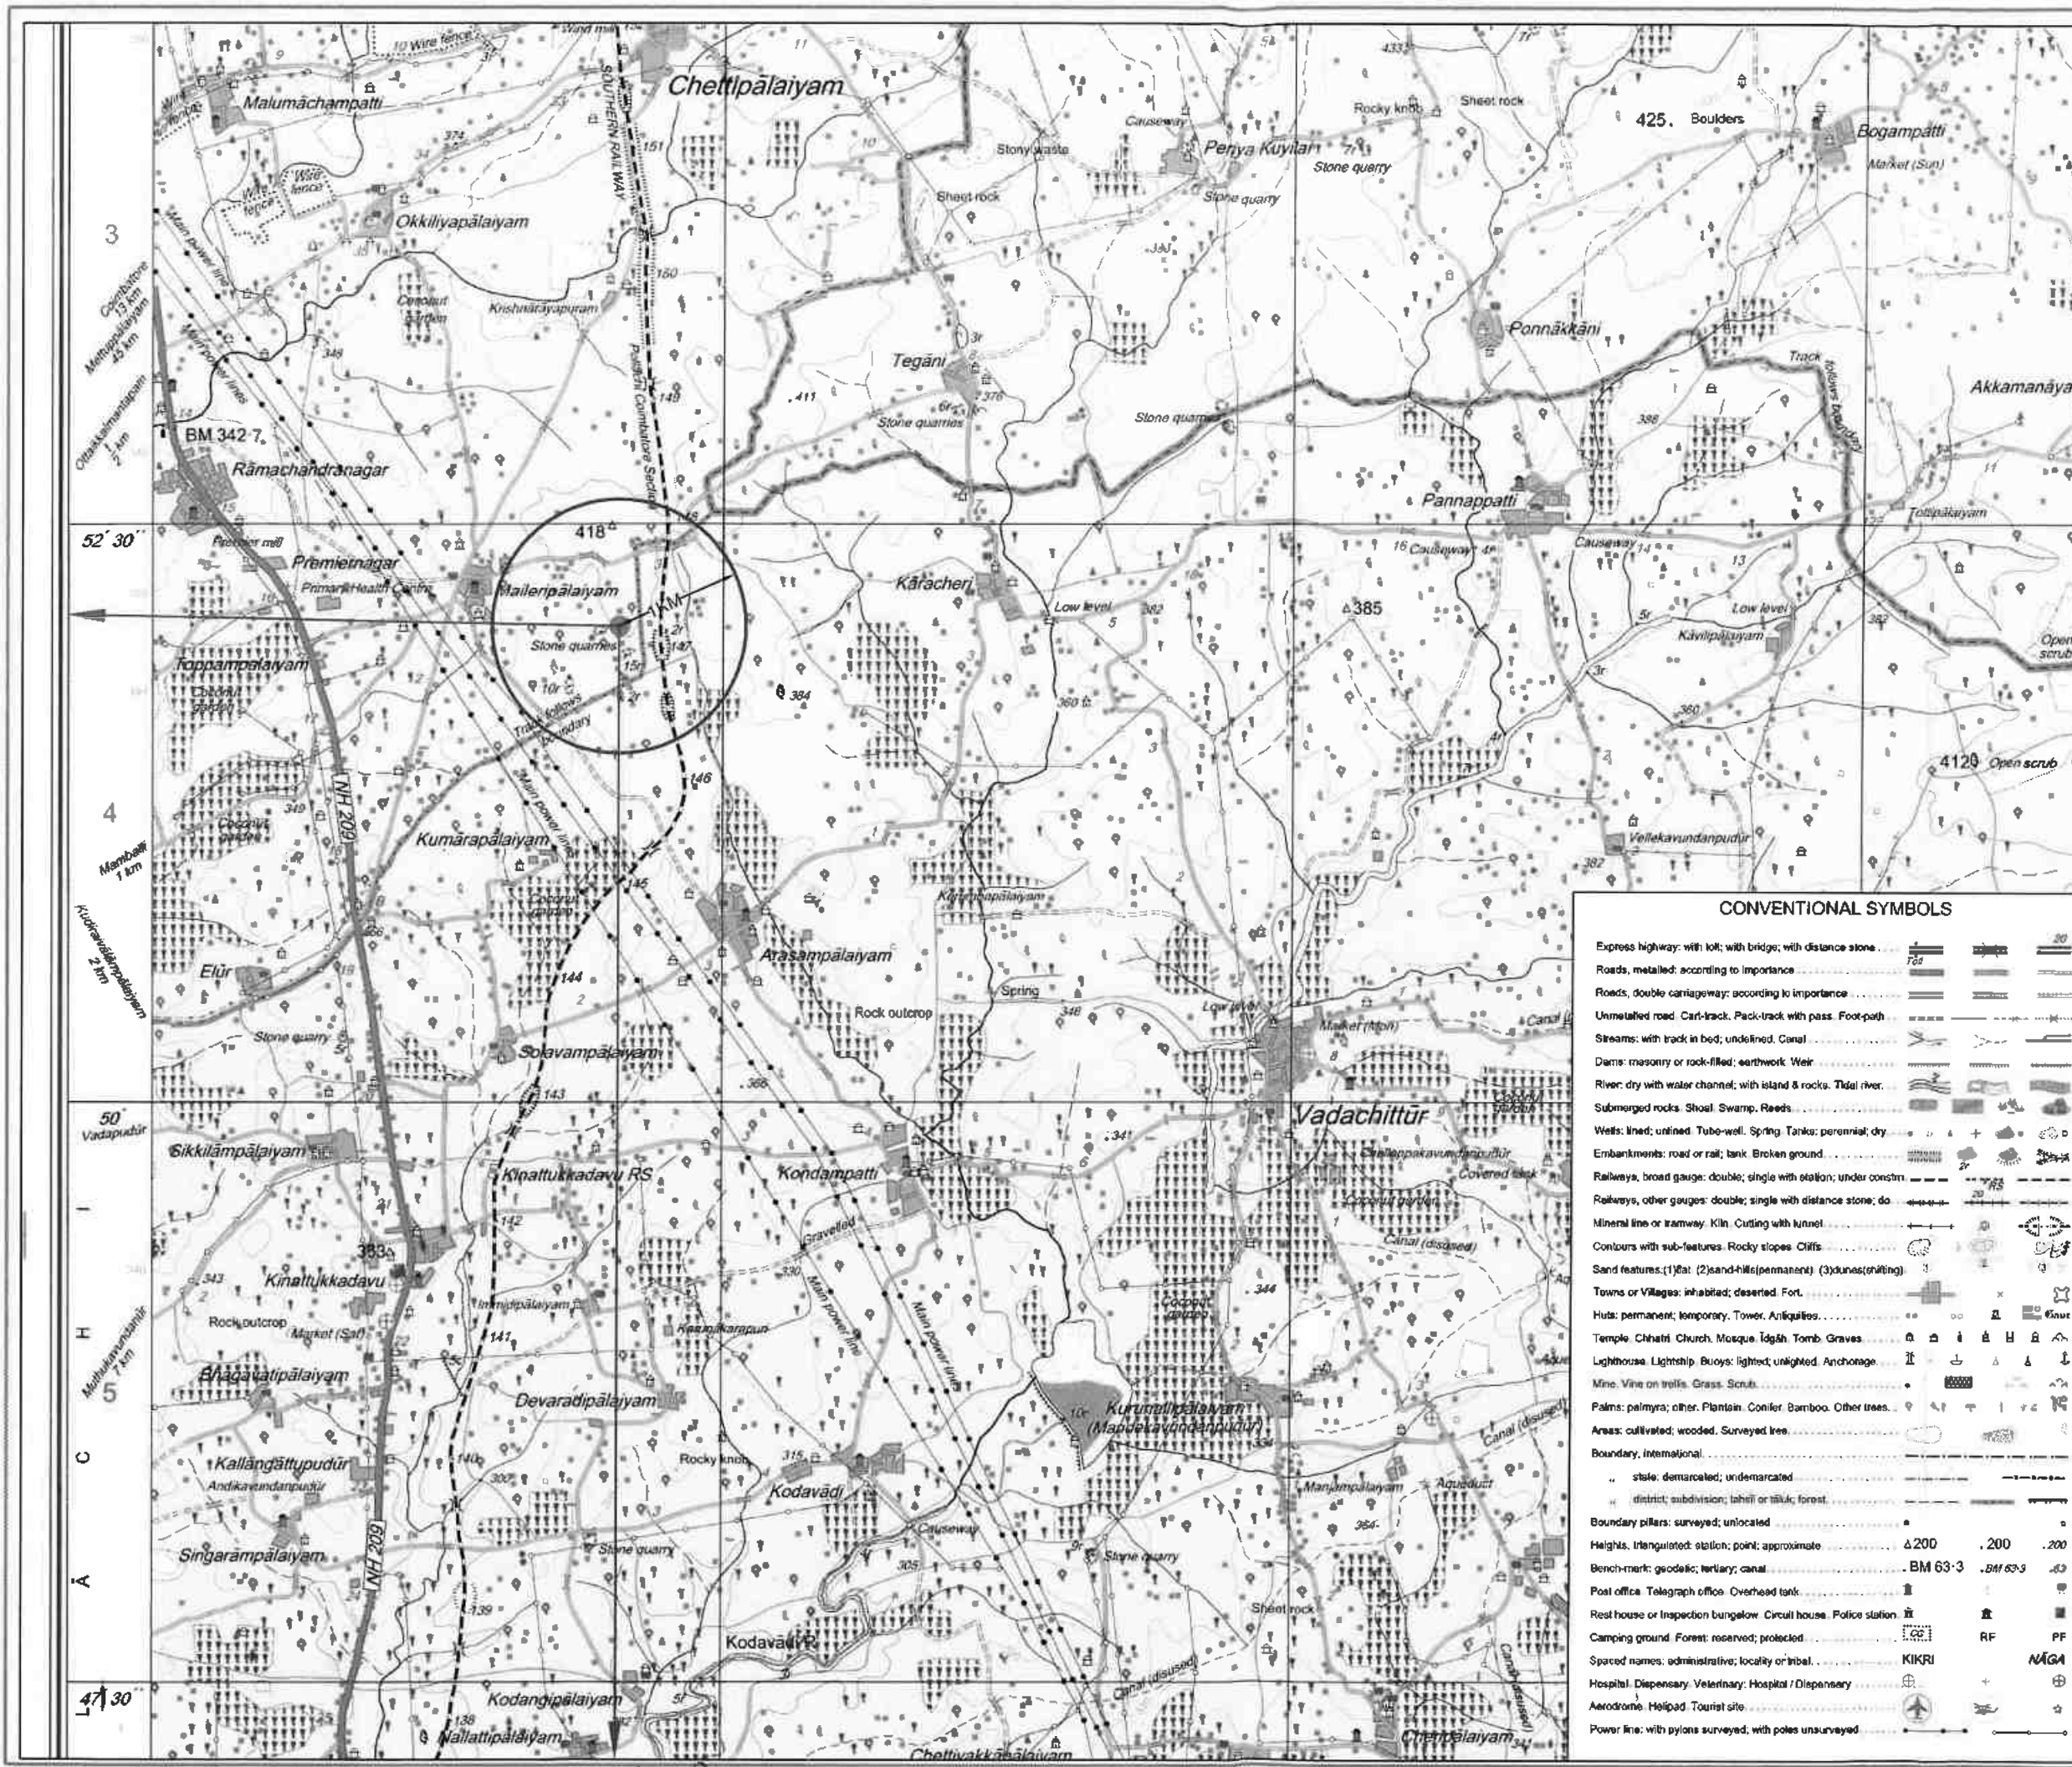


PLATE No.I

LOCATION MAP
Scale - 1:50,000

LOCATION OF THE QUARRY ●

LATITUDE : 10° 52' 00.56"N to 10° 52' 04.76"N
LONGITUDE : 77° 02' 02.14"E to 77° 02' 06.02"E

TOPO SHEED No.58F/01

LOCATION

EXTENT : 1.06.5 HECTARES
S.F.No. : 70/1(PART)
VILLAGE : MYLERIPALAYAM
TALUK : MADUKKARAI
DISTRICT : COIMBATORE
STATE : TAMILNADU

APPLICANT

THIRU.K.RAMARAJ,
S/o.KANDASAMY, 2/395-1,
VENKADESHWARA NAGAR, PREMIER
NAGAR WEST, OTHAKALMANDABAM
COIMBATORE DISTRICT

DATE OF SURVEY: 28.12.2024

PREPARED BY:

I DO HEREBY CERTIFY THAT THE
PLATE HAS BEEN CHECKED BY
ME AND IS CORRECT TO THE
BEST OF MY KNOWLEDGE

A. Allimuthu
A.ALLIMUTHU
(RQP/DMG/HYD/85/ 2022)

CONVENTIONAL SYMBOLS	
Express highway: with toll; with bridge; with distance stone	
Roads, metalled: according to importance	
Roads, double cartiageway: according to importance	
Unmetalled road, Cart-track, Pack-track with pass, Foot-path	
Streams: with track in bed; undefined, Canal	
Dams: masonry or rock-filled; earthwork Weir	
River: dry with water channel; with island & rocks, Tidal river	
Submerged rocks, Shoal, Swamp, Reeds	
Wells: lined; unlined, Tube-well, Spring, Tanks; perennial, dry	
Embankments: road or rail; bank, Broken ground	
Railways, broad gauge: double; single with station; under constn	
Railways, other gauges: double; single with distance stone; do	
Mineral line or tramway, Kiln, Cutting with tunnel	
Contours with sub-features: Rocky slopes, Cliffs	
Sand features:(1)flat (2)sand-hills(permanent) (3)dunes(shifting)	
Towns or Villages: inhabited; deserted, Fort	
Huts: permanent, temporary, Tower, Antiquities	
Temple, Chhatra, Church, Mosque, Idgah, Tomb, Graves	
Lighthouse, Lightship, Buoys: lighted, unlighted, Anchorage	
Mine, Vane on trellis, Grass, Scrub	
Palms: palmyra; other, Plantain, Conifer, Bamboo, Other trees	
Areas: cultivated; wooded, Surveyed line	
Boundary, international	
state, demarcated; undemarcated	
district; subdivision; tahsil or taluk; forest	
Boundary pillars: surveyed; unlocated	
Heights, triangulated: station; point; approximate	
Bench-mark: geodetic; tertiary; canal	
Post office, Telegraph office, Overhead tank	
Rest house or inspection bungalow, Circuit house, Police station	
Camping ground, Forest: reserved; protected	
Spaced names: administrative; locality or tribal	
Hospital, Dispensary, Veterinary, Hospital / Dispensary	
Aerodrome, Helipad, Tourist site	
Power line: with pylons surveyed, with poles unsurveyed	

K. Ramaraj



PLATE No.II

SATELLITE IMAGE

500m RADIUS

Scale - 1:5000

INDEX

LEASE BOUNDARY ☐
500m RADIUS ☐
300m RADIUS ☐

LOCATION

EXTENT : 1.06.5 HECTARES
S.F.No. : 70/1(PART)
VILLAGE : MYLERIPALAYAM
TALUK : MADUKKARAI
DISTRICT : COIMBATORE
STATE : TAMILNADU

APPLICANT

THIRU.K.RAMARAJ,
S/o.KANDASAMY, 2/395-1,
VENKADESHWARA NAGAR,PREMIER
NAGAR WEST, OTHAKALMANDABAM
COIMBATORE DISTRICT

DATE OF SURVEY: 28.12.2024

PREPARED BY:


I DO HEREBY CERTIFY THAT THE
PLATE HAS BEEN CHECKED BY
ME AND IS CORRECT TO THE
BEST OF MY KNOWLEDGE

A. Allimuthu

A.ALLIMUTHU
(RQP/DMG/HYD/85/ 2022)

K. Ramaraj

LEASE PLAN



TOPO SHEET NO. : 58 F/01
LATITUDE : 10° 52' 00.56"N to 10° 52' 04.76"N
LONGITUDE : 77° 02' 02.14"E to 77° 02' 06.02"E

BOUNDARY CO-ORDINATES		
P.No.	LATITUDE	LONGITUDE
1	10° 52' 04.76"N	77° 02' 04.08"E
2	10° 52' 03.75"N	77° 02' 04.30"E
3	10° 52' 03.88"N	77° 02' 05.26"E
4	10° 52' 00.65"N	77° 02' 06.02"E
5	10° 52' 00.62"N	77° 02' 04.72"E
6	10° 52' 00.56"N	77° 02' 02.77"E
7	10° 52' 03.94"N	77° 02' 02.23"E
8	10° 52' 04.29"N	77° 02' 02.14"E
DATUM WGS-84		

- SITE SERVICES**
- A - OFFICE
 - B - STORE ROOM
 - C - FIRST AID ROOM
 - D - REST SHELTER
 - E - TOILET

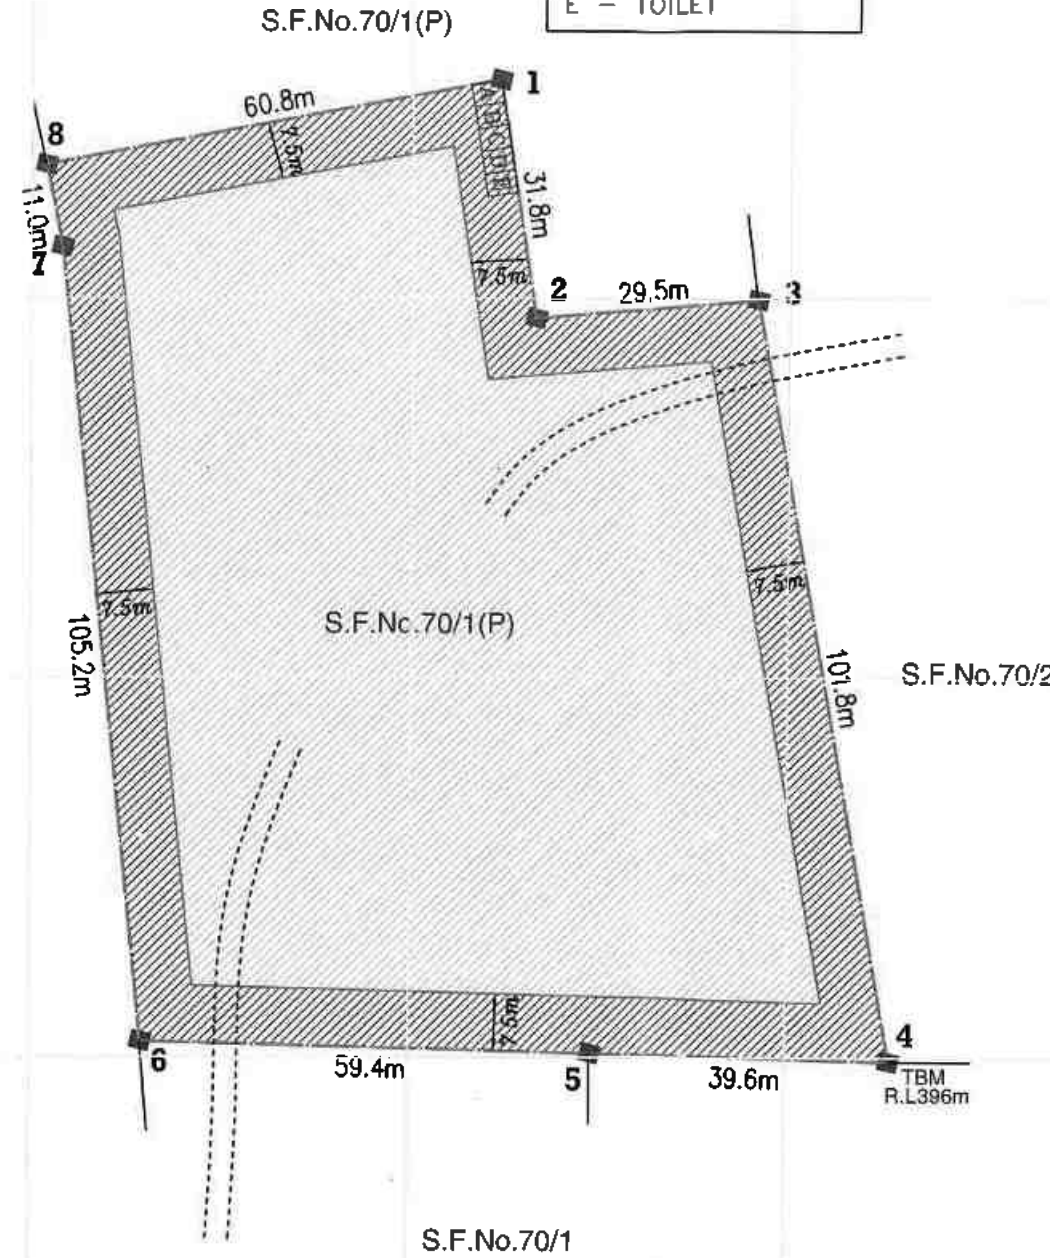


PLATE No.III

LEASE PLAN

Scale - 1:1000

INDEX

- LEASE BOUNDARY
- APPROACH ROAD
- MINING AREA
- SAFETY ZONE
- BOUNDARY PILLAR

LOCATION

EXTENT : 1.065 HECTARES
S.F.No. : 70/1(PART)
VILLAGE : MYLERIPALAYAM
TALUK : MADUKKARAI
DISTRICT : COIMBATORE
STATE : TAMILNADU

APPLICANT

THIRU.K.RAMARAJ,
S/o.KANDASAMY, 2/395-1,
VENKADESHWARA NAGAR, PREMIER
NAGAR WEST, OTHAKALMANDABAM
COIMBATORE DISTRICT

DATE OF SURVEY: 28.12.2024

PREPARED BY:

I DO HEREBY CERTIFY THAT THE
PLATE HAS BEEN CHECKED BY
ME AND IS CORRECT TO THE
BEST OF MY KNOWLEDGE

A. Allimuthu

A.ALLIMUTHU
(RQP/DMG/HYD/85/ 2022)

K. Ramaraj

GEOLOGICAL & SURFACE PLAN



PLATE No.IV

GEOLOGICAL & SURFACE PLAN

Scale - 1:1000

INDEX

GRAVEL	
ROUGH STONE	
CONTOUR LINE	
SHRUP	
TEMPORARY BENCH MARK	
LEASE BOUNDARY	
APPROACH ROAD	
SAFETY ZONE	

LOCATION

EXTENT : 1.06.5 HECTARES
S.F.No. : 70/1(PART)
VILLAGE : MYLERIPALAYAM
TALUK : MADUKKARAI
DISTRICT : COIMBATORE
STATE : TAMILNADU

APPLICANT

THIRU.K.RAMARAJ,
S/o.KANDASAMY, 2/395-1,
VENKADESHWARA NAGAR, PREMIER
NAGAR WEST, OTHAKALMANDABAM
COIMBATORE DISTRICT


DATE OF SURVEY: 28.12.2024

PREPARED BY:


I DO HEREBY CERTIFY THAT THE
PLATE HAS BEEN CHECKED BY
ME AND IS CORRECT TO THE
BEST OF MY KNOWLEDGE

A. Allimuthu


A.ALLIMUTHU
(RQP/DMG/HYD/85/ 2022)

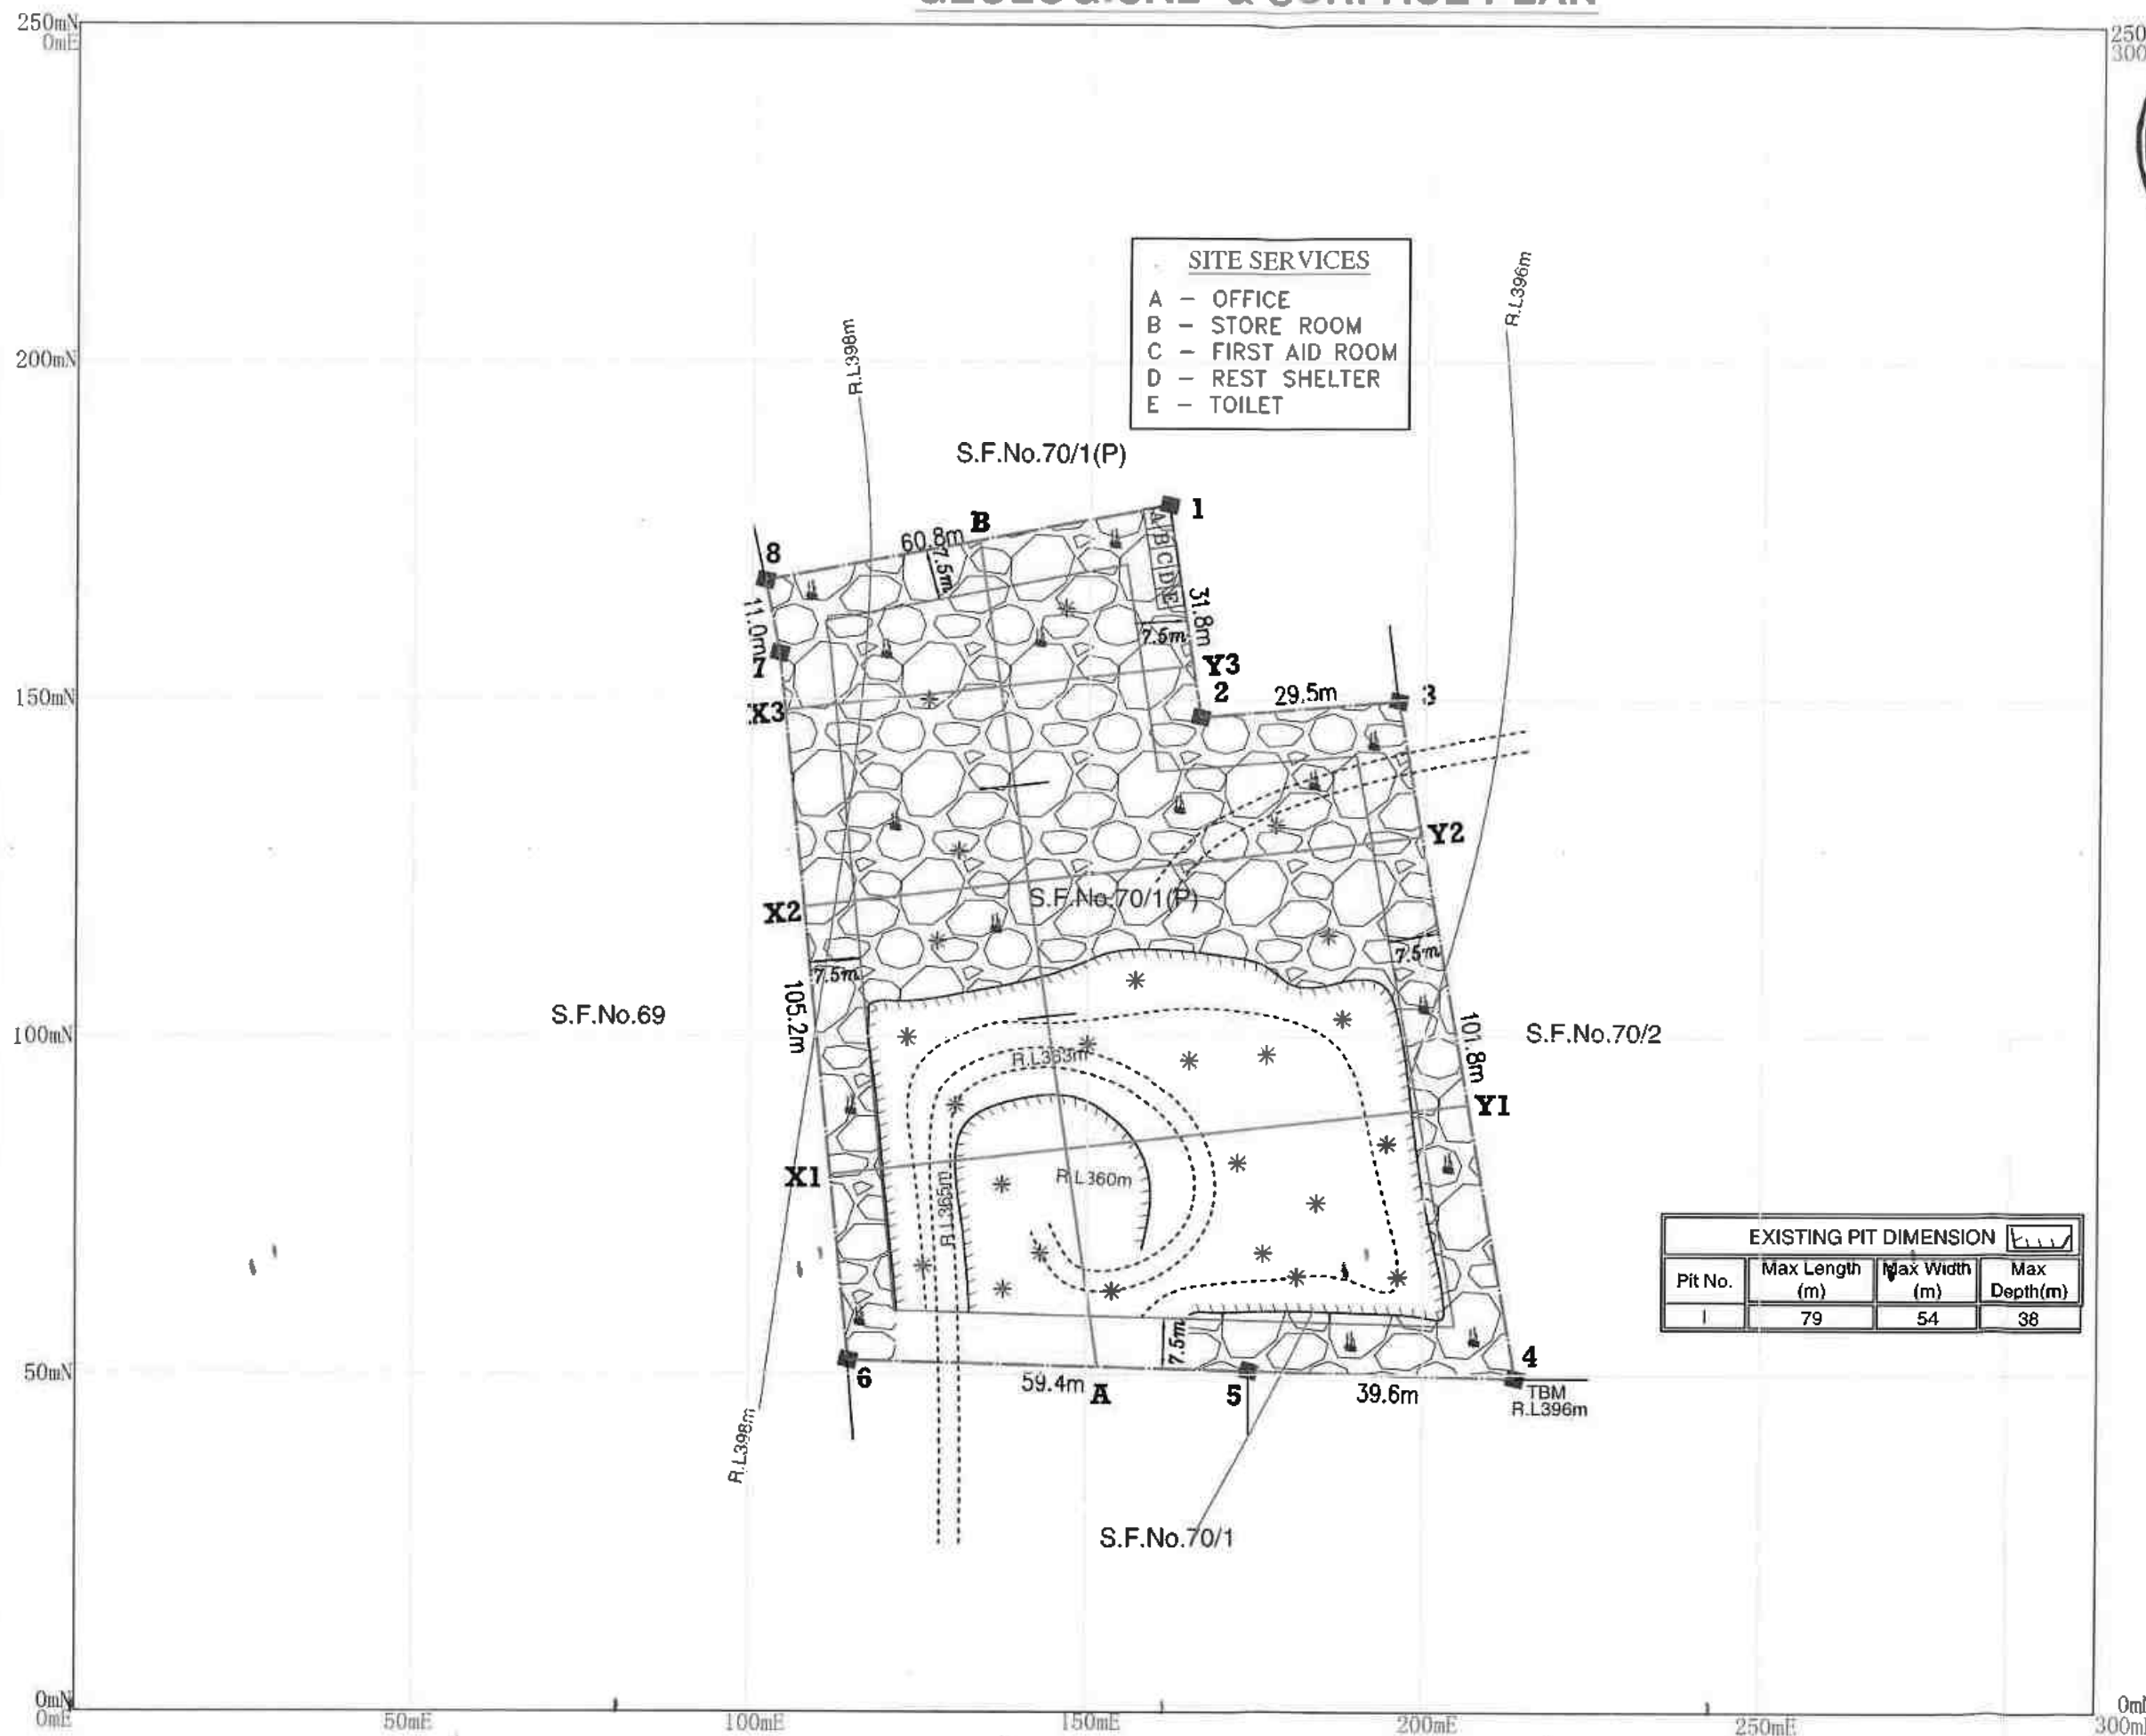

K. Ramaraj

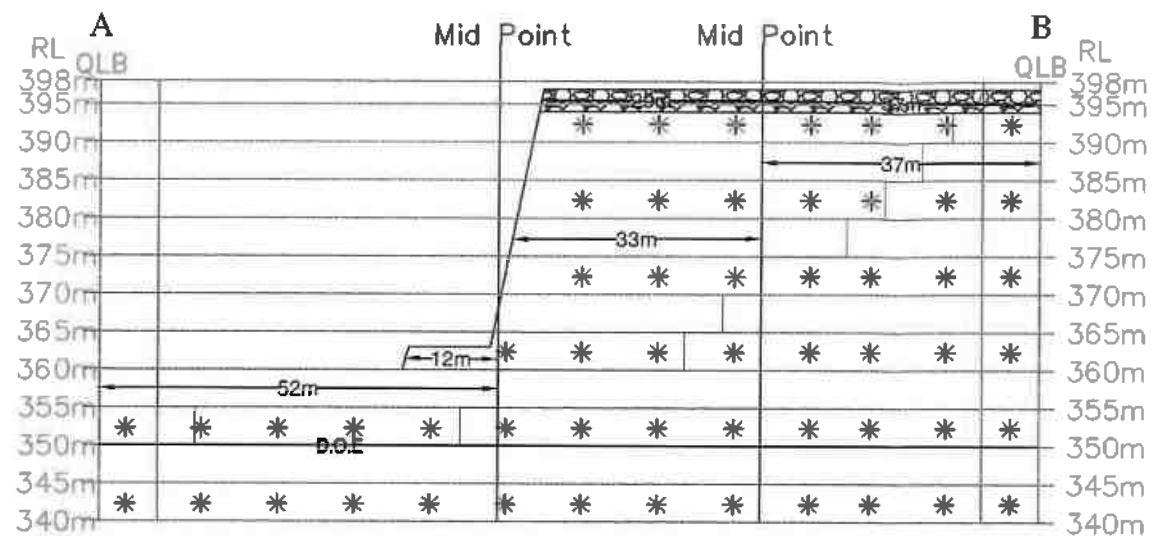


SECTION ALONG A-B

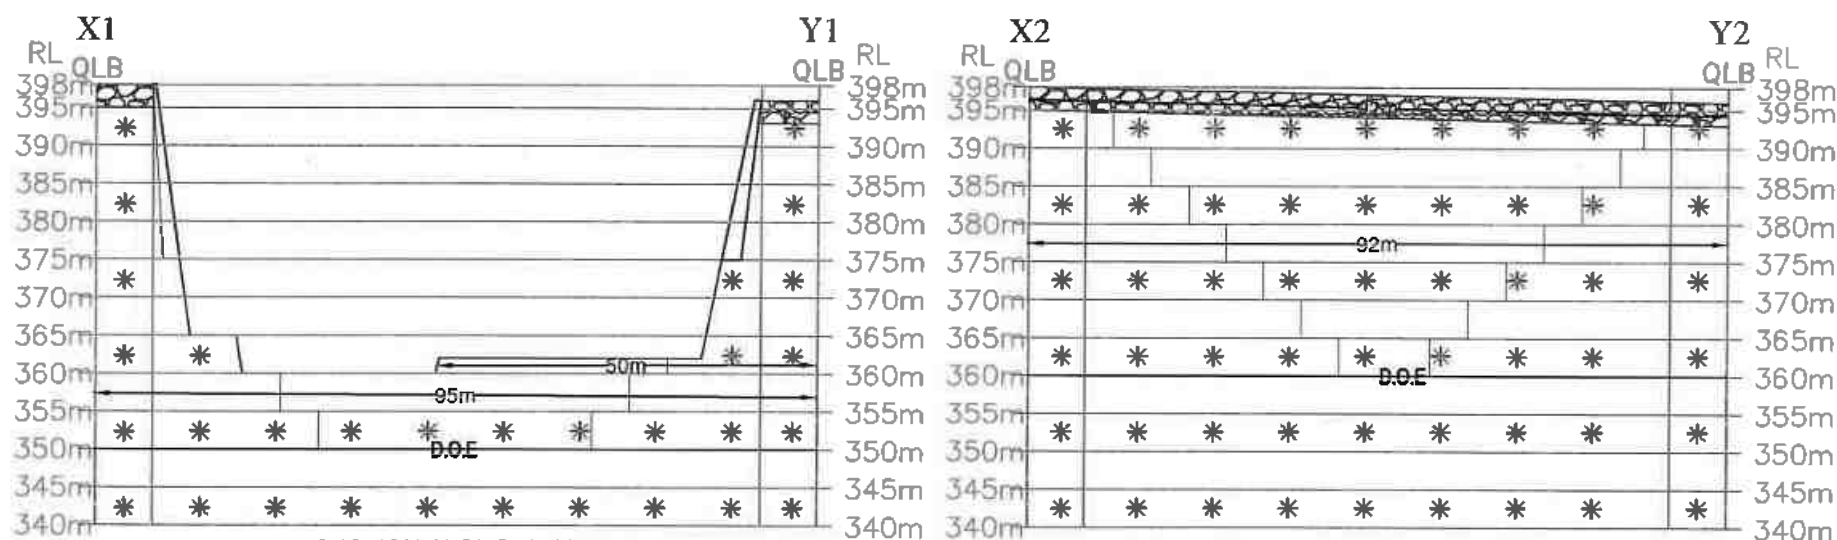

SECTION ALONG X1-Y1

SECTION ALONG X2-Y2

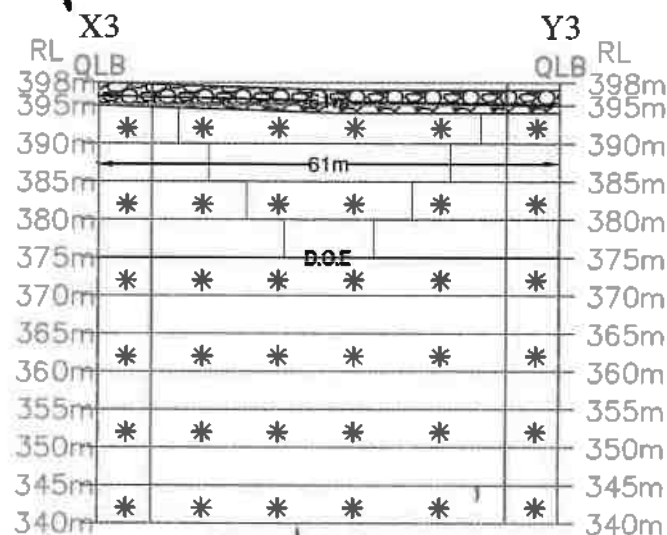

SECTION ALONG X3-Y3

Geological Resources						
Section	Msl	Length (m)	Width (m)	Depth(m)	Volume (m³)	Gravel (m³)
AB-X1Y1	362-360	12	50	2	1200	-
	360-350	52	95	10	49400	-
AB-X2Y2	398-395	29	92	3	-	8004
	395-360	33	92	35	106260	-
AB-X3Y3	398-395	37	61	3	-	6771
	395-350	31	61	20	37820	-
(Up to Depth of 48m) Total					194680.0	14775.0

PLATE No.V

GEOLOGICAL CROSS SECTIONS

Scale : Horizontal = 1:1000
Vertical = 1:1000

INDEX

GRAVEL	
ROUGH STONE	
LEASE BOUNDARY	
SAFETY ZONE	
DEPTH OF ESTIMATION	

LOCATION

EXTENT : 1.06.5 HECTARES
S.F.No. : 70/1(PART)
VILLAGE : MYLERIPALAYAM
TALUK : MADUKKARAI
DISTRICT : COIMBATORE
STATE : TAMILNADU

APPLICANT

THIRU.K.RAMARAJ,
S/o.KANDASAMY, 2/395-1,
VENKADESHWARA NAGAR, PREMIER
NAGAR WEST, OTHAKALMANDABAM
COIMBATORE DISTRICT

DATE OF SURVEY: 28.12.2024

PREPARED BY:

I DO HEREBY CERTIFY THAT THE
PLATE HAS BEEN CHECKED BY
ME AND IS CORRECT TO THE
BEST OF MY KNOWLEDGE

A. Allimuthu

A.ALLIMUTHU
(RQP/DMG/HYD/85/ 2022)

K. Ramaraj

YEAR WISE PRODUCTION AND DEVELOPMENTS PLAN



- I- YEAR EXCAVATION
- II- YEAR EXCAVATION
- III- YEAR EXCAVATION
- IV- YEAR EXCAVATION
- V- YEAR EXCAVATION

- SITE SERVICES**
- A - OFFICE
 - B - STORE ROOM
 - C - FIRST AID ROOM
 - D - REST SHELTER
 - E - TOILET

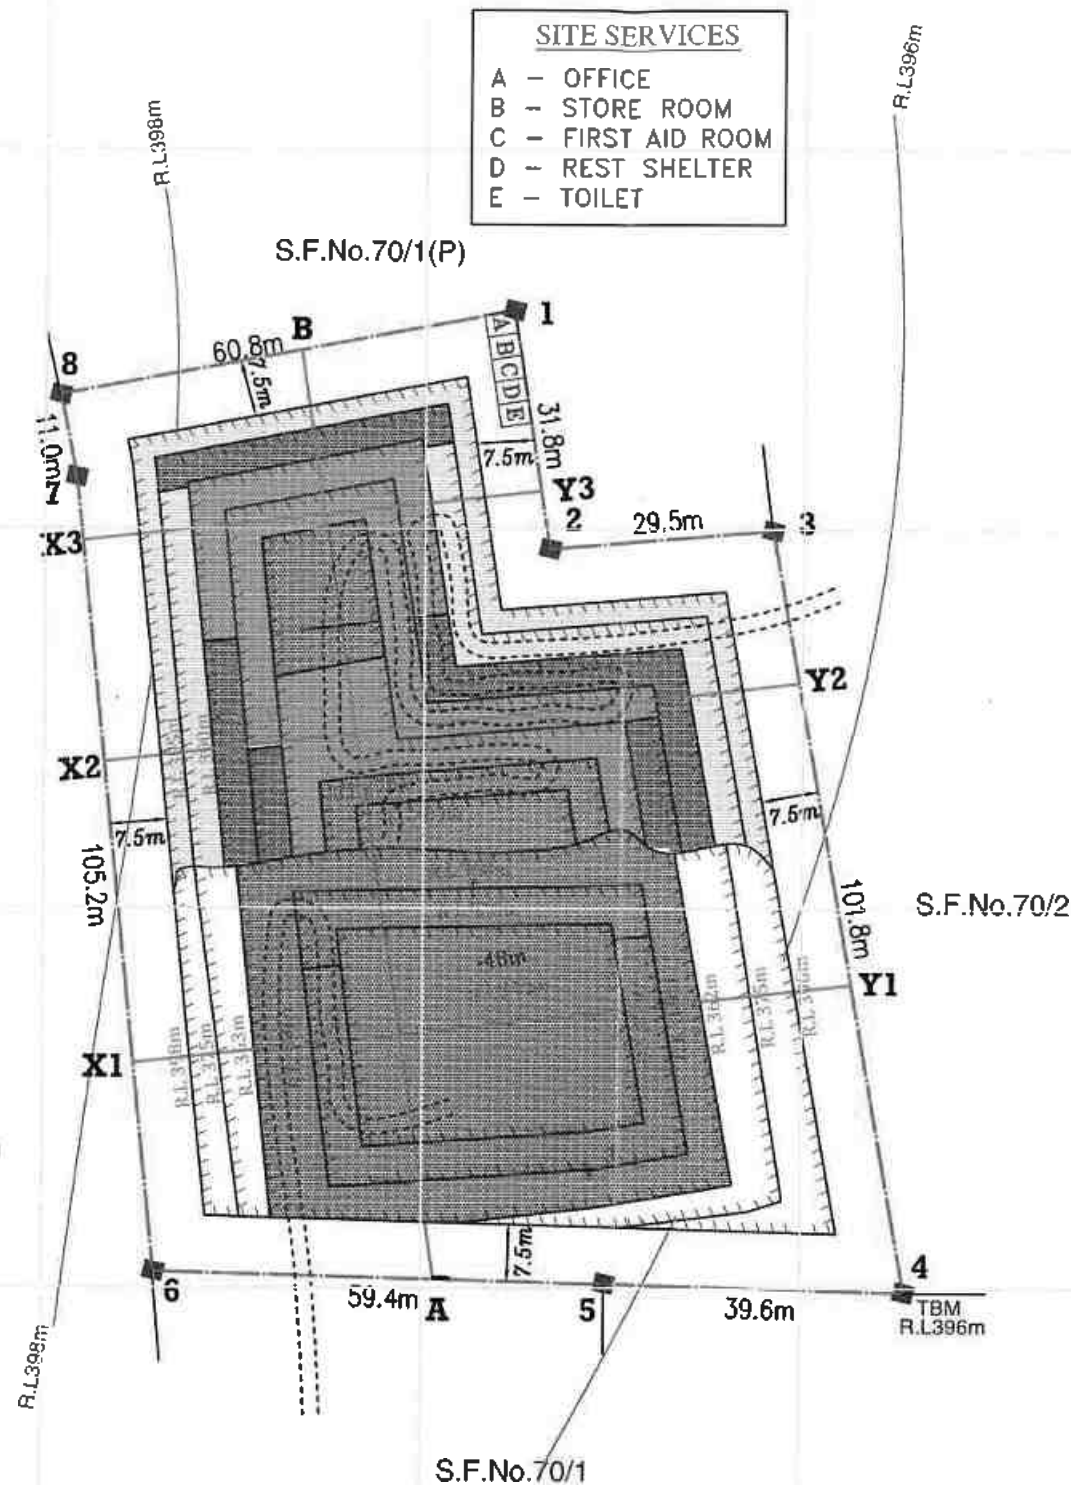


PLATE No.VI

YEAR WISE PRODUCTION AND DEVELOPMENTS PLAN

Scale - 1:1000

INDEX

LEASE BOUNDARY



APPROACH ROAD



MINING BENCHES



LOCATION

EXTENT : 1.06.5 HECTARES
S.F.No. : 70/1(PART)
VILLAGE : MYLERIPALAYAM
TALUK : MADUKKARAI
DISTRICT : COIMBATORE
STATE : TAMILNADU

APPLICANT

THIRU.K.RAMARAJ,
S/o.KANDASAMY, 2/395-1,
VENKADESHWARA NAGAR, PREMIER
NAGAR WEST, OTHAKALMANDABAM
COIMBATORE DISTRICT


DATE OF SURVEY: 28.12.2024

PREPARED BY:


I DO HEREBY CERTIFY THAT THE
PLATE HAS BEEN CHECKED BY
ME AND IS CORRECT TO THE
BEST OF MY KNOWLEDGE

A. Allimuthu


A.ALLIMUTHU,
(RQP/DMG/HYD/85/ 2022)

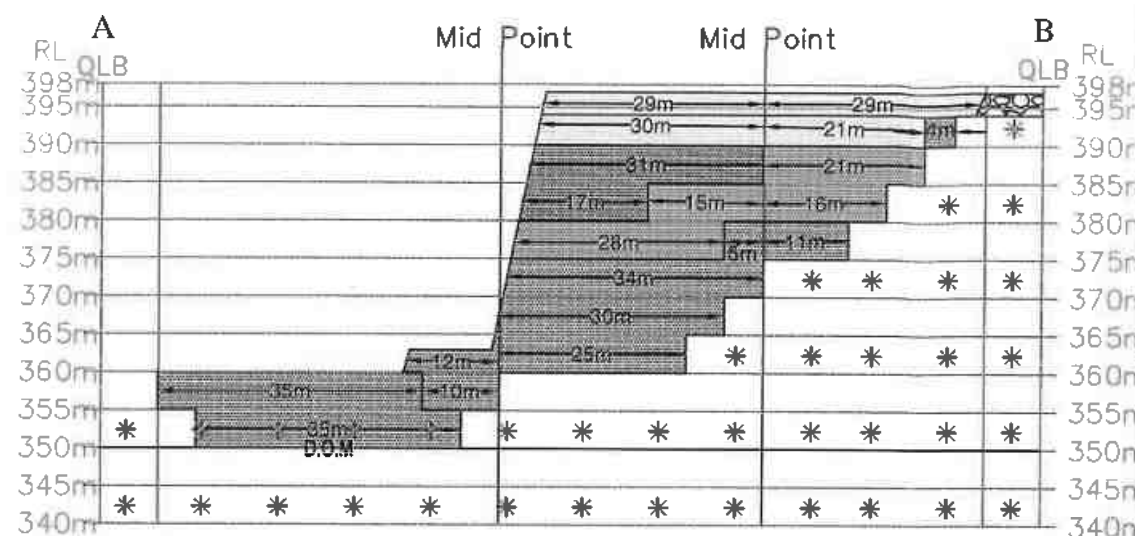


SECTION ALONG A-B

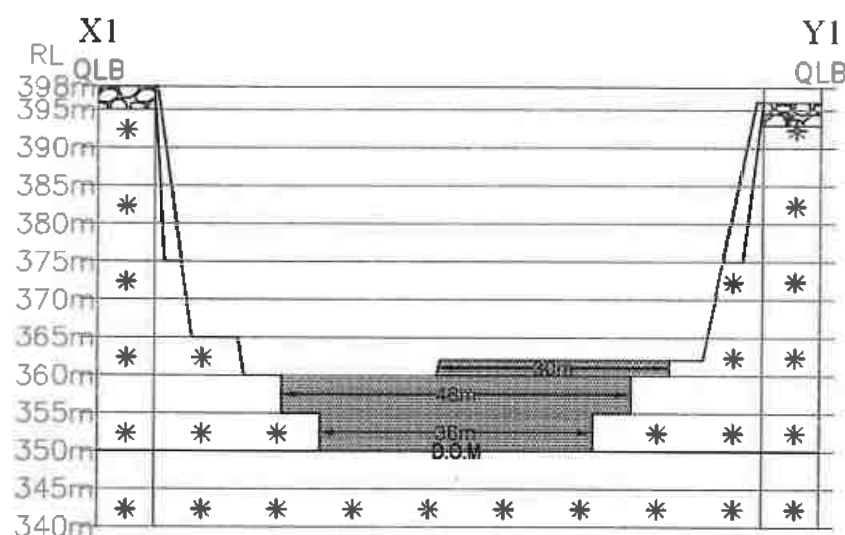

SECTION ALONG X1-Y1

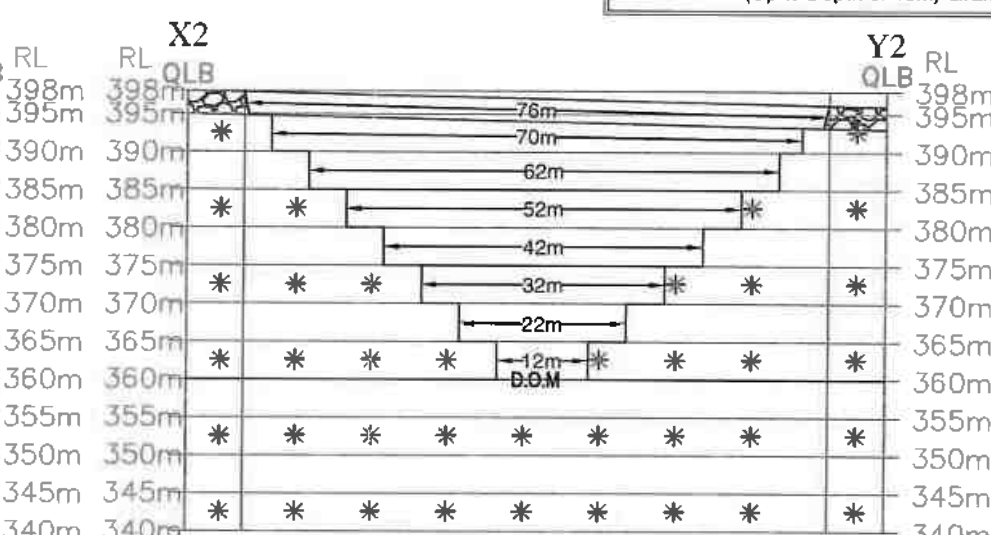

SECTION ALONG X2-Y2

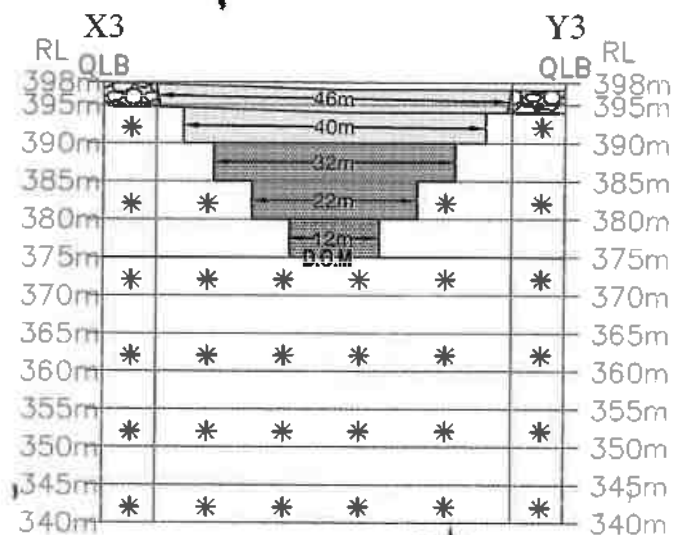

SECTION ALONG X3-Y3

Year wise Production and Developments							
Year	Section	Msl	Length (m)	Width (m)	Depth(m)	Volume (m ³)	Gravel (m ³)
I-Year	AB-X2Y2	398-395	29	76	3	-	6612
		395-390	30	70	5	10500	-
	AB-X3Y3	398-395	29	46	3	-	4002
		395-390	21	40	5	4200	-
Total						14700	10614
II-Year	AB-X2Y2	390-385	31	62	5	9610	-
		385-380	17	52	5	4420	-
	AB-X3Y3	395-390	4	40	5	800	-
Total						14830	-
III-Year	AB-X2Y2	385-380	15	52	5	3900	-
		380-375	28	42	5	5880	-
	AB-X3Y3	390-385	21	32	5	3360	-
		385-380	16	22	5	1760	-
Total						14900	-
IV-Year	AB-X2Y2	380-375	5	42	5	1050	-
		375-370	34	32	5	5440	-
		370-365	30	22	5	3300	-
		365-360	25	12	5	1500	-
	AB-X3Y3	380-375	11	12	5	660	-
		362-360	12	30	2	720	-
V-Year	AB-X1Y1	360-355	10	46	5	2300	-
		360-355	35	46	5	8050	-
	355-350	35	36	5	6300	-	
Total						14350	-
(Up to Depth of 48m) Grand Total						73750	10614



PRODUCTION CROSS SECTIONS

Scale : Horizontal = 1:1000
Vertical = 1:1000

INDEX

GRAVEL	
ROUGH STONE	
LEASE BOUNDARY	
SAFETY ZONE	
DEPTH OF MINING	
ULTIMATE PIT LIMIT	

LOCATION

EXTENT : 1.06.5 HECTARES
S.F.No. : 70/1(PART)
VILLAGE : MYLERIPALAYAM
TALUK : MADUKKARAI
DISTRICT : COIMBATORE
STATE : TAMILNADU

APPLICANT

THIRU.K.RAMARAJ,
S/o.KANDASAMY, 2/395-1,
VENKADESHWARA NAGAR, PREMIER
NAGAR WEST, OTHAKALMANDABAM
COIMBATORE DISTRICT

DATE OF SURVEY: 28.12.2024


PREPARED BY:

I DO HEREBY CERTIFY THAT THE
PLATE HAS BEEN CHECKED BY
ME AND IS CORRECT TO THE
BEST OF MY KNOWLEDGE

A.ALLIMUTHU
(RQP/DMG/HYD/85/ 2022)

K. Ramaraj

CONCEPTUAL PLAN

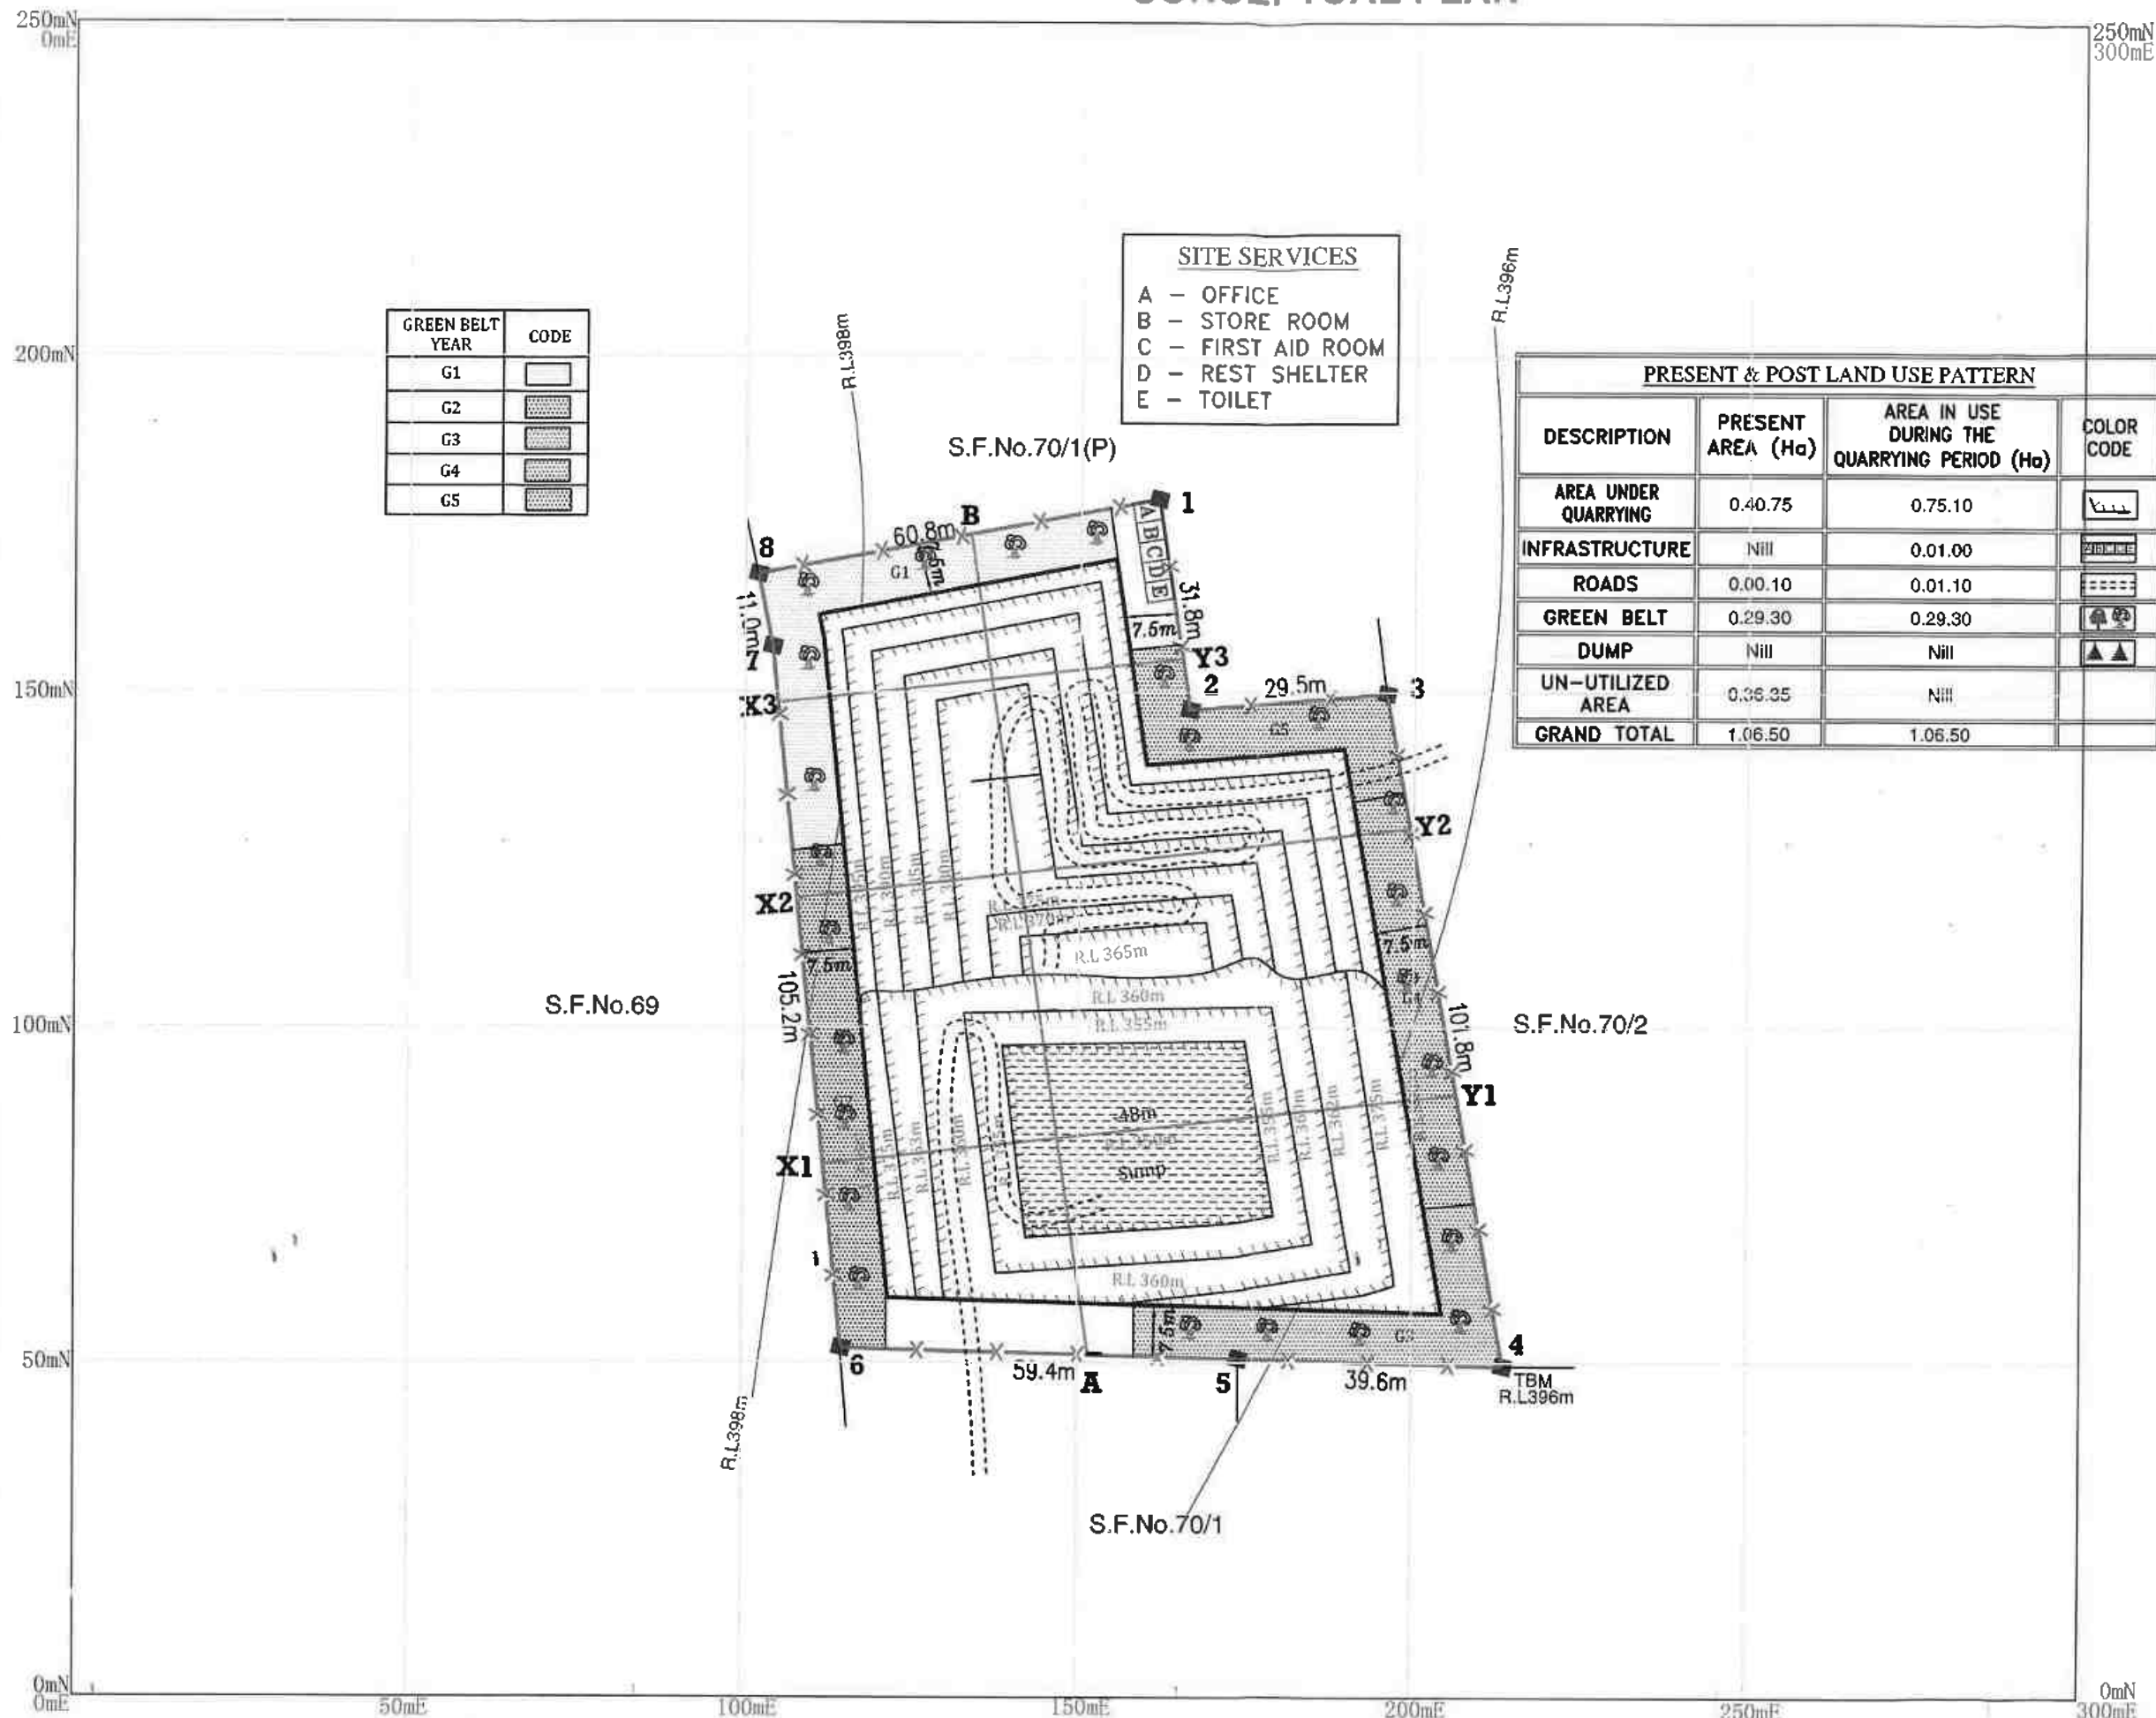

GREEN BELT YEAR	CODE
G1	
G2	
G3	
G4	
G5	

SITE SERVICES	
A	OFFICE
B	STORE ROOM
C	FIRST AID ROOM
D	REST SHELTER
E	TOILET

PRESENT & POST LAND USE PATTERN			
DESCRIPTION	PRESENT AREA (Ha)	AREA IN USE DURING THE QUARRYING PERIOD (Ha)	COLOR CODE
AREA UNDER QUARRYING	0.40.75	0.75.10	
INFRASTRUCTURE	NIII	0.01.00	
ROADS	0.00.10	0.01.10	
GREEN BELT	0.29.30	0.29.30	
DUMP	NIII	NIII	
UN-UTILIZED AREA	0.36.35	NIII	
GRAND TOTAL	1.06.50	1.06.50	

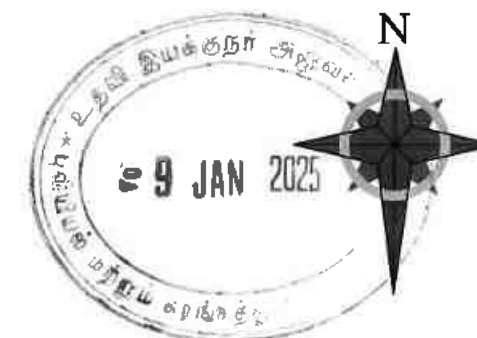


PLATE No.VIII

CONCEPTUAL PLAN

Scale - 1:1000

INDEX

LEASE BOUNDARY FOR FENCING	
APPROACH ROAD	
PIT LIMIT AT THE END OF THE MINE LIFE	
AREA OF AFFORESTATION	
MINING BENCHES	

LOCATION

EXTENT : 1.06.5 HECTARES
S.F.No. : 70/1(PART)
VILLAGE : MYLERIPALAYAM
TALUK : MADUKKARAI
DISTRICT : COIMBATORE
STATE : TAMILNADU

APPLICANT

THIRU.K.RAMARAJ,
S/o.KANDASAMY, 2/395-1,
VENKADESHWARA NAGAR, PREMIER
NAGAR WEST, OTHAKALMANDABAM
COIMBATORE DISTRICT

DATE OF SURVEY: 28.12.2024

PREPARED BY:

I DO HEREBY CERTIFY THAT THE
PLATE HAS BEEN CHECKED BY
ME AND IS CORRECT TO THE
BEST OF MY KNOWLEDGE

A. Allimuthu

A.ALLIMUTHU
(RQP/DMG/HYD/85/ 2022)

K. Ramaraj



PLATE No.IX

CONCEPTUAL CROSS SECTIONS

Scale : Horizontal = 1:1000
Vertical = 1:1000

INDEX

GRAVEL	
ROUGH STONE	
LEASE BOUNDARY	
SAFETY ZONE	
DEPTH OF ESTIMATION	
ULTIMATE PIT LIMIT	

LOCATION

EXTENT : 1.06.5 HECTARES
S.F.No. : 70/1(PART)
VILLAGE : MYLERIPALAYAM
TALUK : MADUKKARAI
DISTRICT : COIMBATORE
STATE : TAMILNADU

APPLICANT

THIRU.K.RAMARAJ,
S/o.KANDASAMY, 2/395-1,
VENKADESHWARA NAGAR, PREMIER
NAGAR WEST, OTHAKALMANDABAM
COIMBATORE DISTRICT


DATE OF SURVEY: 28.12.2024

PREPARED BY:



I DO HEREBY CERTIFY THAT THE
PLATE HAS BEEN CHECKED BY
ME AND IS CORRECT TO THE
BEST OF MY KNOWLEDGE

A. Allimuthu

A.ALLIMUTHU
(RQP/DMG/HYD/85/ 2022)

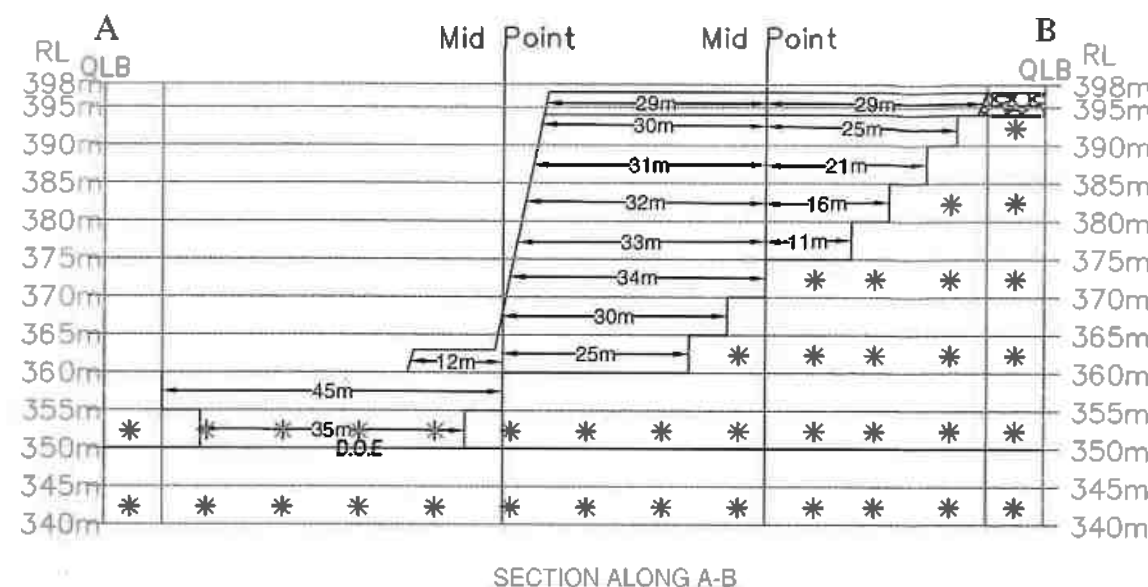

ULTIMATE PIT DIMENTION			
Pit No.	Max Length (m)	Max Width (m)	Max Depth (m)
I	109	77	48

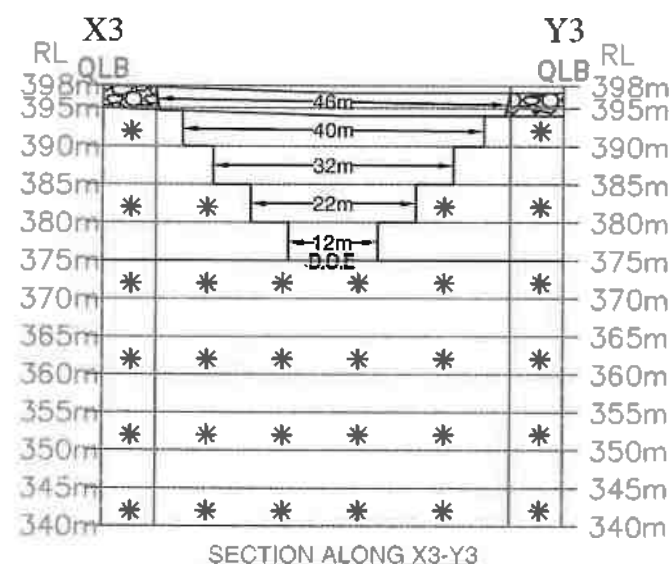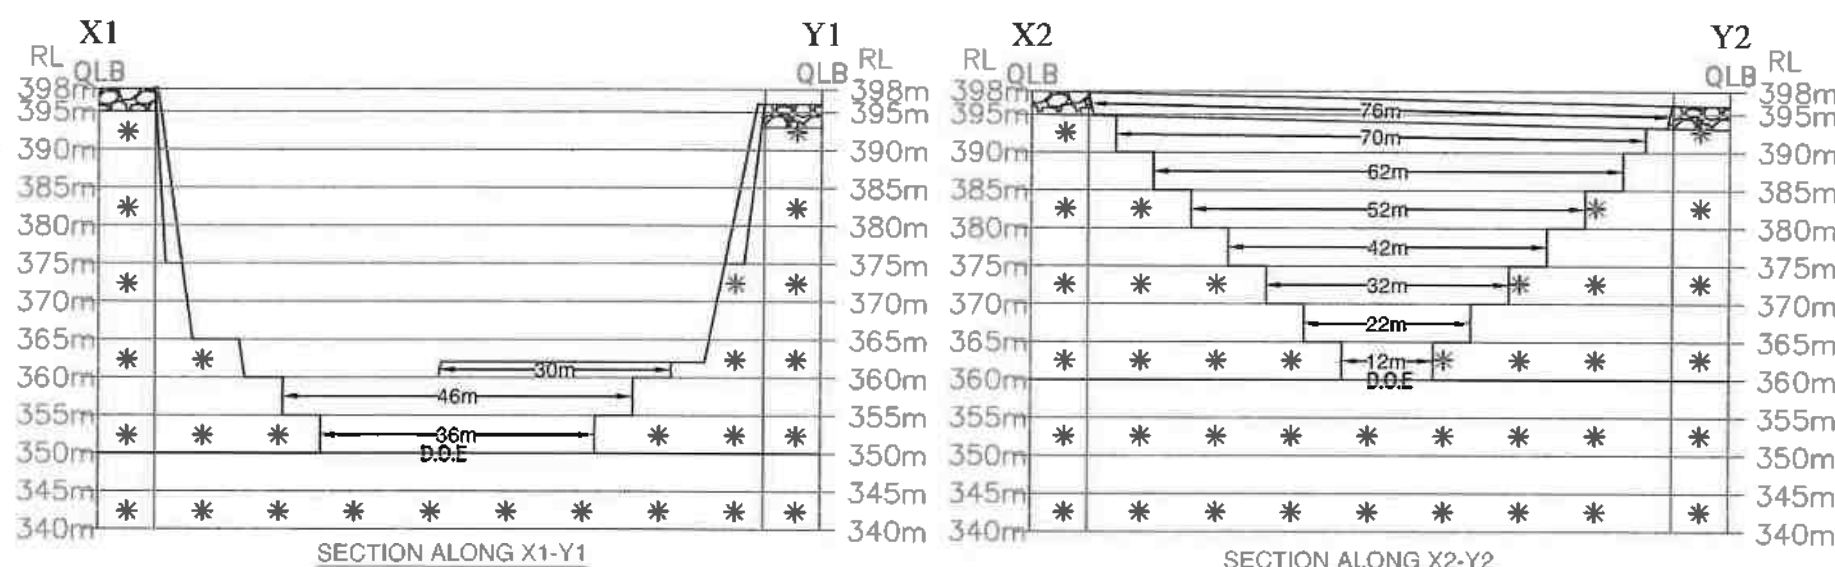


Mineable Reserves						
Section	Msl	Length (m)	Width (m)	Depth(m)	Volume (m³)	Gravel (m³)
AB-X1Y1	362-360	12	30	2	720	-
	360-355	45	46	5	10350	-
	355-350	35	36	5	6300	-
AB-X2Y2	398-395	29	76	3	-	6612
	395-390	30	70	5	10500	-
	390-385	31	62	5	9610	-
	385-380	32	52	5	8320	-
	380-375	33	42	5	6930	-
	375-370	34	32	5	5440	-
	370-365	30	22	5	3300	-
AB-X3Y3	365-360	25	12	5	1500	-
	398-395	29	46	3	-	4002
	395-390	25	40	5	5000	-
	390-385	21	32	5	3360	-
	385-380	16	22	5	1760	-
TOTAL	380-375	11	12	5	660	-
					73750.0	10614.0

H. Ramaraj

ENVIRONMENT PLAN

(showing location of habitation, water bodies, Vegetation, quarries, road, infra structure around 500m Radius)

Scale - 1:5,000

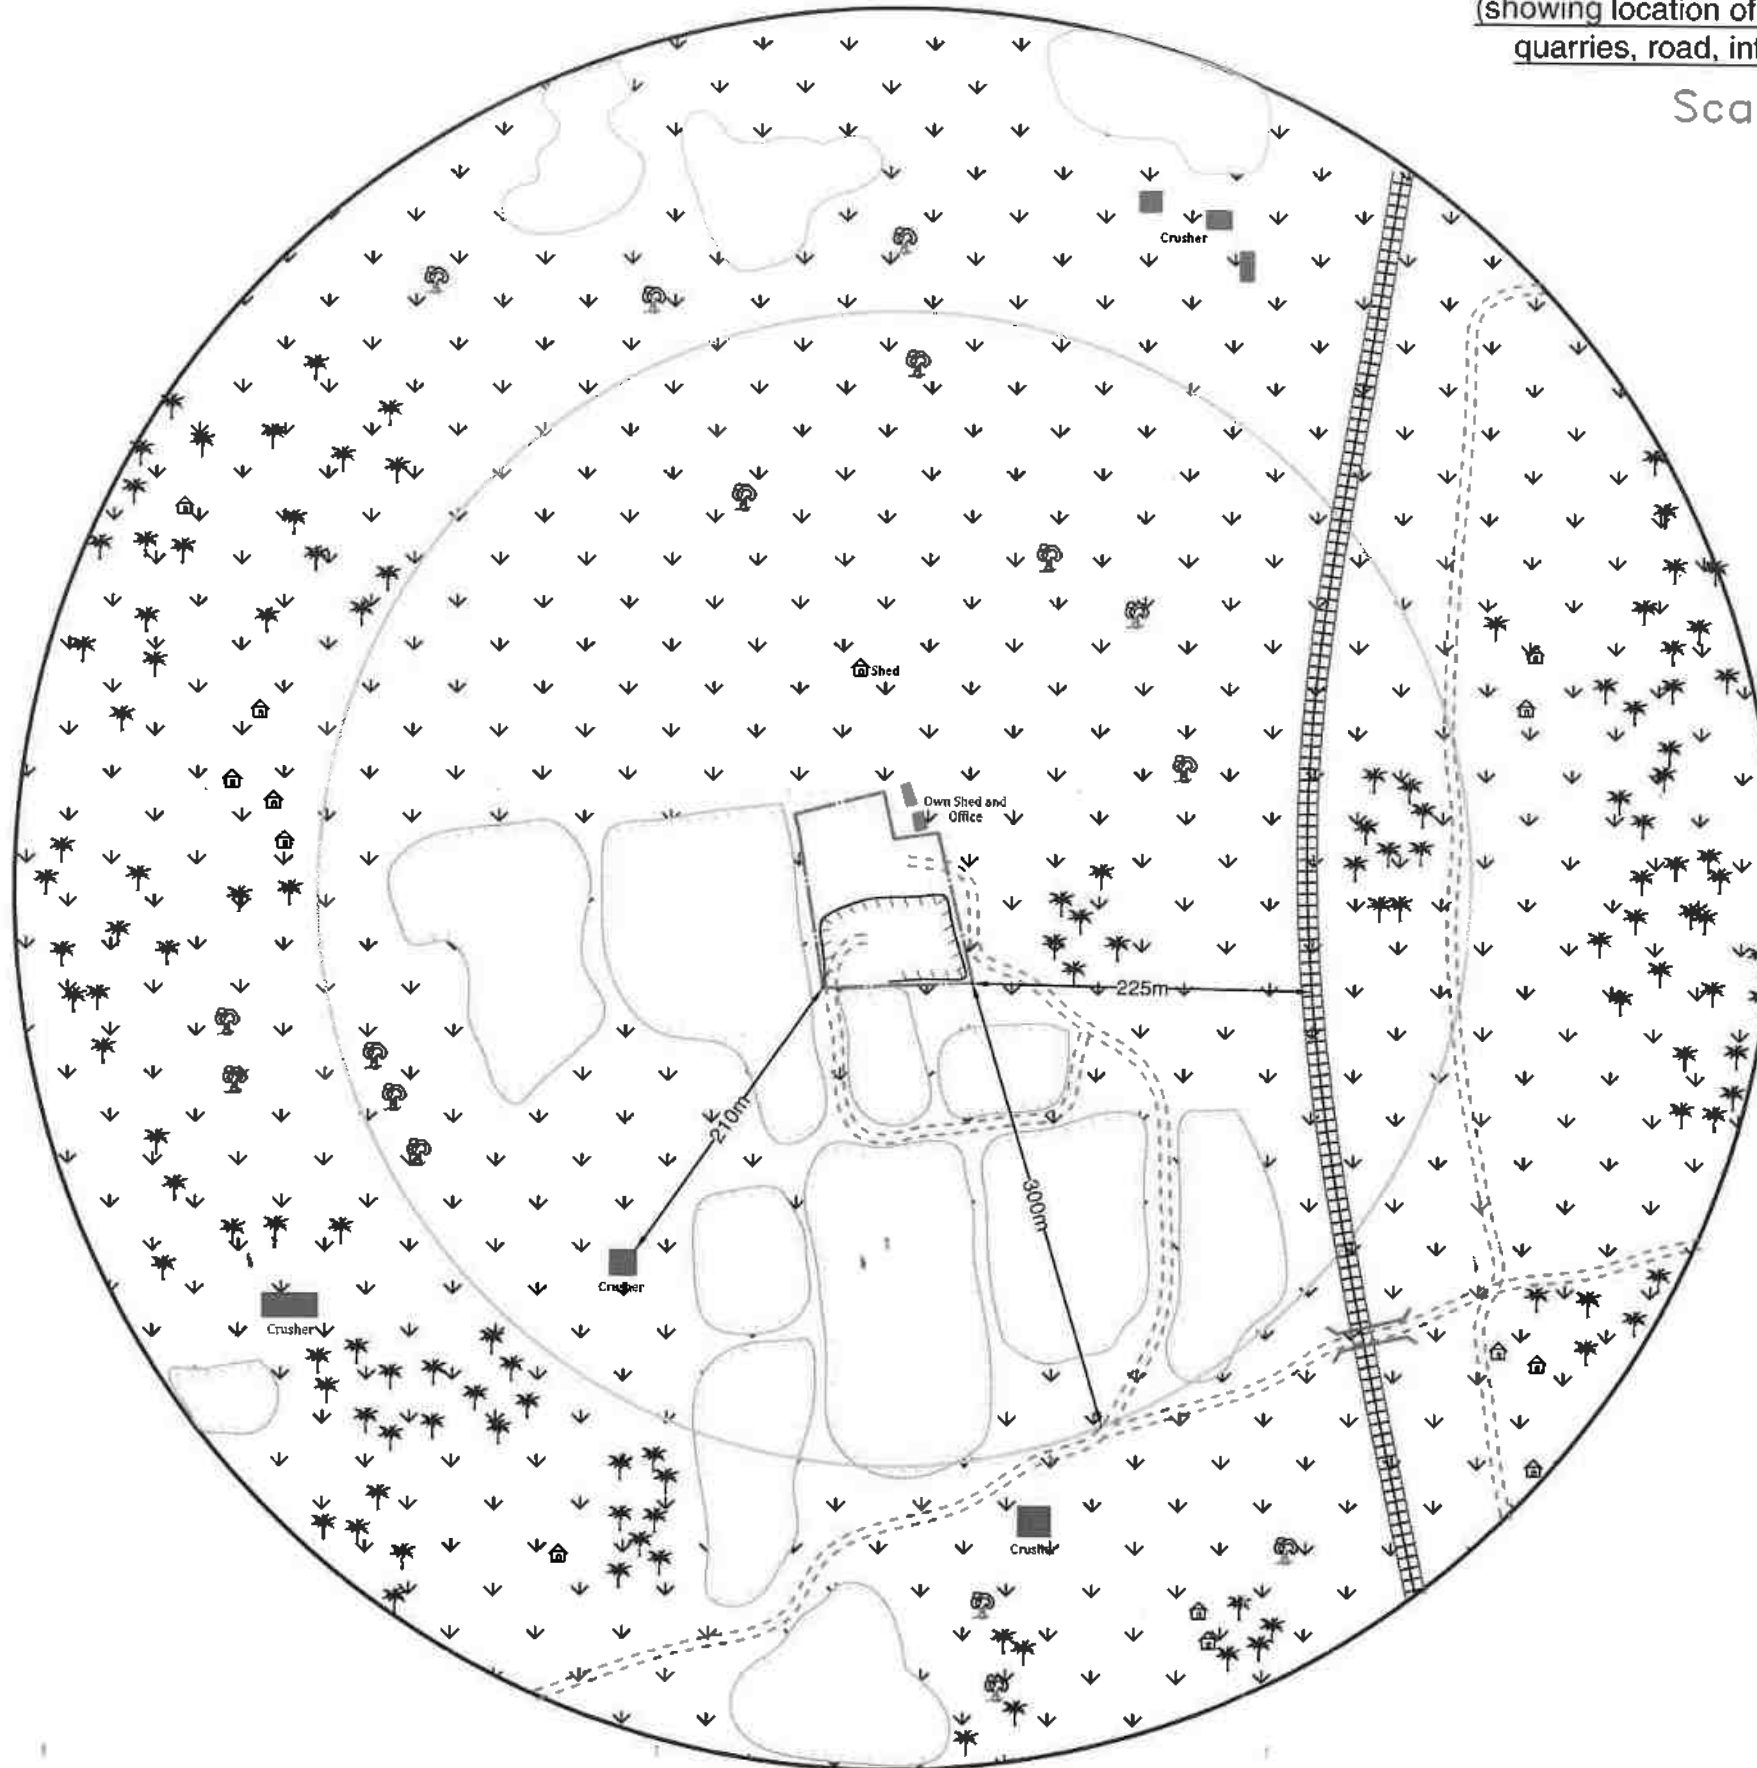

DESCRIPTION	NEAREST DISTANCE (m)	DIRECTION
LEASE BOUNDARY	---	CENTRE
HOUSE / CRUSHER / SHED	210m	SOUTH WEST
WATER BODIES	---	---
VILLAGE ROAD	300m	SOUTH
PRIVATE ROAD	---	---
QUARRIES	1m	SOUTH
TRAIN TRACK	225m	EAST
WIND MILL	---	---
500m SAFETY ZONE	---	---
300m SAFETY ZONE	---	---
TREES	---	---
DRY/ AGRI LAND	---	---
ODAI	---	---
LOCATION		APPLICANT
EXTENT	: 1.06.5 HECTARES	THIRU.K.RAMARAJ, S/o.KANDASAMY, 2/395-1, VENKADESHWARA NAGAR, PREMIER NAGAR WEST, OTHAKALMANDABAM COIMBATORE DISTRICT
S.F.No.	: 70/1(PART)	
VILLAGE	: MYLERIPALAYAM	
TALUK	: MADUKKARAI	
DISTRICT	: COIMBATORE	
STATE	: TAMILNADU	

DATE OF SURVEY: 28.12.2024

PREPARED BY:

I DO HEREBY CERTIFY THAT THE
PLATE HAS BEEN CHECKED BY
ME AND IS CORRECT TO THE
BEST OF MY KNOWLEDGE

A. Allimuthu.

A.ALLIMUTHU
(RQP/DMG/HYD/85/ 2022)

H. Ramaraj