

EXECUTIVE SUMMARY OF ENVIRONMENTAL IMPACT ASSESSMENT AND ENVIRONMENT MANAGEMENT PLAN

FOR OBTAINING

Environmental Clearance under EIA Notification – 2006

Schedule Sl. No. 1 (a) (i): Mining Project

“B1” CATEGORY – MINOR MINERAL – CLUSTER – NON-FOREST LAND

CLUSTER EXTENT = 16.65.0hectares

At

Vinnamangalam Village, Ambur Taluk,
Tirupathur District, Tamil Nadu

Earlier ToR Identification No. TO24B0108TN5680365N Dated: 09.07.2024, File No.II054
Amendment ToR Identification No. TO25B0108TN5850063A Dated:08.04.2025 File No.II867

NAME AND ADDRESS OF THE PROPOSED PROJECT PROPONENT

Name and Address	Extent & S.F.No.	Mineral Production
Mr.T.G.Govind S/o. Thirupathi, No.1.Earikodi, Madavalam Post, Tirupathur District. Tamil nadu-635 653.	2.00.0Ha&S.F.No. 416/35 (Part-3)	Rough Stone 358265m ³

ENVIRONMENTAL CONSULTANT

GEO TECHNICAL MINING SOLUTIONS



No: 1/213-B, Ground Floor, Natesan Complex
Oddapatti, Collectorate Post office,
Dharmapuri-636705. Tamil Nadu.

E-mail: info.gtmsdpi@gmail.com,

Website: www.gtmsind.com

NABET ACC. NO: NABET/EIA/23-26/RA 0319

Valid till: 31.12.2026



ENVIRONMENTAL LAB

INTERSTELLAR TESTING CENTRE Pvt. Ltd

Plot.No.2, Site No.12/2A,

Industrial Estate, Perungudi, Chennai, Tamil Nadu

NABL Certificate Number:TC-6952, Valid Until : 30.07.2026

Baseline study period-October through December 2024

APRIL-2025



GEO TECHNICAL MINING SOLUTIONS

EXECUTIVE SUMMARY

1 INTRODUCTION

As the proposed rough stone and gravel mining project (B1) falls within the quarry cluster of 500 m radius with the total extent of 16.65.0ha, it requires submission of EIA report for grant of Environmental Clearance (EC) after conducting public hearing. The proposed project falling in S.F.No. 416/35 (Part-3) over the extent of 2.00.0ha is situated in the cluster falling in Vinnamangalam Village, Ambur Taluk, Tirupathur District, Tamil Nadu. The projects involved in the calculation of cluster extent are of seven proposed quarries and six existing quarries.

2 PROJECT DESCRIPTION

The proposed project area is located between Latitudes 12°43'21.54"N to 12°43'25.88"N and Longitudes from 78°41'43.00"E to 78°41'48.70"E in Vinnamangalam Village, Ambur Taluk, Tirupathur District, Tamil Nadu. According to the approved mining plan, about 358265m³ of rough stone will be mined up to the depth of 40m (20m AGL + 20m BGL) in the five years. The quarrying operation is proposed to be carried out by open cast semi-mechanized mining method involving drilling and formation of benches of the prescribed dimensions.

3 DESCRIPTION OF THE ENVIRONMENT

Baseline data were collected to evaluate the existing environmental condition in the core and buffer areas during **October through December 2024** as per CPCB guidelines. The data were collected by both the FAEs and NABL accredited and MoEF notified **Interstellar Testing Centre Pvt. Ltd**, for the environmental attributes including soil, water, noise, air and by FAEs for ecology and biodiversity, traffic, and socio-economy.

3.1 Land Environment

Land use pattern of the area of 5 km radius was studied using Sentinel II imagery. LULC types and their extent are given in Table 11.1.

Table.1 LULC Statistics of the Study Area

S. No.	Classification	Area (ha)	Area (%)
1	Water	150.51	1.77
2	Trees	5062.86	59.53
3	Flooded Vegetation	16.57	0.19
4	Crops	1781.55	20.95
5	Mining/Industrial Area	39.76	0.47
6	Built Area	795.42	9.35
7	Rangeland	657.7	7.73
Total		8504.37	100

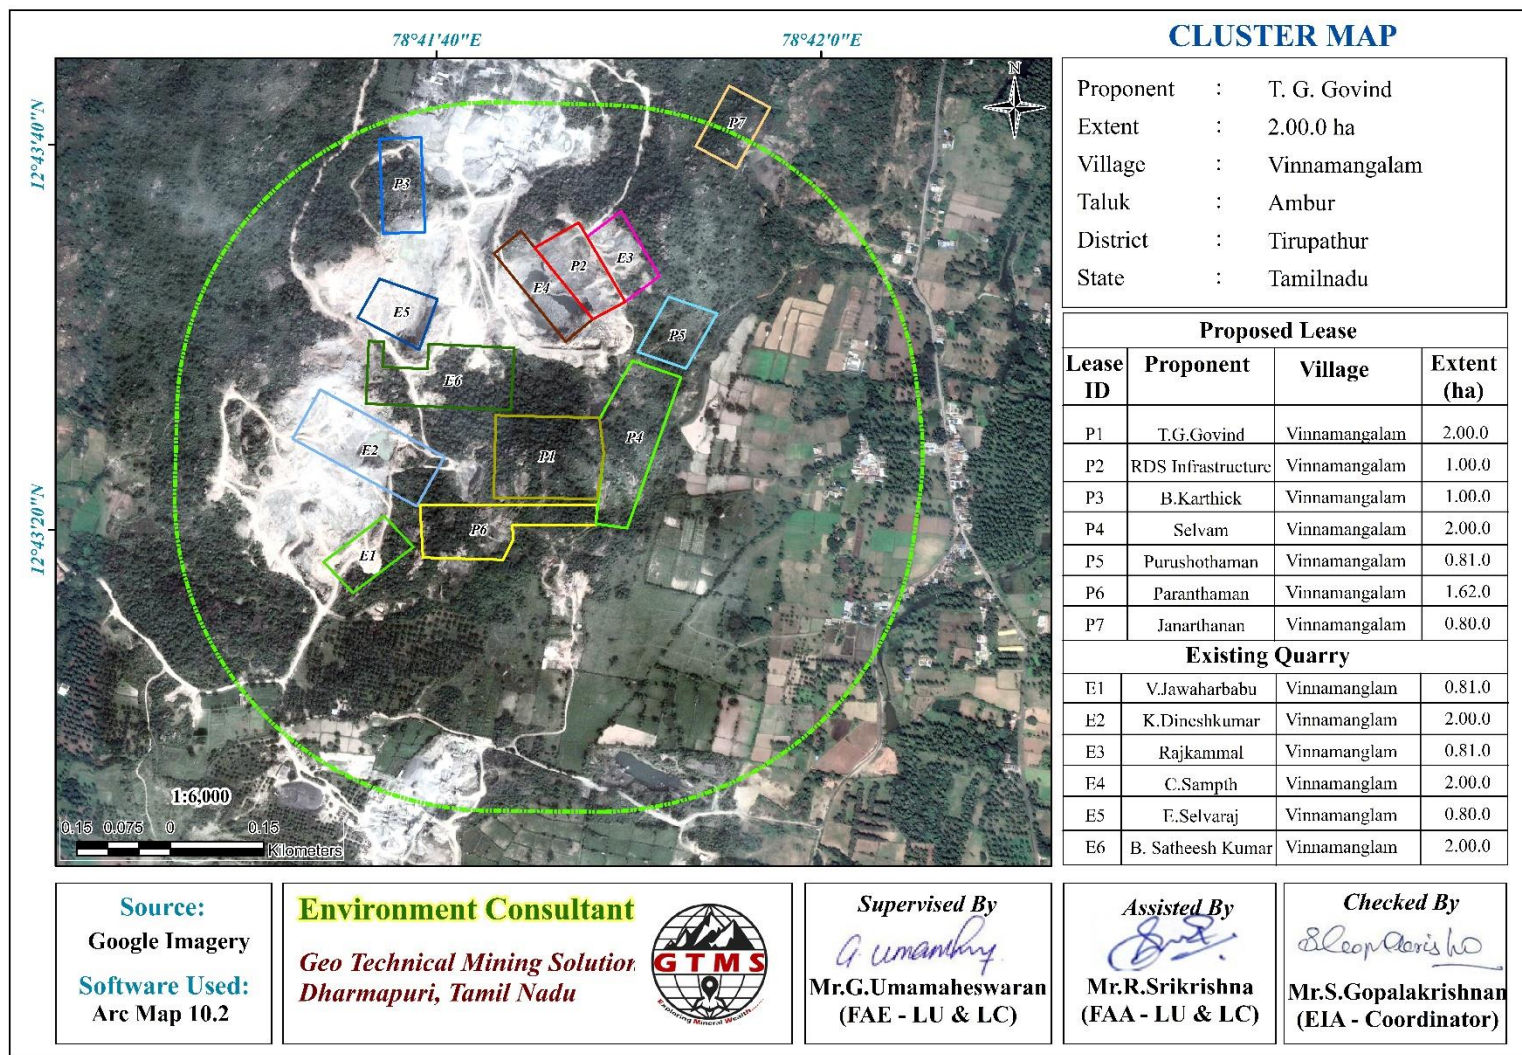


Figure 1. Google Earth Image Showing in cluster map

3.2 Soil Environment

The soil samples in the study area show loamy textures varying between Silt Loam. pH of the soil varies from 7.05 to 8.45 indicating slightly acidic to slightly alkaline nature. Electrical conductivity of the soil varies from 0.118 to 0.305 ms/m.

3.3 Water Environment

Surface and Ground Water Quality Resources and Result

Kannadikuppam Lake, Periyakuppam Lake and Palar River are three prominent surface water resources present in the study area. These lake and river were ephemeral in nature, which convey water only after rainfall events. Three surface water sample, known as SW1 were collected from the Kannadikuppam Lake (1.09km NE), SW2 were collected from the Periyakuppam Lake (1.93 km NE) and SW3 were collected from the Palar River (2.55 km NW) to assess the baseline water quality.

Groundwater in the study area occurs in the crystalline rocks of Archaean age and recent alluvium. The movement of the groundwater is controlled by the intensity of weathering and fracturing of crystalline rocks. Dug wells and bore wells are the most common ground water abstraction structures in the area. However, in dry season, people in the study area heavily rely on bore wells for their domestic and agriculture purpose. Four groundwater samples, known as BW1, BW2, BW3 and OW1 were collected from bore wells and open well were analysed for physico-chemical conditions and bacteriological contents in order to assess baseline quality of ground water. Table 3.6b summarizes surface and ground water quality data of the collected sample. Result for surface and ground water sample in the Table 3.6a & b indicate that the physical, chemical and biological parameters are within permissible limits in compared with standards of IS10500:2012.

3.4 Air Environment

As per the monitoring data, PM_{2.5} ranges from 16.5µg/m³ to 19.8µg/m³; PM₁₀ from 42.0µg/m³ to 48.5µg/m³; SO₂ from 5.0µg/m³ to 5.8µg/m³; NO_x from 13.5µg/m³ to 16.3g/m³. The concentration levels of the pollutants fall within the acceptable limits of NAAQS prescribed by CPCB.

Air quality Index

The AQI shows that the air quality of the study area falls within good category 45 causing minimal impact to human health.

3.5 Noise Environment

Noise level in core zone was 43.2 dB (A) Leq during day time and 37.6dB(A) Leq during night time. Noise levels recorded in buffer zone during day time varied from 40.3 to 45.1dB (A) Leq and during night time from 35.8 to 39.7dB (A) Leq. Thus, the noise level for industrial and residential area meets the requirements of CPCB.

3.6 Biological Environment

Flora study was conducted using the above said methodology to inventory the existing terrestrial plants in both core and buffer zones. Details of plants have been described in the succeeding sections.

Flora in core zone

The species in the mine lease area include herbs (19), trees (5), shrubs (11), the 20 families, Fabaceae and Apocynaceae are the main dominating families in the study area. The quarry lease area is dominated by *Cymbopogon caesius* grass species.

Flora in 1km radius zone

Taxonomically, a total of 80 species belonging to 35 families have been recorded from the 1km radius from the mining lease area. The species in the 1km radius include herbs (39), trees (25), shrubs (16), the 35 families, Fabaceae and Lamiaceae are the main dominating families in the study area, Species Richness (margalef Index) in the study area it mentioned in Table 3.19-3.21. the family pattern and Species Richness bar chart showing in figure 3.25&3.26.

Fauna in 1km radius from the mine lease area

The faunal species observed in the study area are listed in Table 3.24. A total of 39 species were recorded in 1km radius of the project area. Among the 39 species recorded, the distribution was as follows: 13 birds, 16% insects, 04% reptiles, and 06% mammals. These species were cross-checked against the IUCN Red List Database version 3.1 to identify any threatened species. Data analysis revealed that 21 species are categorized as Least Concern on the Red List, while 18 species were not listed. The analysis indicates that there are no REET species in the core and buffer zones of the proposed quarry site.

Flora and Fauna composition on 10km radius

The plant species found within a 1 km radius are same plant species present within a 10 km radius, but they are in greater numbers. The Javathu Hills are located 1.03 km south of the mining lease area. Javadhu hills have covered with dry-deciduous forest patch. The area has the rich cover of deciduous trees. The hills have a mean elevation of 762 metres with the highest points being 1094 metres. Of the total area, 14% constitutes forests. The mean annual

rainfall is 1,100 mm of which about 480 mm is received in the southwest monsoon period (June – September) and 429 mm in the northeast monsoon period (October – December). About half of the soil of the land is red loam clay and sandy soil. The nectarine plant diversity over the area is good, but the only problem is the variation in rainfall, as a result, the flowering is also getting delayed. The flora and fauna data were collection in secondary source the link mention in below table. The common nectar plants. The details of the flora and fauna within a 10 km radius are given in Table 3.25-3.26.

3.7 Socio Economic Environment

The proposed project will provide direct and indirect employment and improve the infrastructural facilities in that area, thus leading to the improvement of people's standard of living.

4 ANTICIPATED ENVIRONMENTAL IMPACTS AND MITIGATION MEASURES

4.1 Land Environment

Anticipated Impact

- ✚ Permanent or temporary change on land use and land cover.
- ✚ Change in topography of the mine lease area will change at the end of the life of the mine.
- ✚ Problems to agricultural land and human habitations due to dust, and noise caused by movement of heavy vehicles
- ✚ Degradation of the aesthetic environment of the core zone due to quarrying
- ✚ Soil erosion and sediment deposition in the nearby water bodies due to earthworks during the rainy season
- ✚ Siltation of water course due to wash off from the exposed working area

Mitigation Measures

- ✚ The mining activity will be gradual confined in blocks and excavation will be undertaken progressively along with other mitigate measures like phase wise development of greenbelt etc.
- ✚ Construction of garland drains all around the quarry pits and construction of check dam at strategic location in lower elevations to prevent erosion due to surface runoff during rainfall and also to collect the storm water for various uses within the proposed area.
- ✚ Green belt development along the boundary within safety zone. The small quantity of water stored in the mined-out pit will be used for greenbelt
- ✚ Thick plantation will be carried out on unutilized area, top benches of mined out pits, on safety barrier, etc.,

- ✚ At conceptual stage, the land use pattern of the quarry will be changed into Greenbelt area and temporary reservoir.
- ✚ In terms of aesthetics, natural vegetation surrounding the quarry will be retained (such as in a buffer area i.e., 7.5 m, 10m and 50m safety barrier and other safety provided) so as to help minimize dust emissions.
- ✚ Proper fencing will be carried out at the conceptual stage, Security will be posted round the clock, to prevent inherent entry of the public and cattle.

4.2 Soil Environment

Anticipated Impact

- ✚ Removal of protective vegetation cover
- ✚ Exposure of subsurface materials which are unsuitable for vegetation establishment

Mitigation Measures

- ✚ Run-off diversion – Garland drains will be constructed around the project boundary to prevent surface flows from entering the quarry works areas and will be discharged into vegetated natural drainage lines, or as distributed flow across an area stabilised against erosion.
- ✚ Sedimentation ponds - Run-off from working areas will be routed towards sedimentation ponds. These trap sediment and reduce suspended sediment loads before runoff is discharged from the quarry site. Sedimentation ponds should be designed based on runoff, retention times, and soil characteristics. There may be a need to provide a series of sedimentation ponds to achieve the desired outcome.
- ✚ Retain vegetation – Retain existing or re-plant the vegetation at the site wherever possible.
- ✚ Monitoring and maintenance – Weekly monitoring and daily maintenance of erosion control systems so that they perform as specified specially during rainy season.

4.3 Water Environment

Anticipated Impact

- ✚ Surface and ground water resources may be contaminated due to pit water discharge, domestic sewage, discharge of oil and grease bearing waste water from washing of vehicles and machineries, and washouts from surface exposure or working areas
- ✚ As the proposed project acquires 3.7KLD of water from water vendors, it will not extract water by developing abstraction structures in the lease area. Therefore, the project will not have impact on depletion of aquifer beneath the lease area.

Mitigation Measures

- ✚ Rain water from mine pit will be treated in settling tanks before being used for dust suppression and tree plantation purposes
- ✚ Domestic sewage from site office will be discharged in septic tank and then directed to soak pits
- ✚ Water from the tipper wash-down facility and machinery maintenance yard will be passed through interceptor traps/oil separators prior to its reuse
- ✚ The garland drainage will be connected to settling tank and sediments will be trapped in the settling tanks and only clear water will be discharged to the natural drainage
- ✚ Periodic (every 6 month once) analysis of ground water quality of quarry pit water and ground water of nearby villages will be conducted
- ✚ Artificial recharge structures will be established in suitable locations as part of the rainwater harvesting management program.

4.4 AIR ENVIRONMENT

Anticipated Impact

Anticipated increase of the air pollutants due to quarrying activities have been predicted using AERMOD software. The values of cumulative concentration i.e., background + incremental concentration of pollutant in all the receptor locations are still within the prescribed NAAQ limits without effective mitigation measures. By adopting suitable mitigation measures, the pollutant levels in the atmosphere can be controlled further

Mitigation Measures

- ✚ To control dust at source, wet drilling will be practiced. Where there is a scarcity of water, suitably designed dust extractor will be provided for dry drilling along with dust hood at the mouth of the drill-hole collar
- ✚ Controlled blasting will be carried out using suitable explosive charge and short delay detonators, adequate stemming of holes at collar zone
- ✚ Blasting will be restricted to a particular time of the day i.e., at the time of lunch hours
- ✚ Before loading of material water will be sprayed on blasted material
- ✚ Dust mask will be provided to the workers and their use will be strictly monitored
- ✚ Water will be sprinkled on haul roads twice a day to avoid dust generation during transportation
- ✚ Transportation of material will be carried out during day time and material will be covered with tarpaulin

- ✚ The speed of tippers plying on the haul road will be limited to < 20 km/hr to avoid generation of dust
- ✚ The un-metalled haul roads will be compacted weekly before being put into use
- ✚ It will be ensured that all transportation vehicles carry a valid PUC certificate
- ✚ Haul roads and service roads will be graded to clear accumulation of loose materials
- ✚ Planting of trees all along main mine haul roads and around the project site will be practiced to prevent the generation of dust
- ✚ Dust mask will be provided to the workers and their use will be strictly monitored

4.5 Noise Environment

Anticipated Impact

Total noise level in all the sampling areas is well below the CPCB standards for industrial and residential areas. The peak particle velocity produced by the charge of 25.54kg is well below that of 0.3 mm/s as per Directorate General of Mines Safety for safe level criteria through Circular No. 7 dated 29/8/1997.

Mitigation Measures

- ✚ The blasting operations in the cluster quarries will use shallow holes and delay detonators to reduce the ground vibrations
- ✚ Proper quantity of explosives, suitable stemming materials and appropriate delay system will be used during blasting
- ✚ Adequate safe distance from blasting will be maintained as per DGMS guidelines
- ✚ Blasting shelter will be provided as per DGMS guidelines
- ✚ Blasting operations will be carried out only during day time
- ✚ During blasting, other activities in the immediate vicinity will be temporarily stopped
- ✚ Drilling parameters like depth, diameter and spacing will be properly designed to give proper blast
- ✚ A fully trained explosives blast man (Mining Mate, Mines Foreman, 2nd Class Mines Manager/ 1st Class Mines Manager) will be appointed
- ✚ A set of shot firing rules will be drawn up and blasting shall commence outlining the detailed operating procedures that will be followed to ensure that shot firing operations on site take place without endangering the workforce or public
- ✚ Sufficient angular stemming material will be used to confine the explosive force and minimise environmental disturbance caused by venting / misfire

- ✚ The detonators will be connected in a predetermined sequence to ensure that only one charge is detonated at any one time and a NONEL or similar type initiation system will be used
- ✚ The detonation delay sequence shall be designed so as to ensure that firing of the holes is in the direction of free faces so as to minimise vibration effects
- ✚ Vibration monitoring will be carried out every 6 months to check the efficacy of blasting practices.

4.6 Biological Environment

Anticipated Impact

- ✚ There shall be negligible air emissions or effluents from the project site. During loading the truck, dust generation will be likely. This shall be a temporary effect and not anticipated to affect the surrounding vegetation significantly
- ✚ Most of the land in the buffer area is undulating terrain with crop lands, grass patches and small shrubs. Hence, there will be no effect on flora of the region. There are no trees in mine lease area.
- ✚ Carbon released from quarrying machineries and tippers during quarrying would be 3014kg per day, 813654kg per year and 4068268kg over five years.
- ✚ Direct impact is anticipated on fauna of core zone
- ✚ Insignificant impact is anticipated on fauna in the buffer area due to air emissions, noise, vibration, transportation, waste water discharges, and changes in land use. There is no fauna in mine lease area.
- ✚ Javadhu hills is located 1.03km south side of the mine lease area, there is a possibility that the animals there may come into the quarry area.

Mitigation Measures

- ✚ During conceptual stage, the top bench will be re-vegetated by planting local /native species and lower benches will be converted into rainwater harvesting structure following completion of mining activities, which will replace habitat resources for fauna species in this locality over a longer time.
- ✚ Existing roads will be used; new roads will not be constructed to reduce impact on flora.
- ✚ To mitigate carbon emission due to mining activities, we recommend planting trees around the quarry to offset the carbon emission during quarrying. A tree can sequester 23976kg of carbon per year. Therefore, we recommend planting large number of trees around the quarry and near school campuses, government wasteland, roadsides etc.

- ✚ As per the greenbelt development plan as recommended by SEAC (Table 4.11), about 1000 trees will be planted within three months from the beginning of mining. These trees, when grown up would sequester carbon of about 32903kg of the total carbon.
- ✚ Fencing will be constructed around the proposed mine lease area to restrict the entry of stray animals
- ✚ The workers shall be trained not to harm any wildlife near the project site
- ✚ Strict monitoring of labourers and associated workers for any activity related to endangering the life or habitat of forest animals and birds.
- ✚ Strict restrictions will be imposed on the workers at Project sites to ensure that they do not harvest any produce from the natural forests and cause any danger or harm to the animals and birds in forest.
- ✚ The Project authorities will be bound by the rules and regulations of the Wildlife Protection Acts or any such agency of the State, which may exist or will be promulgated from time to time for the preservation of habitats and protection of forest animals.
- ✚ It is to be ensured that the noise levels in no case go above 100-150 dB in the Project area. One of the measures that is proposed to be adopted is that the blasting is to be restricted during nights, early mornings and late afternoons, which are the feeding times of most of the fauna. Blasting will be resorted to only if necessary. For this strict blasting regime i.e. controlled blasting under constant and strict surveillance is to be followed. The suggested methodologies aim at reducing and mitigating noise so as to cause as little disturbance to the animals as possible
- ✚ Each worker shall be provided with identity card and would not be allowed access to forest areas without permission.
- ✚ The workers shall be discouraged for plantation of nonnative species in the surroundings of labour colony.
- ✚ Possession of firearms by Project workers shall be strictly prohibited, except for dedicated security personnel.

4.7 Socio Economic Environment

Anticipated Impact

- ✚ Dust generation from mining activity can have negative impact on the health of the workers and people in the nearby area
- ✚ Approach roads can be damaged by the movement of tippers

- ✚ Increase in Employment opportunities both direct and indirect thereby increasing economic status of people of the region

Mitigation Measures

- ✚ Good maintenance practices will be adopted for all machinery and equipment, which will help to avert potential noise problems
- ✚ Green belt will be developed in and around the project site as per Central Pollution Control Board (CPCB) guidelines
- ✚ Air pollution control measure will be taken to minimize the environmental impact within the core zone
- ✚ For the safety of workers, personal protective appliances like hand gloves, helmets, safety shoes, goggles, aprons, nose masks and ear protecting devices will be provided as per mines act and rules
- ✚ Benefit to the State and the Central governments through financial revenues by way of royalty, tax, duties, etc., from this project directly and indirectly

4.8 Occupational Health

- ✚ All the persons will undergo pre-employment and periodic medical examination
- ✚ Employees will be monitored for occupational diseases by conducting medical tests: General physical tests, Audiometric tests, Full chest, X-ray, Lung function tests, Spirometric tests, Periodic medical examination – yearly, Lung function test – yearly, those who are exposed to dust and Eye test
- ✚ Essential medicines will be provided at the site. The medicines and other test facilities will be provided at free of cost.
- ✚ The first aid box will be made available at the mine for immediate treatment. First aid training will be imparted to the selected employees regularly. The lists of first aid trained members shall be displayed at strategic places.

5 Environment Monitoring Program

Table 11.2 Environment Monitoring Program

S. No.	Environment Attributes	Location	Monitoring		Parameters
			Duration	Frequency	
1	Air Quality	2 Locations (1 Core & 1 Buffer)	24 hours	Once in 6 months	Fugitive Dust, PM _{2.5} , PM ₁₀ , SO ₂ and NO _x .
2	Meteorology	At mine site before start of Air Quality Monitoring & IMD Secondary Data	Hourly / Daily	Continuous online monitoring	Wind speed, Wind direction, Temperature,

					Relative humidity and Rainfall
3	Water Quality Monitoring	2 Locations (1SW & 1 GW)	-	Once in 6 months	Parameters specified under IS:10500, 1993 & CPCB Norms
4	Hydrology	Water level in open wells in buffer zone around 1 km at specific wells	-	Once in 6 months	Depth in m BGL
5	Noise	2 Locations (1 Core & 1 Buffer)	Hourly – 1 Day	Once in 6 months	Leq, Lmax, Lmin, Leq Day & Leq Night
6	Vibration	At the nearest habitation (in case of reporting)	–	During blasting operation	Peak particle velocity
7	Soil	2 Locations (1 Core & 1 Buffer)	–	Once in six months	Physical and chemical characteristics
8	Greenbelt	Within the project area	Daily	Monthly	Maintenance

Source: Guidance of manual for mining of minerals, February 2010

6 ADDITIONAL STUDIES

6.1 Risk Assessment

The DGMS risk assessment process is intended to identify existing and probable hazards in the work environment and all operations and assess the risk levels of those hazards in order to prioritize those that need immediate attention. The whole quarry operation will be carried out under the direction of a Qualified Competent Mine Manager holding certificate of competency to manage a metalliferous mine granted by the DGMS, Dhanbad for proposed project.

6.2 Disaster Management Plan

The objective of the disaster management plan is to make use of the combined resources of the mine and the outside services to:

- ✚ Rescue and treat casualties;
- ✚ Safeguard other people;
- ✚ Minimize damage to property and the environment;
- ✚ Initially contain and ultimately bring the incident under control;
- ✚ Secure the safe rehabilitation of affected area; and
- ✚ Preserve relevant records and equipment for the subsequent inquiry into the cause and circumstances of the emergency.

6.3 Cumulative Impact Study

- ✚ The results on the cumulative impact of the seven proposed projects on air environment of the cluster do not exceed the permissible limits set by CPCB for air pollutants.

- ✚ The cumulative results of noise for the habitation in consideration do not exceed the limit set by CPCB for residential areas for day time
- ✚ PPV resulting from seven proposed project is well below the permissible limit of Peak Particle Velocity of 5 mm/s
- ✚ The proposed seven projects will allocate Rs. 35,00,000/- towards CER as recommended by SEAC
- ✚ The proposed seven projects will directly provide jobs to 129 local people, in addition to indirect jobs
- ✚ The proposed seven projects will plant 4615 about trees in and around the lease area.
- ✚ The proposed seven projects will add 321 PCU per day to the nearby roads.

7 Project Benefits

Various benefits are envisaged due to the three proposed mine and benefits anticipated from the proposed project to the locality, neighbourhood, region and nation as a whole are:

- ✚ Direct employment to 23 local people
- ✚ Creation of community assets (infrastructure) like school buildings, village roads/ linked roads, dispensary & health Centre, community Centre, market place etc.,
- ✚ Strengthening of existing community facilities through the Community Development Program
- ✚ Skill development & capacity building like vocational training.
- ✚ Rs. 5,00,000 will be allocated for CER

8 ENVIRONMENT MANAGEMENT PLAN

In order to implement the environmental protection measures, an amount of **Rs.52,89,385** as capital cost and recurring cost as **Rs. 21,69,142** as recurring cost/annum is proposed considering present market price considering present market scenario for the proposed project. After the adjustment of 5% inflation per year, the overall EMP cost for 5 years will be **Rs. 1,72,75,264.**