

EXECUTIVE SUMMARY

FOR OBTAINING

Environmental Clearance under EIA Notification – 2006 Schedule Sl. No. 1 (a) (i): Mining Project

“B1” CATEGORY (Cluster) – MINOR MINERAL - PATTA LAND – FRESH QUARRY
VIRALIPATTI ROUGH STONE AND GRAVEL QUARRIES
Cluster Extent- 11.60.5 Ha
(2 Proposed Quarries+ 1 Existing Quarries)

PROPONENT

M/S. ADAYAR GRANITES,

Thiru. M.C. Saju, Managing Partner,
No. 15/113-2, KPC Complex, Perunai Post,
Changanacherry, Kottayam District,
Kerala State – 686 102.

PROJECT DETAIL P1

Location Details

S.F.Nos. 2/1 and 1269/3
Extent 3.13.5 Ha,
Viralipatti Village, Nilakottai Taluk,
Dindigul District.

Production Details

Mineable Reserves : 3,06,760m³ of Rough stone
1,07,060m³ of Weathered
rock
35,660m³ of Gravel

Peak Production : 55,650m³ of Rough stone
37,310m³ of Weathered rock
12,012m³ of Gravel

Depth : 46.5m bgl

ToR obtained vide

File No. 11873 TOR Identification No.
TO25B0108TN5571923N Dated:07.04.2025-

Environmental Consultant

GEO EXPLORATION AND MINING SOLUTIONS

Old No. 260-B, New No. 17,
Advaitha Ashram Road, Alagapuram,
Salem – 636 004, Tamil Nadu, India
Accredited for sector 1 Cat ‘A’, sector 31 & 38 Cat ‘B’
Certificate No : NABET/EIA/2225/RA 0276
Phone: 0427-2431989,
Email: info@geoexploration@gmail.com
Web: www.gemssalem.com

PROJECT DETAIL P2

Location Details

S.F.Nos. 4/2, 1274/1 and 1274/2
Extent 3.95.0 Ha,
Viralipatti Village, Nilakottai Taluk,
Dindigul District.

Production Details

Mineable Reserves : 4,53,280m³ of Rough stone
1,43,190m³ of Weathered
rock
46,505m³ of Gravel

Peak Production : 91,325m³ of Rough stone
55,475m³ of Weathered rock
19,902m³ of Gravel

Depth : 51.5m bgl

ToR obtained vide

File No. 11767 TOR Identification No.
TO25B0108TN5628642N Dated:07.04.2025-

Laboratory

**GLOBAL LAB AND CONSULTANCY
SERVICES,**
Salem , Tamil Nadu

Baseline Monitoring Period

MARCH to MAY 2025

JUNE 2025

1. INTRODUCTION

- The project proponent M/s. Adayar Granites applied for Rough Stone and Gravel Quarry lease for two leases in Viralipatti Village, Nilakottai Taluk and Dindigul District. These two proposals falls under B1 Category. As per the EIA Notification, 2006 and subsequent amendments and OM The proposal falls in the B1 Category (Cluster quarries - 2 proposal and 1 Exiting quarries forming Cluster Category {Total Extent of the Cluster is 11.60.5 Ha}- Cluster area calculated as per MoEF & CC Notification S.O. 2269(E) Dated 1st July 2016).
- Based on the ToR Baseline Monitoring study has been carried out for one season i.e., (**Pre Monsoon Season**), **March to May 2025** and this EIA/EMP report is prepared for considering cumulative impacts arising out of this project, the Cumulative Environmental Impact Assessment study is undertaken, which is followed by preparation of a detailed Environmental Management Plan (EMP) to minimize those adverse impacts.
- For the Easy representation the two proposals have been marked as P 1 & P2. And the details of the projects are tabulated below.

TABLE 1.1: DETAILS OF PROPOSAL FOR ENVIRONMENTAL CLEARANCE

Description	P1 (File No 11873 Extent 3.13.5 Ha)	P2 (File No 11767 Extent 3.95.0 Ha)
S.F.Nos	2/1 and 1269/3	4/2, 1274/1 and 1274/2
Precise area communication letter Granted	Rc. No. 260/Mines/2024, Dated: 11.01.2025	Rc. No. 259/Mines/2024, Dated: 11.01.2025
Mining plan prepared got approval	Rc. No. 260/Mines/2024, Dated: 22.01.2025	Rc. No. 259/Mines/2024, Dated: 22.01.2025
Mining plan approved quantity	3,06,760m ³ of Rough stone 1,07,060m ³ of Weathered rock 35,660m ³ of Gravel	4,53,280m ³ of Rough stone 1,43,190m ³ of Weathered rock 46,505m ³ of Gravel
Peak production	55,650m ³ of Rough stone 37,310m ³ of Weathered rock 12,012m ³ of Gravel	91,325m ³ of Rough stone 55,475m ³ of Weathered rock 19,902m ³ of Gravel
Depth in m	46.5m bgl	51.5m bgl
ToR Granted details	TOR Identification No. TO25B0108TN5571923N Dated:07.04.2025-	TOR Identification No. TO25B0108TN5628642N Dated:07.04.2025-

1.1 DETAILS OF PROJECT PROPONENT –

Name of the Project Proponent	Tvl. Adayar Granites Managing Partner Thiru. Saju M.C
Address	No. 15/113-2, KPC Complex, Perunai Post, Changanacherry, Kottayam District, Kerala State – 686 102.
Mobile	+91 94473 91909, 98421 88331
Email	adayargranites@gmail.com
Status	Partnership firm Thiru. Saju M.C Managing partner and authorized signatory of this firm

Source: Approved Mining Plan

1.2 QUARRY DETAILS WITHIN 500 M RADIUS

PROPOSED QUARRIES					
CODE	Name of the Owner	Village	S.F. Nos	Extent in Ha	Status
P1	Tvl. Adayar Granites	Viralipatty	S.F.No. 2/1 and 1269/3	3.13.5	File No.11873 TOR Identification No. TO25B0108TN5571923N Dated:07.04.2025
P2	Tvl. Adayar Granites	Viralipatty	S.F.No. 4/2, 1274/1 and 1274/2	3.95.0	File No. 11767 TOR Identification No. TO25B0108TN5628642N Dated:07.04.2025
TOTAL EXTENT				7.08.5 ha	
EXISTING QUARRIES					
CODE	Name of the Owner	Village	S.F. Nos	Extent in Ha	Status
E-1	Tvl. Adayar Granites	Viralipatty	S.F.No 3/1, 3/2 and 4/1	4.52.0	25.07.2023 to 24.07.2033
TOTAL EXTENT				4.52.0 ha	
TOTAL CLUSTER EXTENT				11.60.5 Ha	

Cluster area is calculated as per MoEF & CC Notification – S.O. 2269 (E) Dated: 01.07.2016

As per above notification S.O.2269(E) dated : 01.07.2016 in para (b) in Appendix XI,- (ii)(5): The lease not operative for three years or more and leases which have got environmental clearance as on 15th January, 2016 shall not be counted for calculating the area of cluster, but shall be included in the Environment Management Plan and the Regional Environmental Management Plan.

1.2 SALIENT FEATURES OF THE PROPOSAL

DESCRIPTION OF THE PROJECT-P1

Name of the Project	M/s. Adayar Granites Rough Stone and Gravel Quarry Project		
S.F. No.	4/2, 1274/1 and 1274/2		
Extent	3.95.0 Ha		
Village,Taluk and District	Viralipatti Village, Nilakottai Taluk, Dindigul District.		
Land Type	It is Patta land, registered in the name of M/s. Mirones Builders and Developers Private limited Vide Patta No. 5265. The Company has obtained Lease Deed Registered from the Pattadhar for the period of fifteen years from the date 11.03.2021 to 10.03.2036 and duly registered in Sub register office, Vattalagundu vide Document No. 1028/2021, Dated: 11.03.2021		
Toposheet No	58 F/12 & 58F/16		
Latitude between	10°06'57.4958"N to 10°07'08.2157"N		
Longitude between	77°44'56.3163"E to 77°45'05.4135"E		
Elevation of the area	243m AMSL		
Lease period	10 Years		
Mining Plan period	10 years (After completion of Five years the Review of Mining plan will be submitted)		
Proposed Depth of Mining	51.5m bgl (1.5m Gravel + 5m Weathered rock + 45m Rough stone)		
Geological Resources	Gravel in m ³ (1.5m thickness)	Weathered rock in m ³ (5m thickness)	Rough stone in m ³ (50m thickness)
	59,250	1,97,500	17,77,500
Mineable Reserves	46,505	1,43,190	4,53,280

Year wise Production for five years 1 st to V th Year	46,505	1,09,275	2,76,295
Year wise Production for five years VI th to X th Year	Nil	33,915	1,76,985
Peak Production	19,902	55,475	91,325
Quantity after amalgamation with adjacent proposal			
Mineable Reserves	49,913	1,57,805	6,89,610
Ultimate Pit dimension	Leaving safety and benches	XY – AB – 108m (L) X 65m (W) X 21.5m (D) X1Y1 – CD – 170m (L) X 124m (W) X 51.5m (D) X2Y2-EF - 75m (L) X 69m (W) X 26.5m (D)	
Water Level in the region	68-73m bgl		
Method of Mining	Opencast Mechanized Mining Method involving drilling and Controlled blasting using Slurry Explosives		
Topography	The lease applied area is plain terrain. The area has gentle sloping towards Southern side and altitude of the area is 243m above from Mean Sea level. The area is covered by 1.5m thickness of Gravel followed by Weathered rock 5m thickness and Rough stone formation is estimated for 50m thickness. The lithological variations observed from the nearby existing quarry pit.		
Machinery proposed	Hand Jack Hammer	4 Nos	
	Wagon drill machine	1 Nos (will be used only after obtaining permission for the deep hole drilling)	
	Compressor	1 Nos	
	Excavator with Bucket and Rock Breaker	2 Nos	
	Water sprinklers	1 No	
	Truck	4 Nos	
Blasting Method	Controlled Blasting Method by shot hole drilling and small dia of 25mm slurry explosive are proposed to be used for shattering and heaving effect for removal and winning of Rough Stone. No deep hole drilling is proposed.		
Proposed Manpower Deployment	34 Nos		
Project Cost	Rs. 3,80,03,000/-		
EMP Cost	Rs. 3,80,000/-		
CER Cost	Rs. 3,00,000/-		
Nearby Water Bodies	Odai	350m SW	
	Canal	720m SE	
	Vaigai River	1.5km SE	
	Tank	1.8km East	
	Veerakudumban Lake	2.8km North	
Greenbelt Development Plan	Proposed to plant 1500 Nos of trees. The plantation will be developed around the project site and nearby village roads		
Proposed Water Requirement	3.0 KLD		
Nearest Habitation	860m – North west		
Nearest Reserve Forest	Vellaikaradu RF – 1.62 km – North East (Source – TNGIS) Palapattykaradu R.F – 4.37 km – North West		
Nearest Wild Life Sanctuary	Kodaikanal Wildlife Sanctuary – 10.7 km – North West		

Source: Approved Mining Plan

DESCRIPTION OF THE PROJECT-P2

Name of the Project	M/s. Adayar Granites Rough Stone and Gravel Quarry Project		
S.F. No.	4/2, 1274/1 and 1274/2		
Extent	3.95.0 Ha		
Village,Taluk and District	Viralipatti Village, Nilakottai Taluk, Dindigul District.		
Land Type	It is Patta land, registered in the name of M/s. Mirones Builders and Developers Private limited Vide Patta No. 5265. The Company has obtained Lease Deed Registered from the Pattadhar for the period of fifteen years from the date 11.03.2021 to 10.03.2036 and duly registred in Sub register office, Vattalagundu vide Document No. 1028/2021, Dated: 11.03.2021		
Toposheet No	58 F/12 & 58F/16		
Latitude between	10°06'57.4958"N to 10°07'08.2157"N		
Longitude between	77°44'56.3163"E to 77°45'05.4135"E		
Elevation of the area	243m AMSL		
Lease period	10 Years		
Mining Plan period	10 years (After completion of Five years the Review of Mining plan will be submitted)		
Proposed Depth of Mining	51.5m bgl (1.5m Gravel + 5m Weathered rock + 45m Rough stone)		
Geological Resources	Gravel in m ³ (1.5m thickness)	Weathered rock in m ³ (5m thickness)	Rough stone in m ³ (50m thickness)
	59,250	1,97,500	17,77,500
Mineable Reserves	46,505	1,43,190	4,53,280
Year wise Production for five years 1 st to V th Year	46,505	1,09,275	2,76,295
Year wise Production for five years VI th to X th Year	Nil	33,915	1,76,985
Peak Production	19,902	55,475	91,325
Quantity after amalgamation with adjacent proposal			
Mineable Reserves	49,913	1,57,805	6,89,610
Ultimate Pit dimension	Leaving safety and benches	XY – AB – 108m (L) X 65m (W) X 21.5m (D) X1Y1 – CD – 170m (L) X 124m (W) X 51.5m (D) X2Y2-EF - 75m (L) X 69m (W) X 26.5m (D)	
Water Level in the region	68-73m bgl		
Method of Mining	Opencast Mechanized Mining Method involving drilling and Controlled blasting using Slurry Explosives		
Topography	The lease applied area is plain terrain. The area has gentle sloping towards Southern side and altitude of the area is 243m above from Mean Sea level. The area is covered by 1.5m thickness of Gravel followed by Weathered rock 5m thickness and Rough stone formation is estimated for 50m thickness. The lithological variations observed from the nearby existing quarry pit.		
Machinery proposed	Hand Jack Hammer	4 Nos	
	Wagon drill machine	1 Nos (will be used only after obtaining permission for the deep hole drilling)	
	Compressor	1 Nos	
	Excavator with Bucket and Rock Breaker	2 Nos	
	Water sprinklers	1 No	
	Truck	4 Nos	
Blasting Method	Controlled Blasting Method by shot hole drilling and small dia of 25mm slurry explosive are proposed to be used for shattering and heaving effect for removal and winning of Rough Stone. No deep hole drilling is proposed.		
Proposed Manpower Deployment	34 Nos		
Project Cost	Rs. 3,80,03,000/-		
EMP Cost	Rs. 3,80,000/-		
CER Cost	Rs. 3,00,000/-		
Nearby Water Bodies	Odai	350m SW	
	Canal	720m SE	

	Vaigai River	1.5km SE
	Tank	1.8km East
	Veerakudumban Lake	2.8km North
Greenbelt Development Plan	Proposed to plant 1500 Nos of trees. The plantation will be developed around the project site and nearby village roads	
Proposed Water Requirement	3.0 KLD	
Nearest Habitation	860m – North west	
Nearest Reserve Forest	Vellaikaradu RF – 1.62 km – North East (Source – TNGIS) Palapattykaradu R.F – 4.37 km – North West	
Nearest Wild Life Sanctuary	Kodaikanal Wildlife Sanctuary – 10.7 km – North West	

Source: Approved Mining Plan

1.3 STATUTORY DETAILS

SCREENING: -P1

- Proponent applied for Rough stone and Gravel quarry lease on 16.09.2024
- Precise area communication letter was issued by the District Collector vide RC. No. 260/Kanimam/2024 Dated 11.01.2025
- The Mining Plan was prepared by Qualified Person and approved by Assistant Director, Geology and Mining, Dindigul District, vide RC. No. 260/Mines/2024, Dated: 22.01.2025
- The proposed project falls under “B1” Category as per Order Dated: 04.09.2018 & 13.09.2018 passed by Hon’ble National Green tribunal, New Delhi in O.A. No. 173 of 2018 & O.A. No, 186 of 2016 and MoEF & CC Office Memorandum F. No. L-11011/175/2018-IA-II (M) Dated: 12.12.2018
- Proponent applied for ToR for Environmental Clearance vide online Proposal No. SIA/TN/MIN/521185/2025 Dated: 31.01.2025

SCREENING: -P2

- Proponent applied for Rough stone and Gravel quarry lease on 16.09.2024
- Precise area communication letter was issued by the District Collector vide Rc. No. 259/Mines/2024, Dated: 11.01.2025
- The Mining Plan was prepared by Recognized Qualified Person and approved by Assistant Director, Geology and Mining, Dindigul District, vide Rc. No. 259/Mines/2024, Dated: 22.01.2025
- The proposed project falls under “B1” Category as per Order Dated: 04.09.2018 & 13.09.2018 passed by Hon’ble National Green tribunal, New Delhi in O.A. No. 173 of 2018 & O.A. No, 186 of 2016 and MoEF & CC Office Memorandum F. No. L-11011/175/2018-IA-II (M) Dated: 12.12.2018
- Proponent applied for ToR for Environmental Clearance vide online Proposal No. SIA/TN/MIN/520970/2025 Dated: 29.01.2025

SCOPING:

- Both the proposal was placed in 538th SEAC meeting held on 01.03.2025 and the committee recommended for issue of ToR.
- The proposal was considered in 804th SEIAA meeting held on 01.04.2025 and issued Terms of Reference as follows
File No 11873 – ToR Granted vide ToR identification No TO25B0108TN5571923N Dated 07.04.2025
File No 11767 – ToR Granted vide ToR identification No TO25B0108TN5628642N Dated 07.04.2025

2. PROJECT DESCRIPTION

The proposed projects are site specific and there is no additional area required for this project. There is no effluent generation/discharge from the proposed quarries.

Method of mining is common for all the quarries in the cluster. Rough Stone is proposed to be excavated by opencast mechanized method involving splitting of rock mass of considerable volume from the parent rock mass by jackhammer drilling and blasting, hydraulic excavators are used for loading the Rough Stone from pithead to the needy crushers and rock breakers to avoid secondary blasting.

2.1 SITE CONNECTIVITY TO THE PROJECT AREA

Nearest Roadway	(NH-183) Dindigul – Theni - 5Km – NW (SH-154) Vattalagundu – Usilampatti – 1.7 Km – SE
Nearest Village	V.Kurumbapatty – 1.30 Km – North West
Nearest Town	Vattalagundu – 4.7 km – North
Nearest Railway Station	Usilampatti – 17.3 km – SE
Nearest Airport	Madurai – 48.9 km – SE
Seaport	Cochin Port – 165 km – West

Source: Survey of India Toposheet

2.2 LAND USE PATTERN OF THE LEASE APPLIED AREA-P1

Description	Proposed Amalgamation		Leaving safety and Benches	
	Area to be required at the present mining plan period (Ha)	Area at the end of lease period (Ha)	Area to be required at the present mining plan period (Ha)	Area at the end of lease period (Ha)
Area Under Quarry	2.33.16	2.33.16	2.54.88	2.54.88
Site Services	0.02.00	0.02.00	0.02.00	0.02.00
Roads	0.02.00	0.02.00	0.02.00	0.02.00
Green Belt	0.34.74	0.76.34	0.26.28	0.54.62
Unutilized Area	0.41.60	Nil	0.28.34	Nil
Grand Total	3.13.50	3.13.50	3.13.50	3.13.50

Source: Approved Mining Plans of Proposal

LAND USE PATTERN OF THE LEASE APPLIED AREA-P2

Description	Present Area (Ha)	Proposed Amalgamation		Leaving safety and Benches	
		Area required during the first five years (Ha)	Area at the end of lease period (Ha)	Area required during the first five years (Ha)	Area at the end of lease period (Ha)
Area Under Quarry	Nil	3.35.0	3.35.0	3.17.0	3.17.0
Site Services	Nil	0.01.0	0.01.0	0.01.0	0.01.0
Roads	Nil	0.02.0	0.02.0	0.02.0	0.02.0
Green Belt	Nil	0.57.0	0.57.0	0.75.0	0.75.0
Unutilized Area	3.95.0	Nil	Nil	Nil	Nil
Grand Total	3.95.0	3.95.0	3.95.0	3.95.0	3.95.0

Source: Approved Mining Plans of Proposal

2.3 OPERATIONAL DETAILS OF LEASE APPLIED AREA-P1

Geological Resources	Gravel in m ³ (1.5m thickness)	Weathered rock in m ³ (5m thickness)	Rough stone in m ³ (40m thickness)
	47,025	1,56,750	14,10,750
Mineable Reserves	35,660	1,07,060	3,06,760
Year wise Production for five years 1 st to V th Year	35,660	1,07,060	1,83,800
Year wise Production for five years VI th to X th Year	Nil	Nil	1,22,960
Peak Production	12,012	37,310	55,650
Production per day	40	124	185
Lorry loads per day (12m ³ Capacity)	3-4 Lorry loads	10 lorry loads	15 Lorry loads
Total Depth of mining	46.5m bgl		

Source: proposed mining plan

OPERATIONAL DETAILS OF LEASE APPLIED AREA-P2

Geological Resources	Gravel in m ³ (1.5m thickness)	Weathered rock in m ³ (5m thickness)	Rough stone in m ³ (50m thickness)
	59,250	1,97,500	17,77,500
Mineable Reserves	46,505	1,43,190	4,53,280
Year wise Production for five years 1 st to V th Year	46,505	1,09,275	2,76,295
Year wise Production for five years VI th to X th Year	Nil	33,915	1,76,985
Peak Production	19,902	55,475	91,325
Production per day	66	185	304
Lorry loads per day (12m ³ Capacity)	5-6 Lorry loads	15 Lorry loads	25 Lorry loads
Total Depth of the mining	51.5m bgl		

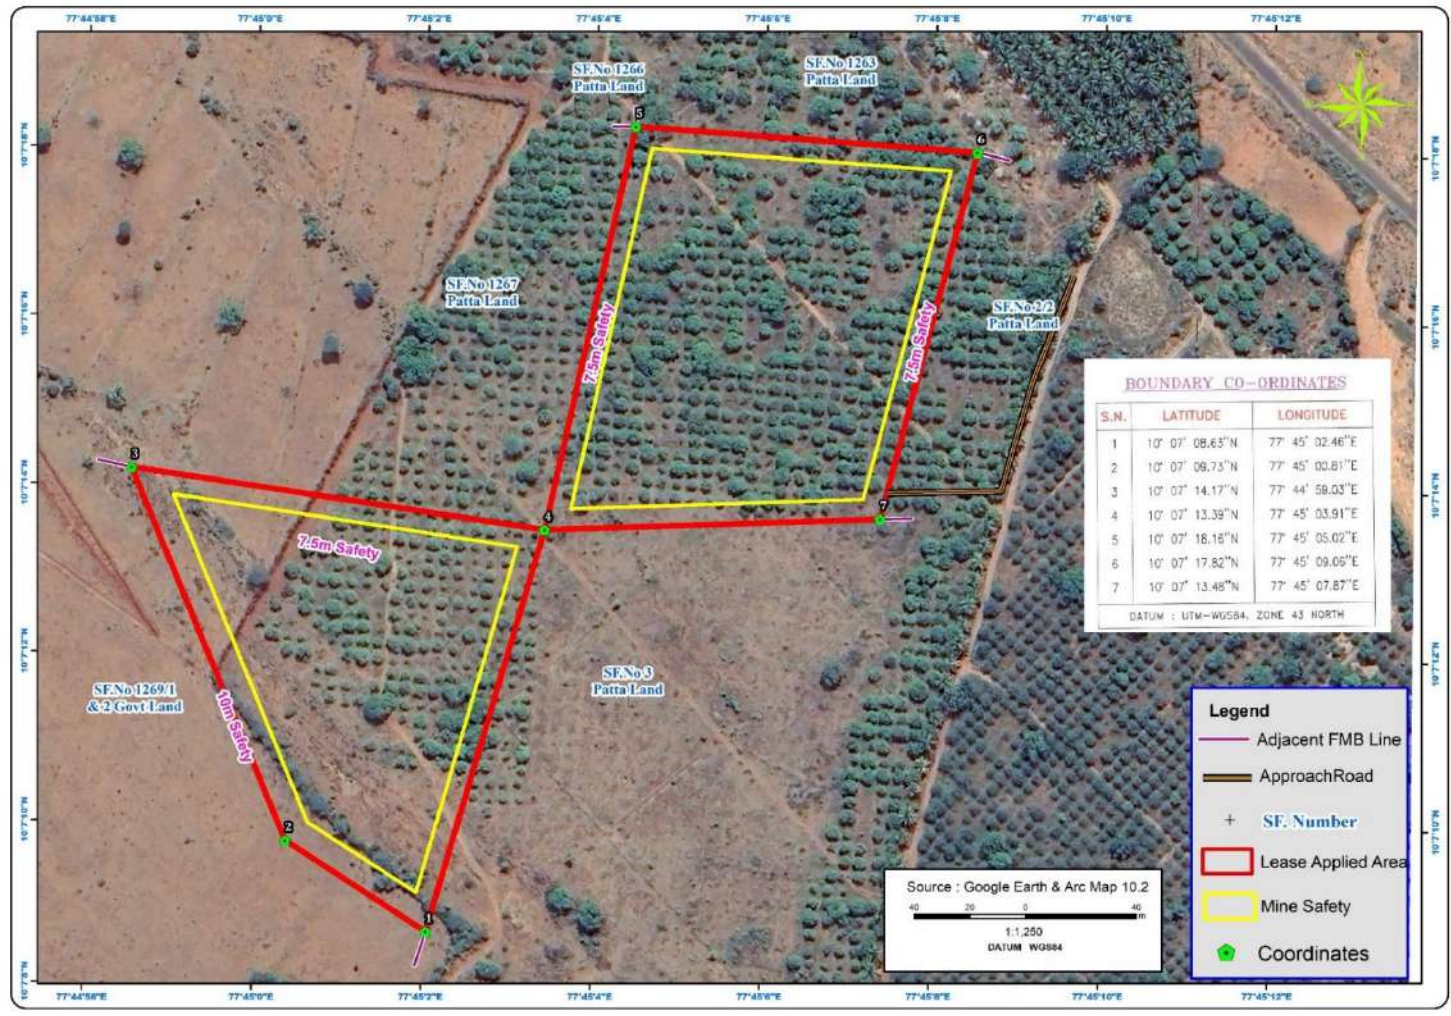
2.4 OPERATIONAL DETAILS OF LEASE APPLIED AREA-P1

YEAR	Rough Stone (m ³)	Weathered rock in m ³	Gravel in m ³
I	36,500	35,000	11,813
II	55,650	34,750	11,835
III	30,650	37,310	12,012
IV	30,700		
V	30,300		
Total	1,83,800	1,07,060	35,660
VI	24,250		
VII	24,250		
VIII	24,740		
IX	24,390		
X	25,330		
TOTAL	1,22,960		
Grand total	3,06,760	1,07,060	35,660

Source: proposed mining plan

OPERATIONAL DETAILS OF LEASE APPLIED AREA-P2

YEAR	Rough Stone (m³)	Weathered rock in m³	Gravel in m³
I	36,500	35,000	11,813
II	55,650	34,750	11,835
III	30,650	37,310	12,012
IV	30,700		
V	30,300		
Total	1,83,800	1,07,060	35,660
VI	24,250		
VII	24,250		
VIII	24,740		
IX	24,390		
X	25,330		
TOTAL	1,22,960		
Grand total	3,06,760	1,07,060	35,660

FIGURE – 1: GOOGLE IMAGE OF THE PROJECT AREA -P1

Source: Google Earth Imagery

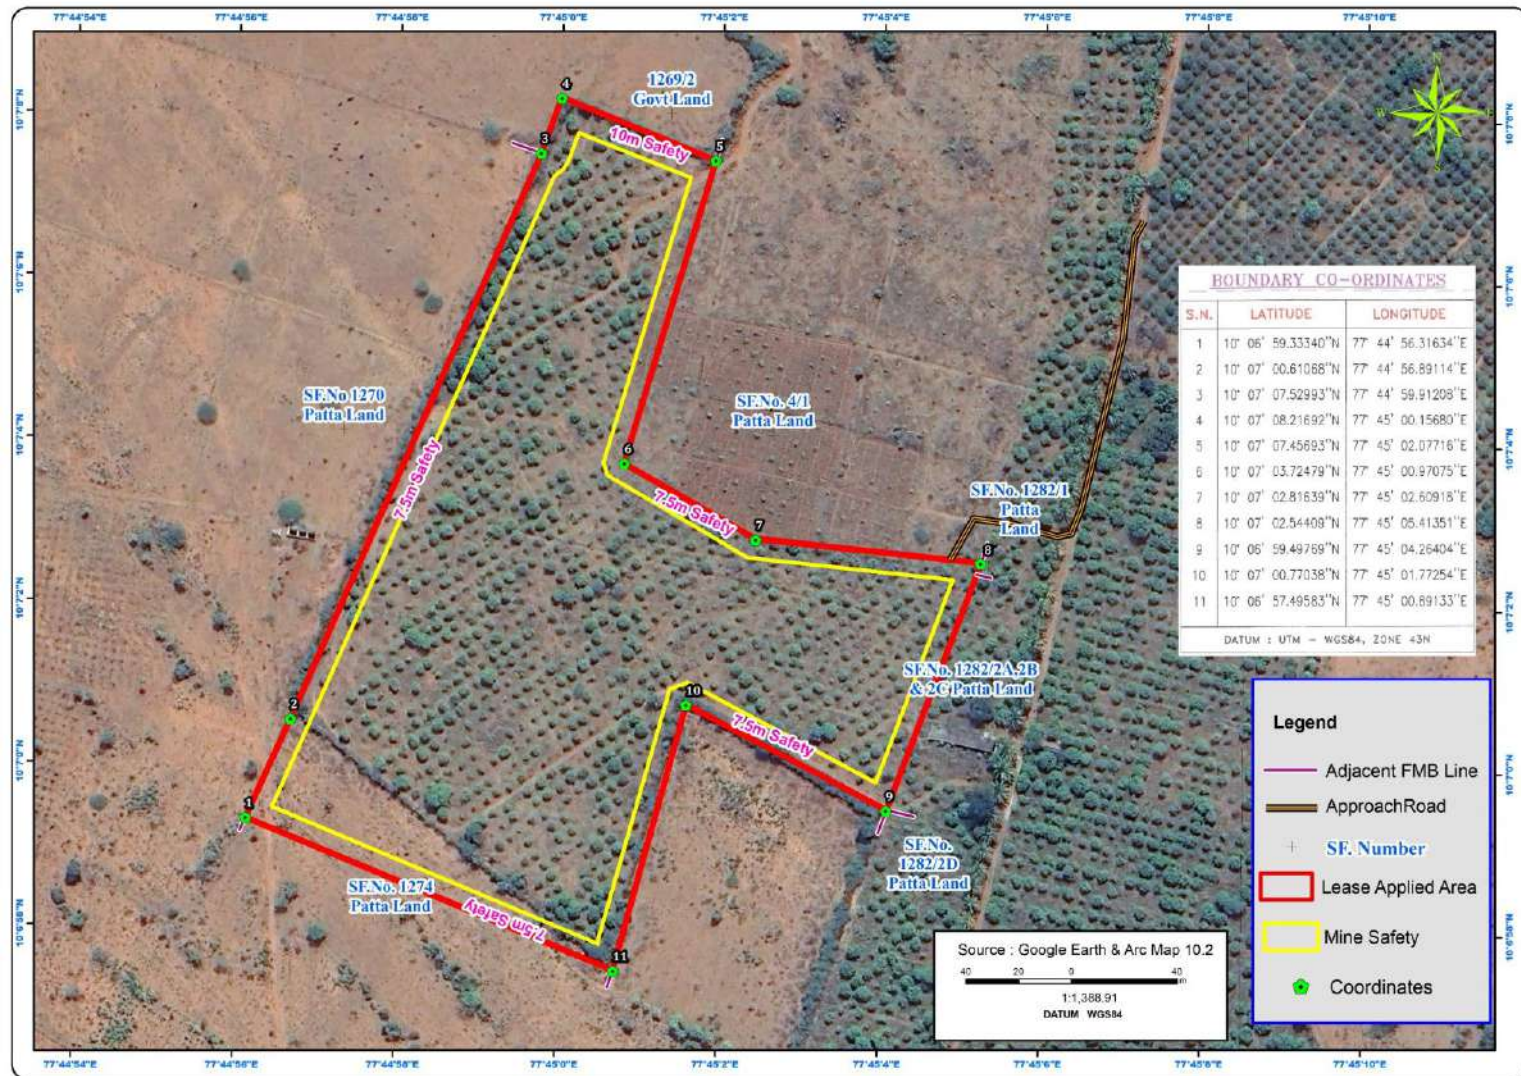
FIGURE – 2: GOOGLE IMAGE OF THE PROJECT AREA -P2

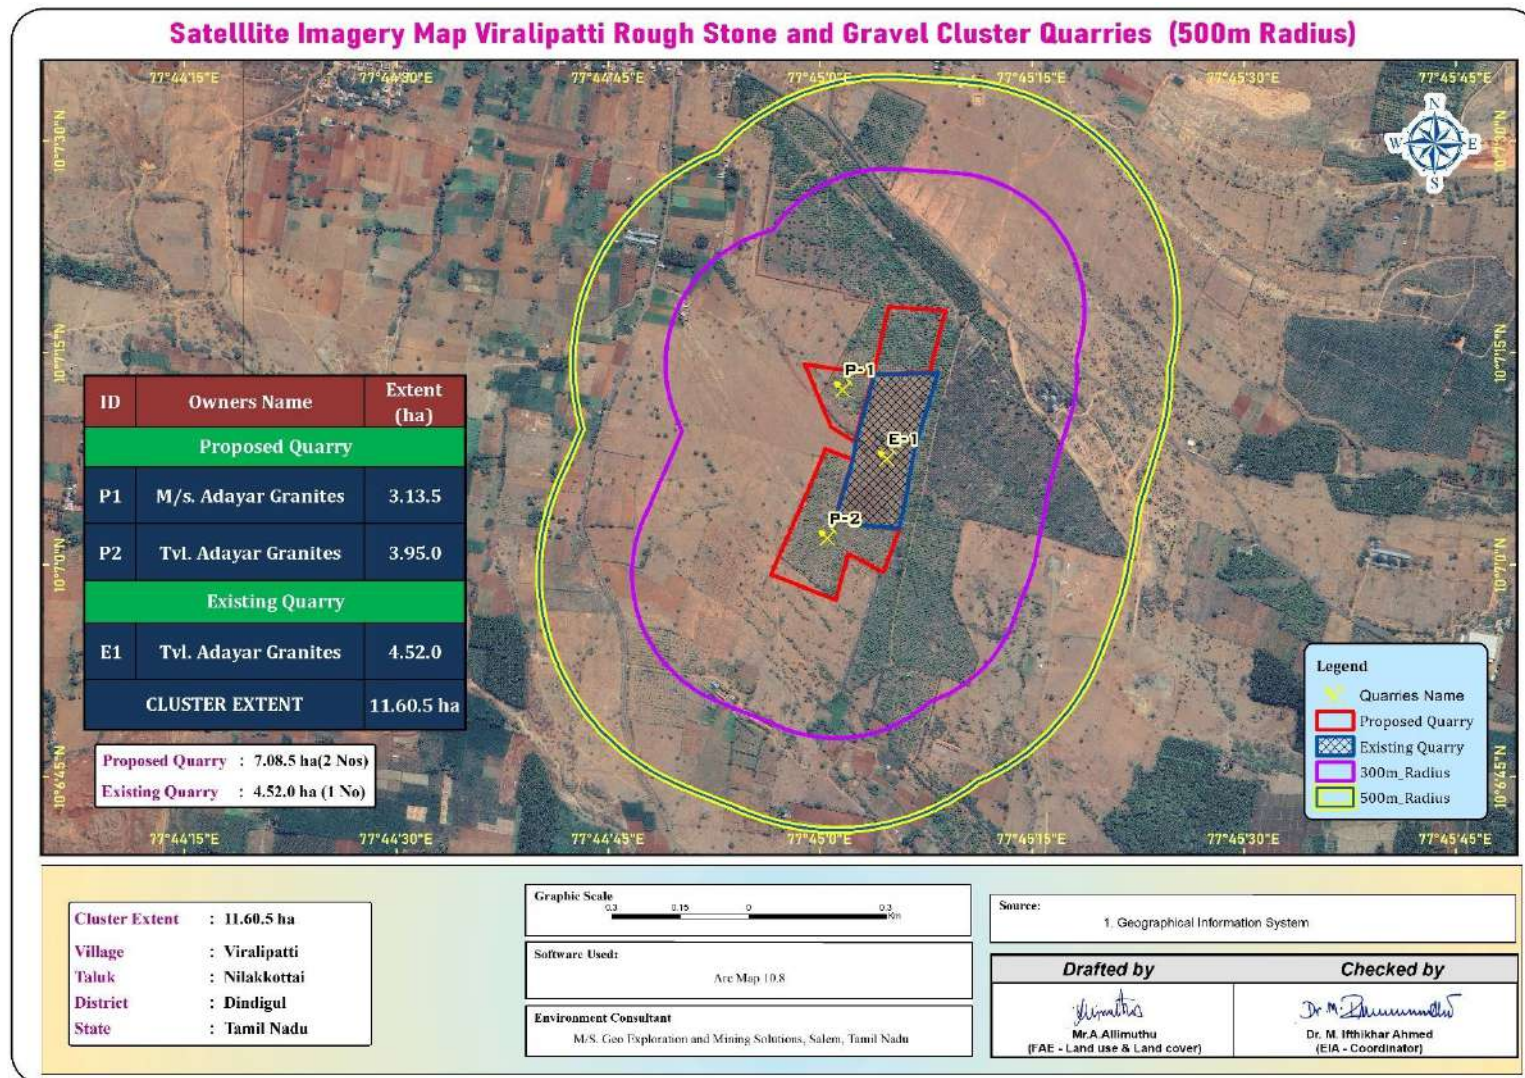
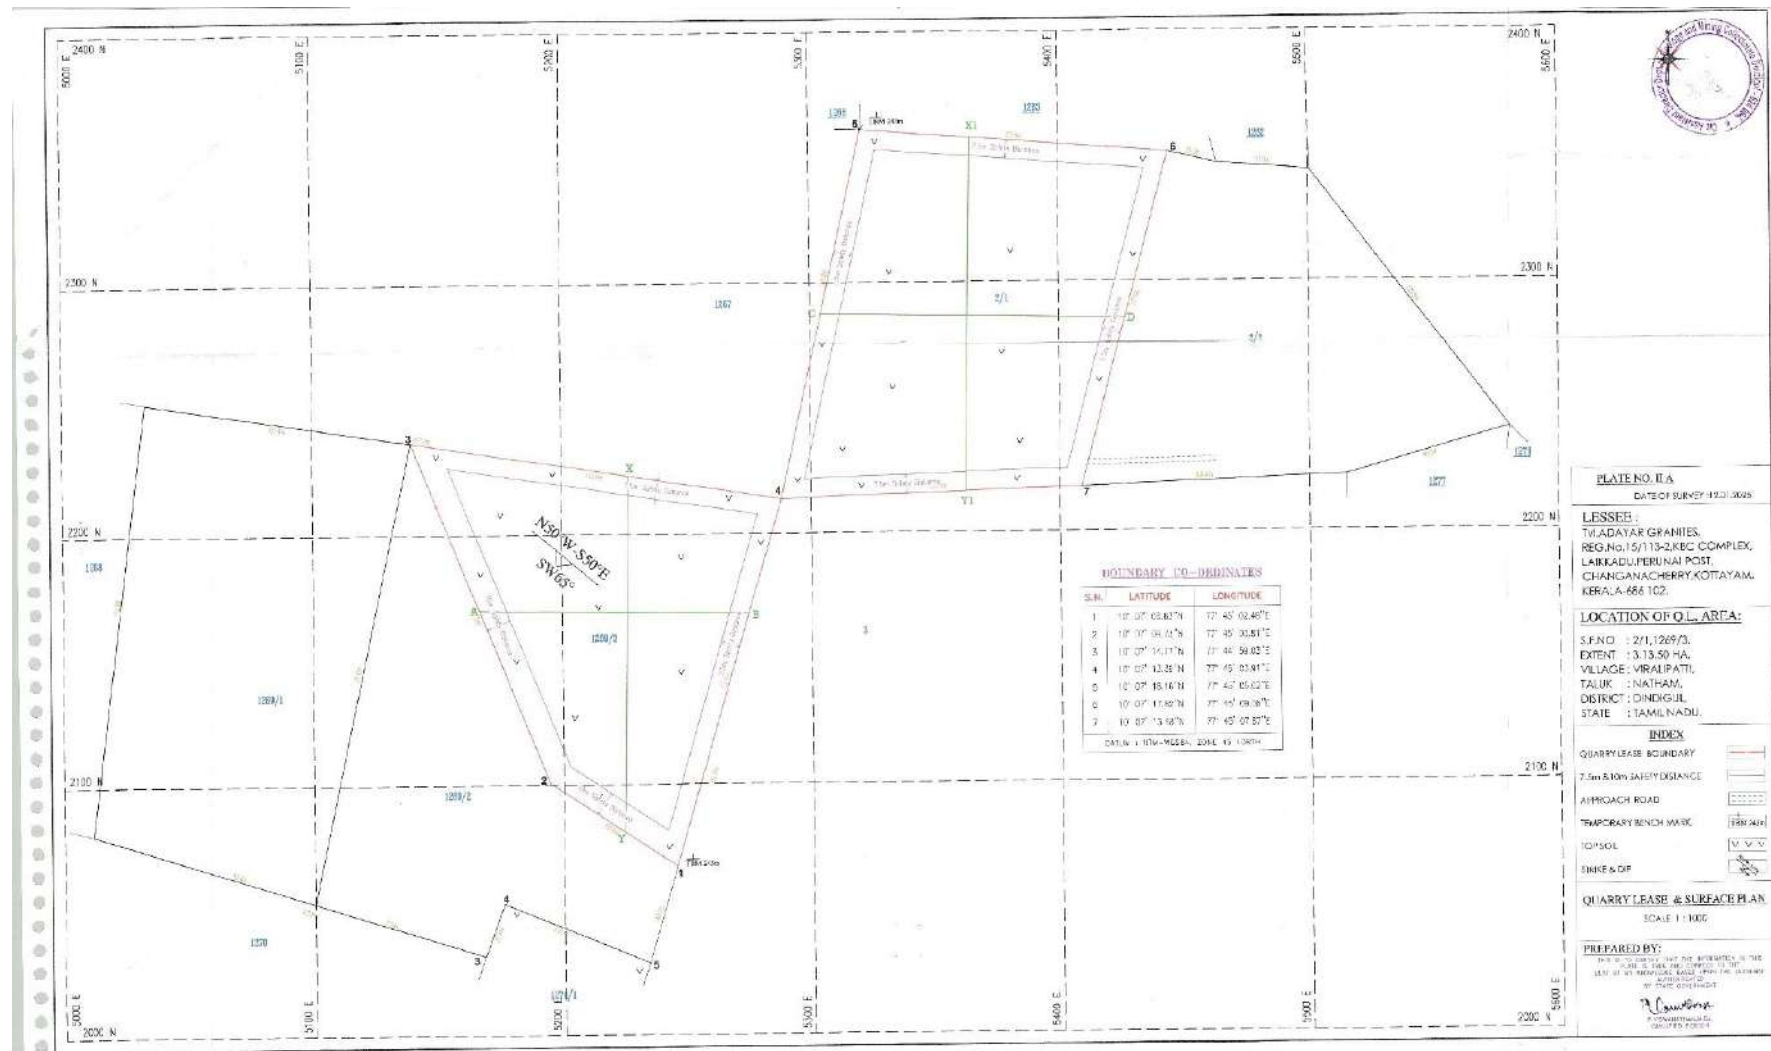
FIGURE – 3: VILLAGE MAP SUPERIMPOSED ON GOOGLE EARTH IMAGE

FIGURE 4: QUARRY LEASE PLAN / SURFACE PLAN-P1


BOUNDARY CO-ORDINATES

S.N.	LATITUDE	LONGITUDE
1	10° 06' 58.33240"N	77° 44' 16.61124"E
2	10° 07' 00.01082"N	77° 44' 16.61124"E
3	10° 07' 00.55127"N	77° 44' 16.61124"E
4	10° 07' 00.70047"N	77° 45' 02.18880"E
5	10° 07' 00.94052"N	77° 45' 02.18880"E
6	10° 07' 05.71198"N	77° 45' 02.18880"E
7	10° 07' 02.61028"N	77° 45' 02.18880"E
8	10° 07' 02.94429"N	77° 45' 02.18880"E
9	10° 06' 59.40760"N	77° 45' 02.18880"E
10	10° 07' 02.75126"N	77° 45' 02.18880"E
11	10° 06' 54.98425"N	77° 45' 02.18880"E

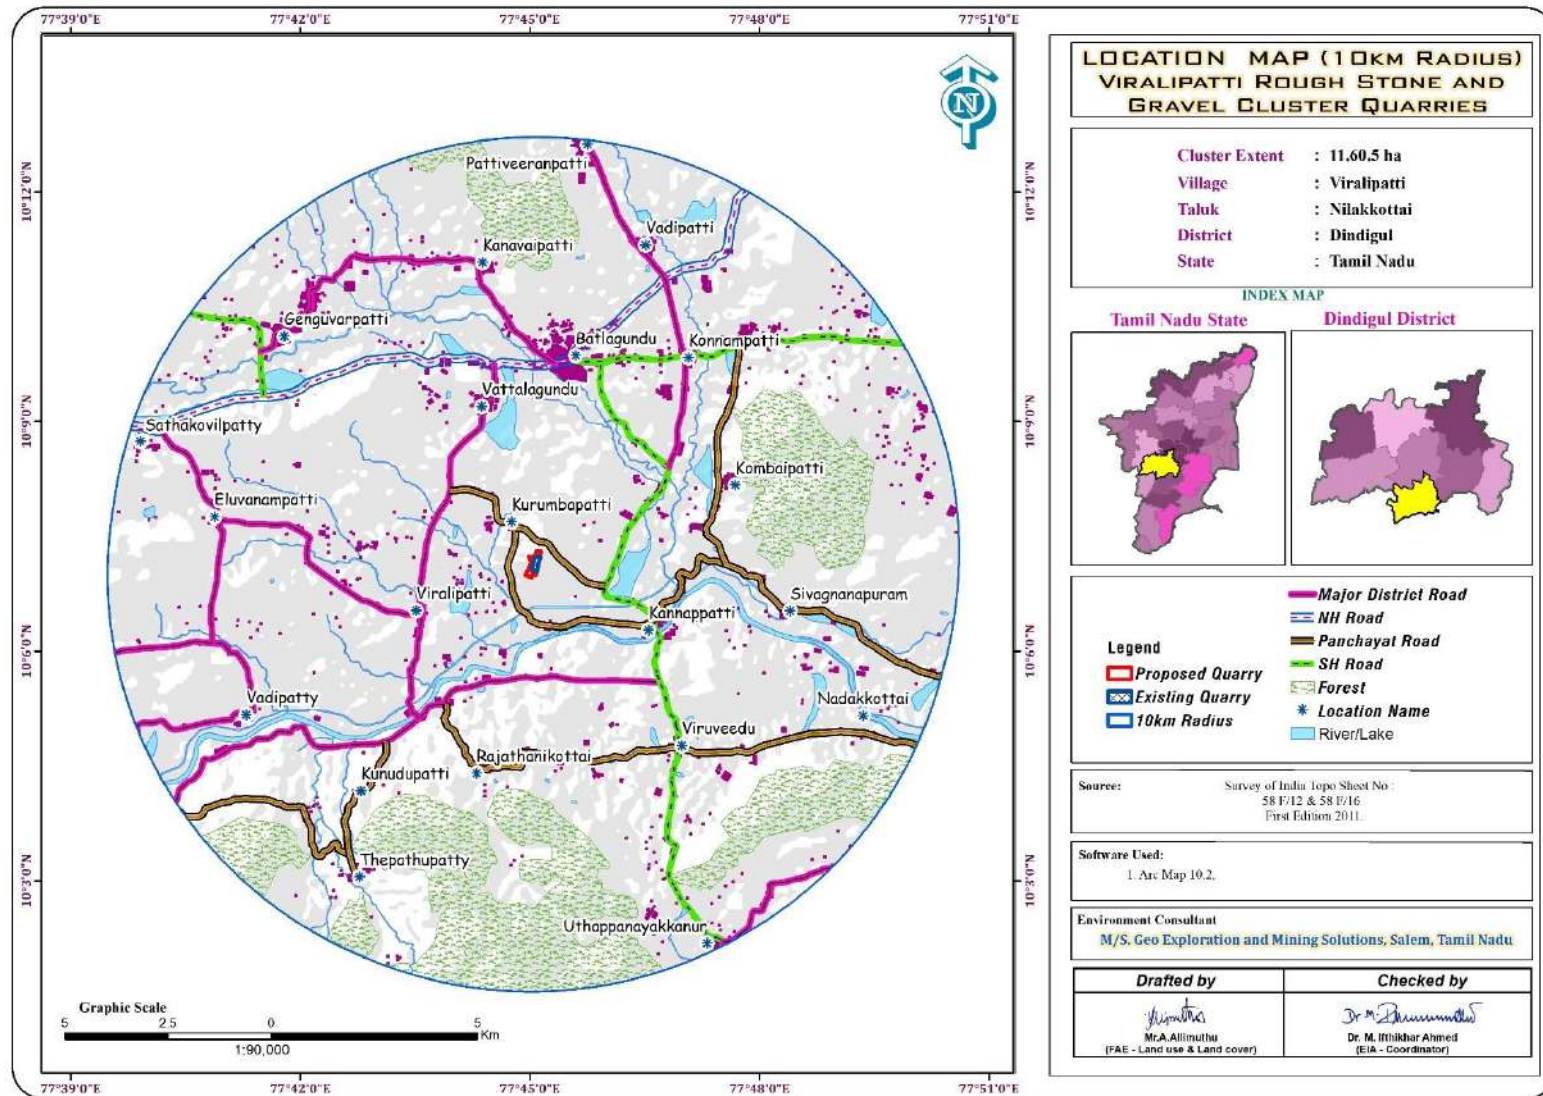
DATE: 12/01/2021

QUARRY LEASE & SURFACE PLAN

SCALE: 1:1000

DATE: 12/01/2021

PREPARED BY: SURVEY DEPARTMENT, GOVERNMENT OF TAMIL NADU

FIGURE – 6: IMAGE SHOWING SURFACE FEATURES AROUND 10 KM RADIUS

2.5 METHOD OF MINING

Proposed Method of Mining is common for all the Proposed Projects – The method of mining is Opencast Mechanized Mining Method is being proposed by formation of 5.0-meter height bench with a bench width not less than the bench height. However, as far as the quarrying of Rough Stone is concerned, observance of the provisions of Regulation 106 (2) (b) as above is seldom possible due to various inherent petro genetic factors coupled with mining difficulties. Hence it is proposed to obtain relaxation to the provisions of the above regulation from the Director of Mines Safety for which necessary provision is available with the Regulation 106 (2) (b) of MMR-1961, under Mine Act – 1952.

The Rough Stone is a batholith formation and the splitting of rock mass of considerable volume from the parent rock mass will be carried out by deploying jackhammer drilling and Slurry Explosives will be used for blasting. Hydraulic Excavators attached with Rock Breakers unit will be deployed for breaking large boulders to required fragmented sizes to avoid secondary blasting and hydraulic excavators attached with bucket unit will be deployed for loading the Rough Stone into the tippers and then the stone is transported from pithead to the nearby crushers.

2.6 PROPOSED MACHINERY DEPLOYMENT-P1 & P2

P1				
S.NO.	TYPE	NOS	SIZE/CAPACITY	MOTIVE POWER
1	Hand Jack hammers	8	1.2m to 2.0m	Compressed air
2	Compressor	2	400psi	Diesel Drive
3	Excavator with Bucket and Rock Breaker	3	300 HP	Diesel Drive
4	Tippers	6	20 Tonnes	Diesel Drive
5	Water Sprinkling Tanker	1	6,000 Litres	Diesel Drive
P2				
S.NO.	TYPE	NOS	SIZE/CAPACITY	MOTIVE POWER
1	Wagon drill machine	1	3m to 10m	Diesel Drive
2	Hand Jack hammers	4	1.2m to 2.0m	Compressed air
3	Compressor	1	400psi	Diesel Drive
4	Excavator with Bucket and Rock Breaker	2	300 HP	Diesel Drive
5	Tippers	4	30 Tonnes	Diesel Drive
6	Water Sprinkling Tanker	1	10,000 litres	Diesel Drive

Source: Approved Mining Plan

2.7 CONCEPTUAL MINING PLAN/ FINAL MINE CLOSURE PLAN

- ✚ At the end of life of mine, the excavated mine pit / void will act as artificial reservoir for collecting rain water and helps to meet out the demand or crises during drought season.
- ✚ After mine closure the greenbelt developed along the safety barrier and top benches and temporary water reservoir will enhance the ecosystem
- ✚ Mine Closure is a process of returning a disturbed site to its natural state or which prepares it for other productive uses that prevents or minimizes any adverse effects on the environment or threats to human health and safety.
- ✚ The principal closure objectives are for rehabilitated mines to be physically safe to humans and animals, geo-technically stable, geo-chemically non-polluting/ non-contaminating, and capable of sustaining an agreed post-mining land use.

3. DESCRIPTION OF THE ENVIRONMENT

Field monitoring studies to evaluate the base line status of the project site were carried out March to May 2025 as per CPCB guidelines. Environmental Monitoring data has been collected with reference to proposed mine by Global Lab and Consultancy Services.

3.1 ENVIRONMENT MONITORING ATTRIBUTES

Attribute	Parameters	Frequency of Monitoring	No. of Locations	Protocol
Land-use Land cover	Land-use Pattern within 10 km radius of the study area	Data from census handbook 2011 and from the satellite imagery	Study Area	Satellite Imagery Primary Survey
*Soil	Physio-Chemical Characteristics	Once during the study period	6 (2 core & 4 buffer zone)	IS 2720 Agriculture Handbook – Indian Council of Agriculture Research, New Delhi
*Water Quality	Physical, Chemical and Bacteriological Parameters	Once during the study period	6 (2 surface water & 4 ground water)	IS 10500& CPCB Standards
Meteorology	Wind Speed Wind Direction Temperature Cloud cover Dry bulb temperature Rainfall	1 Hourly Continuous Mechanical/Automatic Weather Station	1	Site specific primary data& Secondary Data from IMD Station
*Ambient Air Quality	PM10 PM2.5 SO2 NOX Fugitive Dust	24 hourly twice a week (March 2025 – May 2025)	7 (2 core & 5 buffer)	IS 5182 Part 1-23 National Ambient Air Quality Standards, CPCB
*Noise Levels	Ambient Noise	Hourly observation for 24 Hours per location	7 (2 core & 5 buffer zone)	IS 9989 As per CPCB Guidelines
Ecology	Existing Flora and Fauna	Through field visit during the study period	Study Area	Primary Survey by Quadrant & Transect Study Secondary Data – Forest Working Plan
Socio Economic Aspects	Socio-Economic Characteristics, Population Statistics and Existing Infrastructure in the study area	Site Visit & Census Handbook, 2011	Study Area	Primary Survey, census handbook & need based assessments.

Source: On-site monitoring/sampling by Global Lab and Consultancy Services in association with GEMS

* All monitoring and testing have been carried out as per the Guidelines of CPCB and MoEF & CC.

3.2 LAND ENVIRONMENT

S. No	CLASSIFICATION	AREA in HA	AREA in %
BUILTUP			
1	Urban	287.29	0.87
2	Rural	452.26	1.36
3	Mining	41.30	0.12
AGRICULTURAL LAND			
4	Crop Land	12162.47	36.70
5	Plantation	3707.64	11.19
6	Fallow Land	5073.23	15.31

	FOREST		
7	Forest	4475.11	13.50
	BARREN/WASTE LANDS		
8	Scrub Land	6349.87	19.16
	WETLANDS/ WATER BODIES		
9	Waterbodies	589.40	1.78
	TOTAL	33138.58	100.00

Interpretation

From the above table, pie diagram and land use map it is inferred that the majority of the land in the study area is Agriculture includes crop land 63.2% followed by Built-up Lands – 2.35%, Scrub land – 19.16%, and Water bodies 1.78%.

The total mining area within the study area is 41.30 ha i.e., 0.12%. The cluster area of 11.60.5 ha contributes about 3.55% of the total mining area within the study area. This small percentage of Mining Activities shall not have any significant impact on the environment.

3.3 SOIL ENVIRONMENT

Physical Characteristics –

The physical properties of the soil samples were examined for texture, bulk density, porosity and water holding capacity. The soil texture found in the study area is Clay (22.0 % to 28.68%) to Sandy Loam Soil and Bulk Density of Soils in the study area varied between 1.1 – 1.18 g/cm³. The Water Holding Capacity is found to be medium i.e., ranging from 42 – 54 %.

Chemical Characteristics –

- The nature of soil is slightly alkaline to strongly alkaline with pH range 7.56 – 8.24
- The available Nitrogen content range between 451.6 – 602 mg/kg
- The available Phosphorus content range between 18.2 – 46.3 mg/kg
- The available Potassium range between 1.24 – 1.64 mg/kg

Observation:

The pH of the Soil indicates that the soil is Neutral and arid region and ideal for plant growth.

3.4 WATER ENVIRONMENT

Surface Water

The pH varied from 7.43 – 7.86 while turbidity found within the standards (Optimal pH range for sustainable aquatic life is 6.5 to 8.5 pH).

Total Dissolved Solids:

Total Dissolved Solids varied from 874 – 1162 mg/l, the TDS mainly composed of carbonates, bicarbonates, Chlorides, phosphates and nitrates of calcium, magnesium, sodium and other organic matter.

Other parameters:

Chloride content is 190 – 290 mg/l. while sulphates varied from 132 – 155 mg/l.

Ground Water

The pH of the water samples collected ranged from 6.96 – 7.69 and within the acceptable limit of 6.5 to 8.5. pH, Sulphates and Chlorides of water samples from all the sources are within the limits as per the

Standard. On Turbidity, the water samples meet the requirement. Total Dissolved Solids were found in the range of 9880 – 1340 mg/l in all samples. Total hardness varied between 390 – 720 mg/l for all samples.

On Microbiological parameters, the water samples from all the locations meet the requirement. The parameters thus analysed were compared with IS 10500:2012 and are well within the prescribed limits.

3.5 AIR ENVIRONMENT

The baseline studies on air environment include identification of specific air pollution parameters and their existing levels in ambient air. The ambient air quality with respect to the study zone of 10 km radius around the proposed quarry forms the baseline information.

FIGURE – 5: WIND ROSE DIAGRAM

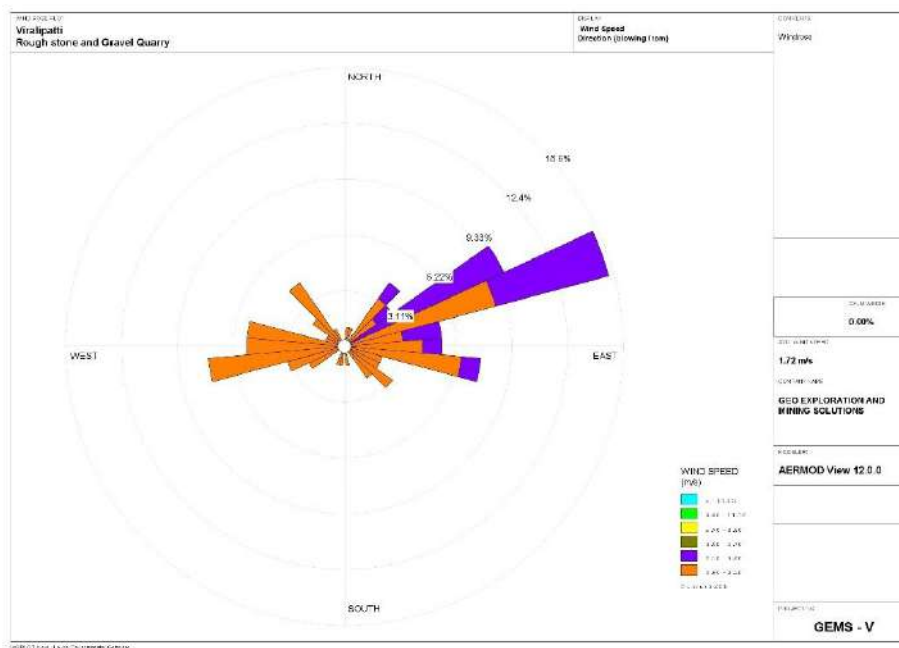
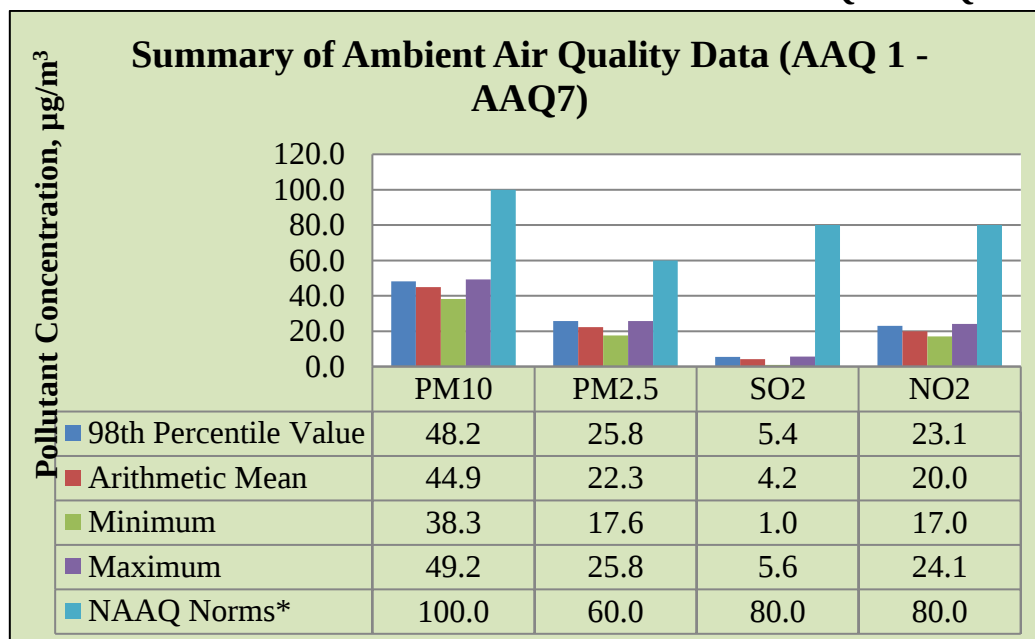


FIGURE – 6. BAR DIAGRAM OF SUMMARY OF AAQ1 – AAQ7



The results of ambient air quality monitoring for the period (March to May 2025) are presented in the report. Data has been compiled for three months.

Interpretations & Conclusion

As per monitoring data, PM₁₀ ranges from 38.3 µg/m³ to 49.2 µg/m³, PM_{2.5} data ranges from 17.6 µg/m³ to 25.8 µg/m³, SO₂ ranges from 1.0 µg/m³ to 5.6 µg/m³ and NO₂ data ranges from 17.0 µg/m³ to 24.1 µg/m³. The concentration levels of the above criteria pollutants were observed to be well within the limits of NAAQS prescribed by CPCB.

3.6 NOISE ENVIRONMENT

Ambient noise levels were measured at 7 (Seven) locations around the proposed project area. Noise levels recorded in core zone during day time were from 49.0 – 46.0 dB (A) Leq and during night time were from 36.9 – 38.9 dB (A) Leq. Noise levels recorded in buffer zone during day time were from 46.1 – 49.9 dB (A) Leq and during night time were from 36.7 – 39.6 dB (A) Leq. Thus, the noise level for Industrial and Residential area meets the requirements of CPCB.

Thus, the noise level for Industrial and Residential area meets the requirements of CPCB.

3.7 ECOLOGICAL ENVIRONMENT

The study involved in the collection of primary data by conducting a survey in the field, examination of floral and faunal records in previously published reports and records. Analysis of the information is the view of the possible alteration in the environment of the project site. For the survey of fauna, both direct and indirect observation methods were used.

There is no schedule I species of animals observed within study area as per Wildlife Protection Act 1972 as well as no species is in vulnerable, endangered or threatened category as per IUCN. There is no endangered red list species found in the study area. Hence this small operation over short period of time will not have any significant impact on the surrounding flora and fauna.

3.8 SOCIO ECONOMIC ENVIRONMENT

It includes demographic structure of the area, provision of basic amenities viz., housing, education, health and medical services, occupation, water supply, sanitation, communication, transportation, prevailing diseases pattern as well as feature like temples, historical monuments etc., at the baseline level. This will help in visualizing and predicting the possible impact depending upon the nature and magnitude of the project.

The socio-economic study of surveyed villages gives a clear picture of its population, average household size, literacy rate and sex ratio etc. It is also found that a part of population is suffering from lack of permanent job to run their day-to-day life. Their expectation is to earn some income for their sustainability on a long-term basis. The proposed projects will aim to provide preferential employment to the local people there by improving the employment opportunity in the area and in turn the social standards will improve.

4. ANTICIPATED ENVIRONMENTAL IMPACTS AND MITIGATION MEASURES

In order to maintain the environmental commensuration with the mining operation, it is essential to undertake studies on the existing environmental scenario and assess the impact on different environmental components. This would help in formulating suitable management plans sustainable resource extraction.

4.1 LAND ENVIRONMENT:

ANTICIPATED IMPACT

- Permanent or temporary change on land use and land cover.
 - Change in Topography: Topography of the ML area will change at the end of the life of the mine.
 - Movement of heavy vehicles sometimes cause problems to agricultural land, human habitations due to dust, noise and it also causes traffic hazards.
 - Due to degradation of land by pitting the aesthetic environment of the core zone may be affected.
-

-
- Earthworks during the rainy season increase the potential for soil erosion and sediment laden water entering the water ways.

MITIGATION MEASURES

- The mining activity will be gradual confined in blocks and excavation will be undertaken progressively along with other mitigative measures like phase wise development of greenbelt etc.
- Construction of garland drains all around the quarry pits and construction of check dam at strategic location in lower elevations to prevent erosion due to surface runoff during rainfall and also to collect the storm water for various uses within the proposed area.
- Green belt development along the boundary within safety zone. The small quantity of water stored in the mined-out pit will be used for greenbelt.
- Thick plantation will be carried out on unutilized area, top benches of mined out pits, on safety barrier, etc.,
- At conceptual stage, the land use pattern of the quarry will be changed into Greenbelt area and temporary reservoir
- In terms of aesthetics, natural vegetation surrounding the quarry will be retained (such as in a buffer area i.e., 7.5 m safety barrier and other safety provided) so as to help minimise dust emissions.

4.2 WATER ENVIRONMENT

ANTICIPATED IMPACT

- The major sources of water pollution normally associated due to mining and allied operations are:
 - Generation of waste water from vehicle washing.
 - Washouts from surface exposure or working areas
 - Domestic sewage
 - Disturbance to drainage course in the project area
 - Mine Pit water discharge
- Increase in sediment load during monsoon in downstream of lease area
- This being a mining project, there will be no process effluent. Waste from washing of machinery may result in discharge of Oil & grease, suspended solids.
- The sewage from soak pit may percolate to the ground water table and contaminate it.
- Surface drainage may be affected due to Mining
- Abstraction of water may lead to depletion of water table.

MITIGATION MEASURES

- Water for the quarrying operation such as sprinkling on haul roads, Greenbelt development will be sourced from the lower part of the mine pit which is specifically allotted to collect the rain water.
 - Garland drain, settling tank will be constructed along the proposed mining lease area. The Garland drain will be connected to settling tank and sediments will be trapped in the settling traps and only clear water will be discharged out to the natural drainage
 - Rainwater will be collected in sump in the mining pits and will be allowed to store and pumped out to surface setting tank of 15 m x 10m x 3m to remove suspended solids if any. This collected water will be judiciously used for dust suppression and such sites where dust likely to be generated and for developing green belt. The proponent will collect and judiciously utilize the rainwater as part of rainwater harvesting system.
 - Periodic (every 6 months once) analysis of quarry pit water and ground water quality in nearby villages.
 - Domestic sewage from site office & urinals/latrines provided in ML is discharged in septic tank followed by soak pits.
 - Waste water discharge from mine will be treated in settling tanks before using for dust suppression and tree plantation purposes.
 - De-silting will be carried out before and immediately after the monsoon season.
-

4.3 AIR ENVIRONMENT

ANTICIPATED IMPACT

- During mining, at various stages activities such as excavation, drilling, blasting, and transportation of materials, particular matter (PM), gases such as Sulphur dioxide, oxides of Nitrogen from vehicular exhaust are the main air pollutants.
- Emissions of noxious gases due to incomplete detonation of explosive may sometimes pollute the air.
- The fugitive dust released from the mining operations may cause effect on the mine workers who are directly exposed to the fugitive dust.
- Simultaneously, the air-borne dust may travel to longer distances and settle in the villages located near the mine lease area.

MITIGATION MEASURES

Drilling – To control dust at source, wet drilling will be practiced. Where there is a scarcity of water, suitably designed dust extractor will be provided for dry drilling along with dust hood at the mouth of the drill-hole collar.

Advantages of Wet Drilling:

- In this system dust gets suppressed close to its formation. Dust suppression become very effective and the work environment will be improved from the point of occupational comfort and health.
- Due to dust free atmosphere, the life of engine, compressor etc., will be increased.
- The life of drill bit will be increased.
- The rate of penetration of drill will be increased.
- Due to the dust free atmosphere visibility will be improved resulting in safer working conditions.

Blasting

- Establish time of blasting to suit the local conditions and water sprinkling on blasting face
- Avoid blasting i.e., when temperature inversion is likely to occur and strong wind blows towards residential areas
- Controlled blasting includes Adoption of suitable explosive charge and short delay detonators, adequate stemming of holes at collar zone and restricting blasting to a particular time of the day i.e., at the time lunch hours, controlled charge per hole as well as charge per round of hole
- Before loading of material water will be sprayed on blasted material
- Dust mask will be provided to the workers and their use will be strictly monitored

Haul Road & Transportation

- Water will be sprinkled on haul roads twice a day to avoid dust generation during transportation
- Transportation of material will be carried out during day time and material will be covered with tarpaulin
- The speed of tippers plying on the haul road will be limited below 20 km/hr to avoid generation of dust.
- Water sprinkling on haul roads & loading points will be carried out twice a day
- Main source of gaseous pollution will be from vehicle used for transportation of mineral; therefore, weekly maintenance of machines improves combustion process & makes reduction in the pollution.
- The un-metalled haul roads will be compacted weekly before being put into use.
- Over loading of tippers will be avoided to prevent spillage.
- It will be ensured that all transportation vehicles carry a valid PUC certificate
- Grading of haul roads and service roads to clear accumulation of loose materials.

Green Belt

- Planting of trees all along main mine haul roads and regular grading of haul roads will be practiced to prevent the generation of dust due to movement of dumpers/trucks
 - Green belt of adequate width will be developed around the project areas
-

Occupational Health

- Dust mask will be provided to the workers and their use will be strictly monitored.
- Annual medical check-ups, trainings and campaigns will be arranged to ensure awareness about importance of wearing dust masks among all mine workers & tipper drivers.
- Ambient Air Quality Monitoring will be conducted six months once to assess effectiveness of mitigation measures proposed.

4.4 NOISE ENVIRONMENT**ANTICIPATED IMPACT**

Noise pollution poses a major health risk to the mine workers. Following are the sources of noise in the existing open cast mine project are being observed such as Drilling, & Blasting, Loading and during movement of vehicles.

MITIGATION MEASURES

- Usage of sharp drill bits while drilling which will help in reducing noise;
- Secondary blasting will be totally avoided and hydraulic rock breaker will be used for breaking boulders;
- Controlled blasting with proper spacing, burden, stemming and optimum charge/delay will be maintained;
- The blasting will be carried out during favourable atmospheric condition and less human activity timings by using nonelectrical initiation system;
- Proper maintenance, oiling and greasing of machines will be done every week to reduce generation of noise;
- Provision of sound insulated chambers for the workers working on machines (HEMM) producing higher levels of noise;
- Silencers / mufflers will be installed in all machineries;
- Green Belt/Plantation will be developed around the project area and along the haul roads. The plantation minimizes propagation of noise;
- Personal Protective Equipment (PPE) like ear muffs/ear plugs will be provided to the operators of HEMM and persons working near HEMM and their use will be ensured through training and awareness.
- Regular medical check-up and proper training to personnel to create awareness about adverse noise level effects.

4.5 BIOLOGICAL ENVIRONMENT**ANTICIPATED IMPACT**

There are no National Park and Archaeological monuments within project area. There are no migratory corridors, migratory avian-fauna, rare endemic and endangered species. There are no wild animals in the area. No breeding and nesting site were identified in project site. No National Park and Wildlife Sanctuary found within 10km radius. The dumps / bunds around the mine itself act as a good barrier for entry of stray animals. In the post mining stage, barbed wire fencing is proposed all around the mined-out void to prevent fall of animals in the mine pits.

MITIGATION MEASURES

To reduce the adverse effects on natural flora/fauna status of the area due to deposition of dust generated from mining operations, water sprinkling and water spraying systems will be ensured in all dust prone areas to arrest dust generation. Methodical and well-planned plantation scheme will be carried out.

4.5.1 GREENBELT DEVELOPMENT PLAN

Code	Year	No. of tress proposed to be planted	Area to be covered in m ²	Name of the species
P1	I	1750	The safety zone along the boundary barrier has been identified to be utilized for Greenbelt development and along village roads.	Vembu, Pungan, Mahakani, Naval etc.,
P2	I	2000		

4.6 SOCIO ECONOMIC ENVIRONMENT

ANTICIPATED IMPACT

Employment generation due to the project will provide direct employment for about 76 persons.

MITIGATION MEASURES

- Good maintenance practices will be adopted for plant machinery and equipment, which will help to avert potential noise problems.
- Green belt will be developed in and around the project site as per Central Pollution Control Board (CPCB) guidelines.
- Appropriate air pollution control measure will be taken to minimize the environmental impact within the core zone.
- For the safety of workers, personal protective appliances like hand gloves, helmets, safety shoes, goggles, aprons, nose masks and ear protecting devices will be provided as per mines act and rules.
- Benefit to the State and the Central governments through financial revenues by way of royalty, tax, DMF, NMET etc, from this project directly and indirectly.

5. ANALYSIS OF ALTERNATIVES (TECHNOLOGY AND SITE)

The site has been selected based on geological investigation and exploration as below:

- Occurrence of minerals at the specific site.
- Transportation facility for materials & manpower.
- Overall impact on environment and mitigation feasibility
- Socio – economic background.

The mineral deposits are site specific in nature; hence question of seeking alternate site does not arise for this project.

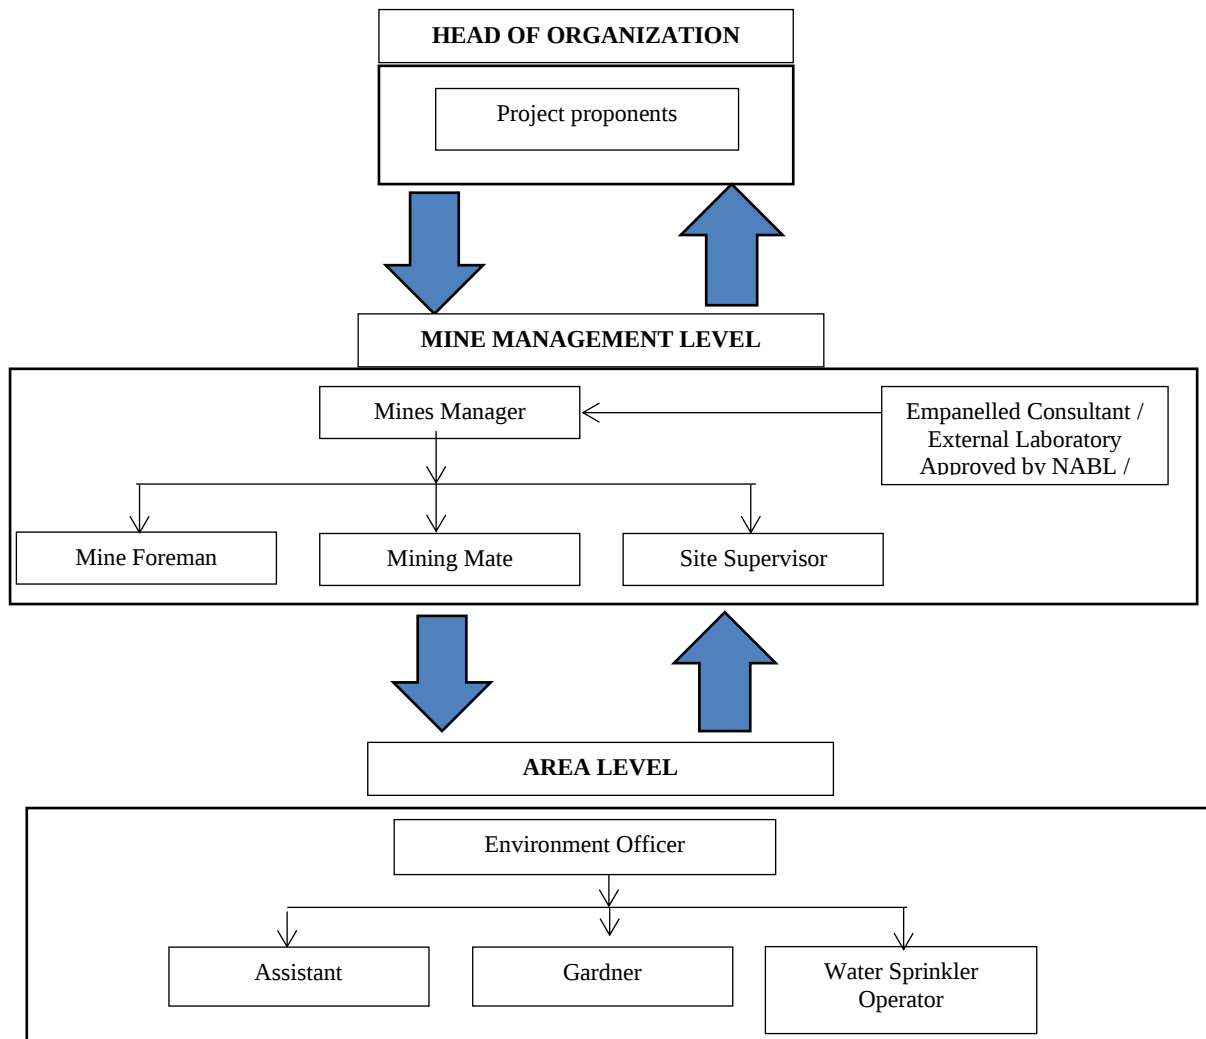
6. ENVIRONMENT MONITORING PROGRAM

Usually, an impact assessment study is carried over short period of time and the data cannot bring out all variations induced by natural or human activities. Hence regular monitoring program of Environmental parameters is essential to take into account the changes in the Environment.

The Objective of Monitoring -

- To check or assess the efficiency of the controlling measures;
- To establish a data base for future impact assessment studies.

6.1 PROPOSED ENVIRONMENTAL MONITORING CELL



6.2 POST ENVIRONMENTAL CLEARANCE MONITORING SCHEDULE

S.No.	Environment Attributes	Location	Monitoring		Parameters
			Duration	Frequency	
1	Air Quality	2 Locations (1 Core & 1 Buffer)	24 hours	Once in 6 months	Fugitive Dust, PM _{2.5} , PM ₁₀ , SO ₂ and NO _x .
2	Meteorology	At mine site before start of Air Quality Monitoring & IMD Secondary Data	Hourly / Daily	Continuous online monitoring	Wind speed, Wind direction, Temperature, Relative humidity and Rainfall
3	Water Quality Monitoring	2 Locations (1SW & 1 GW)	-	Once in 6 months	Parameters specified under IS:10500, 1993 & CPCB Norms
4	Hydrology	Water level in open wells in buffer zone around 1 km at specific wells	-	Once in 6 months	Depth in bgl
5	Noise	2 Locations (1 Core & 1 Buffer)	Hourly – 1 Day	Once in 6 months	Leq, Lmax, Lmin, Leq Day & Leq Night
6	Vibration	At the nearest habitation (in case of reporting)	–	During blasting Operation	Peak Particle Velocity

7	Soil	2 Locations (1 Core & 1 Buffer)	–	Once in six months	Physical and Chemical Characteristics
8	Greenbelt	Within the Project Area	Daily	Monthly	Maintenance

7. ADDITIONAL STUDIES

7.1 RISK ASSESSMENT

The methodology for the risk assessment has been based on the specific risk assessment guidance issued by the Directorate General of Mine Safety (DGMS), Dhanbad, vide Circular No.13 of 2002, dated 31st December, 2002. The DGMS risk assessment process is intended to identify existing and probable hazards in the work environment and all operations and assess the risk levels of those hazards in order to prioritize those that need immediate attention. Further, mechanisms responsible for these hazards are identified and their control measures, set to timetable are recorded along with pinpointed responsibilities.

The whole quarry operation will be carried out under the direction of a Qualified Competent Mine Manager holding certificate of competency to manage a metalliferous mine granted by the DGMS, Dhanbad. Risk Assessment is all about prevention of accidents and to take necessary steps to prevent it from happening.

7.2 DISASTER MANAGEMENT PLAN

The Disaster Management Plan is aimed to ensure safety of life, protection of environment, protection of installation, restoration of production and salvage operations in this same order of priorities. The objective of the Disaster Management Plan is to make use of the combined resources of the mine and the outside services to achieve the following:

- ✚ Rescue and medical treatment of casualties;
- ✚ Safeguard other people;
- ✚ Minimize damage to property and the environment;
- ✚ Initially contain and ultimately bring the incident under control;
- ✚ Secure the safe rehabilitation of affected area; and
- ✚ Preserve relevant records and equipment for the subsequent inquiry into the cause and circumstances of the emergency.

7.3 CUMULATIVE IMPACT STUDY

CUMULATIVE PRODUCTION LOAD OF ROUGH STONE

Quarry	Production for five-year plan period	Per Year Production in m ³	Per Day Production in m ³	Number of Lorry Load Per Day
P1	3,06,760	30,676	102	8
P2	2,76,295	27,629	92	7
E1	7,58,190	75,819	252	21
Total	13,41,245	1,34,124	446	36

CUMULATIVE PRODUCTION LOAD OF WEATHERED ROCK

Quarry	Production for five-year plan period	Per Year Production in m ³	Per Day Production in m ³	Number of Lorry Load Per Day
P1	1,07,060	35,686	118	10
P2	1,09,275	36,425	121	10
E1	31,995	10,665	35	3
Total	2,48,330	82,776	274	23

CUMULATIVE PRODUCTION LOAD OF GRAVEL

Quarry	Production for five-year plan period	Per Year Production in m ³	Per Day Production in m ³	Number of Lorry Load Per Day
P1	35,660	11,886	39	3
P2	46,505	15,501	51	4
E1	50,763	16,921	56	4
Total	1,32,928	44,308	146	11

8. PROJECT BENEFITS

The Proposed Project for Quarrying Rough Stone and Gravel at Viralipatti Village aims to produce 13,41,245 m³ Rough Stone over a period of 10 years. Gravel 1,32,928 m³ for period of 3 years, weathered Rock 2,48,330 m³ and This will enhance the socio-economic activities in the adjoining areas and will result in the following benefits.

- Increase in Employment Potential
- Improvement in Socio-Economic Welfare
- Improvement in Physical Infrastructure
- Improvement in Social infrastructure

9. ENVIRONMENT MANAGEMENT PLAN

The Environment Monitoring Cell formed by the mine management will ensure effective implementation of environment management plan and to ensure compliance of environmental statutory guidelines through Mine Management Level.

The said team will be responsible for:

- ✚ Monitoring of the water/ waste water quality, air quality and solid waste generated
- ✚ Analysis of the water and air samples collected through external laboratory
- ✚ Implementation and monitoring of the pollution control and protective measures/ devices which shall include financial estimation, ordering, installation of air pollution control equipment, waste water treatment plant, etc.
- ✚ Co-ordination of the environment related activities within the project as well as with outside agencies
- ✚ Collection of health statistics of the workers and population of the surrounding villages
- ✚ Green belt development
- ✚ Monitoring the progress of implementation of the environmental monitoring programme
- ✚ Compliance to statutory provisions, norms of State Pollution Control Board, Ministry of Environment and Forests and the conditions of the environmental clearance as well as the consents to establish and consents to operate.

10. CONCLUSION

It can be concluded from overall assessment of the impacts, in terms of positive and negative effects on various environmental components, that the mining activities will not have any adverse effect on the surrounding environment.

To mitigate any impacts due to the mining activities, a well-planned EMP and a detailed post project monitoring system is provided for regular monitoring and immediate rectification at site. Due to the cluster quarrying activities, socio economic conditions in and around the project site will be improved substantially. Hence, the Prior Environmental Clearance shall be granted at the earliest.
