

EXECUTIVE SUMMARY

PROJECT PROPONENT

Sl. No.	Name	Extent of Mining Applied
P1	Tmt.S. Manonmani	1.30.0 ha

TMT.S. MANONMANI ROUGH STONE & GRAVEL QUARRY

“B1” CATEGORY – MINOR MINERAL – CLUSTER – NON-FOREST LAND

CLUSTER EXTENT = 12.78.0 ha

At

Arasampalayam Village, Kinathukadavu Taluk, Coimbatore District

Complied as per ToR obtained for the Projects in Cluster Situation – Cluster area is calculated as per MoEF & CC Notification – S.O. 2269 (E) Dated: 01.07.2016

✚ Letter No. SEIAA- TN/F.No.9106/SEAC/ToR-1345/2022 Dated: 09.02.2023

Environmental Consultant

GEO EXPLORATION AND MINING SOLUTIONS



Old No. 260-B, New No. 17,
Advaitha Ashram Road, Alagapuram,
Salem – 636 004, Tamil Nadu, India



Accredited for sector 1 Category ‘A’, 31 & 38 Category ‘B’

Certificate No : NABET/EIA/2225/RA 0276

Phone: 0427-2431989,

Email: ifthiahmed@gmail.com, geothagam@gmail.com

Web: www.gemssalem.com



Baseline Monitoring Season – March 2021 to May 2021

1. INTRODUCTION

Environmental Impact Assessment (EIA) is the management tool to ensure the sustainable development and it is a process, used to identify the environmental, social and economic impacts of a project prior to decision-making. It is a decision-making tool, which guides the decision makers in taking appropriate decisions for any project. EIA systematically examines both beneficial and adverse consequences of the project and ensures that these impacts are taken into account during the project designing. It also reduces conflicts by promoting community participation, information, decision makers, and helps in developing the base for environmentally sound project.

Rough Stone & Gravel is the major requirements for construction industry. This EIA report is prepared by considering Cumulative load of proposed & existing quarries of Tmt. S. Manonmani, Rough Stone & Gravel Quarry cluster consisting of Eight Proposed and two Existing Quarry with total extent of Cluster of 12.78.0 ha in Arasampalayam Village, Kinathukadavu Taluk, Coimbatore District and Tamil Nadu State, cluster area calculated as per MoEF & CC Notification S.O. 2269(E) Dated 1st July 2016.

The Baseline Monitoring study has been carried out during the period of March – May 2021 (Baseline Data Used is as per MoEF & CC Office Memorandum No. J-11013/41/2006-IA-II (I) (Part) Dated 29th August 2017 & MoEF & CC Office Memorandum F. No. IA3-22/10/2022-IA.III [E 177258] Dated: 08.06.2022) and this EIA and EMP report is prepared for considering cumulative impacts arising out of these projects, the Cumulative Environmental Impact Assessment study is undertaken, which is followed by preparation of a detailed Environmental Management Plan (EMP) individually to minimize those adverse impacts.

“Draft EIA report prepared on the basis of ToR Issued for carrying out Public Hearing for the Grant of Environmental Clearance from SEIAA, - Tamil Nadu”

1.1 DETAILS OF PROJECT PROPONENT –

Name of the Company	Tmt. S. Manonmani Rough Stone & Gravel Quarry Project
Address	W/o. Somasundaram No.7/73, Karachery, Arasampalayam, Kinathukadavu, Coimbatore District. Pin:641 201
Mobile	+91 98657 55889
Status	Individual

1.2 QUARRY DETAILS WITHIN 500 M RADIUS

PROPOSED QUARRIES				
CODE	Name of the Proponent and Address	S.F. Nos, Village & Taluk	Extent in Ha	Status
P1	Tmt. S. Manonmani, W/o, V. Somasundaram, 7/73, Karachery, Kinathukadavu, Coimbatore District.	360/1B (P) Arasampalayam, Kinathukadavu	1.30.00	Letter No. SEIAA- TN/F.No.9106/SEAC/ToR- 1345/2022 Dated: 09.02.2023
PUBLIC HEARING COMPLETED FILE				
P2	Thiru.M. Loganathan S/o. Myilsamy Gounder, West Thottam, Karacheri, Chettipalayam (via), Coimbatore	360/1A1(P), 360/1A2(P), 360/1A3, Arasampalayam & Kinathukadavu	0.78.5	Public hearing completed on 07.02.23
P3	Tmt. M.Rasamani, W/o. K. Marimuthu, Karachery, Periyakuyili Post, Chettipalayam via,	361/1A & 362/1 Arasampalayam & Kinathukadavu	0.99.0	Public hearing completed on 07.02.23

	Coimbatore District – 641 201			
P4	Thiru. M. Viswanathan, S/o. Mailsamy Gounder, West Thottam, Chettipalayam via, Coimbatore District-641201	360/1A5 and 360/1A6 Arasampalayam & Kinathukadavu	1.00.5	Public hearing completed on 07.02.23
P5	Thiru. K. Ravikumar S/o. R. Kumarasamy, 7/68, West Thottam, Karacheri, Periyakuyili Post, Chettipalayam via, Coimbatore District.	355/2A (P), 355/2C (P) and 355/2D1A (P) Arasampalayam, Kinathukadavu	1.40.0	Public hearing completed on 07.02.23
P6	Thiru. V.Somasundaram, S/o.Velusamy, No.7/73, Karachery, Arasampalayam Village, Kinathukadavu Tk, Coimbatore – 641 201	360/1B (P), 360/1E(P) and 360/1G Arasampalayam	1.43.00	Public hearing completed on 07.02.23
P7	Tmt.R. Baby, W/o. R.S. Radhakrishnan, No.96/65G, Ruba Nagar, Ramanathapuram, Coimbatore District – 641 045	83/1C1B & 83/1C2, Pachapalayam	1.33.0	EC granted
P8	Thiru.K. Nataraj, Theerthakinaru Thottam, Karacheri, Chettipalayam via, Kinathukadavu Taluk, Coimbatore District – 641 201	84/5A Pachapalayam	1.48.0	EC granted
TOTAL			9.72.0	
EXISTING QUARRIES				
CODE	Name of the Proponent and Address	S.F. Nos	Extent in Ha	Lease Period
E-1	Thiru.S. Arunachalam	83/1C1A	1.33.00	13.04.2018 to 12.04.2023
E-2	Thiru.R. Chinnsamy	83/1A(P) & 83/2(P)	1.73.00	13.04.2018 to 12.04.2023
TOTAL			3.06.00	
EXPIRED QUARRIES				
EX-1	Thiru.R.Sampathkumar	84/4C Pachapalayam	0.46.5	10.06.2014 to 09.06.2018
TOTAL			0.46.5 Ha	
TOTAL CLUSTER EXTENT			12.78.0 Ha	

1.3 SALIENT FEATURES OF THE PROPOSAL

Name of the Quarry	Tmt. S. Manonmani, Rough Stone & Gravel Quarry	
Toposheet No	58-F/01	
Latitude between	10°52'33.75"N to 10°52'38.99"N	
Longitude between	77°02'48.41"E to 77°02'53.53"E	
Highest Elevation	380 m AMSL	
Proposed Depth of Mining	27m (2m Gravel + 25m Rough Stone)	
Geological Resources	Rough Stone in m ³	Gravel m ³
	3,25,000	26,000
Mineable Reserves	Rough Stone in m ³	Gravel m ³
	38,925	6,794
Ultimate Pit Dimension	79m (L) x 43m (W) x 27m (2m Gravel + 25m Rough Stone)	
Water Level in the surrounds area	70 - 65m bgl	
Method of Mining	Opencast Mechanized Mining Method involving drilling and blasting	
Topography	The lease applied area exhibits Plain topography. The area has gentle sloping towards Western side. The altitude of the area is 380 m (max) above mean sea level. The area is covered by 2m thickness of Gravel Formation. Massive Charnockite is found after 2m (Gravel Formation) which is clearly inferred from the nearby existing quarrying pit.	
Machinery proposed	Jack Hammer	2Nos
	Compressor	1 Nos
	Excavator with bucket and rock breaker	1 Nos
	Tipper	1 Nos
Blasting Method	Controlled Blasting Method by shot hole drilling and small dia of 25mm slurry explosive are proposed to be used for shattering and heaving effect for removal and winning of Rough Stone. No deep hole drilling is proposed.	
Proposed Manpower Deployment	14 Nos	
Project Cost	Rs.24,49,000/-	
EMP Cost	Rs. 3,80,000/-	
CER Cost @ 2% of Project Cost	Rs 5,00,000/-	
Nearby Water Bodies	Water bodies	Distance & Direction
	Odai	50m Safety West
	Tank Near Myleripalayam	850m_NE
	Tank Near Chettipalayam	2.5km_SW
	Kothavadi Lake	4.0km_NW
	Odai near_Kothavadi	7.0km_SE
Greenbelt Development Plan	Proposed to plant 780 trees in the 7.5m Safety Zone and panchayat roads.	
Proposed Water Requirement	1.2 KLD	
Nearest Habitation	Karacheri – 2.0Km- SE	

Source: Approved Mining Plan

1.4 STATUTORY DETAILS

Project – P1

- The proponent applied for Rough Stone and Gravel Quarry Lease Dated: 8.07.2021 & 21.12.2021
- Precise Area Communication Letter was issued by the District Collector, Coimbatore, vide letter Rc.No.857/Mines/2021, Dated: 01.02.2022
- The Mining Plan was prepared by Qualified Person and approved by Assistant Director, Geology and Mining, Coimbatore District, vide Rc.No.857/Mines/2021, Dated: 15.02.2022
- The proposed project falls under “B1” Category as per Order Dated: 04.09.2018 & 13.09.2018 passed by Hon'ble National Green tribunal, New Delhi in O.A. No. 173 of 2018 & O.A. No. 186 of 2016 and MoEF & CC Office Memorandum F. No. L-11011/175/2018-IA-II (M) Dated: 12.12.2018
- Proponents applied for ToR for Environmental Clearance vide online Proposal No. SIA/TN/MIN/73759/2022, Dated: 16.03.2022

2. PROJECT DESCRIPTION

The proposed projects are site specific and there is no additional area required for this project. There is no effluent generation/discharge from the proposed quarries.

Method of mining is common for all the proposed quarries in the cluster. Rough Stone is proposed to be excavated by opencast mechanized method involving splitting of rock mass of considerable volume from the parent rock mass by jackhammer drilling and blasting, hydraulic excavators are used for loading the Rough Stone from pithead to the needy crushers and rock breakers to avoid secondary blasting.

2.1 SITE CONNECTIVITY TO THE PROJECT AREA

Nearest Roadway	NH-83- Coimbatore – Dindigul – 4.0km-W SH-163- Palladam - Othakalmandapam road- 4.0km-NW
Nearest Village	Karacheri - 2.0 km – SE
Nearest Town	Kinathukadavu – 6.5km – SW
Nearest Railway	Kinathukadavu - 6km – SW
Nearest Airport	Coimbatore - 18km – N
Seaport	Kochi - 140km – Southwest

2.2 LAND USE PATTERN OF THE LEASE APPLIED AREA

Description	Present area in (ha)	Area at the end of this quarrying period (ha)
Area under Quarrying	Nil	0.34.0
Infrastructure	Nil	0.01.0
Roads	Nil	0.02.0
Green Belt	Nil	0.14.6
Unutilized Area	1.30.0	0.78.4
Grand Total	1.30.0	1.30.0

2.3 OPERATIONAL DETAILS OF LEASE APPLIED AREA

PARTICULARS	DETAILS	
	Rough Stone (5Year Plan period)	Gravel (3 Years Plan period)
Geological Resources in m ³	3,25,000	26,000
Mineable Reserves in m ³	38,925	6,794
Production in m ³	38,925	6,794
Mining Plan Period	5 Years	
Number of Working Days	300 Days	
Production per day in m ³	26	8
No of Lorry loads (12m ³ per load)	2	1
Total Depth of Mining	27m (2m Gravel + 25m Rough Stone)	

Source: Approved mining plan

2.4 RESOURCES AND RESERVES OF THE PROPOSAL

ROUGH STONE PRODUCTION FROM THE PROPOSAL

Quarry	Production for five-year plan period considering safety parameters	YEARWISE Reserves	Per Year Production in m ³	Per Day Production in m ³	Number of Lorry Load Per Day @ 12m ³ per load
P1	38925	I	8,230	26	2 Trips /Day
		II	9,880		
		III	10,260		
		IV	6,785		
		V	3770		

GRAVEL PRODUCTION FROM THE PROPOSAL

Quarry	Mineable Reserves in m3	YEARWISE Reserves	Per Year Production in m3	Per Day in m3	Number of Lorry Load @ 12m3 per load
P1	6,794	I	2,408	8	1 load per week
		II	2,236		
		III	2,150		
		IV	-		
		V	-		

FIGURE – 1: GOOGLE IMAGE SHOWING APPLIED QUARRY LEASE AREA – P1



FIGURE – 2: GOOGLE IMAGE SHOWING CLUSTER (500 m QUARRIES)


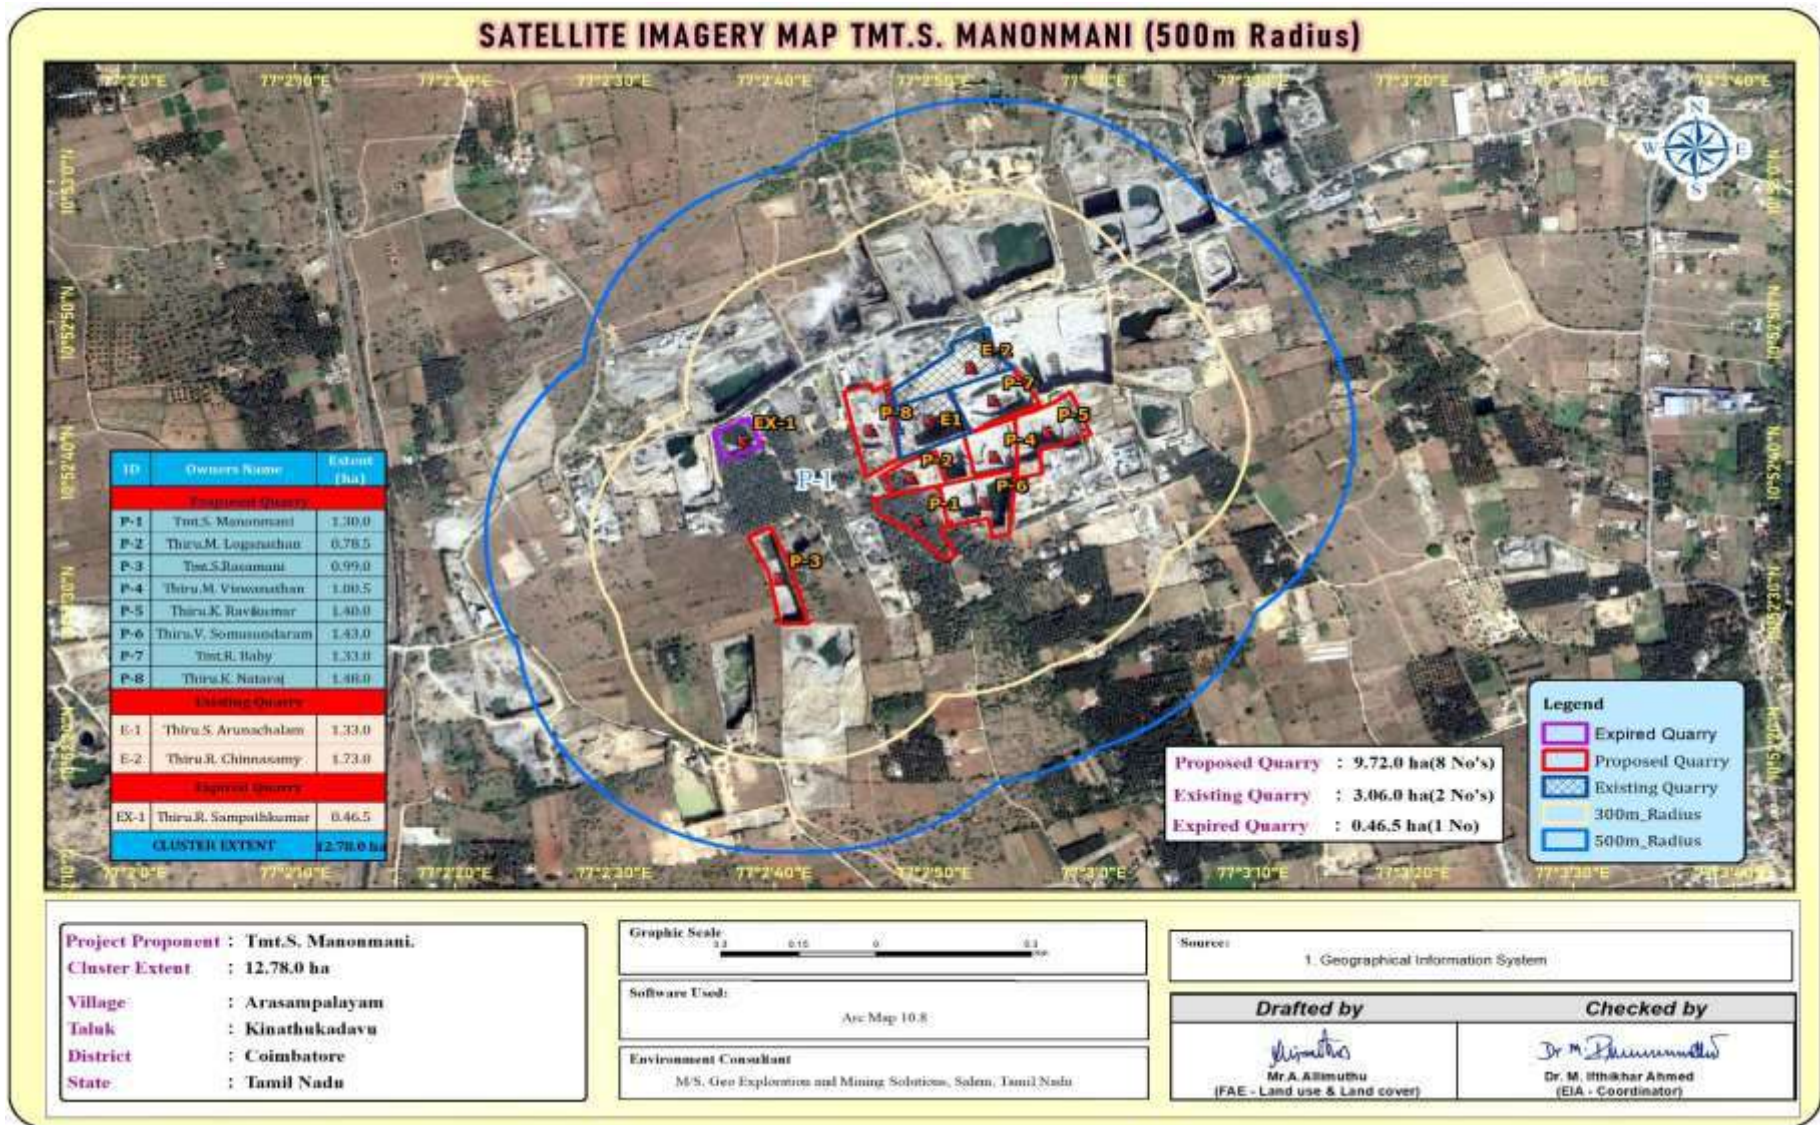


FIGURE – 3: TOPOSHEET MAP COVERING 10 KM RADIUS

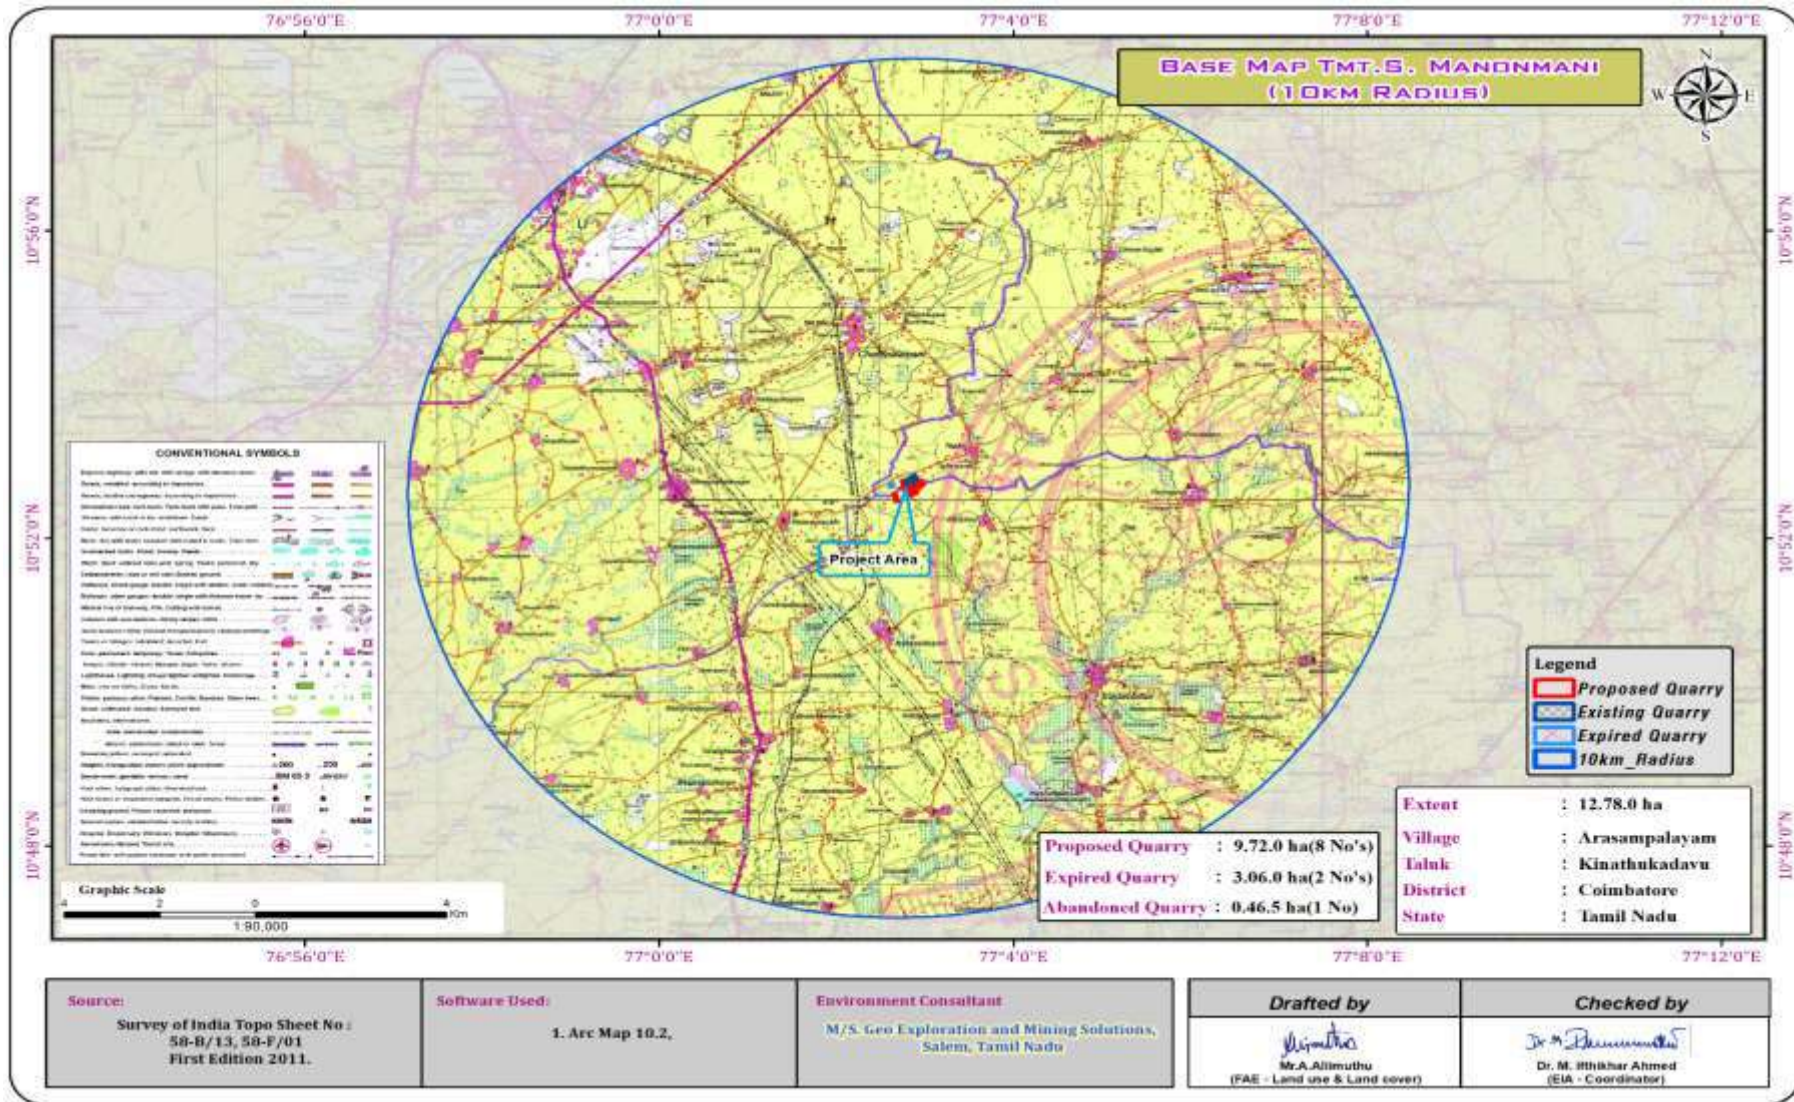

2.5 METHOD OF MINING

Proposed Method of Mining is common for all the Proposed Projects – The method of mining is Opencast Mechanized Mining Method is being proposed by formation of 5.0 meter height bench with a bench width not less than the bench height.

The Rough Stone is a batholith formation and the splitting of rock mass of considerable volume from the parent rock mass will be carried out by deploying jackhammer drilling and Slurry Explosives will be used for blasting. Hydraulic Excavators attached with Rock Breakers unit will be deployed for breaking large boulders to required fragmented sizes to avoid secondary blasting and hydraulic excavators attached with bucket unit will be deployed for loading the Rough Stone into the tippers and then the stone is transported from pithead to the nearby crushers.

2.6 PROPOSED MACHINERY DEPLOYMENT

PROPOSAL – P1				
S.NO.	TYPE	NOS	SIZE/CAPACITY	MOTIVE POWER
1	Jack hammers	2	1.2m to 2.0m	Compressed air
2	Compressor	1	400psi	Diesel Drive
3	Excavator with Bucket / Rock Breaker	1	300 HP	Diesel Drive
4	Trucks	1	20 Tonnes	Diesel Drive

2.7 CONCEPTUAL MINING PLAN/ FINAL MINE CLOSURE PLAN

- ✚ At the end of life of mine, the excavated mine pit / void will act as artificial reservoir for collecting rain water and helps to meet out the demand or crises during drought season.
- ✚ After mine closure the greenbelt developed along the safety barrier and top benches and temporary water reservoir will enhance the ecosystem.
- ✚ Mine Closure is a process of returning a disturbed site to its natural state or which prepares it for other productive uses that prevents or minimizes any adverse effects on the environment or threats to human health and safety.
- ✚ The principle closure objectives are for rehabilitated mines to be physically safe to humans and animals, geo-technically stable, geo-chemically non-polluting/ non-contaminating, and capable of sustaining an agreed post-mining land use.

2.8 ULTIMATE PIT DIMENSION

PROPOSAL – P1			
Pit	Length (Max) (m)	Width (Max) (m)	Depth (Max)
I	79	43	27 m bgl

3. DESCRIPTION OF THE ENVIRONMENT

Field monitoring studies to evaluate the base line status of the project site were carried out during March to May 2021 as per CPCB guidelines. Environmental Monitoring data has been collected with reference to proposed mine Enviro-Tech Services – An ISO 9001: 2015, 14001: 2015 & 45001:2015 Certified & MoEF Recognised Laboratory, accredited by ISO/IEC-17025:2017 (NABL) & UPPCB Certified & MoEF Notified Laboratory.

3.1 ENVIRONMENT MONITORING ATTRIBUTES

ATTRIBUTE	PARAMETERS	FREQUENCY OF MONITORING	NO. OF LOCATIONS	PROTOCOL
Land-use Land cover	Land-use Pattern within 10 km radius of the study area	Data's from census handbook 2011 and from the satellite imagery	Study Area	Satellite Imagery Primary Survey
Soil	Physio - Chemical Characteristics	Once during the study period	8 (4 core & 4 buffer zone)	IS 2720 Agriculture Handbook - Indian Council of Agriculture Research, New Delhi
Water quality	Physical, Chemical and Bacteriological Parameters	Once during the study period	7 (1 surface water & 6 ground water)	IS 10500& CPCB Standards
Meteorology	Wind Speed Wind Direction Temperature Cloud cover Dry bulb temperature Rainfall	1 Hourly Continuous Mechanical/Automatic Weather Station	1	Site specific primary data & Secondary Data from IMD Station
Ambient Air Quality	PM ₁₀ PM _{2.5} SO ₂ , NO _x CO Fugitive Dust	24 hourly twice a week (March 2021 – May 2021)	10 (4 core & 6 buffer)	IS 5182 Part 1-23 National Ambient Air Quality Standards, CPCB
Noise Levels	Ambient Noise	Hourly observation for 24 Hours per location	10 (4 core & 6 buffer zone)	IS 9989 As per CPCB Guidelines
Ecology	Existing Flora and Fauna	Through field visit during the study period	Study Area	Primary Survey by Quadrant & Transect Study & Secondary Data
Socio Economic Aspects	Socio-Economic Characteristics, Population Statistics and Existing Infrastructure in the study area	Site Visit & Census Handbook, 2011	Study Area	Primary Survey, census handbook & need based assessments.

3.2 LAND ENVIRONMENT

S.No	CLASSIFICATION	AREA_Ha	Area_%
1	BUILT-UP URBAN	728.08	1.96
2	BUILT-UP RURAL	1138.75	3.06
3	MINING	587.02	1.58
4	CROP LAND	17360.11	46.62
5	SCRUB LAND	1055.70	2.83
6	FALLOW LAND	10031.47	26.94
7	AGRICULTURE PLANTATION	6276.64	16.85
8	WATER BODIES	61.82	0.17
TOTAL		37239.59	100.00

3.3 SOIL ENVIRONMENT

Physical Characteristics –

The physical properties of the soil samples were examined for texture, bulk density, porosity and water holding capacity. The soil texture found in the study area is Clay to Sandy Soil and Bulk Density of Soils in the study area varied between 0.79 – 1.10 g/cc. The Water Holding Capacity and Porosity of the soil samples is found to be medium i.e., ranging from 42.1 - 51.5 % and 27.3 – 38.6 %

Chemical Characteristics –

- The nature of soil is slightly alkaline to strongly alkaline in nature with pH range 7.39 to 8.23
- The available Nitrogen content range between 146.2 to 220 kg/ha
- The available Phosphorus content range between 0.71 to 1.55 kg/ha
- The available Potassium range between 30.0 to 44.2 mg/kg

3.4 WATER ENVIRONMENT

Surface Water

Ph:

The pH of surface 7.9 while turbidity found within the standards. (Optimal pH range for sustainable aquatic life is 6.5 to 8.5 pH).

Total Dissolved Solids:

Total Dissolved Solids 510 mg/l, the TDS mainly composed of carbonates, bicarbonates, Chlorides, phosphates and nitrates of calcium, magnesium, sodium and other organic matter.

Other parameters:

Chloride 134.2 mg/l. Nitrates 12.4 mg/l, while sulphates 18.5 mg/l.

Ground Water


The pH of the water samples collected ranged from 6.71 to 8.27 and within the acceptable limit of 6.5 to 8.5. pH, Sulphates and Chlorides of water samples from all the sources are within the limits as per the Standard. on Turbidity, the water samples meet the requirement. The Total Dissolved Solids were found in the range of 451 - 566 mg/l in all samples. The Total hardness varied between 103.6 – 201.95 mg/l for all samples.

On Microbiological parameters, the water samples from all the locations meet the requirement. The parameters thus analysed were compared with IS 10500:2012 and are well within the prescribed limits.

3.5 AIR ENVIRONMENT

The baseline studies on air environment include identification of specific air pollution parameters and their existing levels in ambient air. The ambient air quality with respect to the study zone of 10 km radius around the proposed quarry forms the baseline information.

FIGURE – 4: WIND ROSE DIAGRAM

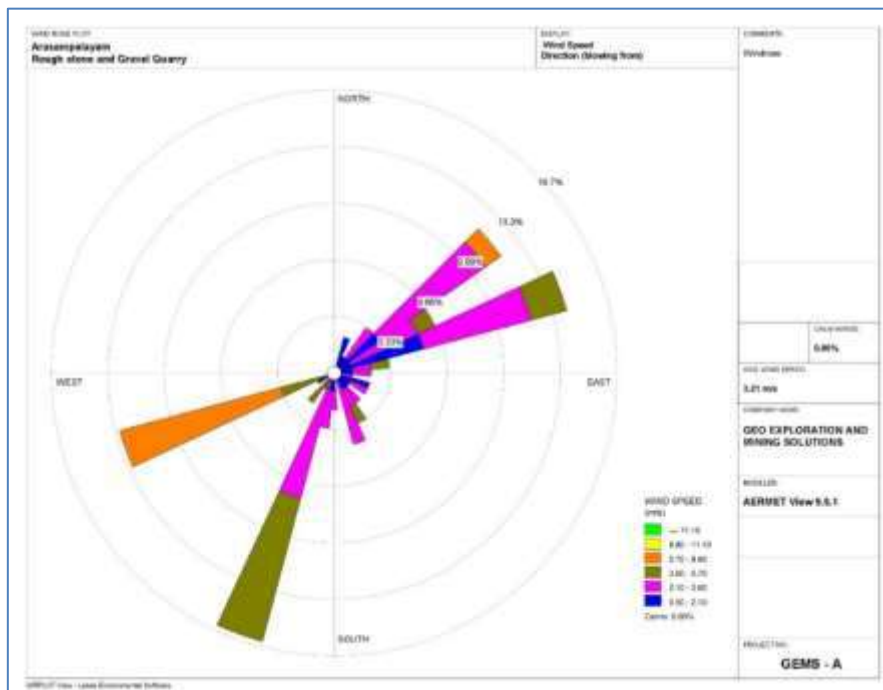

As per monitoring data, PM₁₀ ranges from 40.2 µg/m³ to 46.7 µg/m³, PM_{2.5} data ranges from 18.3 µg/m³ to 26.9 µg/m³, SO₂ ranges from 5.0 µg/m³ to 11.5 µg/m³ and NO₂ data ranges from 13.5 µg/m³ to 28.4 µg/m³. The concentration levels of the above criteria pollutants were observed to be well within the limits of NAAQS prescribed by CPCB.

3.6 NOISE ENVIRONMENT

Ambient noise levels were measured at 10 (ten) locations around the project area considering cluster quarries. Noise levels recorded in core zone during day time were from 39.4 – 48.4 dB (A) Leq and during night time were from 35.4 – 40.0 dB (A) Leq. Noise levels recorded in buffer zone during day time were from 39.7 – 48.9 dB (A) Leq and during night time were from 35.5 – 39.1 dB (A) Leq.

3.7 ECOLOGICAL ENVIRONMENT

The study involved in the collection of primary data by conducting a survey in the field, examination of floral and faunal records in previously published reports and records. Analysis of the information is the view of the possible alteration in the environment of the project site. For the survey of fauna, both direct and indirect observation methods were used.

There is no schedule I species of animals observed within study area as per Wildlife Protection Act 1972 as well as no species is in vulnerable, endangered or threatened category as per IUCN. There is no endangered red list species found in the study area. Hence this small operation over short period of time will not have any significant impact on the surrounding flora and fauna.

3.8 SOCIO ECONOMIC ENVIRONMENT

It includes demographic structure of the area, provision of basic amenities viz., housing, education, health and medical services, occupation, water supply, sanitation, communication, transportation, prevailing

diseases pattern as well as feature like temples, historical monuments etc., at the baseline level. This will help in visualizing and predicting the possible impact depending upon the nature and magnitude of the project.

The socio-economic study of surveyed villages gives a clear picture of its population, average household size, literacy rate and sex ratio etc. It is also found that a part of population is suffering from lack of permanent job to run their day-to-day life. Their expectation is to earn some income for their sustainability on a long-term basis.

The proposed projects will aim to provide preferential employment to the local people there by improving the employment opportunity in the area and in turn the social standards will improve.

4. ANTICIPATED ENVIRONMENTAL IMPACTS AND MITIGATION MEASURES – IN COMMON FOR PROPOSED QUARRY

In order to maintain the environmental commensuration with the mining operation, it is essential to undertake studies on the existing environmental scenario and assess the impact on different environmental components. This would help in formulating suitable management plans sustainable resource extraction.

4.1 LAND ENVIRONMENT:

ANTICIPATED IMPACT

- Permanent or temporary change on land use and land cover.
- Change in Topography: Topography of the ML area will change at the end of the life of the mine.
- Movement of heavy vehicles sometimes cause problems to agricultural land, human habitations due to dust, noise and it also causes traffic hazards.
- Due to degradation of land by pitting the aesthetic environment of the core zone may be affected.
- Earthworks during the rainy season increase the potential for soil erosion and sediment laden water entering the water ways.
- If no due care is taken wash off from the exposed working area may choke the water course & can also causes the siltation of water course

MITIGATION MEASURES

- The mining activity will be gradual confined in blocks and excavation will be undertaken progressively along with other mitigative measures like phase wise development of greenbelt etc.
- Construction of garland drains all around the quarry pits and construction of check dam at strategic location in lower elevations to prevent soil erosion due to surface runoff during rainfall and also to collect the storm water for various uses within the proposed area
- Green belt development along the boundary within safety zone. The small quantity of water stored in the mined-out pit will be used for greenbelt
- Thick plantation will be carried out on unutilized area, top benches of mined out pits, on safety barrier, etc.,
- At conceptual stage, the land use pattern of the quarry will be changed into Greenbelt area and temporary reservoir
- In terms of aesthetics, natural vegetation surrounding the quarry will be retained (such as in a buffer area i.e., 7.5 m safety barrier and other safety provided) so as to help minimise dust emissions.
- Proper fencing will be carried out at the conceptual stage, Security will be posted round the clock, to prevent inherent entry of the public and cattle

4.2 WATER ENVIRONMENT

ANTICIPATED IMPACT

- The major sources of water pollution normally associated due to mining and allied operations are:
 - Generation of waste water from vehicle washing.
 - Washouts from surface exposure or working areas
 - Domestic sewage

- Disturbance to drainage course in the project area
- Mine Pit water discharge
- Increase in sediment load during monsoon in downstream of lease area
- This being a mining project, there will be no process effluent. Waste from washing of machinery may result in discharge of Oil & grease, suspended solids.
- The sewage from soak pit may percolate to the ground water table and contaminate it.
- Surface drainage may be affected due to Mining
- Abstraction of water may lead to depletion of water table

MITIGATION MEASURES

- Garland drains, settling tank will be constructed along the individual mining leases. The Garland drains of the individual leases will be connected to settling tank and after settling the water will be discharged out to the natural drainage
- Rainwater will be collected in sump in the mining pits and will be allowed to store and pumped out to surface setting tank of 15 m x 10m x 3m to remove suspended solids if any. This collected water will be judiciously used for dust suppression onwards and such sites where dust likely to be generated and for developing green belt. The proponent will collect and judiciously utilize the rainwater as part of rainwater harvesting
- Providing benches with inner slopes and through a system of drains and channels, allowing rain water to descent into surrounding drains, so as to minimize the effects of erosion & water logging arising out of uncontrolled descent of water.
- Reuse the water collected during storm for dust suppression and greenbelt development within the mines
- Installing interceptor traps/oil separators to remove oils and greases. Water from the tipper wash-down facility and machinery maintenance yard will pass through interceptor traps/oil separators prior to its reuse;
- Using flocculating or coagulating agents to assist in the settling of suspended solids during monsoon seasons.
- Periodic analysis of quarry pit water and ground water quality in nearby villages
- Domestic sewage from site office & urinals/latrines provided in ML is discharged in septic tank followed by soak pits
- Waste water discharge from mine will be treated in settling tanks before using for dust suppression and tree plantation purposes
- De-silting will be carried out before and immediately after the monsoon season
- Regular monitoring and analysing the quality of water in open well, bore wells and surface water

4.3 AIR ENVIRONMENT

ANTICIPATED IMPACT

- During mining, at various stages activities such as excavation, drilling, blasting, and transportation of materials, particular matter (PM), gases such as Sulphur dioxide, oxides of Nitrogen from vehicular exhaust are the main air pollutants.
- Emissions of noxious gases due to incomplete detonation of explosive may sometimes pollute the air.
- The fugitive dust released from the mining operations may cause effect on the mine workers who are directly exposed to the fugitive dust.
- Simultaneously, the air-borne dust may travel to longer distances and settle in the villages located near the mine lease area.

MITIGATION MEASURES

Drilling – To control dust at source, wet drilling will be practiced. Where there is a scarcity of water, suitably designed dust extractor will be provided for dry drilling along with dust hood at the mouth of the drill-hole collar.

Advantages of Wet Drilling: -

- In this system dust gets suppressed close to its formation. Dust suppression become very effective and the work environment will be improved from the point of occupational comfort and health.
- Due to dust free atmosphere, the life of engine, compressor etc., will be increased.
- The life of drill bit will be increased.
- The rate of penetration of drill will be increased.
- Due to the dust free atmosphere visibility will be improved resulting in safer working conditions.

Blasting –

- Establish time of blasting to suit the local conditions and water sprinkling on blasting face
- Avoid blasting i.e., when temperature inversion is likely to occur and strong wind blows towards residential areas
- Controlled blasting includes Adoption of suitable explosive charge and short delay detonators, adequate stemming of holes at collar zone and restricting blasting to a particular time of the day i.e., at the time lunch hours, controlled charge per hole as well as charge per round of hole
- Before loading of material water will be sprayed on blasted material
- Dust mask will be provided to the workers and their use will be strictly monitored.

Haul Road & Transportation –

- Water will be sprinkled on haul roads twice a day to avoid dust generation during transportation
- Transportation of material will be carried out during day time and material will be covered with tarpaulin
- The speed of tippers plying on the haul road will be limited below 20 km/hr to avoid generation of dust.
- Water sprinkling on haul roads & loading points will be carried out twice a day
- Main source of gaseous pollution will be from vehicle used for transportation of mineral; therefore weekly maintenance of machines improves combustion process & makes reduction in the pollution.
- The un-metalled haul roads will be compacted weekly before being put into use.
- Over loading of tippers will be avoided to prevent spillage.
- It will be ensured that all transportation vehicles carry a valid PUC certificate
- Grading of haul roads and service roads to clear accumulation of loose materials

Green Belt –

- Planting of trees all along main mine haul roads and regular grading of haul roads will be practiced to prevent the generation of dust due to movement of dumpers/trucks
- Green belt of adequate width will be developed around the project areas

Occupational Health –

- Dust mask will be provided to the workers and their use will be strictly monitored
- Annual medical check-ups, trainings and campaigns will be arranged to ensure awareness about importance of wearing dust masks among all mine workers & tipper drivers
- Ambient Air Quality Monitoring will be conducted six months once to assess effectiveness of mitigation measures proposed.

4.4 NOISE ENVIRONMENT**ANTICIPATED IMPACT**

Noise pollution poses a major health risk to the mine workers. Following are the sources of noise in the existing open cast mine project are being observed such as Drilling, & Blasting, Loading and during movement of vehicles.

MITIGATION MEASURES

- Usage of sharp drill bits while drilling which will help in reducing noise;
- Secondary blasting will be totally avoided and hydraulic rock breaker will be used for breaking boulders;
- Controlled blasting with proper spacing, burden, stemming and optimum charge/delay will be maintained;
- The blasting will be carried out during favourable atmospheric condition and less human activity timings by using nonelectrical initiation system;
- Proper maintenance, oiling and greasing of machines will be done every week to reduce generation of noise;
- Provision of sound insulated chambers for the workers working on machines (HEMM) producing higher levels of noise;
- Silencers / mufflers will be installed in all machineries;
- Green Belt/Plantation will be developed around the project area and along the haul roads. The plantation minimizes propagation of noise;
- Personal Protective Equipment (PPE) like ear muffs/ear plugs will be provided to the operators of HEMM and persons working near HEMM and their use will be ensured through training and awareness.
- Regular medical check-up and proper training to personnel to create awareness about adverse noise level effects.

4.5 BIOLOGICAL ENVIRONMENT

ANTICIPATED IMPACT

There are no National Park and Archaeological monuments within project area. There are no migratory corridors, migratory avian-fauna, rare endemic and endangered species. There are no wild animals in the area. No breeding and nesting site were identified in project site. No National Park and Wildlife Sanctuary found within 10km radius. The dumps / bunds around the mine itself act as a good barrier for entry of stray animals. In the post mining stage, barbed wire fencing is proposed all around the mined-out void to prevent fall of animals in the mine pits.

MITIGATION MEASURES

To reduce the adverse effects on natural flora/fauna status of the area due to deposition of dust generated from mining operations, water sprinkling and water spraying systems will be ensured in all dust prone areas to arrest dust generation. Methodical and well-planned plantation scheme will be carried out.

4.5.1 GREENBELT DEVELOPMENT PLAN

PROPOSAL FOR P1 – Tmt.S. Manonmani				
Year	No. of trees proposed to be planted	Survial %	Area to be planted	Name of the species
I	It is proposed to plant 780 Nos of trees in the 1 st year	80%	7.5m Safety barrier, Un utilized areas and nearby village roads	Neem, Pungam, Sengondrai, Panai, Naval

4.6 SOCIO ECONOMIC ENVIRONMENT

ANTICIPATED IMPACT

Employment generation due to the project will provide direct employment for about 105 persons.

MITIGATION MEASURES

- Good maintenance practices will be adopted for plant machinery and equipment, which will help to avert potential noise problems.

- Green belt will be developed in and around the project site as per Central Pollution Control Board (CPCB) guidelines.
- Appropriate air pollution control measure will be taken to minimize the environmental impact within the core zone.
- For the safety of workers, personal protective appliances like hand gloves, helmets, safety shoes, goggles, aprons, nose masks and ear protecting devices will be provided as per mines act and rules.
- Benefit to the State and the Central governments through financial revenues by way of royalty, tax, DMF, NMET etc, from this project directly and indirectly.

5. ANALYSIS OF ALTERNATIVES (TECHNOLOGY AND SITE)

The site has been selected based on geological investigation and exploration as below:

- Occurrence of minerals at the specific site.
- Transportation facility for materials & manpower.
- Overall impact on environment and mitigation feasibility
- Socio – economic background.

The mineral deposits are site specific in nature; hence question of seeking alternate site does not arise for this project.


6. ENVIRONMENT MONITORING PROGRAM

Usually, an impact assessment study is carried over short period of time and the data cannot bring out all variations induced by natural or human activities. Hence regular monitoring program of Environmental parameters is essential to take into account the changes in the Environment.

The Objective of Monitoring -

- ✚ To check or assess the efficiency of the controlling measures;
- ✚ To establish a data base for future impact assessment studies.

6.1 ENVIRONMENTAL MONITORING CELL

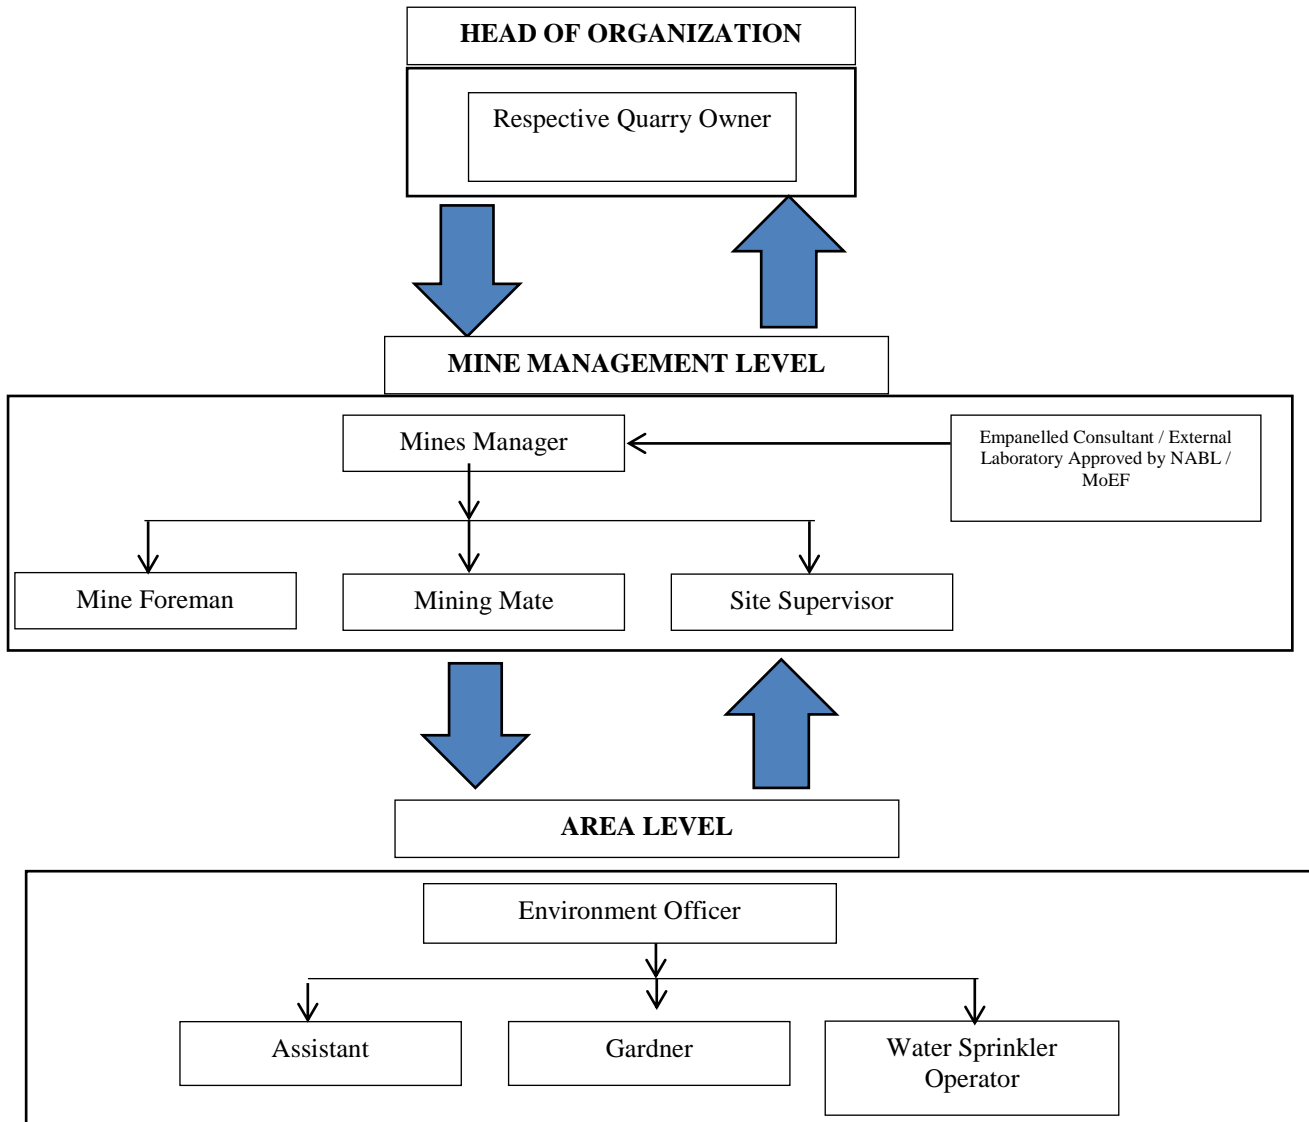

6.2 POST ENVIRONMENTAL CLEARANCE MONITORING SCHEDULE

IN COMMON FOR PROPOSAL QUARRY					
S. No.	Environment Attributes	Location	Monitoring		Parameters
			Duration	Frequency	
1	Air Quality	2 Locations (1 Core & 1 Buffer)	24 hours	Once in 6 months	Fugitive Dust, PM _{2.5} , PM ₁₀ , SO ₂ and NO _x .
2	Meteorology	At mine site before start of Air Quality Monitoring & IMD Secondary Data	Hourly / Daily	Continuous online monitoring	Wind speed, Wind direction, Temperature, Relative humidity and Rainfall
3	Water Quality Monitoring	2 Locations (1SW & 1 GW)	-	Once in 6 months	Parameters specified under IS:10500, 1993 & CPCB Norms
4	Hydrology	Water level in open wells in buffer zone around 1 km at specific wells	-	Once in 6 months	Depth in bgl
5	Noise	2 Locations (1 Core & 1 Buffer)	Hourly – 1 Day	Once in 6 months	Leq, Lmax, Lmin, Leq Day & Leq Night
6	Vibration	At the nearest habitation (in case of reporting)	-	During blasting Operation	Peak Particle Velocity
7	Soil	2 Locations (1 Core & 1 Buffer)	-	Once in six months	Physical and Chemical Characteristics
8	Greenbelt	Within the Project Area	Daily	Monthly	Maintenance

7. ADDITIONAL STUDIES

7.1 RISK ASSESSMENT FOR PROPOSAL QUARRY

The methodology for the risk assessment has been based on the specific risk assessment guidance issued by the Directorate General of Mine Safety (DGMS), Dhanbad, vide Circular No.13 of 2002, dated 31st December, 2002. The DGMS risk assessment process is intended to identify existing and probable hazards in the work environment and all operations and assess the risk levels of those hazards in order to prioritize those that need immediate attention. Further, mechanisms responsible for these hazards are identified and their control measures, set to timetable are recorded along with pinpointed responsibilities.

The whole quarry operation will be carried out under the direction of a Qualified Competent Mine Manager holding certificate of competency to manage a metalliferous mine granted by the DGMS, Dhanbad. Risk Assessment is all about prevention of accidents and to take necessary steps to prevent it from happening.

7.2 DISASTER MANAGEMENT PLAN FOR PROPOSAL QUARRY

The Disaster Management Plan is aimed to ensure safety of life, protection of environment, protection of installation, restoration of production and salvage operations in this same order of priorities.

The objective of the Disaster Management Plan is to make use of the combined resources of the mine and the outside services to achieve the following:

- ✚ Rescue and medical treatment of casualties;
- ✚ Safeguard other people;
- ✚ Minimize damage to property and the environment;
- ✚ Initially contain and ultimately bring the incident under control;
- ✚ Secure the safe rehabilitation of affected area; and

- ✚ Preserve relevant records and equipment for the subsequent inquiry into the cause and circumstances of the emergency

7.3 CUMULATIVE IMPACT STUDY

CUMULATIVE PRODUCTION LOAD OF ROUGH STONE

Proposed Quarry Project -A				
Quarry	Production for five-year plan period considering safety parameters	Per Year Production in m ³	Per Day Production in m ³	Number of Lorry Load Per Day @ 12m ³ per load
P1	38,925	7,785	26	2 Trips /Day
Public hearing Conducted Projects-B				
Quarry	Production for five year plan period considering safety parameters	Per Year Production in m ³	Per Day Production in m ³	Number of Lorry Load Per Day @ 12m ³ per load
P2	47,770	9,554	32	3 Trips /Day
P3	68,150	13,630	45	4 Trips /Day
P4	55,284	11,056	37	3 Trips /Day
P5	48,251	9,650	32	3 Trips /Day
P6	48,923	9,784	33	3 Trips /Day
P7	72,473	14,495	48	4 Trips /Day
P8	62,849	12,570	42	4 Trips /Day
Total	4,03,700	80,740	269	24 Trips /Day
List of Existing Quarries -C				
Quarry	Production for five year plan period	Per Year Production in m ³	Per Day Production in m ³	Number of Lorry Load Per Day @ 12m ³ per load
E-1	99,400	19,880	66	6 Trips /Day
E-2	1,08,440	21,688	72	6 Trips/Day
Total	2,07,840	41,568	138	12Trips/ Day

CUMULATIVE PRODUCTION LOAD OF GRAVEL

Proposed Quarry Project -A				
Quarry	Production for three-year plan period considering safety parameters	Per Year Production in m ³	Per Day Production in m ³	Number of Lorry Load Per Day @ 12m ³ per load
P1	6,794	2,265	8	1-2 trips per day /week
Public hearing Conducted Projects-B				
Quarry	Production for Three-year plan period considering safety parameters	Per Year Production in m ³	Per Day Production in m ³	Number of Lorry Load Per Day @ 12m ³ per load
PH-1	9,068	3,023	10	1 load per week
PH-2	NIL			
PH-3				
PH-4				

PH-5	1,350	450	2	1 trips per week
PH-6	1,950	650	2	1- Trips /week
PH-7	2,430	810	3	1- Trips /week
Total	14,798	4,933	17	2 Trips /Day
List of Existing Quarries -C				
Quarry	Production for three-year plan period	Per Year Production in m ³	Per Day Production in m ³	Number of Lorry Load Per Day @ 12m ³ per load
E-1	3,960	1,320	5	1 Trips /Day/Week
E-2	3,570	1,190	4	1Trips/Day/ Week
Total	7,530	2,510	9	2Trips/ Day / Week

SOCIO ECONOMIC BENEFITS FROM CLUSTER

PROPOSAL QUARRIES			
Code	Employment	Project Cost	CER
P1	14	Rs 24,49,000/-	Rs 5,00,000/-
PUBLIC HEARING COMPLETED FILE			
Code	Employment	Project Cost	CER
PH-1	15	Rs. 22,81,000/-	Rs 5,00,000/-
PH-2	14	Rs. 32,20,000/-	Rs 5,00,000/-
PH-3	16	Rs. 25,93,000/-	Rs 5,00,000/-
PH-4	14	Rs 36,62,000/-	Rs 5,00,000/-
PH-5	14	Rs. 36,54,000/-	Rs 5,00,000/-
PH-6	16	Rs.51,01,900/-	Rs 5,00,000/-
PH-7	19	Rs.47,30,600/-	Rs 5,00,000/-
Total	121	Rs. 2,76,91,500/-	Rs.40,00,000/-
EXISTING QUARRIES			
Code	Employment	Project Cost	CER
E1	11	Rs.39,06,000/-	Rs. 78,120/-
E2	11	Rs.38,26,000/-	Rs. 76,520/-
Total	22	Rs. 77,32,000	Rs. 1,54,640/-
Grand Total	143	Rs. 3,54,23,500	Rs. 41,54,640/-

GREENBELT DEVELOPMENT BENEFITS FROM PROPOSAL MINE

Proposed project				
CODE	No of Trees proposed to be planted	Survival %	Area to be covered	Name of the Species
P1	780	80	7.5m Safety barrier, Un utilized area and Village roads	Neem, Pongamia, Pinnata, Causarina, etc.,

8. PROJECT BENEFITS

The Proposed Projects for Quarrying Rough Stone and Gravel at Arasampalayam Village aims to produce 38,925 m³ Rough Stone (7,785 m³ rough stone @ 2 Tipper per day) & 6,794 m³ of Gravel over a period of 3 Years.

- ✚ Increase in Employment Potential
- ✚ Improvement in Socio-Economic Welfare
- ✚ Improvement in Physical Infrastructure
- ✚ Improvement in Social infrastructure

9. ENVIRONMENT MANAGEMENT PLAN FOR PROPOSAL QUARRY

The Environment Monitoring Cell discussed formed by the mine management will ensure effective implementation of environment management plan and to ensure compliance of environmental statutory guidelines through Mine Management Level.

The said team will be responsible for:

- ✦ Monitoring of the water/ waste water quality, air quality and solid waste generated
- ✦ Analysis of the water and air samples collected through external laboratory
- ✦ Implementation and monitoring of the pollution control and protective measures/ devices which shall include financial estimation, ordering, installation of air pollution control equipment, waste water treatment plant, etc.
- ✦ Co-ordination of the environment related activities within the project as well as with outside agencies
- ✦ Collection of health statistics of the workers and population of the surrounding villages
- ✦ Green belt development
- ✦ Monitoring the progress of implementation of the environmental monitoring programme
- ✦ Compliance to statutory provisions, norms of State Pollution Control Board, Ministry of Environment and Forests and the conditions of the environmental clearance as well as the consents to establish and consents to operate.

10. CONCLUSION

It can be concluded from overall assessment of the impacts, in terms of positive and negative effects on various environmental components, that the mining activities will not have any adverse effect on the surrounding environment.

To mitigate any impacts due to the mining activities, a well-planned EMP and a detailed post project monitoring system is provided for regular monitoring and immediate rectification at site. Due to the cluster quarrying activities, socio economic conditions in and around the project site will be improved substantially. Hence, the Prior Environmental Clearance shall be granted at the earliest.