

EXECUTIVE SUMMARY

FOR OBTAINING

**Environmental Clearance under EIA Notification – 2006
Schedule Sl. No. 1 (a) (i): Mining Project**

“B1” CATEGORY (Cluster) – MINOR MINERAL – CLUSTER –

PATTA LAND - FRESH QUARRY

THIRU. S. SHANMUGAM ROUGH STONE AND GRAVEL QUARRY

CLUSTER EXTENT – 21.02.66 Ha

(7 Proposed Quarries+ 1 Existing Quarry)

PROJECT PROPONENT

Proponent Name	Project Location
Thiru.S.Shanmugam S/o Subramani No.3/251, Karanampettai, Kodangipalayam, Tiruppur District, Tamil Nadu – 641 662	Extent: 5.11.5 ha S.F. Nos: 169/1A, 1B, 178/1(P), 178/2(P), 179/1A, 179/1B Idayarpalayam Village, Sulur Taluk, Coimbatore District

Complied as per ToR obtained

File No. 12987 TOR Identification No. TO25B0108TN5201182N

Dated:19.12.2025

Environmental Consultant

GEO EXPLORATION AND MINING SOLUTIONS



Old No. 260-B, New No. 17,
Advaitha Ashram Road, Alagapuram,
Salem – 636 004, Tamil Nadu, India



Accredited for sector 1 Category 'A' 31 & 38 Category 'B'
Certificate No: NABET/EIA/25-28/RA0424



Phone: 0427-2431989,

Email: ifthiahmed@gmail.com, geothangam@gmail.com

Web: www.gemssalem.com

Laboratory

GLOBAL LAB AND CONSULTANCY SERVICES

Approved by ISO:9001:2015, NABL, FSSAI, Experts in QHSE

S.F No:92/3A2, Geetha Nagar, Alagapuram Pudur, Salem-636016.

Baseline Monitoring Period: October – December 2024

December 2025

* Calculated as per MoEF & CC Notification – S.O. 2269(E) Dated: 01.07.2016

● INTRODUCTION

The project proponent Thiru. S.Shanmugam has applied for Rough stone and Gravel quarry over an extent of 5.11.5 Ha in S.F.Nos. 169/1A, 169/1B, 178/1 (Part), 178/2 (Part), 179/1A and 179/1B Idayarpalayam Village, Sulur Taluk & Coimbatore District.

- Proponent applied for Rough Stone and Gravel quarry lease on 27.09.2025.
- Precise Area Communication Letter was issued by the District Collector, Tirunelveli R.C. No: 339/Kanimam/2025, Dated: 30.09.2025.
- The Mining Plan was prepared by Recognized Qualified Person and approved by Joint Director, Geology and Mining, Coimbatore District, vide R.C. No: 339/Kanimam/2025, Dated: 30.09.2025.
- The Mining plan has been approved for the quantity of 12,58,005 m³ of Rough Stone and 79,980 m³ of Gravel up to the depth of 77m bgl for the period of Ten years.
- The proposed project falls under “B1” Category as per Order Dated: 04.09.2018 & 13.09.2018 passed by Hon'ble National Green tribunal, New Delhi in O.A. No. 173 of 2018 & O.A. No, 186 of 2016 and MoEF & CC Office Memorandum F. No. L-11011/175/2018-IA-II (M) Dated: 12.12.2018
- Proponent applied for ToR for Environmental Clearance vide online Proposal No. SIA/TN/MIN/557640/2025 Dated: 11.11.2025
- The proposal was placed 648th SEAC meeting held on 05.12.2025 and the committee recommended for issue of ToR.
- The proposal was considered in 931st SEIAA meeting held on 15.12.2025 and issued ToR vide File No.12987 TOR Identification No. TO25B0108TN5201182N Dated:19.12.2025
- As per the EIA Notification, 2006 and subsequent amendments and OM The proposal falls in the B1 Category (Cluster quarries – 2 proposals, 1 Existing quarry forming Cluster Category {Total Extent of the Cluster is 21.02.66 Ha}- Cluster area calculated as per MoEF & CC Notification S.O. 2269(E) Dated 1st July 2016).

Based on the ToR Baseline Monitoring study has been carried out for one season (Post Monsoon) i.e., **October – December 2024** and this EIA and EMP report is prepared for considering cumulative impacts arising out of these projects, the Cumulative Environmental Impact Assessment study is undertaken, which is followed by preparation of a detailed Environmental Management Plan (EMP) to minimize those adverse impacts.

Environmental Impact Assessment (EIA) study is a process, used to identify the Environmental, Social and Economic impacts of a project prior to decision-making. EIA systematically examines both beneficial and adverse consequences of the proposed project and ensure that these impacts are considered during the project designing.

1.1 DETAILS OF PROJECT PROPONENT –

Name of the Project	Thiru. S.Shanmugam Rough Stone & Gravel Quarry
S.F. No.	S.F.Nos. 169/1A,169/1B, 178/1 (Part), 178/2 (Part), 179/1A and 179/1B
Extent	5.11.50 Ha
Village, Taluk	Idayarpalayam Village, Sulur Taluk
District	Coimbatore District

Source: Approved Mining Plan

1.2 QUARRY DETAILS WITHIN 500 M RADIUS

PROPOSED QUARRIES				
CODE	Name of the Proponent and Address	S.F. Nos	Extent in Ha	Status
P1	Thiru.S.Shanmugam	168/1A,169/1B, 178/1(P), 178/2(P), 179/1A,179/1B	5.11.5	ToR obtained vide

				File No. 12987 TOR Identification No. TO25B0108TN5201182N Dated:19.12.2025
P2	Thiru.N. Kathiresh	172/1B, 172/2 & 173/2A2	1.42.82	Public hearing conducted on 22.08.2024
P3	Thiru.N.Vivek Prithiviraj	180/3(P)	1.62.0	EC Under Process
P4	M/s.Ultra Ready Mix Concrete Pvt Ltd	168/2A (P), 168/2B (P), 169/1C (P) & 169/2A (P)	2.94.01	EC obtained
P5	Thiru.K. Ranganathan	174/4 & 176/1 of	2.28.0	EC Under Process
P6	Thiru. S. Nandhagopal	180/1 & 181/3	2.15.83	Public hearing conducted on 03.12.2025
P7	Thiru. V.Saravanan	171/2(P) & 176/2(P)	1.84.0	Public hearing conducted on 17.06.2025
	Total		17.38.16	
EXISTING QUARRIES				
CODE	Name of the Proponent and Address	S.F.Nos , Village & Taluk	Extent in Ha	Lease Period
E1	Tmt. N. Chitradevi	179/2(P), Edayarpalayam Village, Sulur Taluk	3.64.5	14.07.2021 to 13.07.2026
	Total		3.64.5	
ABANDONED QURRIES				
CODE	Name of the Proponent and Address	S.F. Nos, Village & Taluk	Extent in Ha	Lease Period
A-1	Government Quarry	164/1	3.13.5	-
A-2	Jayakumar	260	-	-
A-3	R.Ayik Goundar	164/8	0.60.0	22.01.1999 – 28.01.2004
A-4	R.Rangasamy	171/1	0.20.5	28.10.2002 – 27.10.2007
A-5	A.Arumuga Gounder	178/1(P)	0.39.5	23.09.2003 – 22.09.2008
A-6	Tmt. Ponnammal	178/2, Edayarpalayam Village, Sulur Taluk	0.33.0	22.10.2004 – 21.10.2009
	Total		4.66.5	
EXPIRED QURRIES				
CODE	Name of the Proponent and Address	S.F. Nos, Village & Taluk	Extent in Ha	Lease Period
Ex-1	B.Sakthivel	164/6A, 164/7 Edayarpalayam Village, Sulur Taluk	1.19.5	07.10.2017 to 06.10.2022
	Total		1.19.5	
TOTAL CLUSTER EXTENT			21.02.66	

Note: -Cluster area is calculated as per MoEF & CC Notification – S.O. 2269 (E) Dated: 01.07.2016

1.2 SALIENT FEATURES OF THE PROPOSAL

DESCRIPTION OF THE PROJECT

Name of the Mine	Thiru. S.Shanmugam Rough Stone and Gravel Quarry				
Land Type	Patta Land				
S.F. No.	169/1A,169/1B, 178/1 (Part), 178/2 (Part), 179/1A and 179/1B				
Extent	5.11.5 Ha				
Previous quarry operation details	S.No	Name of the Lessee	Extent Ha	S.F.No.	Lease Period

	1	Tmt.R.Ponnamal	0.33.0	178/2(P)	22.10.2004 – 21.10.2009
	2	Tmt.R.Ponnamal	0.39.5	178/1(P)	23.09.2003 – 22.09.2008
	Present quarry pit dimension				
	Depth - 7m Bgl				
Proposed Depth		77m bgl (2m Gravel + 75m Roughstone)			
Geological Resources	Rough Stone		Gravel		
	38,25,625 m³		98,050 m³		
Mineable Reserves	Rough Stone		Gravel		
	12,58,005 m³		79,980 m³		
Proposed production for first five years		6,30,780 m³		47,312 m³	
Proposed production for Second five years		6,27,225 m³		32,668 m³	
Mining Plan Period / Lease Period		10Years			
Ultimate Pit Dimension	Section	Length (m)	Width (m)	Depth (m)	
	XY-AB	53	123	52	
	XY-CD	58	165	62	
	XY-EF	128	153	77	
	X1Y1-EF	113	43	42	
Toposheet No		58 - F/01			
Latitude		10°54'39.5259"N to 10°54'49.3401"N			
Longitude		77°06'38.4897"E to 77°06'48.1409"E			
Highest Elevation		433m AMSL			
Machinery	Wagon Drill Machine		2		
	Jack Hammer		4		
	Compressor		1		
	Excavator with Bucket and Rock Breaker		3		
	Tippers		6		
	Water Sprinkling Tanker		1		
Blasting		Usage of Slurry Explosive with MSD detonators			
Manpower Deployment		42 Nos			
Water Bodies	Odai		50m Safety Northwest		
	Niyaviyal Odai		60m N		
Total Cost		Project Cost		Rs. 3,50,60,000/-	
		EMP Cost		Rs. 3,80,000/-	
		Total		Rs. 3,54,40,000/-	
CER cost		Rs.5,00,000/-			
Water Requirements		2.7 KLD			
Nearest Habitation		730m-NE			

Source: Approved Mining Plan

1.3 STATUTORY DETAILS

SCREENING:

- The proponent applied for Rough Stone and Gravel Quarry Lease Date from 27.09.2025
- The precise area communication letter was received from the Assistant Director, Department of Geology and Mining, Coimbatore District vide Rc.No.339/Kanimam/2025 Dated.30.09.2025.
- The Mining plan was approved by the Assistant Director, Department of Geology and Mining, Coimbatore vide Rc.No. 339/Kanimam/2025 Dated.27.10.2025

- Proponent applied for ToR for Environmental Clearance vide online No. SIA/TN/MIN/557640/2025, Dated:11.11.2025

SCOPING:

- The proposal was placed in 648th SEAC-II meeting held on 05.12.2025 and the committee recommended for issue of ToR.
- The proposal was considered in 931st SEIAA meeting held on 15.12.2025 and issued ToR vide File No.12987. TOR Identification No. TO25B0108TN5201182N Dated:19.12.2025

2. PROJECT DESCRIPTION

The proposed projects are site specific and there is no additional area required for this project. There is no effluent generation/discharge from the proposed quarries.

Method of mining is common for all the quarries in the cluster. Rough Stone is proposed to be excavated by opencast mechanized method involving splitting of rock mass of considerable volume from the parent rock mass by jackhammer drilling and blasting, hydraulic excavators are used for loading the Rough Stone from pithead to the needy crushers and rock breakers to avoid secondary blasting.

2.1 SITE CONNECTIVITY TO THE PROJECT AREA

Nearest Roadway	NH544 - Palakkad- Coimbatore Road -10.3km-NW SH163 - Kochi - Palladam Road - 4.2km-NE
Nearest Village	Idayarpalayam - 1.0Km- NW
Nearest Town	Sulur - 12.4Km - North
Nearest Railway	Chettipalayam Railway station - 8.4Km - West
Nearest Airport	Coimbatore Airport - 15.0Km - NW
Seaport	Kochi- 143 Km-SW

Source: Survey of India Toposheet

2.2 LAND USE PATTERN OF THE LEASE APPLIED AREA

Description	Present area in (ha)	Area required during first five years (Ha)	Area at the end of lease period (Ha)
Area under quarrying	0.21.25	2.61.32	4.28.66
Infrastructure	Nil	0.02.00	0.02.00
Roads	0.01.00	0.02.00	0.02.00
Green Belt	Nil	0.35.84	0.75.08
Unutilized area	4.89.25	2.10.34	0.03.76
Grand Total	5.11.5	5.11.5	5.11.5

Source: Approved Mining Plans of Proposal

2.3 OPERATIONAL DETAILS OF LEASE APPLIED AREA


PARTICULARS	DETAILS	
	Rough Stone (m ³) (10Year Plan period)	Gravel (m ³) (10 Year Plan period)
Geological Resources	38,25,625 m ³	98,050 m ³
Mineable Reserves	12,58,005 m ³	79,980 m ³
Production for first five years Plan	6,30,780 m ³	47,312 m ³
Production for second five years Plan	6,27,225 m ³	32,668 m ³
Mining Plan Period / Lease Applied Period	10 Years	
Number of Working Days	300 Days	
Production per day	419	27
No of Lorry loads (12m ³ per load)	35	2
Total Depth of mining	77m bgl (2m Gravel + 75m Rough stone)	

Source: proposed mining plan

2.4 OPERATIONAL DETAILS OF LEASE APPLIED AREA

Years	Rough stone in m ³	Gravel in m ³	Depth
I	103740	16244	67m BGL
II	125425	9900	
III	128055	7398	
IV	144210	7650	
V	129350	6120	
Total	6,30,780	47,312	
VI	123800	11860	77m BGL
VII	131025	5508	
VIII	131490	5508	
IX	118830	4896	
X	122080	4896	
Total	6,27,225	32,668	
G.Total	12,58,005	79,980	

Source: proposed mining plan

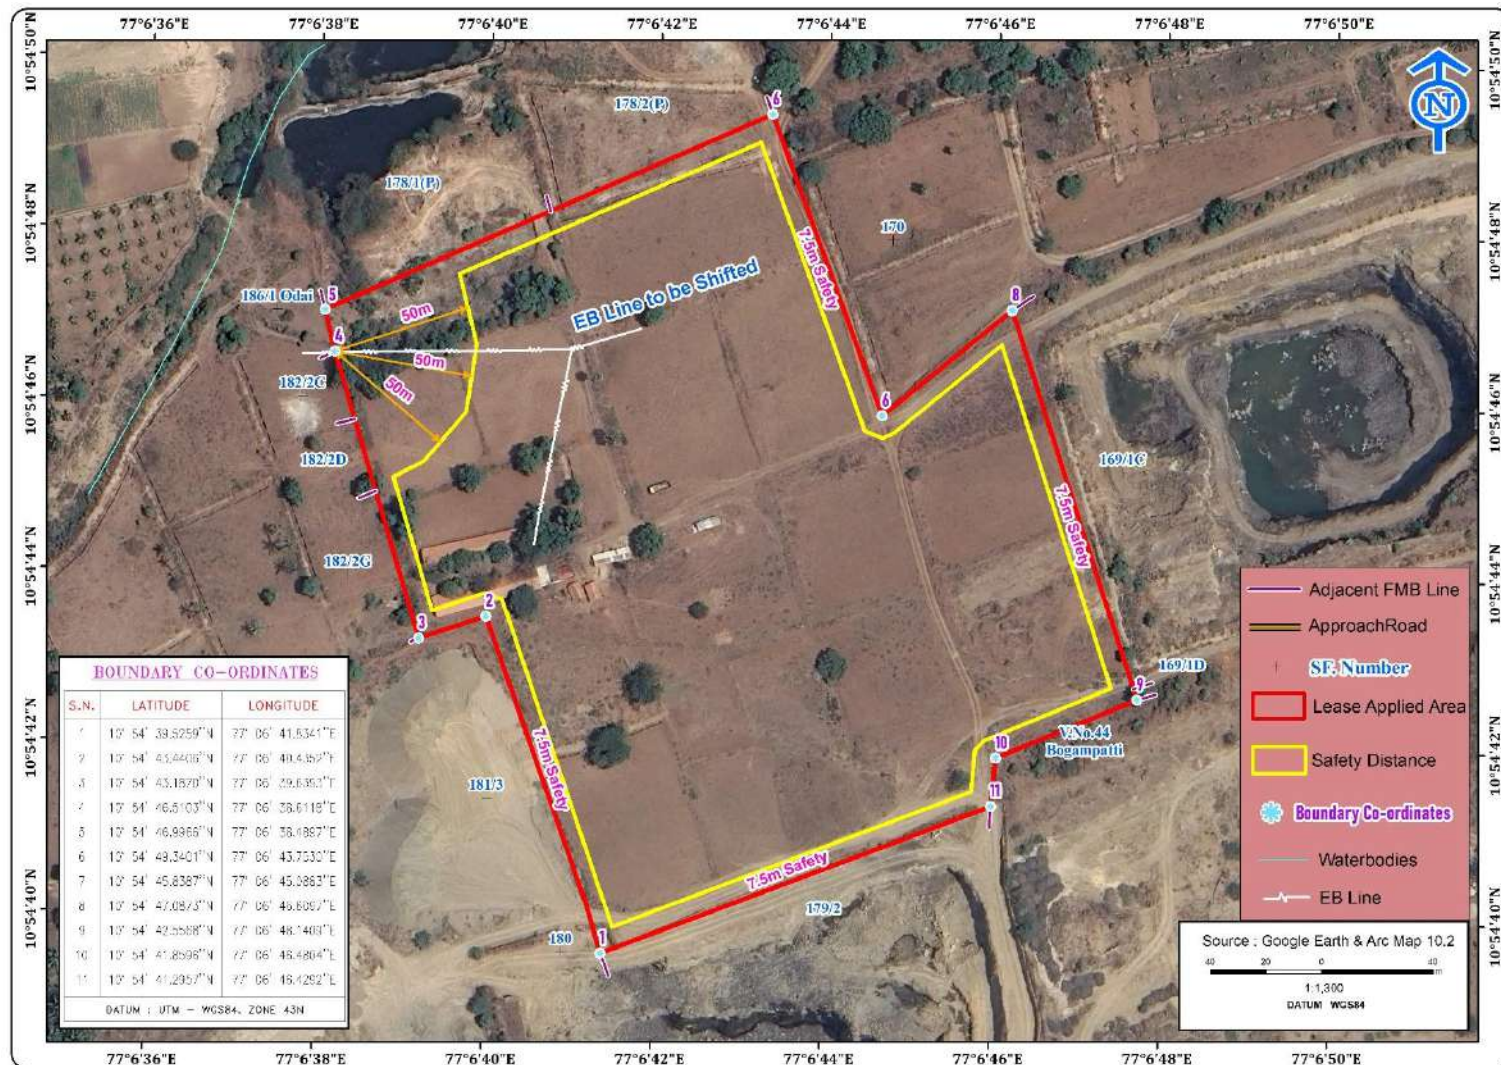FIGURE – 1: GOOGLE IMAGE OF THE PROJECT AREA

Source: Google Earth Imagery

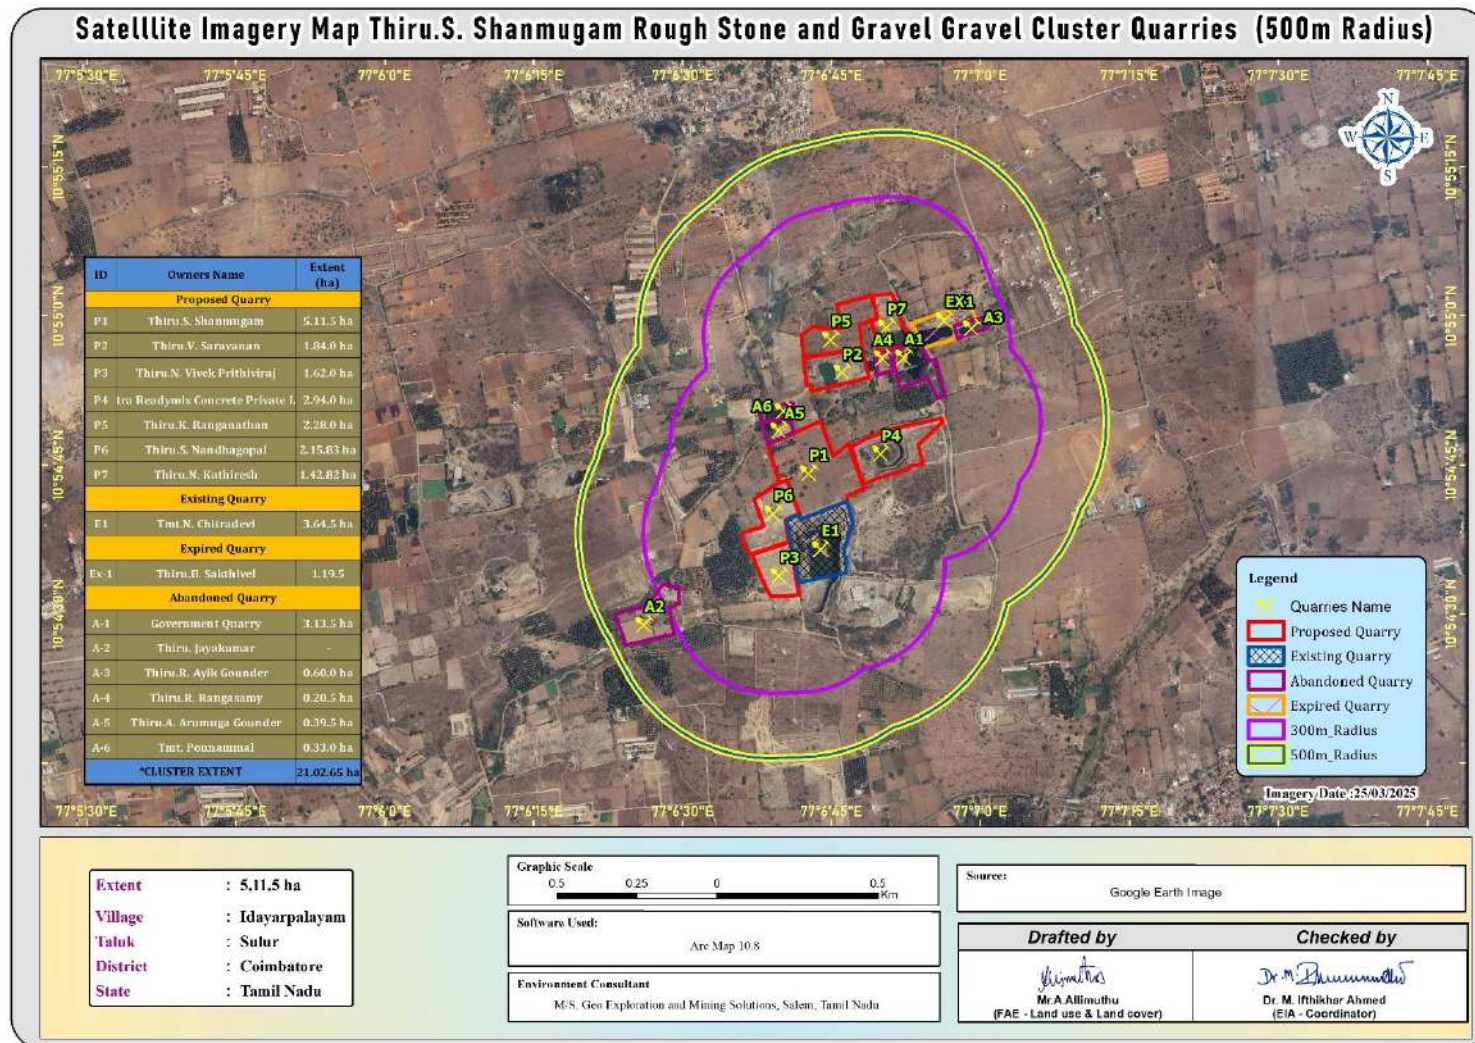
FIGURE – 2: SATELLITE IMAGERY CLUSTER QUARRIES

FIGURE 3: QUARRY LEASE PLAN / SURFACE PLAN

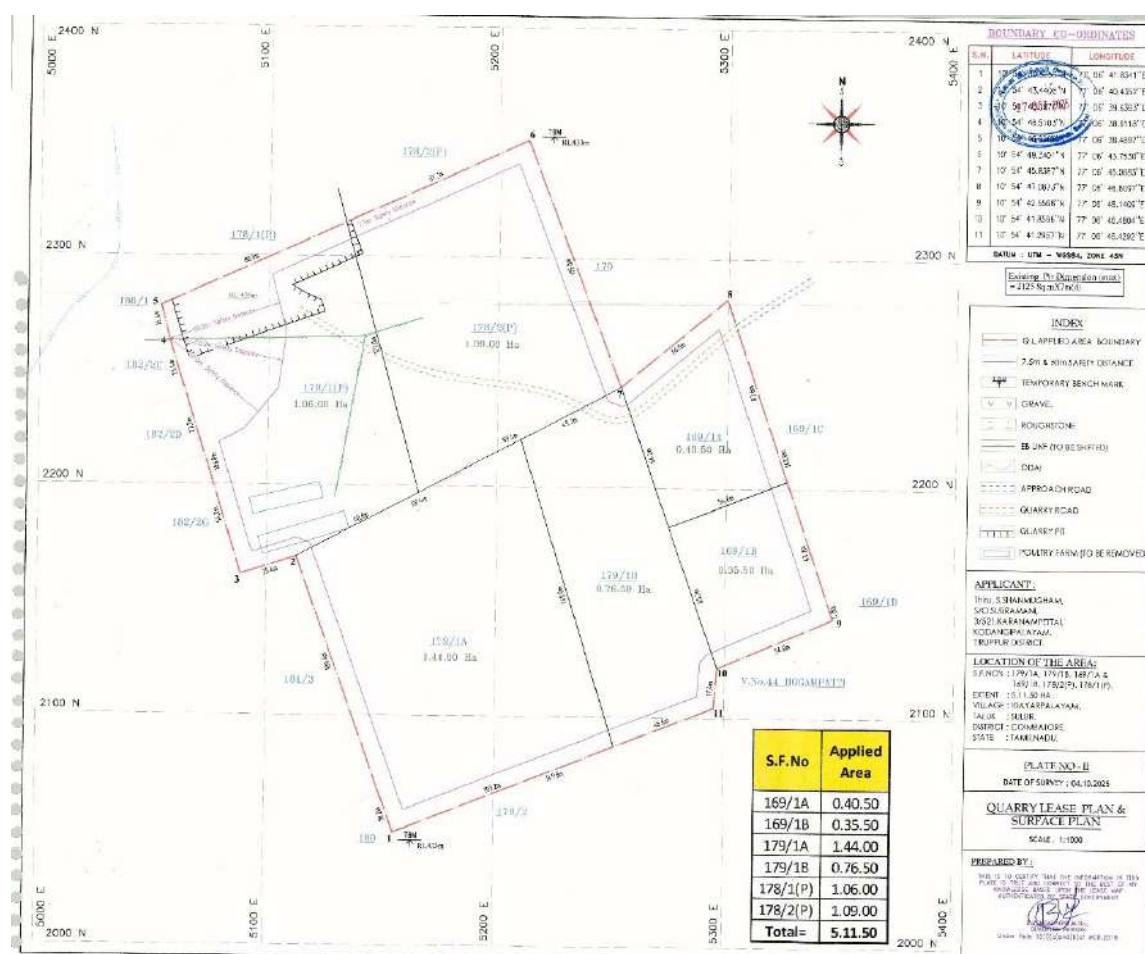
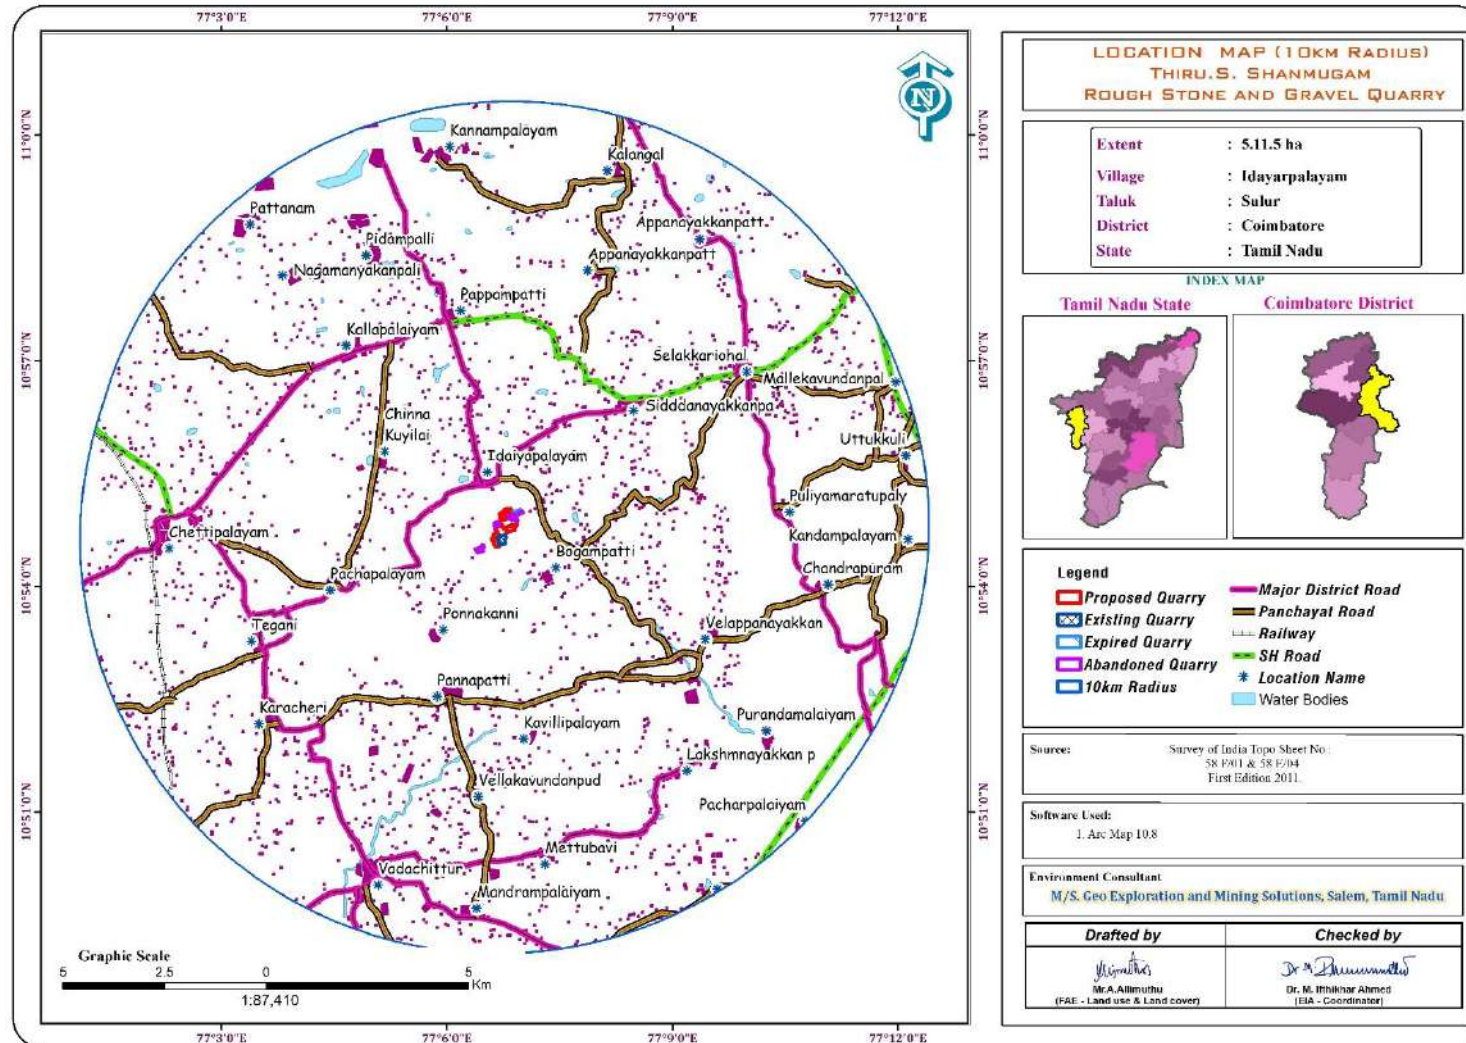


FIGURE – 4: IMAGE SHOWING SURFACE FEATURES AROUND 10 KM RADIUS

2.5 METHOD OF MINING

Proposed Method of Mining is common for all the Proposed Projects – The method of mining is Opencast Mechanized Mining Method is being proposed by formation of 5.0-meter height bench with a bench width not less than the bench height. However, as far as the quarrying of Rough Stone is concerned, observance of the provisions of Regulation 106 (2) (b) as above is seldom possible due to various inherent petro genetic factors coupled with mining difficulties. Hence it is proposed to obtain relaxation to the provisions of the above regulation from the Director of Mines Safety for which necessary provision is available with the Regulation 106 (2) (b) of MMR-1961, under Mine Act – 1952.

The Rough Stone is a batholith formation and the splitting of rock mass of considerable volume from the parent rock mass will be carried out by deploying jackhammer drilling and Slurry Explosives will be used for blasting. Hydraulic Excavators attached with Rock Breakers unit will be deployed for breaking large boulders to required fragmented sizes to avoid secondary blasting and hydraulic excavators attached with bucket unit will be deployed for loading the Rough Stone into the tippers and then the stone is transported from pithead to the nearby crushers.

2.6 PROPOSED MACHINERY DEPLOYMENT

S.NO.	TYPE	NOS	SIZE/CAPACITY	MOTIVE POWER
1	Hand Jack hammers	4	1.2m to 2.0m	Compressed air
	Wagon Drill Machine	2	Upto 9m	Diesel Drive
2	Compressor	1	400psi	Diesel Drive
3	Excavator with Bucket / Rock Breaker Unit 4	3	300 HP	Diesel Drive
4	Tippers	6	30 Tonnes	Diesel Drive

Source: Approved Mining Plan

2.7 CONCEPTUAL MINING PLAN/ FINAL MINE CLOSURE PLAN

- ✚ At the end of life of mine, the excavated mine pit / void will act as artificial reservoir for collecting rain water and helps to meet out the demand or crises during drought season.
- ✚ After mine closure the greenbelt developed along the safety barrier and top benches and temporary water reservoir will enhance the ecosystem
- ✚ Mine Closure is a process of returning a disturbed site to its natural state or which prepares it for other productive uses that prevents or minimizes any adverse effects on the environment or threats to human health and safety.
- ✚ The principal closure objectives are for rehabilitated mines to be physically safe to humans and animals, geo-technically stable, geo-chemically non-polluting/ non-contaminating, and capable of sustaining an agreed post-mining land use.

3. DESCRIPTION OF THE ENVIRONMENT

Field monitoring studies to evaluate the base line status of the project site were carried out during October – December 2024 as per CPCB guidelines. Environmental Monitoring data has been collected with reference to proposed mine by Global Lab and Consultancy Services

3.1 ENVIRONMENT MONITORING ATTRIBUTES

Attribute	Parameters	Frequency of Monitoring	No. of Locations	Protocol
Land-use Land cover	Land-use Pattern within 10 km radius of the study area	Data's from census handbook 2011 and from the satellite imagery	Study Area	Satellite Imagery Primary Survey
*Soil	Physio-Chemical Characteristics	Once during the study period	6 (1 core & 5 buffer zone)	IS 2720 Agriculture Handbook - Indian Council of Agriculture Research, New Delhi

*Water Quality	Physical, Chemical and Bacteriological Parameters	Once during the study period	6 (1 surface water & 5 ground water)	IS 10500& CPCB Standards
Meteorology	Wind Speed Wind Direction Temperature Cloud cover Dry bulb temperature Rainfall	1 Hourly Continuous Mechanical/Automatic Weather Station	1	Site specific primary data& Secondary Data from IMD Station
*Ambient Air Quality	PM10 PM2.5 SO2 NOX Fugitive Dust	24 hourly twice a week (October – December 2024)	7 (2 core & 5 buffer)	IS 5182 Part 1-23 National Ambient Air Quality Standards, CPCB
*Noise Levels	Ambient Noise	Hourly observation for 24 Hours per location	7 (2 core & 5 buffer zone)	IS 9989 As per CPCB Guidelines
Ecology	Existing Flora and Fauna	Through field visit during the study period	Study Area	Primary Survey by Quadrant & Transect Study Secondary Data – Forest Working Plan
Socio Economic Aspects	Socio-Economic Characteristics, Population Statistics and Existing Infrastructure in the study area	Site Visit & Census Handbook, 2011	Study Area	Primary Survey, census handbook & need based assessments.

Source: On-site monitoring/sampling by Global Lab and Consultancy in association with GEMS

* All monitoring and testing have been carried out as per the Guidelines of CPCB and MoEF & CC.

3.2 LAND ENVIRONMENT

S.No	CLASSIFICATION	AREA_H A	AREA_%	AREA_H A	AREA_%
BUILTUP					
1	Builtup Urban	315.07	0.93	0.00	0.00
2	Builtup Rural	1054.32	3.11	63.68	4.68
3	Builtup Mining	346.79	1.02	13.67	1.01
AGRICULTURAL LAND					
4	Crop Land	19816.84	58.38	688.00	50.58
5	Agricultural Plantation	3655.31	10.77	11.2257	0.83
6	Fallow Land	7558.23	22.27	506.46	37.23
BARREN/WASTE LANDS					
7	Barren Rocky	13.93	0.04	74.06	5.44
8	Scrub Land	1033.26	3.04	0.00	0.00
WETLANDS/ WATER BODIES					
9	Waterbodies	151.04	0.44	3.23	0.24
TOTAL		33944.80	100.00	1360.33	100.00

Interpretation

- ∞ The 10 km radius study area mainly comprises of crop land & Agriculture Plantation land accounting of 58.38% & 10.77% of the total study area. The study area also consists of fallow land of 22.27%.
- ∞ The buffer zone studied has no ecological sensitive area (National Park, Wildlife Sanctuary, Biosphere Reserve/ etc.).
- ∞ Water Bodies such as Odai, ponds/ lakes comprise of 0.44% of the total buffer area. There are some lake found in the study area like Pallapalayam lake (9km-NW), Kammampalayam Lake (9.5km-NW) of the total study area.
- ∞ The Scrub land accounts of 3.04%. As per the primary survey, it was observed the scrub land is mainly occupied by the stony waste and left-over domestic waste generated by the nearby areas.
- ∞ The Barren rocky area covered is about 0.04% in buffer zone.
- ∞ 1.02% of the total study area is occupied by the mine industries. The area occupied by Mainly Roughstone of the total buffer area. As also observed within the primary survey, the 10 km buffer area is also occupied by the medium scaled roughstone and small Brick kiln industries also located in the study area.
- ∞ 4.04% of the area is covered under the Builtup Land including rural area. The nearest village within the 3km from the project site boundary is observed to be villages Edayarpalaym, Bogampatti, Kalipalayam, Chinnakuyili villages etc.

3.3 SOIL ENVIRONMENT

Physical Characteristics –

The physical properties of the soil samples were examined for texture, bulk density, porosity and water holding capacity. The soil texture found in the study area is Clay to Sandy Soil and Bulk Density of Soils in the study area varied between 15 to 27 % and 1.1– 1.18 g/cc. The Water Holding Capacity 52 to 68%

Chemical Characteristics –

- The nature of soil is slightly alkaline to strongly alkaline in nature with pH range 7.63 to 8.26
- The available Nitrogen content range between 213 to 401.41 kg/ha
- The available Phosphorus content range between 4.9 to 11.6 mg/kg
- The available Potassium range between 0.78 to 1.73 mg/100g

Whereas, the micronutrient as zinc (Zn), iron (Fe) and copper (Cu) were found in the range of 10.9 to 16.9mg/kg; 19.9 to 52 mg/kg and; 2.5 to 15.2 mg/kg

3.4 WATER ENVIRONMENT

Surface Water

The pH of surface 8.12 while turbidity found within the standards. Total Dissolved Solids 975 mg/l and Chloride 215 mg/l. Nitrates BDL (DL:2.0)mg/l, while sulphates 82 mg/l.

Ground Water

The pH of the water samples collected ranged from 7.16 to 7.58 and within the acceptable limit of 6.5 to 8.5. pH, Sulphates and Chlorides of water samples from all the sources are within the limits as per the Standard. on Turbidity, the water samples meet the requirement. Total Dissolved Solids were found in the range of 816 - 1026 mg/l in all samples. The Total hardness varied between 430 – 530 mg/l for all samples..

On Microbiological parameters, the water samples from all the locations meet the requirement. The parameters thus analysed were compared with IS 10500:2012 and are well within the prescribed limits.

3.5 AIR ENVIRONMENT

The baseline studies on air environment include identification of specific air pollution parameters and their existing levels in ambient air. The ambient air quality with respect to the study zone of 10 km radius around the proposed quarry forms the baseline information.

FIGURE – 5: WIND ROSE DIAGRAM


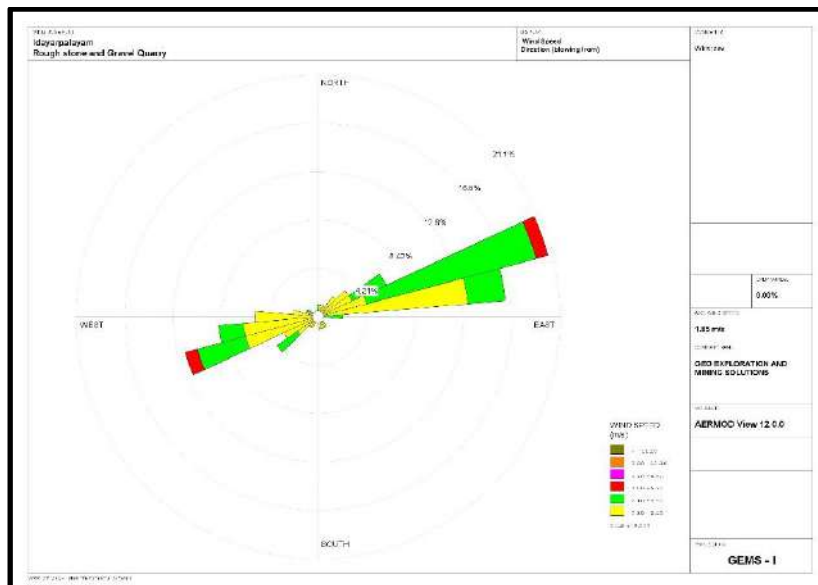


FIGURE – 6. BAR DIAGRAM OF SUMMARY OF AAQ1 – AAQ7

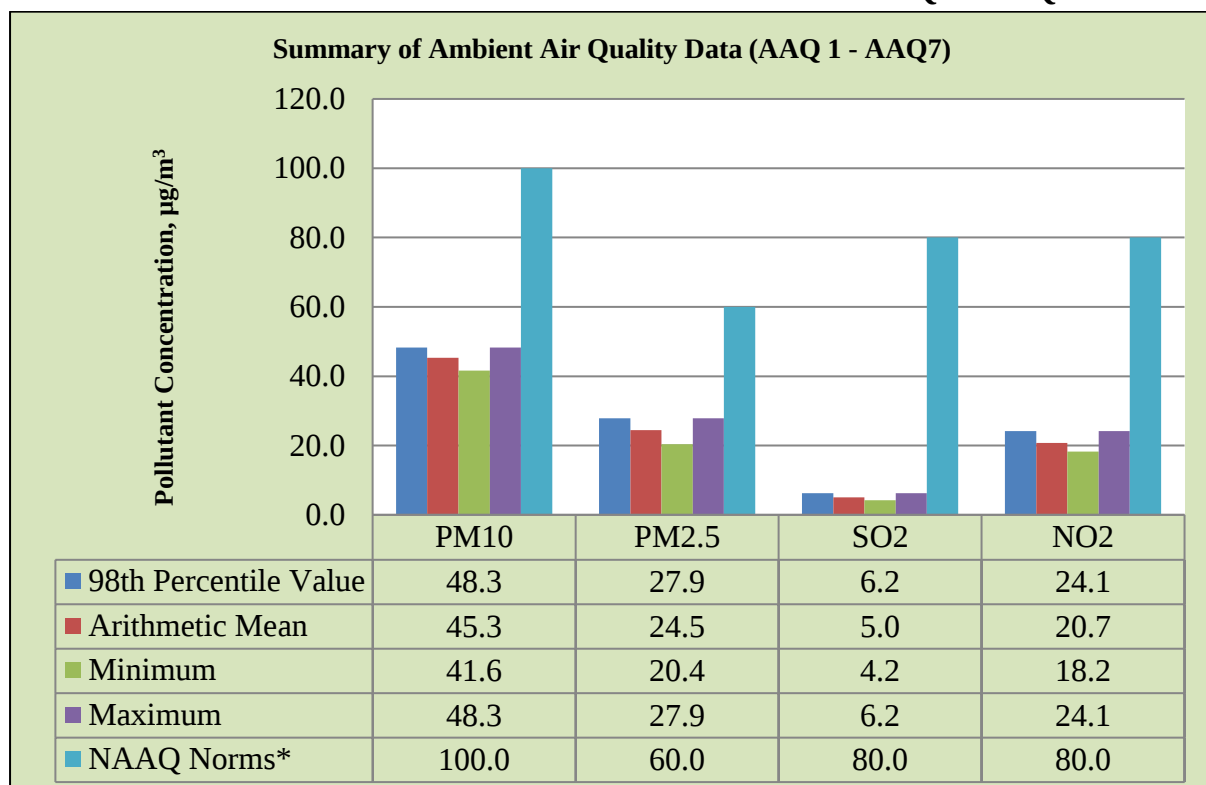

The results of ambient air quality monitoring for the period (October to December 2024) are presented in the report. Data has been compiled for three months.

Interpretations & Conclusion

As per monitoring data, PM₁₀ ranges from 41.9 µg/m³ to 45.5 µg/m³, PM_{2.5} data ranges from 20.6 µg/m³ to 24.9 µg/m³, SO₂ ranges from 4.4 µg/m³ to 5.0 µg/m³ and NO₂ data ranges from 19.8 µg/m³ to 20.5 µg/m³. The concentration levels of the above criteria pollutants were observed to be well within the limits of NAAQS prescribed by CPCB. The minimum & maximum concentrations of PM₁₀ were found to be 41.9 µg/m³ in Core Zone & 45.5 µg/m³ in Lakshminaickenpalayam respectively. The minimum & maximum concentrations of PM_{2.5} were found to be 20.6 µg/m³ in Core Zone & 24.9 µg/m³ in Lakshminaickenpalayam respectively.

The concentration levels of the above criteria pollutants were observed to be well within the limits of NAAQS prescribed by CPCB.

3.6 NOISE ENVIRONMENT

Ambient noise levels were measured at 7 (Seven) locations around the project area considering quarries. Noise levels recorded in core zone during day time were from 42.5 – 43.1 dB (A) Leq and during night time were from 34.9-38.7 dB (A) Leq. Noise levels recorded in buffer zone during day time were from 45.3 – 49.4 dB (A) Leq and during night time were from 35.4-36.7 dB (A) Leq.

The values of noise observed in some of the areas are primarily owing to quarrying activities due to cluster of quarries within 500m radius, movement of vehicles and other anthropogenic activities. Noise monitoring results reveal that the maximum & minimum noise levels at day time were recorded in the range of 49.4 dB(A) in Bogampatti village and 45.3 dB(A) in chinnakuili Village respectively. 35.4 dB(A) in Panapatti and 36.7 dB(A) in Lakshminaickenpalayam Village respectively in night time. Thus, the noise level for Industrial and Residential area meets the requirements of CPCB.

3.7 ECOLOGICAL ENVIRONMENT

The study involved in the collection of primary data by conducting a survey in the field, examination of floral and faunal records in previously published reports and records. Analysis of the information is the view of the possible alteration in the environment of the project site. For the survey of fauna, both direct and indirect observation methods were used.

There is no schedule I species of animals observed within study area as per Wildlife Protection Act 1972 as well as no species is in vulnerable, endangered or threatened category as per IUCN. There is no endangered red list species found in the study area. Hence this small operation over short period of time will not have any significant impact on the surrounding flora and fauna.

3.8 SOCIO ECONOMIC ENVIRONMENT

It includes demographic structure of the area, provision of basic amenities viz., housing, education, health and medical services, occupation, water supply, sanitation, communication, transportation, prevailing diseases pattern as well as feature like temples, historical monuments etc., at the baseline level. This will help in visualizing and predicting the possible impact depending upon the nature and magnitude of the project.

The socio-economic study of surveyed villages gives a clear picture of its population, average household size, literacy rate and sex ratio etc. It is also found that a part of population is suffering from lack of permanent job to run their day-to-day life. Their expectation is to earn some income for their sustainability on a long-term basis. The proposed projects will aim to provide preferential employment to the local people there by improving the employment opportunity in the area and in turn the social standards will improve.

2. ANTICIPATED ENVIRONMENTAL IMPACTS AND MITIGATION MEASURES

In order to maintain the environmental commensuration with the mining operation, it is essential to undertake studies on the existing environmental scenario and assess the impact on different environmental components. This would help in formulating suitable management plans sustainable resource extraction.

4.1 LAND ENVIRONMENT:

ANTICIPATED IMPACT

-
- 4.28.66 Ha of the land will be under mining since the Permanent or temporary change on land use and land cover will occur
 - Movement of heavy vehicles sometimes cause problems to agricultural land, human habitations due to dust, noise and it also causes traffic hazards.
 - Due to degradation of land by pitting the aesthetic environment of the core zone may be affected.
 - Earthworks during the rainy season increase the potential for soil erosion and sediment laden water entering the water ways.
 - If no due care is taken wash off from the exposed working area may choke the water course & can also cause the siltation of water course.

MITIGATION MEASURES

- The 4.28.66 Ha of the land will be converted into temporary reservoir which will full fill the water scarcity in the drought season and the nearby agriculture land will have benefitted by the supply of water
- About 2560 Nos of trees will be planted in the lease area and approach road will retain the ecosystem
- The mining activity will be gradual confined in blocks and excavation will be undertaken progressively along with other mitigative measures like phase wise development in the production
- Construction of garland drains all around the quarry pits and construction of silt trap at strategic location in lower elevations to prevent erosion due to surface runoff during rainfall and also to collect the storm water for various uses within the proposed area.
- Green belt development along the boundary within safety zone. The small quantity of water stored in the mined-out pit will be used for greenbelt.
- Thick plantation will be carried out on unutilized area, top benches of mined out pits, on safety barrier, etc.,
- Fencing will be constructed before starting the mining operation and it will be maintained in the conceptual stage Security will be posted round the clock, to prevent inherent entry of the public and cattle.

4.2 WATER ENVIRONMENT

ANTICIPATED IMPACT

- The major sources of water pollution normally associated due to mining and allied operations are:
 - Generation of waste water from vehicle washing.
 - Washouts from surface exposure or working areas
 - Domestic sewage
 - Disturbance to drainage course in the project area
 - Mine Pit water discharge
- Increase in sediment load during monsoon in downstream of lease area
- This being a mining project, there will be no process effluent. Waste from washing of machinery may result in discharge of Oil & grease, suspended solids.
- The sewage from soak pit may percolate to the ground water table and contaminate it.
- Surface drainage may be affected due to Mining
- Abstraction of water may lead to depletion of water table.
- 2.7 KLD water will be utilized for the quarrying operation.

MITIGATION MEASURES

- Water for the quarrying operation such as sprinkling on haul roads, Greenbelt development will be sourced from the lower part of the mine pit which is specifically allotted to collect the rain water.
 - Garland drain, settling tank will be constructed along the proposed mining lease area. The Garland drain will be connected to settling tank and sediments will be trapped in the settling traps and only clear water will be discharged out to the natural drainage
 - Rainwater will be collected in sump in the mining pits and will be allowed to store and pumped out to surface setting tank of 15 m x 10m x 3m to remove suspended solids if any. This collected water will be
-

judiciously used for dust suppression and such sites where dust likely to be generated and for developing green belt. The proponent will collect and judiciously utilize the rainwater as part of rainwater harvesting system.

- Periodic (every 6 months once) analysis of quarry pit water and ground water quality in nearby villages.
- Domestic sewage from site office & urinals/latrines provided in ML is discharged in septic tank followed by soak pits.
- Waste water discharge from mine will be treated in settling tanks before using for dust suppression and tree plantation purposes.
- De-silting will be carried out before and immediately after the monsoon season.

4.3 AIR ENVIRONMENT

ANTICIPATED IMPACT

- During mining, at various stages activities such as excavation, drilling, blasting, and transportation of materials, particular matter (PM), gases such as Sulphur dioxide, oxides of Nitrogen from vehicular exhaust are the main air pollutants.
- Emissions of noxious gases due to incomplete detonation of explosive may sometimes pollute the air.
- The fugitive dust released from the mining operations may cause effect on the mine workers who are directly exposed to the fugitive dust.
- Simultaneously, the air-borne dust may travel to longer distances and settle in the villages located near the mine lease area.

MITIGATION MEASURES

Drilling – To control dust at source, wet drilling will be practiced. Where there is a scarcity of water, suitably designed dust extractor will be provided for dry drilling along with dust hood at the mouth of the drill-hole collar.

Advantages of Wet Drilling:

- In this system dust gets suppressed close to its formation. Dust suppression become very effective and the work environment will be improved from the point of occupational comfort and health.
- Due to dust free atmosphere, the life of engine, compressor etc., will be increased.
- The life of drill bit will be increased.
- The rate of penetration of drill will be increased.
- Due to the dust free atmosphere visibility will be improved resulting in safer working conditions.

Blasting

- Establish time of blasting to suit the local conditions and water sprinkling on blasting face
- Avoid blasting i.e., when temperature inversion is likely to occur and strong wind blows towards residential areas
- Controlled blasting includes Adoption of suitable explosive charge and short delay detonators, adequate stemming of holes at collar zone and restricting blasting to a particular time of the day i.e., at the time lunch hours, controlled charge per hole as well as charge per round of hole
- Before loading of material water will be sprayed on blasted material
- Dust mask will be provided to the workers and their use will be strictly monitored

Haul Road & Transportation

- Water will be sprinkled on haul roads twice a day to avoid dust generation during transportation
 - Transportation of material will be carried out during day time and material will be covered with tarpaulin
 - The speed of tippers plying on the haul road will be limited below 20 km/hr to avoid generation of dust.
 - Water sprinkling on haul roads & loading points will be carried out twice a day
-

- Main source of gaseous pollution will be from vehicle used for transportation of mineral; therefore weekly maintenance of machines improves combustion process & makes reduction in the pollution.
- The un-metalled haul roads will be compacted weekly before being put into use.
- Over loading of tippers will be avoided to prevent spillage.
- It will be ensured that all transportation vehicles carry a valid PUC certificate
- Grading of haul roads and service roads to clear accumulation of loose materials.

Green Belt

- Planting of trees all along main mine haul roads and regular grading of haul roads will be practiced to prevent the generation of dust due to movement of dumpers/trucks
- Green belt of adequate width will be developed around the project areas

Occupational Health

- Dust mask will be provided to the workers and their use will be strictly monitored.
- Annual medical check-ups, trainings and campaigns will be arranged to ensure awareness about importance of wearing dust masks among all mine workers & tipper drivers.
- Ambient Air Quality Monitoring will be conducted six months once to assess effectiveness of mitigation measures proposed.

4.4 NOISE ENVIRONMENT

ANTICIPATED IMPACT

Noise pollution poses a major health risk to the mine workers. Following are the sources of noise in the existing open cast mine project are being observed such as Drilling, & Blasting, Loading and during movement of vehicles.

MITIGATION MEASURES

- Usage of sharp drill bits while drilling which will help in reducing noise;
- Secondary blasting will be totally avoided and hydraulic rock breaker will be used for breaking boulders;
- Controlled blasting with proper spacing, burden, stemming and optimum charge/delay will be maintained;
- The blasting will be carried out during favourable atmospheric condition and less human activity timings by using nonelectrical initiation system;
- Proper maintenance, oiling and greasing of machines will be done every week to reduce generation of noise;
- Provision of sound insulated chambers for the workers working on machines (HEMM) producing higher levels of noise;
- Silencers / mufflers will be installed in all machineries;
- Green Belt/Plantation will be developed around the project area and along the haul roads. The plantation minimizes propagation of noise;
- Personal Protective Equipment (PPE) like ear muffs/ear plugs will be provided to the operators of HEMM and persons working near HEMM and their use will be ensured through training and awareness.
- Regular medical check-up and proper training to personnel to create awareness about adverse noise level effects.

4.5 BIOLOGICAL ENVIRONMENT

ANTICIPATED IMPACT

There are no National Park and Archaeological monuments within project area. There are no migratory corridors, migratory avian-fauna, rare endemic and endangered species. There are no wild animals in the area. No breeding and nesting site were identified in project site. No National Park and Wildlife Sanctuary found within 10km radius. The dumps / bunds around the mine itself act as a good barrier for entry of stray animals. In the post

mining stage, barbed wire fencing is proposed all around the mined-out void to prevent fall of animals in the mine pits.

MITIGATION MEASURES

To reduce the adverse effects on natural flora/fauna status of the area due to deposition of dust generated from mining operations, water sprinkling and water spraying systems will be ensured in all dust prone areas to arrest dust generation. Methodical and well-planned plantation scheme will be carried out.

4.5.1 GREENBELT DEVELOPMENT PLAN

Year	No. of tress proposed to be planted	Area to be covered in m ²	Name of the species
I	2560	The safety zone along the boundary barrier and Village roads has been utilized for Greenbelt development.	Neem, Pungam, Vilvam, Panai, Ashokha etc..

4.6 SOCIO ECONOMIC ENVIRONMENT

ANTICIPATED IMPACT

Employment generation due to the project will provide direct employment for about 19 persons.

MITIGATION MEASURES

- Good maintenance practices will be adopted for plant machinery and equipment, which will help to avert potential noise problems.
- Green belt will be developed in and around the project site as per Central Pollution Control Board (CPCB) guidelines.
- Appropriate air pollution control measure will be taken to minimize the environmental impact within the core zone.
- For the safety of workers, personal protective appliances like hand gloves, helmets, safety shoes, goggles, aprons, nose masks and ear protecting devices will be provided as per mines act and rules.
- Benefit to the State and the Central governments through financial revenues by way of royalty, tax, DMF, NMET etc, from this project directly and indirectly.

3. ANALYSIS OF ALTERNATIVES (TECHNOLOGY AND SITE)

The site has been selected based on geological investigation and exploration as below:

- Occurrence of minerals at the specific site.
- Transportation facility for materials & manpower.
- Overall impact on environment and mitigation feasibility
- Socio – economic background.

The mineral deposits are site specific in nature; hence question of seeking alternate site does not arise for this project.


4. ENVIRONMENT MONITORING PROGRAM

Usually, an impact assessment study is carried over short period of time and the data cannot bring out all variations induced by natural or human activities. Hence regular monitoring program of Environmental parameters is essential to take into account the changes in the Environment.

The Objective of Monitoring -

- To check or assess the efficiency of the controlling measures;
- To establish a data base for future impact assessment studies.

6.1 PROPOSED ENVIRONMENTAL MONITORING CELL

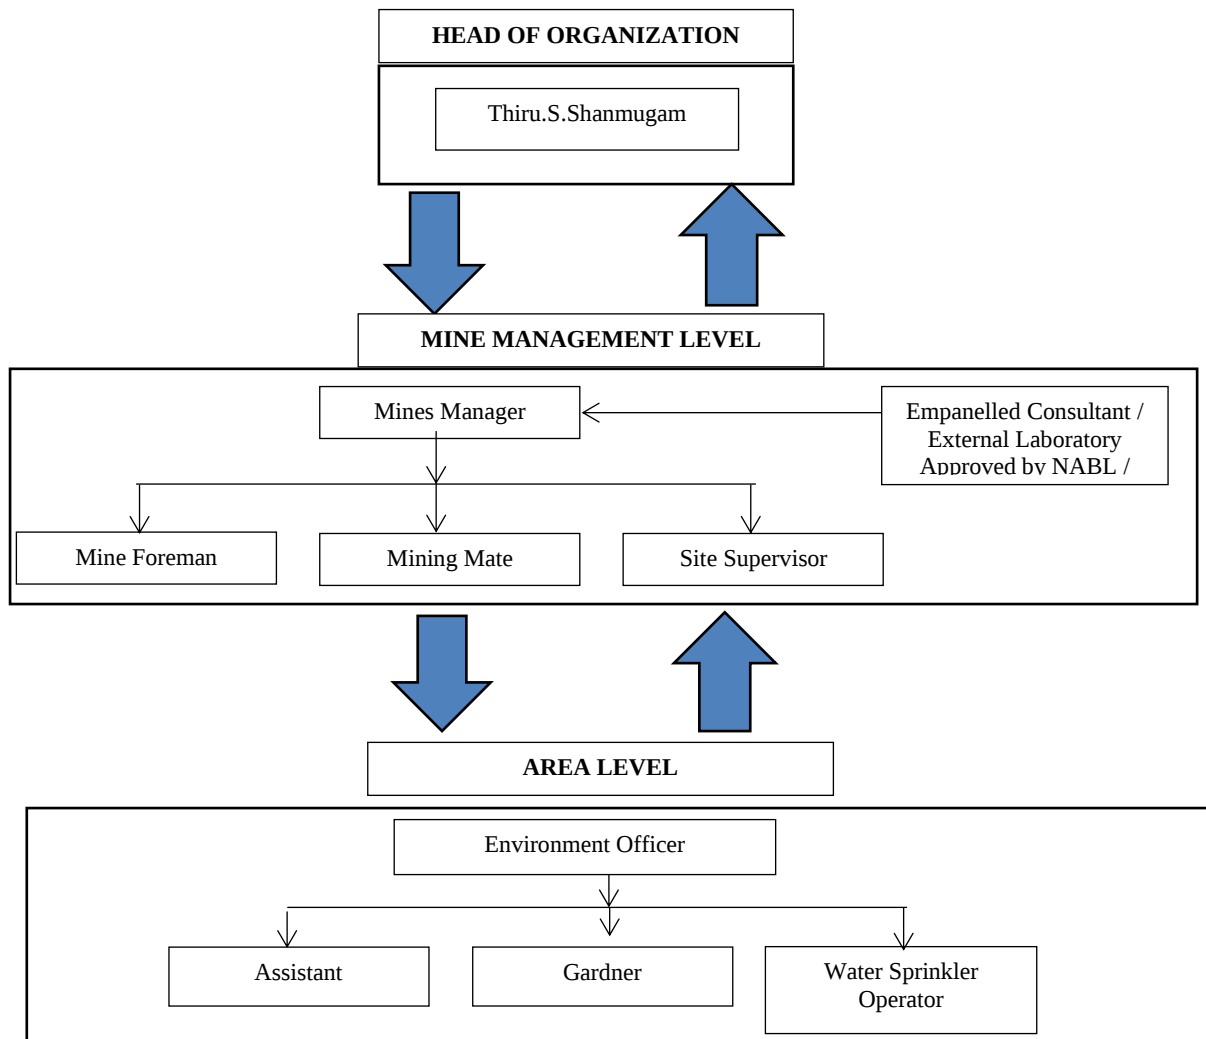

6.2 POST ENVIRONMENTAL CLEARANCE MONITORING SCHEDULE

S.No.	Environment Attributes	Location	Monitoring		Parameters
			Duration	Frequency	
1	Air Quality	2 Locations (1 Core & 1 Buffer)	24 hours	Once in 6 months	Fugitive Dust, PM _{2.5} , PM ₁₀ , SO ₂ and NO _x .
2	Meteorology	At mine site before start of Air Quality Monitoring & IMD Secondary Data	Hourly / Daily	Continuous online monitoring	Wind speed, Wind direction, Temperature, Relative humidity and Rainfall
3	Water Quality Monitoring	2 Locations (1SW & 1 GW)	-	Once in 6 months	Parameters specified under IS:10500, 1993 & CPCB Norms
4	Hydrology	Water level in open wells in buffer zone around 1 km at specific wells	-	Once in 6 months	Depth in bgl
5	Noise	2 Locations (1 Core & 1 Buffer)	Hourly – 1 Day	Once in 6 months	Leq, Lmax, Lmin, Leq Day & Leq Night
6	Vibration	At the nearest habitation (in case of reporting)	–	During blasting Operation	Peak Particle Velocity

7	Soil	2 Locations (1 Core & 1 Buffer)	–	Once in six months	Physical and Chemical Characteristics
8	Greenbelt	Within the Project Area	Daily	Monthly	Maintenance

5. ADDITIONAL STUDIES

7.1 RISK ASSESSMENT

The methodology for the risk assessment has been based on the specific risk assessment guidance issued by the Directorate General of Mine Safety (DGMS), Dhanbad, vide Circular No.13 of 2002, dated 31st December, 2002. The DGMS risk assessment process is intended to identify existing and probable hazards in the work environment and all operations and assess the risk levels of those hazards in order to prioritize those that need immediate attention. Further, mechanisms responsible for these hazards are identified and their control measures, set to timetable are recorded along with pinpointed responsibilities.

The whole quarry operation will be carried out under the direction of a Qualified Competent Mine Manager holding certificate of competency to manage a metalliferous mine granted by the DGMS, Dhanbad. Risk Assessment is all about prevention of accidents and to take necessary steps to prevent it from happening.

7.2 DISASTER MANAGEMENT PLAN

The Disaster Management Plan is aimed to ensure safety of life, protection of environment, protection of installation, restoration of production and salvage operations in this same order of priorities. The objective of the Disaster Management Plan is to make use of the combined resources of the mine and the outside services to achieve the following:

- ✚ Rescue and medical treatment of casualties;
- ✚ Safeguard other people;
- ✚ Minimize damage to property and the environment;
- ✚ Initially contain and ultimately bring the incident under control;
- ✚ Secure the safe rehabilitation of affected area; and
- ✚ Preserve relevant records and equipment for the subsequent inquiry into the cause and circumstances of the emergency.

7.3 CUMULATIVE IMPACT STUDY

CUMULATIVE PRODUCTION LOAD OF ROUGH STONE

Quarry	Production for five/ten years plan period	Per Year Production in m ³	Per Day Production in m ³	Number of Lorry Load Per Day @ 12m ³ per load
P1	12,58,005	125801	419	35
P2	65,140	13028	43	4
P3	-	-	-	-
P4	3,18,706	63741	212	18
P5	-	-	-	-
P6	2,31,510	46302	154	13
P7	1,27,607	25521	85	7
Total	20,00,968	274393	913	77
E1	2,63,226	52,645	175	15
Total	2,63,226	52,645	175	15
Gran Total	22,64,194	3,27,038	1,088	92

CUMULATIVE PRODUCTION LOAD OF GRAVEL

Quarry	Mineable Reserves in m ³	Per Year Production in m ³	Per Day in m ³	Number of Lorry Load @ 12m ³ per load
P1(Ten Years)	79,980	7998	27	2
P2	5,712	1904	6	1
P3	-	-	-	-
P4	32,304	10768	36	3

P5	-	-	-	-
P6	30,964	10,321	34	3
P7	4640	1547	5	1
TOTAL	1,53,600	32,538	108	10
E1	27,000	9,000	30	3
Total	27,000	9,000	30	3
Grand total	1,80,600	41,538	138	13

SOCIO ECONOMIC BENEFITS FROM 8 MINES

Location Code	Project Cost	CER
P1	Rs. 3,50,60,000/-	Rs.5,00,000/-
P2	Rs. 62,32,000/-	Rs.5,00,000/-
P3	-	-
P4	Rs. 85,44,000/-	Rs.5,00,000/-
P5	-	-
P6	Rs. 1,60,59,000/-	Rs.3,00,000/-
P7	Rs. 69,27,000/-	Rs.5,00,000/-
Total	Rs. 7,28,22,000/-	Rs. 23,00,000/-
E1	Rs. 1,46,40,700/-	Rs. 5,00,000/-
Total	Rs. 1,46,40,700/-	Rs. 5,00,000/-
Grand Total	Rs. 8,74,62,700/-	Rs.28,00,000/-

EMPLOYMENT BENEFITS FROM 8 MINES

Location Code	Employment
P1	42
P2	15
P3	-
P4	40
P5	-
P6	23
P7	18
Total	138
E1	31
Total	31
Grand Total	169

A total of 138 people will get employment due to 7 proposed mines in cluster and 31 people are already employed at existing mines.

GREENBELT DEVELOPMENT BENEFITS FROM MINES

CODE	No of Trees proposed to be planted	Area Covered Sq.m	Name of the Species
P1	2560	Near 7.5m safety distance, panchayat road and village road	Neem, Pungam, Vilvam, Panai, Ashokha etc..
P2	715		
P3	810		
P4	1470		
P5	1440		
P6	1080		
P7	920		
E1	1830		
Total	10825		

8. PROJECT BENEFITS

The Proposed Project for Quarrying Rough Stone and Gravel at Edayarpalayam Village aims to produce cumulatively 12,58,005m³ Rough Stone over a period of 10 Years & 79,980m³ of Gravel over a period of 10 Years. This will enhance the socio-economic activities in the adjoining areas and will result in the following benefits

- Increase in Employment Potential
- Improvement in Socio-Economic Welfare
- Improvement in Physical Infrastructure
- Improvement in Social infrastructure

9. ENVIRONMENT MANAGEMENT PLAN

The Environment Monitoring Cell formed by the mine management will ensure effective implementation of environment management plan and to ensure compliance of environmental statutory guidelines through Mine Management Level.

The said team will be responsible for:

- ✚ Monitoring of the water/ waste water quality, air quality and solid waste generated
- ✚ Analysis of the water and air samples collected through external laboratory
- ✚ Implementation and monitoring of the pollution control and protective measures/ devices which shall include financial estimation, ordering, installation of air pollution control equipment, waste water treatment plant, etc.
- ✚ Co-ordination of the environment related activities within the project as well as with outside agencies
- ✚ Collection of health statistics of the workers and population of the surrounding villages
- ✚ Green belt development
- ✚ Monitoring the progress of implementation of the environmental monitoring programme
- ✚ Compliance to statutory provisions, norms of State Pollution Control Board, Ministry of Environment and Forests and the conditions of the environmental clearance as well as the consents to establish and consents to operate.

10. CONCLUSION

It can be concluded from overall assessment of the impacts, in terms of positive and negative effects on various environmental components, that the mining activities will not have any adverse effect on the surrounding environment.

To mitigate any impacts due to the mining activities, a well-planned EMP and a detailed post project monitoring system is provided for regular monitoring and immediate rectification at site. Due to the cluster quarrying activities, socio economic conditions in and around the project site will be improved substantially. Hence, the Prior Environmental Clearance shall be granted at the earliest.
