

Tvl. SRI RAJALAKSHMI SAMAPPA ROUGH STONE & GRAVEL QUARRY

"B1" CATEGORY - MINOR MINERAL - PATTA LAND - NON-FOREST LAND

PROJECT PROPONENT

Project Proponent	Proposed Project	Extent
Tvl. Sri Rajalakshmi Samappa	S.F. Nos:1120/2 & 1121/2,	
Building Materials Company,	Bilichi Village,	2.60.5 ha
No. 677/1A, Vellamadai,	Coimbatore North Taluk,	2.00.5 Ha
Coimbatore District - 641 110.	Coimbatore District.	

CLUSTER EXTENT = 7.23.0 ha

At

Bilichi Village, Coimbatore North Taluk, Coimbatore District, Tamil Nadu State

Complied as per ToR obtained for the Projects in Cluster Situation – Cluster area is calculated as per MoEF & CC Notification – S.O. 2269 (E) Dated: 01.07.2016

Letter No. SEIAA- TN/F.No.9051/SEAC/ToR-1167/2022 Dated: 06.06.2022

Environmental Consultant

GEO EXPLORATION AND MINING SOLUTIONS Old No. 260-B, New No. 17,





Advaitha Ashram Road, Alagapuram, Salem – 636 004, Tamil Nadu, India Accredited for sector 1 Category 'A', 31 & 38 Category 'B' Certificate No: NABET/EIA/2225/RA 0276

Phone: 0427-2431989, Email: ifthiahmed@gmail.com, geothangam@gmail.com **Web:** www.gemssalem.com



ENVIRONMENTAL LAB

EHS 360 LABS PRIVATE LIMITED,

10/2 Ground floor, 50th street, 7th Avenue, Ashok Nagar, Chennai – 600 083.

Baseline Monitoring Season - Dec 2022 to Feb 2023

MAY -2023

1. INTRODUCTION

Environmental Impact Assessment (EIA) is the management tool to ensure the sustainable development and it is a process, used to identify the environmental, social and economic impacts of a project prior to decision-making. It is a decision-making tool, which guides the decision makers in taking appropriate decisions for any project. EIA systematically examines both beneficial and adverse consequences of the project and ensures that these impacts are taken into account during the project designing. It also reduces conflicts by promoting community participation, information, decision makers, and helps in developing the base for environmentally sound project.

Rough Stone & Gravel is the major requirements for construction industry. This EIA report is prepared by considering Cumulative load of proposed & existing quarries of **Tvl. Sri Rajalakshmi Samappa** Rough Stone & Gravel Quarry cluster consisting of one Proposed and one Existing Quarry with total extent of Cluster of. 7.23.0 ha in Bilichi Village, Coimbatore North Taluk, Coimbatore District, Tamil Nadu State, cluster area calculated as per MoEF & CC Notification S.O. 2269(E) Dated 1st July 2016.

The Baseline Monitoring study has been carried out during the period of December– February 2023 (Baseline Data Used is as per MoEF & CC Office Memorandum No. J-11013/41/2006-IA-II (I) (Part) Dated 29th August 2017 & MoEF & CC Office Memorandum F. No. IA3-22/10/2022-IA.III [E 177258] Dated: 08.06.2022) and this EIA and EMP report is prepared for considering cumulative impacts arising out of these projects, the Cumulative Environmental Impact Assessment study is undertaken, which is followed by preparation of a detailed Environmental Management Plan (EMP) individually to minimize those adverse impacts.

"Draft EIA report prepared on the basis of ToR Issued for carrying out Public Hearing for the Grant of Environmental Clearance from SEIAA, - Tamil Nadu"

1.1 DETAILS OF PROJECT PROPONENT –

Name of the Company Tvl. Sri Rajalakshmi Samappa Rough Stone & Gravel Quarry Project	
Tvl. Sri Rajalakshmi Samappa Building Materials Company, No. 677/1A, Vellamadai, Coimbatore District - 641 110.	
Mobile	99763 64777 and 86673 84540
Status	Partnership firm

1.2 QUARRY DETAILS WITHIN 500 M RADIUS

PROPOSED QUARRY					
CODE	Name of the Proponent and Address	S.F. Nos, Village & Taluk	Extent in Ha	Status	
P1	Tvl. Sri Rajalakshmi Samappa Building Materials Company, No. 677/1A, Vellamadai, Coimbatore District - 641 110.	1120/2 & 1121/2, Bilichi Village, Coimbatore North Taluk	2.60.5	Letter No. SEIAA- TN/F.No.9051/SEAC/ToR- 1167/2022 Dated: 06.06.2022	
	TOTAL 2.60.5				
		EXISTING QUARRY			
CODE	Name of the Proponent and Address	S.F. Nos	Extent in Ha	Lease Period	
E-1	Thiru.P.Sidharthamouli	1119, 1120,1121	4.62.50	10.11.2020 to 09.11.2025 EC Granted	
	TOTAL		4.62.50		
EXPIRED QUARRY					
-	1	-	-	-	
	TOTAL CLUSTER EXTENT				

1.3 SALIENT FEATURES OF THE PROPOSAL

Name of the Quarry	Tyl. Sri Rajalakshmi S	Samappa Rough	Stone & Gravel Quarry	
Toposheet No	58-A/16			
Latitude between	11°11'5	11°11'51.42"N to 11°12'01.24"N		
Longitude between	76°59'38.35"E to 76°59'41.55"E			
Highest Elevation	426m AMSL			
Proposed Depth of Mining		Gravel + 35m R		
Geological Resources	Rough Stone in r	n^3	Gravel m ³	
Geological Resources	9,15,950		51,136	
Mineable Reserves	Rough Stone in r	n^3	Gravel m ³	
Ultimate Pit Dimension	3,22,380	27m (2m Casyal	40,936	
			+ 35m Rough Stone) Bgl	
Existing Pit Dimension (Maximum)	192m (L) x 80m	(W) x Im (D) (Volume 15,360 m ³⁾	
Existing Gravel Dump Dimension (Maximum)	64 m (L) x 40m ((W) x 6 m (H) (Volume 15,360 m ³⁾	
Water Level in the surrounds area		64 - 59m bgl		
Method of Mining	Opencast Mechanized Mir	ning Method inv	volving drilling and blasting	
Topography	The lease applied area is flat terrain. The area has gentle sloping towards Northern side and altitude of the area is 426m (max) above from Mean Sea level. The area is covered by 2m thickness of Gravel and followed by Massive Charnockite which is clearly inferred from the outcrop. The Water level in the surrounding area is 64m in summer and at 59m in rainy seasons below general ground profile which is observed from the nearby bore wells. Average annual rainfall is about 689mm.			
	Jack Hammer	6Nos		
	Compressor	2 No		
Machinery proposed	Excavator with bucket and rock breaker	2 No		
	Tipper		4 No	
Blasting Method	slurry explosive are proposed	d to be used for of Rough Ston	rilling and small dia of 25mm shattering and heaving effect the. No deep hole drilling is	
Proposed Manpower Deployment		29Nos		
Project Cost		Rs.82,98,000/-		
EMP Cost		Rs. 3,80,000/-		
CER Cost		Rs 5,00,000/-		
	Water bodies	Distance & D	Direction	
	Odai	780m NE		
Nearby Water Bodies	Stream	2.7km NW		
	Agrahara Samakulam Lake	4.5km SE		
	Tank Near Kariampalayam	8.8km NE		
Greenbelt Development Plan	Proposed to plant 1300 trees in the 7.5m Safety Zone and panchayat roads.			
Proposed Water Requirement	3.0 KLD			
Nearest Habitation		420m- W		

Source: Approved Mining Plan

1.4 STATUTORY DETAILS

Project - P1

- The proponent applied for Rough Stone and Gravel Quarry Lease Dated: 12.07.2021.
- Precise Area Communication was issued by the Assistant Director, Department of Geology and Mining, Coimbatore District vide Rc.No. 875/Mines/2021, Dated: 02.12.2021
- The mining plan was approved by the Assistant Director, Department of Geology and Mining, Coimbatore District vide Rc.No. 875/Mines/2021, Dated: 31.12.2021.
- The proposed project falls under "B1" Category as per Order Dated: 04.09.2018 & 13.09.2018 passed by Hon'ble National Green tribunal, New Delhi in O.A. No. 173 of 2018 & O.A. No, 186 of 2016 and MoEF & CC Office Memorandum F. No. L-11011/175/2018-IA-II (M) Dated: 12.12.2018
- Proponent applied for ToR for Environmental Clearance vide online Proposal No. SIA/TN/MIN/72677/2022, Dated: 26.02.2022.

2. PROJECT DESCRIPTION

The proposed projects are site specific and there is no additional area required for this project. There is no effluent generation/discharge from the proposed quarries.

Method is mining is common for all the proposed quarries in the cluster. Rough Stone is proposed to be excavated by opencast mechanized method involving splitting of rock mass of considerable volume from the parent rock mass by jackhammer drilling and blasting, hydraulic excavators are used for loading the Rough Stone from pithead to the needy crushers and rock breakers to avoid secondary blasting.

2.1 SITE CONNECTIVITY TO THE PROJECT AREA

Nearest Roadway	NH – 181 – Coimbatore – Mettupalayam – 3.0km – W SH – 168 – Karamadai – Kariampalayam – 4.0km – N
Nearest Village	Onnipalayam – 1.0km – NE
Nearest Town	Periyanayakkanpalayam – 7.0km – SW
Nearest Railway	Karamadai Railway Station – 6.0km – NW
Nearest Airport	Coimbatore Airport – 20km – S
Seaport	Kochi - 160km – Southwest

2.2 LAND USE PATTERN OF THE LEASE APPLIED AREA

Description	Present area in (ha)	Area at the end of this quarrying period (ha)
Quarrying Pit	1.46.5	2.12.0
Dump	0.25.6	NIL
Infrastructure	Nil	0.01.0
Roads	0.02.0	0.02.0
Green Belt	Nil	0.16.0
Unutilized Area	0.86.4	0.29.5
Grand Total	2.60.5	2.60.5

2.3 OPERATIONAL DETAILS OF LEASE APPLIED AREA

	DETAILS		
PARTICULARS	Rough Stone (5Year Plan period)	Gravel (3 Years Plan period)	
Geological Resources in m ³	9,15,950	51,136	
Mineable Reserves in m ³	3,22,380	40,936	
Yearwise Production in m ³	2,53,220	40,936	
Mining Plan Period	5 Years		
Number of Working Days	300 Days		

Production per day in m ³	215	45
No of Lorry loads (12m ³ per load)	18	4
Total Depth of Mining	37m (2m Gravel + 25m Rough Stone)	

Source: Approved mining plan

2.4 RESOURCES AND RESERVES OF THE PROPOSAL

ROUGH STONE PRODUCTION FROM THE PROPOSAL

Quarry	Production for five- year plan period considering safety parameters	YEARWISE Reserves	Per Year Production in m ³	Per Day Production in m ³	Number of Lorry Load Per Day @ 12m³ per load
		I	50,400		
		II	50,440		
P1	2,53,220	III	50,970	169	14 Trips /Day
		IV	51,280		
		V	50,130		


GRAVEL PRODUCTION FROM THE PROPOSAL

Quarry	Mineable Reserves in m ³	YEARWISE Reserves	Per Year Production in m ³	Per Day in m ³	Number of Lorry Load @ 12m³ per load
		I	14,016		
		II	15,360		
P1	40,936	III	11,560	45	4 load per week
		IV	-		
		V	-		

76°59'42"E 76°59'33"E 76°59'36 E 76°59'39"E 1121/1 Patta Land 1121/3 Patta Land Legend 1120/3 Patta Land 1120/1 Patta Land ApproachRoad Adjacent FMB Line SF. Number Lease Applied Area Safety Distance Source : Google Earth & Arc Map 10.2 V.No-6-Vellamadai 1:1,300 DATUM WGS84 76°59'36"E 76°59'45"E 76°59'33"E 76°59'39"E 76°59'42"E 76°59'48"E

FIGURE – 1: GOOGLE IMAGE SHOWING APPLIED QUARRY LEASE AREA – P1

FIGURE-2 QUARRY LEASE PLAN / SURFACE PLAN

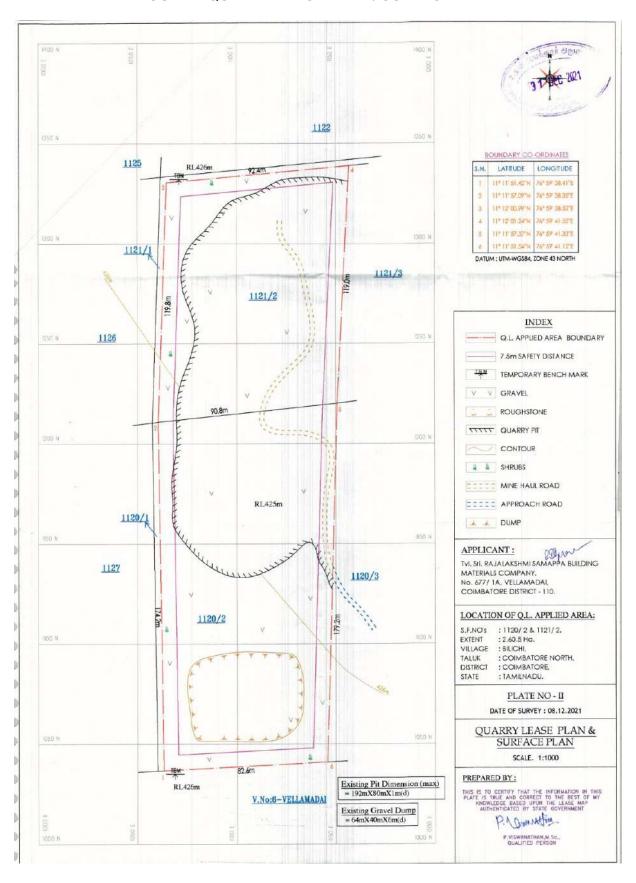

SATELLITE IMAGERY MAP TVL.SRI RAJALAKSHMI SAMAPPA BUILDING MATERIALS COMPANY (500m Radius) Extent **Owners Name** Proposed Quarry : 2.60.5 ha (1 No) Existing Quarry : 4.62.5 ha (1 No) Proposed Quarry Tvl. Sri Rajalakshmi Samappa 2.60.50 **Building Materials Company** Proposed Quarry **Existing Quarry** Existing Quarry Thiru.P. Siddharthamouli 4.62.50 300m_Radius 500m_Radius Graphic Scale Source: Cluster Extent : 7.23.0 ha 1. Geographical Information System Village : Bilichi Software Used: Drafted by Checked by Arc Map 10.8 Taluk : Coimbatore North Dr. M. Blennumoller District : Coimbatore **Environment Consultant** State : Tamil Nadu Dr. M. Ifthikhar Ahmed (EIA - Coordinator) Mr.A.Allimuthu (FAE - Land use & Land cover) M/S. Geo Exploration and Mining Solutions, Salem, Tamil Nadu

FIGURE – 3: GOOGLE IMAGE SHOWING CLUSTER (500 m QUARRIES)

76°52'0"E 76°56'0"E 77"0'0"E 77°4'0"E 77°8'0"E **BASE MAP** Tvl. Sri Rajalakshmi Samappa Iding Materials Company (10km Radius 10km Radius Legend Proposed Quarry Existing Quarry 10km Radius Proposed Quarry : 2.60.5 ha (1 No) Existing Quarry : 4.62.5 ha (1 No) : 7.23.0 ha : Bilichi Village Taluk : Coimbatore North Graphic Scale : Coimbatore District : Tamil Nadu State 1:90,000 77°4'0"E 76°52'0"E 77°8'0"E Source: Software Used: **Environment Consultant** Drafted by Checked by Survey of India Topo Sheet No: M/S. Geo Exploration and Mining Solutions, 1. Arc Map 10.2, dimetro Dr M. Blummedles 58 A/15, 58 A/16, 58 E/03 & 58 E/04 First Edition 2011. Salem, Tamil Nadu Mr.A.Allimuthu (FAE - Land use & Land cover) Dr. M. Ifthikhar Ahmed (EIA - Coordinator)

FIGURE - 4: TOPOSHEET MAP COVERING 10 KM RADIUS

2.5 METHOD OF MINING

Proposed Method of Mining is common for all the Proposed Projects – The method of mining is Opencast Mechanized Mining Method is being proposed by formation of 5.0 meter height bench with a bench width not less than the bench height.

The Rough Stone is a batholith formation and the splitting of rock mass of considerable volume from the parent rock mass will be carried out by deploying jackhammer drilling and Slurry Explosives will be used for blasting. Hydraulic Excavators attached with Rock Breakers unit will be deployed for breaking large boulders to required fragmented sizes to avoid secondary blasting and hydraulic excavators attached with bucket unit will be deployed for loading the Rough Stone into the tippers and then the stone is transported from pithead to the nearby crushers.

2.6 PROPOSED MACHINERY DEPLOYMENT

	PROPOSAL – P1					
S.NO.	ТҮРЕ	NOS	SIZE/CAPACITY	MOTIVE POWER		
1	Jack hammers	6	1.2m to 2.0m	Compressed air		
2	Compressor	2	400psi	Diesel Drive		
3	Excavator with Bucket / Rock Breaker	2	300 HP	Diesel Drive		
4	Trucks	4	20 Tonnes	Diesel Drive		

2.7 CONCEPTUAL MINING PLAN/ FINAL MINE CLOSURE PLAN

- 4 At the end of life of mine, the excavated mine pit / void will act as artificial reservoir for collecting rain water and helps to meet out the demand or crises during drought season.
- ♣ After mine closure the greenbelt developed along the safety barrier and top benches and temporary water reservoir will enhance the ecosystem.
- Mine Closure is a process of returning a disturbed site to its natural state or which prepares it for other productive uses that prevents or minimizes any adverse effects on the environment or threats to human health and safety.
- ♣ The principle closure objectives are for rehabilitated mines to be physically safe to humans and animals, geo-technically stable, geo-chemically non-polluting/ non-contaminating, and capable of sustaining an agreed post-mining land use.

2.8 ULTIMATE PIT DIMENSION

PROPOSAL – P1		
Length (Max) (m)	Width (Max) (m)	Depth (Max)
280	83	37m bgl

3. DESCRIPTION OF THE ENVIRONMENT

Field monitoring studies to evaluate the base line status of the project site were carried out during December to February 2023 as per CPCB guidelines. Environmental Monitoring data has been collected with reference to proposed mine EHS 360 LABS PRIVATE LIMITED, NABL Certified & MoEF Notified Laboratory.

3.1 ENVIRONMENT MONITORING ATTRIBUTES

ATTRIBUTE	PARAMETERS	FREQUENCY OF MONITORING	NO. OF LOCATIONS	PROTOCOL
Land-use Land cover	Land-use Pattern within 10 km radius of the study area	Data's from census handbook 2011 and from the satellite imagery	Study Area	Satellite Imagery Primary Survey
Soil	Physio - Chemical Characteristics	Once during the study period	8 (1 core & 5 buffer zone)	IS 2720 Agriculture Handbook - Indian Council of Agriculture Research, New Delhi
Water quality	Physical, Chemical and Bacteriological Parameters	Once during the study period	6 (2 surface water & 4 ground water)	IS 10500& CPCB Standards
Meteorology	Wind Speed Wind Direction Temperature Cloud cover Dry bulb temperature Rainfall	1 Hourly Continuous Mechanical/Automatic Weather Station	1	Site specific primary data & Secondary Data from IMD Station
Ambient Air Quality	PM ₁₀ PM _{2.5} SO ₂ , NO _X CO Fugitive Dust	24 hourly twice a week (March 2021 – May 2021)	8 (1 core & 7 buffer)	IS 5182 Part 1-23 National Ambient Air Quality Standards, CPCB
Noise Levels	Ambient Noise	Hourly observation for 24 Hours per location	8 (1 core & 7 buffer zone)	IS 9989 As per CPCB Guidelines
Ecology	Existing Flora and Fauna	Through field visit during the study period	Study Area	Primary Survey by Quadrate & Transect Study & Secondary Data
Socio Economic Aspects	Socio–Economic Characteristics, Population Statistics and Existing Infrastructure in the study area	Site Visit & Census Handbook, 2011	Study Area	Primary Survey, census handbook & need based assessments.

Source: On-site monitoring/sampling by EHS 360 LABS PRIVATE LIMITED, with GEMS

3.2 LAND ENVIRONMENT

S.No	CLASSIFICATION	AREA_HA	AREA_%			
	BUILTUP					
1	URBAN	1664.47	5.06			
2	RURAL	1247.17	3.79			
3	MINING	209.89	0.64			
	AGRICULTU	RAL LAND				
4	CROP LAND	10732.91	32.64			
5	PLANTATION	3811.58	11.59			
6	FALLOW LAND	12393.63	37.70			
	FOREST					
7	DECIDUOUS	968.46	2.95			
	BARREN/WA	STE LANDS				
8	SCRUB LAND	1624.78	4.94			
	WETLANDS/ WATER BODIES					
9	WATER BODIES/LAKE/RIVER	225.42	0.69			
•	TOTAL	32878.30	100.00			

3.3 SOIL ENVIRONMENT

Physical Characteristics –

The physical properties of the soil samples were examined for texture, bulk density, porosity and water holding capacity. The soil texture found in the study area is Clay to Sandy Soil and Bulk Density of Soils in the study area varied between 0.94-1.25 g/cc. The Water Holding Capacity and Porosity of the soil samples is found to be medium i.e. ranging from 46.9-48.7% and 42.4-46.1%

Chemical Characteristics –

- The nature of soil is slightly alkaline to strongly alkaline in nature with pH range 7.55 to 8.75
- The available Nitrogen content range between 270 to 410 kg/ha
- The available Phosphorus content range between 1.10 to 3.7 kg/ha
- The available Potassium range between 25.1 to 47.3 mg/kg

Whereas, the micronutrient as zinc (Zn), iron (Fe) and copper (Cu) were found in the range of 1.01 to 2.6 mg/kg; 1.10 to 2.38 mg/kg and ND

3.4 WATER ENVIRONMENT

Surface Water

Ph:

The pH of surface 7.10-7.29 while turbidity found within the standards. (Optimal pH range for sustainable aquatic life is 6.5 to 8.5 pH).

Total Dissolved Solids:

Total Dissolved Solids 550-710 mg/l, the TDS mainly composed of carbonates, bicarbonates, Chlorides, phosphates and nitrates of calcium, magnesium, sodium and other organic matter.

Other parameters:

Chloride 140-200 mg/l. Nitrates 7.7-8.8 mg/l, while sulphates 65.6-71.7 mg/l.

Ground Water

The pH of the water samples collected ranged from 7.10 to 8.03 and within the acceptable limit of 6.5 to 8.5. pH, Sulphates and Chlorides of water samples from all the sources are within the limits as per the Standard. on Turbidity, the water samples meet the requirement. The Total Dissolved Solids were found in the range of 440 - 550 mg/l in all samples. The Total hardness varied between 136.18 - 203.05 mg/l for all samples.

On Microbiological parameters, the water samples from all the locations meet the requirement. The parameters thus analysed were compared with IS 10500:2012 and are well within the prescribed limits.

3.5 AIR ENVIRONMENT

The baseline studies on air environment include identification of specific air pollution parameters and their existing levels in ambient air. The ambient air quality with respect to the study zone of 10 km radius around the proposed quarry forms the baseline information.

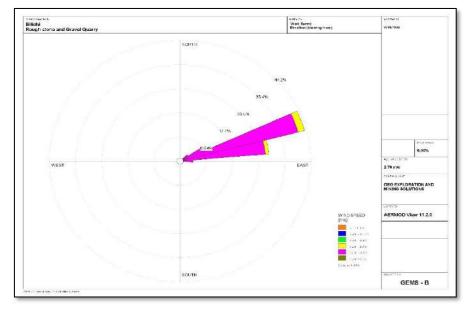


FIGURE - 4: WIND ROSE DIAGRAM

As per monitoring data, PM_{10} ranges from 42.0 $\mu g/m^3$ to 49.3 $\mu g/m^3$, $PM_{2.5}$ data ranges from 20.5 $\mu g/m^3$ to 28.3 $\mu g/m^3$, SO_2 ranges from 5.0 $\mu g/m^3$ to 8.8 $\mu g/m^3$ and NO_2 data ranges from 16.3 $\mu g/m^3$ to 25.6 $\mu g/m^3$. The concentration levels of the above criteria pollutants were observed to be well within the limits of NAAQS prescribed by CPCB.

3.6 NOISE ENVIRONMENT

Ambient noise levels were measured at 8 (eight) locations around the project area considering cluster quarries. Noise levels recorded in core zone during day time were from 43.8~dB (A) Leq and during night time were from 36.0~dB (A) Leq. Noise levels recorded in buffer zone during day time were from 36.8-40~dB (A) Leq and during night time were from 34.4-37.4~dB (A) Leq.

3.7 ECOLOGICAL ENVIRONMENT

The study involved in the collection of primary data by conducting a survey in the field, examination of floral and faunal records in previously published reports and records. Analysis of the information is the view of the possible alteration in the environment of the project site. For the survey of fauna, both direct and indirect observation methods were used.

There is no schedule I species of animals observed within study area as per Wildlife Protection Act 1972 as well as no species is in vulnerable, endangered or threatened category as per IUCN. There is no endangered red list species found in the study area. Hence this small operation over short period of time will not have any significant impact on the surrounding flora and fauna.

3.8 SOCIO ECONOMIC ENVIRONMENT

It includes demographic structure of the area, provision of basic amenities viz., housing, education, health and medical services, occupation, water supply, sanitation, communication, transportation, prevailing diseases pattern as well as feature like temples, historical monuments etc., at the baseline level. This will help in visualizing and predicting the possible impact depending upon the nature and magnitude of the project.

The socio-economic study of surveyed villages gives a clear picture of its population, average household size, literacy rate and sex ratio etc. It is also found that a part of population is suffering from lack of permanent job to run their day-to-day life. Their expectation is to earn some income for their sustainability on a long-term basis.

The proposed projects will aim to provide preferential employment to the local people there by improving the employment opportunity in the area and in turn the social standards will improve.

4. ANTICIPATED ENVIRONMENTAL IMPACTS AND MITIGATION MEASURES – IN COMMON FOR PROPOSED QUARRY

In order to maintain the environmental commensuration with the mining operation, it is essential to undertake studies on the existing environmental scenario and assess the impact on different environmental components. This would help in formulating suitable management plans sustainable resource extraction.

4.1 LAND ENVIRONMENT:

ANTICIPATED IMPACT

- Permanent or temporary change on land use and land cover.
- Change in Topography: Topography of the ML area will change at the end of the life of the mine.
- Movement of heavy vehicles sometimes cause problems to agricultural land, human habitations due to dust, noise and it also causes traffic hazards.
- Due to degradation of land by pitting the aesthetic environment of the core zone may be affected.
- Earthworks during the rainy season increase the potential for soil erosion and sediment laden water entering the water ways.
- If no due care is taken wash off from the exposed working area may choke the water course & can also causes the siltation of water course

MITIGATION MEASURES

- The mining activity will be gradual confined in blocks and excavation will be undertaken progressively along with other mitigative measures like phase wise development of greenbelt etc.
- Construction of garland drains all around the quarry pits and construction of check dam at strategic location
 in lower elevations to prevent soil erosion due to surface runoff during rainfall and also to collect the storm
 water for various uses within the proposed area
- Green belt development along the boundary within safety zone. The small quantity of water stored in the mined-out pit will be used for greenbelt
- Thick plantation will be carried out on unutilized area, top benches of mined out pits, on safety barrier, etc.,
- At conceptual stage, the land use pattern of the quarry will be changed into Greenbelt area and temporary reservoir
- In terms of aesthetics, natural vegetation surrounding the quarry will be retained (such as in a buffer area i.e., 7.5 m safety barrier and other safety provided) so as to help minimise dust emissions.
- Proper fencing will be carried out at the conceptual stage, Security will be posted round the clock, to prevent inherent entry of the public and cattle

4.2 WATER ENVIRONMENT

ANTICIPATED IMPACT

- The major sources of water pollution normally associated due to mining and allied operations are:
 - o Generation of waste water from vehicle washing.
 - Washouts from surface exposure or working areas
 - Domestic sewage
 - o Disturbance to drainage course in the project area
 - Mine Pit water discharge
- Increase in sediment load during monsoon in downstream of lease area

- This being a mining project, there will be no process effluent. Waste from washing of machinery may result in discharge of Oil & grease, suspended solids.
- The sewage from soak pit may percolate to the ground water table and contaminate it.
- Surface drainage may be affected due to Mining
- Abstraction of water may lead to depletion of water table

MITIGATION MEASURES

- Garland drains, settling tank will be constructed along the individual mining leases. The Garland drains
 of the individual leases will be connected to settling tank and after settling the water will be discharged
 out to the natural drainage
- Rainwater will be collected in sump in the mining pits and will be allowed to store and pumped out to surface setting tank of 15 m x 10m x 3m to remove suspended solids if any. This collected water will be judiciously used for dust suppression onwards and such sites where dust likely to be generated and for developing green belt. The proponent will collect and judicially utilize the rainwater as part of rainwater harvesting
- Providing benches with inner slopes and through a system of drains and channels, allowing rain water
 to descent into surrounding drains, so as to minimize the effects of erosion & water logging arising out
 of uncontrolled descent of water.
- Reuse the water collected during storm for dust suppression and greenbelt development within the mines
- Installing interceptor traps/oil separators to remove oils and greases. Water from the tipper wash-down facility and machinery maintenance yard will pass through interceptor traps/oil separators prior to its reuse;
- Using flocculating or coagulating agents to assist in the settling of suspended solids during monsoon seasons.
- Periodic analysis of quarry pit water and ground water quality in nearby villages
- Domestic sewage from site office & urinals/latrines provided in ML is discharged in septic tank followed by soak pits
- Waste water discharge from mine will be treated in settling tanks before using for dust suppression and tree plantation purposes
- De-silting will be carried out before and immediately after the monsoon season
- Regular monitoring and analysing the quality of water in open well, bore wells and surface water

4.3 AIR ENVIRONMENT

ANTICIPATED IMPACT

- During mining, at various stages activities such as excavation, drilling, blasting, and transportation of
 materials, particular matter (PM), gases such as Sulphur dioxide, oxides of Nitrogen from vehicular
 exhaust are the main air pollutants.
- Emissions of noxious gases due to incomplete detonation of explosive may sometimes pollute the air.
- The fugitive dust released from the mining operations may cause effect on the mine workers who are directly exposed to the fugitive dust.
- Simultaneously, the air-borne dust may travel to longer distances and settle in the villages located near the mine lease area.

MITIGATION MEASURES

Drilling – To control dust at source, wet drilling will be practiced. Where there is a scarcity of water, suitably designed dust extractor will be provided for dry drilling along with dust hood at the mouth of the drill-hole collar.

Advantages of Wet Drilling: -

- In this system dust gets suppressed close to its formation. Dust suppression become very effective and the work environment will be improved from the point of occupational comfort and health.
- Due to dust free atmosphere, the life of engine, compressor etc., will be increased.
- The life of drill bit will be increased.
- The rate of penetration of drill will be increased.
- Due to the dust free atmosphere visibility will be improved resulting in safer working conditions.

Blasting -

- Establish time of blasting to suit the local conditions and water sprinkling on blasting face
- Avoid blasting i.e., when temperature inversion is likely to occur and strong wind blows towards residential areas
- Controlled blasting includes Adoption of suitable explosive charge and short delay detonators, adequate stemming of holes at collar zone and restricting blasting to a particular time of the day i.e., at the time lunch hours, controlled charge per hole as well as charge per round of hole
- Before loading of material water will be sprayed on blasted material
- Dust mask will be provided to the workers and their use will be strictly monitored.

Haul Road & Transportation -

- Water will be sprinkled on haul roads twice a day to avoid dust generation during transportation
- Transportation of material will be carried out during day time and material will be covered with taurpaulin
- The speed of tippers plying on the haul road will be limited below 20 km/hr to avoid generation of dust.
- Water sprinkling on haul roads & loading points will be carried out twice a day
- Main source of gaseous pollution will be from vehicle used for transportation of mineral; therefore weekly maintenance of machines improves combustion process & makes reduction in the pollution.
- The un-metalled haul roads will be compacted weekly before being put into use.
- Over loading of tippers will be avoided to prevent spillage.
- It will be ensured that all transportation vehicles carry a valid PUC certificate
- Grading of haul roads and service roads to clear accumulation of loose materials

Green Belt -

- Planting of trees all along main mine haul roads and regular grading of haul roads will be practiced to prevent the generation of dust due to movement of dumpers/trucks
- Green belt of adequate width will be developed around the project areas

Occupational Health -

- Dust mask will be provided to the workers and their use will be strictly monitored
- Annual medical check-ups, trainings and campaigns will be arranged to ensure awareness about importance of wearing dust masks among all mine workers & tipper drivers
- Ambient Air Quality Monitoring will be conducted six months once to assess effectiveness of mitigation measures proposed.

4.4 NOISE ENVIRONMENT

ANTICIPATED IMPACT

Noise pollution poses a major health risk to the mine workers. Following are the sources of noise in the existing open cast mine project are being observed such as Drilling, & Blasting, Loading and during movement of vehicles.

MITIGATION MEASURES

- Usage of sharp drill bits while drilling which will help in reducing noise;
- Secondary blasting will be totally avoided and hydraulic rock breaker will be used for breaking boulders;
- Controlled blasting with proper spacing, burden, stemming and optimum charge/delay will be maintained;
- The blasting will be carried out during favourable atmospheric condition and less human activity timings by using nonelectrical initiation system;
- Proper maintenance, oiling and greasing of machines will be done every week to reduce generation of noise:
- Provision of sound insulated chambers for the workers working on machines (HEMM) producing higher levels of noise;
- Silencers / mufflers will be installed in all machineries;
- Green Belt/Plantation will be developed around the project area and along the haul roads. The plantation minimizes propagation of noise;
- Personal Protective Equipment (PPE) like ear muffs/ear plugs will be provided to the operators of HEMM and persons working near HEMM and their use will be ensured though training and awareness.
- Regular medical check-up and proper training to personnel to create awareness about adverse noise level effects.

4.5 BIOLOGICAL ENVIRONMENT

ANTICIPATED IMPACT

There are no National Park and Archaeological monuments within project area. There are no migratory corridors, migratory avian-fauna, rare endemic and endangered species. There are no wild animals in the area. No breeding and nesting site were identified in project site. No National Park and Wildlife Sanctuary found within 10km radius. The dumps / bunds around the mine itself act as a good barrier for entry of stray animals. In the post mining stage, barbed wire fencing is proposed all around the mined-out void to prevent fall of animals in the mine pits.

MITIGATION MEASURES

To reduce the adverse effects on natural flora/fauna status of the area due to deposition of dust generated from mining operations, water sprinkling and water spraying systems will be ensured in all dust prone areas to arrest dust generation. Methodical and well-planned plantation scheme will be carried out.

4.5.1 GREENBELT DEVELOPMENT PLAN

	PROPOSAL FOR P1 – Tvl. Sri Rajalakshmi Samappa				
Year	No. of trees proposed Survial Area in m ² Area to be		Name of the species		
	to be planted	%		planted	
I	It is proposed to plant 1300 Nos of trees in the 1 st year	80 %	1600	7.5m Safety barrier, Panchayat road and nearby village roads	Neem, Pongamia, Pinnata, Causaraina etc.,

4.6 SOCIO ECONOMIC ENVIRONMENT

ANTICIPATED IMPACT

Employment generation due to the project will provide direct employment for about 29 persons.

MITIGATION MEASURES

- Good maintenance practices will be adopted for plant machinery and equipment, which will help to avert potential noise problems.
- Green belt will be developed in and around the project site as per Central Pollution Control Board (CPCB) guidelines.
- Appropriate air pollution control measure will be taken to minimize the environmental impact within the core zone.
- For the safety of workers, personal protective appliances like hand gloves, helmets, safety shoes, goggles, aprons, nose masks and ear protecting devices will be provided as per mines act and rules.
- Benefit to the State and the Central governments through financial revenues by way of royalty, tax, DMF, NMET etc, from this project directly and indirectly.

5. ANALYSIS OF ALTERNATIVES (TECHNOLOGY AND SITE)

The site has been selected based on geological investigation and exploration as below:

- Occurrence of minerals at the specific site.
- Transportation facility for materials & manpower.
- Overall impact on environment and mitigation feasibility
- Socio economic background.

The mineral deposits are site specific in nature; hence question of seeking alternate site does not arise for this project.


6. ENVIRONMENT MONITORING PROGRAM

Usually, an impact assessment study is carried over short period of time and the data cannot bring out all variations induced by natural or human activities. Hence regular monitoring program of Environmental parameters is essential to take into account the changes in the Environment.

The Objective of Monitoring -

- ♣ To check or assess the efficiency of the controlling measures;
- To establish a data base for future impact assessment studies.

6.1 ENVIRONMENTAL MONITORING CELL

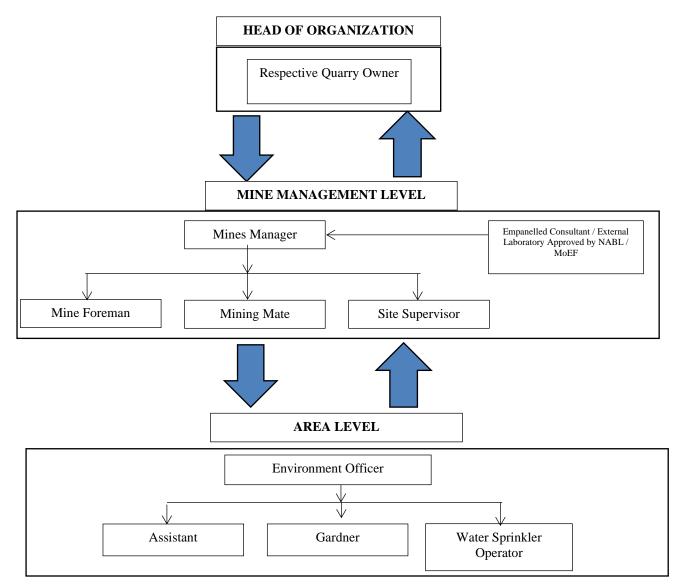

6.2 POST ENVIRONMENTAL CLEARANCE MONITORING SCHEDULE

	IN COMMON FOR PROPOSAL QUARRY						
S. No.	Environment	Location	Monitoring		Parameters		
	Attributes		Duration	Frequency			
1	Air Quality	2 Locations (1 Core & 1 Buffer)	24 hours	Once in 6 months	Fugitive Dust, $PM_{2.5}$, PM_{10} , SO_2 and NO_x .		
2	Meteorology	At mine site before start of Air Quality Monitoring & IMD Secondary Data	Hourly / Daily	Continuous online monitoring	Wind speed, Wind direction, Temperature, Relative humidity and Rainfall		
3	Water Quality Monitoring	2 Locations (1SW & 1 GW)	-	Once in 6 months	Parameters specified under IS:10500, 1993 & CPCB Norms		
4	Hydrology	Water level in open wells in buffer zone around 1 km at specific wells	-	Once in 6 months	Depth in bgl		
5	Noise	2 Locations (1 Core & 1 Buffer)	Hourly – 1 Day	Once in 6 months	Leq, Lmax, Lmin, Leq Day & Leq Night		
6	Vibration	At the nearest habitation (in case of reporting)	_	During blasting Operation	Peak Particle Velocity		
7	Soil	2 Locations (1 Core & 1 Buffer)	_	Once in six months	Physical and Chemical Characteristics		
8	Greenbelt	Within the Project Area	Daily	Monthly	Maintenance		

7. ADDITIONAL STUDIES

7.1 RISK ASSESSMENT FOR PROPOSAL QUARRY

The methodology for the risk assessment has been based on the specific risk assessment guidance issued by the Directorate General of Mine Safety (DGMS), Dhanbad, vide Circular No.13 of 2002, dated 31st December, 2002. The DGMS risk assessment process is intended to identify existing and probable hazards in the work environment and all operations and assess the risk levels of those hazards in order to prioritize those that need immediate attention. Further, mechanisms responsible for these hazards are identified and their control measures, set to timetable are recorded along with pinpointed responsibilities.

The whole quarry operation will be carried out under the direction of a Qualified Competent Mine Manager holding certificate of competency to manage a metalliferous mine granted by the DGMS, Dhanbad. Risk Assessment is all about prevention of accidents and to take necessary steps to prevent it from happening.

7.2 DISASTER MANAGEMENT PLAN FOR PROPOSAL QUARRY

The Disaster Management Plan is aimed to ensure safety of life, protection of environment, protection of installation, restoration of production and salvage operations in this same order of priorities.

The objective of the Disaster Management Plan is to make use of the combined resources of the mine and the outside services to achieve the following:

- Rescue and medical treatment of casualties;
- Safeguard other people;
- ♣ Minimize damage to property and the environment;
- Initially contain and ultimately bring the incident under control;
- ♣ Secure the safe rehabilitation of affected area; and
- Preserve relevant records and equipment for the subsequent inquiry into the cause and circumstances of the emergency

7.3 CUMULATIVE IMPACT STUDY

CUMULATIVE PRODUCTION LOAD OF ROUGH STONE

	Proposed Quarry Project -A						
Quarry	Production for five-year plan period considering safety parameters	Per Year Production in m ³	Per Day Production in m ³	Number of Lorry Load Per Day @ 12m³ per load			
P1	3,22,380	64,476	215	18 Trips /Day			
	List of Existing Quarries -B						
Quarry	Production for five-year plan period	Per Year Production in m ³	Per Day Production in m ³	Number of Lorry Load Per Day @ 12m³ per load			
E-1	2,82,076	56,415	188	16 Trips /Day			
G.Total	6,04,456	1,20,891	403	34 Trips/ Day			

CUMULATIVE PRODUCTION LOAD OF GRAVEL

	Proposed Quarry Project -A						
Quarry	Production for three-year plan period considering safety parameters	Per Year Production in m ³	Per Day Production in m ³	Number of Lorry Load Per Day @ 12m³ per load			
P1	40,936	13,645	45	4 trips per day /			
	List of Existing Quarries -B						
Quarry	Production for three-year plan period	Per Year Production in m ³	Per Day Production in m ³	Number of Lorry Load Per Day @ 12m³ per load			
E-1	70,592	23,531	79	7 Trips /Day			
G.Total	1,11,528	37,176	124	11 Trips/ Day			

SOCIO ECONOMIC BENEFITS FROM CLUSTER

PROPOSAL QUARRIES					
Code	Employment	Project Cost	CER		
P1	29	Rs.82,98,000/-	Rs 5,00,000/-		
EXISTING QUARRIES					
Code	Employment	Project Cost	CER		
E1	30	Rs. 1,10,41,063/-	Rs 5,00,000/-		
Total	30	Rs. 1,10,41,063/-	Rs 5,00,000/-		
Grand Total	59	Rs. 1,93,39,063/-	Rs. 10,00,000/-		

GREENBELT DEVELOPMENT BENEFITS FROM PROPOSAL MINE

		Proposed project		
CODE	No of Trees proposed to be planted	Survival %	Area to be covered	Name of the Species
P1	1300	80	7.5m Safety barrier, Panchayat Road and Village roads	Neem, Pongamia, Pinnata, Causarina etc.,

8. PROJECT BENEFITS

The Proposed Project for Quarrying Rough Stone and Gravel at Bilichi Village aims to produce **3,22,380** m³ Rough Stone over a period of 5 Years & **40,936** m³ of Gravel over a period of 3 Years.

- ♣ Increase in Employment Potential

- Improvement in Social infrastructure

9. ENVIRONMENT MANAGEMENT PLAN FOR PROPOSAL QUARRY

The Environment Monitoring Cell discussed formed by the mine management will ensure effective implementation of environment management plan and to ensure compliance of environmental statutory guidelines through Mine Management Level.

The said team will be responsible for:

- Monitoring of the water/ waste water quality, air quality and solid waste generated
- ♣ Analysis of the water and air samples collected through external laboratory
- ♣ Implementation and monitoring of the pollution control and protective measures/ devices which shall include financial estimation, ordering, installation of air pollution control equipment, waste water treatment plant, etc.
- ♣ Co-ordination of the environment related activities within the project as well as with outside agencies
- ♣ Collection of health statistics of the workers and population of the surrounding villages
- **♣** Green belt development
- ♣ Monitoring the progress of implementation of the environmental monitoring programme

10. CONCLUSION

It can be concluded from overall assessment of the impacts, in terms of positive and negative effects on various environmental components, that the mining activities will not have any adverse effect on the surrounding environment.

To mitigate any impacts due to the mining activities, a well-planned EMP and a detailed post project monitoring system is provided for regular monitoring and immediate rectification at site. Due to the cluster quarrying activities, socio economic conditions in and around the project site will be improved substantially. Hence, the Prior Environmental Clearance shall be granted at the earliest.